Stakeholder Feedback to MGSTF Design Component Prioritization

GT Power Group (Dave Pratzon & Tom Hyzinski)

Identify unit dispatch breakpoints

One of the places where the new unit model effort intersects with other PJM initiatives is in the proposal at the EPFSTF to redesign the synchronized reserve market processes. PJM has observed for some time that their calculation of available Tier 1 reserves is substantially in excess of observed response during many synchronized reserve activation events. One reason for this persistent difference could be limitations in GO ability to model unit operational features within their segmented dispatch curves, such as 1 BFP/2 BFP limits, coal mill switch points or augmented operating modes on CC plants.

To the extent that PJM-GO evaluations show that modeling limitations contribute significantly to the observed difference in calculated versus delivered Tier 1 response, it would be worthwhile for the MGSTF to consider whether minor, straightforward data items could be added to the current model to identify unit dispatch breakpoints and improve PJM's estimate of available Tier 1 resources on a real time basis.


Dominion

Related to Design component #4 DA Modeling of Fuel Switching cost

Problem: Fuel switching (for duel fuel units) while possible with hourly offers, doesn't allow for all parameters to be changed. While you can change your actual offer curves, you can also change the startups, no load, min runtime, and notification time. **However, you cannot change your max runtime or actual fuel type for the 99 price-based curve**. Therefore, if you are awarded on your 99 curve, there is no way to change fuel type without switching to cost.

In our example of 99 price-based curve on oil with max run of 4 hours. There is no way to change specific hours to gas; the max run time cannot be switched to 16 hours. Even though the price reflects gas the scheduled detailed page would still reflect oil (with max run time of 4 hours).

Below represents the parameters you are allowed to change in the current platform

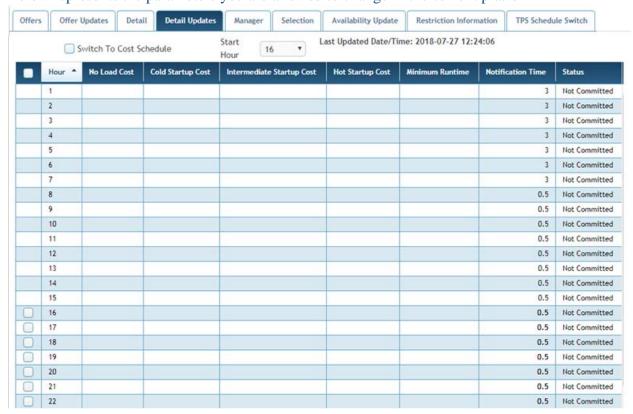

Suggested change; be able to model fuel types per hour.


You can currently change your price offer to "reflect" two fuel types, but the details of the 99 curve will only be one fuel type. Therefore if you specify "Oil" as your fuel type, it has a max run time of 4 hours. But in real-time, you find out you can run 10 hours of gas. You change the offers down to reflect that gas, but PJM is limited to running the unit for 4 hours because you couldn't change the max run time.

Related to Design component #19 Modeling Fuel Market and Supply limitations

Problem: Combined cycle units are very dependent on ambient temperature and relative humidity. Therefore, the "base load" (full load without duct burners) value can vary greatly throughout the day. The current system only allows 1 ramp rate to be entered for the entire day by 10:30 the previous day. The ramp rate that takes it to "base load" could be off during most hours of the day due to temperature and humidity swings.

Suggested change: Allow units to be able to change ramp rates hourly.

Example of ramp rate for one day for a combine cycle unit with ducts:

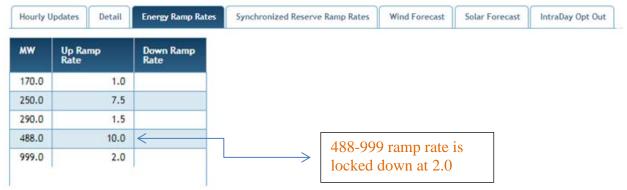

Example of how much the ECO MAX changes in one day for a combined cycle unit:

In this example 488 MWs is "base load" (full load without duct burners) but there is no category in PJM's hourly updates for this value, which is why you rely on the ramp rate to slow down once you hit duct burners. Therefore, if your ramp rate shows a "base load" at 488 MWs for the entire day, it will only be accurate for a few hours. Duct burner ~ 72 MWs (560 ECO MAX -72 = 488 MWs base load)



	Hour *
	3
	4
	5
	6
	7
	8
	9
	10
	11
	12
	13
	14
	15
	16
	17
	18
	19
	20
	21
	22
	23
0	24

Econ. Max. (MW)	
	568.0
	570.0
	570.0
	570.0
	568.0
	565.0
	560.0
	555.0
	550.0
	547.0
	543.0
	542.0
	542.0
	543.0
	545.0
	548.0
	552.0
	555.0
-	559.0
_	562.0
	565.0
	567.0