

**UNITED STATES OF AMERICA
BEFORE THE
FEDERAL ENERGY REGULATORY COMMISSION**

PJM Interconnection, L.L.C.) Docket No. ER24-1772-000

Regulation Market Design Filing

Craig Glazer
Vice President–Federal Government Policy
PJM Interconnection, L.L.C.
1200 G Street, N.W., Suite 600
Washington, D.C. 20005
(202) 423-4743
craig.glazer@pjm.com

Ryan J. Collins
Krystal A. Tapper
Wright & Talisman, P.C.
1200 G Street, N.W., Suite 600
Washington, D.C. 20005
(202) 393-1200
collins@wrightlaw.com
tapper@wrightlaw.com

Thomas DeVita
Associate General Counsel
PJM Interconnection, L.L.C.
2750 Monroe Blvd.
Audubon, PA 19403
(610) 635-3042 (phone)
(610) 666-8211 (fax)
thomas.devita@pjm.com

April 16, 2024

TABLE OF CONTENTS

- I. BACKGROUND 5
- II. OVERVIEW AND JUSTIFICATION OF PROPOSAL 8
 - A. *The Changing Resource Mix, Particularly the Growth of Renewable Resources, Support Updating the Current Regulation Market Design 8*
 - B. *The Current Regulation Market Design is Characterized by Complexities that Can Be Reduced to Better Align with the Changing Resource Mix 10*
 - C. *Overview of PJM’s Proposed Comprehensive Reforms to the Regulation Market 14*
 - D. *To Accommodate Time Needed to Develop Necessary Software Changes, PJM Is Proposing to Implement the Proposal in Two Phases..... 16*
- III. PROPOSED REGULATION MARKET ENHANCEMENTS 17
 - A. *PJM Is Proposing to Remove the RegA and RegD Regulation Signals, Remove the Benefits Factor, and Transition to a Single-Signal Market 17*
 - B. *PJM Is Proposing to Transition from a Single Regulation Product to a Two-Product, Regulation-Up and Regulation-Down, Market Design ... 17*
 - C. *PJM Is Proposing to Clear the Regulation Market Twice as Often 23*
 - D. *PJM Is Proposing a Number of Enhancements and Updates to the Regulation Offer Rules..... 27*
 - 1. *PJM is renaming the “performance” Regulation offer as the “mileage” Regulation offer, and updating how PJM adjusts such offers, but is not changing the Regulation mileage-clearing price determination 27*
 - 2. *PJM is proposing minor changes to PJM’s adjustment of a resource’s capability Regulation offer, but is not changing the Regulation capability-clearing price determination..... 29*
 - 3. *General changes to the submission of offers in the Regulation market that will occur in Phase 1 30*
 - 4. *Market Participants will submit separate offers for Regulation-Up and Regulation-Down Services 31*

5.	<i>With the establishment of the Regulation-Up and Regulation-Down products, Regulation resources need only to have sufficient capability in the direction of the Regulation product they are committed to provide.....</i>	32
6.	<i>PJM is proposing corresponding changes to the Regulation-specific offer price cap rules.....</i>	34
E.	<i>PJM Is Proposing to Update the Compensation Determination (i.e., Settlements), While Ensuring Resources Continue to be Paid Based on Performance.....</i>	35
F.	<i>PJM is Refining the Lost Opportunity Cost Determinations to More Accurately Capture the Foregone Energy Market Revenues Associated with Providing Regulation Service</i>	37
1.	<i>PJM proposes to use the energy schedule (i.e., Final Offer) on which an online resource is dispatched for energy to calculate lost opportunity costs.....</i>	39
2.	<i>PJM proposes to move the calculation of lost opportunity cost to a “tracking” ramp rate limited desired MW at LMP</i>	43
3.	<i>PJM’s proposed reformulation of the lost opportunity cost determination retains, as the final two data points in the Regulation lost opportunity cost determination, the resource’s applicable LMP and the resource’s Regulation set point.....</i>	44
4.	<i>PJM is updating the determination of the resource-specific lost opportunity cost credit used in settlements.....</i>	46
5.	<i>PJM is clarifying that “Regulation only” resources do not get opportunity costs.....</i>	48
6.	<i>As part of adding the Regulation-Up and Regulation-Down products, PJM is proposing modification to the lost opportunity cost calculation used in settlements.....</i>	49
G.	<i>PJM Proposes to Enhance Performance Scoring so that It Better Reflects the Resource’s Actual Performance Over the Relevant Interval</i>	51
H.	<i>PJM Proposes to Codify That Resources Must Meet Specific Performance Score-based Thresholds to Be Eligible to Provide Regulation or Be Compensated for Providing Regulation.....</i>	57
IV.	PROPOSED EFFECTIVE DATE	58
V.	DESCRIPTION OF SUBMITTAL.....	59

VI.	CORRESPONDENCE.....	60
VII.	SERVICE.....	60
VIII.	CONCLUSION.....	61



1200 G Street, N.W., Suite 600
Washington, D.C. 20005-3898
Phone: 202.393.1200
Fax: 202.393.1240
wrightlaw.com

April 16, 2024

Honorable Debbie-Anne A. Reese
Federal Energy Regulatory Commission
888 First Street, N.E.
Washington, D.C. 20426-0001

*Re: PJM Interconnection, L.L.C., Docket No. ER24-1772-000
Regulation Market Redesign*

Dear Secretary Reese,

Pursuant to Section 205 of the Federal Power Act (“FPA”),¹ and Part 35 of the Federal Energy Regulatory Commission’s (“Commission”) Regulations,² PJM Interconnection, L.L.C. (“PJM”) proposes revisions to the PJM Open Access Transmission Tariff (“Tariff”) and the Amended and Restated Operating Agreement of PJM Interconnection, L.L.C. (“Operating Agreement”)³ to effectuate a fundamental redesign of PJM’s Regulation market. As proposed, PJM’s Regulation market will shift from a market with one product and two signals (“RegA and RegD”) to a market with one signal and two products Regulation-Up (“RegUp”) and Regulation-Down (“RegDown”), which will bring significant operational and market enhancements. In particular, by sending a single signal to all resources providing Regulation, PJM will be able to better convey the system needs

¹ 16 U.S.C. § 824d.

² 18 C.F.R. part 35.

³ The Tariff and Operating Agreement are currently located under PJM’s “Intra-PJM Tariffs” eTariff title. See *PJM Interconnection, L.L.C. - Intra-PJM Tariffs*, Federal Energy Regulatory Commission, <https://etariff.ferc.gov/TariffBrowser.aspx?tid=1731> (last visited Apr. 16, 2024). Capitalized terms not otherwise defined herein shall have the same meaning as set forth in the Tariff, Operating Agreement, and the Reliability Assurance Agreement Among Load-Serving Entities in the PJM Region.

Honorable Debbie-Anne A. Reese

April 16, 2024

Page 2

to those providing Regulation and better monitor the level of Regulation that should be available at any time.

As PJM's resource mix evolves to include a greater proportion of intermittent (e.g., solar and wind) resources, the need for a more granular Regulation market, i.e., one that separately procures Regulation-Up Service and Regulation-Down Service, to manage associated uncertainties correspondingly grows. That is, Regulation allows the Balancing Authority, like PJM, to keep the system in balance when the wind suddenly dies down or when the sun is suddenly eclipsed by cloud cover. Thus, for example, when solar output is peaking, PJM needs less Regulation-Down but more Regulation-Up to manage the uncertainty of solar output unexpectedly decreasing. Separately identifying and procuring these two products will better allow PJM to procure the necessary Regulation megawatts ("MWs") in each direction to maintain system balance and correct for instantaneous changes in generation and load.

PJM's proposed changes to the Regulation market will result in a market similar in concept and product design to that currently employed by the California Independent System Operator, Inc. ("CAISO") and the Southwest Power Pool, Inc. ("SPP"), but different in implementation to align with PJM's market design. Similar to PJM's proposal herein, both of these markets utilize the one-signal, two-product (Regulation-Up and Regulation-Down) Regulation market design to maintain system balance and manage the uncertainties resulting from relatively high levels of intermittent resources. PJM likewise believes that its proposed market design will better enable it to correct for instantaneous changes in load and generation that may result from greater levels of intermittent resources.

The market redesign is by almost any measure an improvement over the status quo—while remaining true to Order No. 755’s pay for performance framework.⁴

Through this filing, PJM is proposing a number of enhancements and updates to the Regulation market design and implementing rules. In addition to the one-signal, two-product design, PJM proposes to refine the lost opportunity cost (i.e., the cost of providing Regulation instead of energy) determination to one that considers resource-specific operating characteristics, including a resource’s ramping capability. PJM also proposes to clear the market twice as often and commit resources to provide Regulation for 30-minute periods, instead of the current one-hour commitment periods. Shorter commitment periods and clearing the market closer to the real-time operating period should allow PJM to better estimate the conditions over the commitment period and thus better commit the appropriate (least-cost set of) resources to provide Regulation, while minimizing the overall system production cost. The upshot of these changes is that the market should see efficiencies in procurement and price formation, while meeting the challenges presented by the changing resource mix.

The enclosed Regulation market enhancements are the product of approximately 18 months of work by PJM, the Independent Market Monitor for PJM (“Market Monitor”), and stakeholders in the Regulation Market Design Senior Task Force.⁵ There the participants thoroughly evaluated all aspects of PJM’s Regulation market, including signal design, performance scoring, clearing, and settlements. Over the course of almost two

⁴ *Regulation Compensation in the Organized Wholesale Power Markets*, Order No. 755, 137 FERC ¶ 61,064 (2011), *reh’g denied*, Order No. 755-A, 138 FERC ¶ 61,123 (2012).

⁵ *See Regulation Market Design Senior Task Force*, PJM Interconnection, L.L.C., <https://www.pjm.com/committees-and-groups/task-forces/rmdstf> (last visited Apr. 16, 2024).

years, PJM and its stakeholders arrived at the package of reforms PJM is submitting in this filing. The amendments to the Tariff and Operating Agreement proposed herein were overwhelmingly endorsed by PJM Members at the December 20, 2023 PJM Markets and Reliability Committee meeting (after a first read at the November 15, 2023 meeting), through an acclamation vote with three abstaining and zero rejections and at the January 24, 2024 PJM Members Committee meeting, through a consent agenda approval.⁶

As discussed below, PJM is proposing to implement these Regulation market changes in two phases, with “Phase 1” effective October 1, 2025, and “Phase 2” effective October 1, 2026. Such effective dates will allow PJM to orderly implement the market reforms after the summer operating season has passed. However, to allow PJM to begin coding the software changes necessary for these market enhancements effective by those dates, PJM respectfully requests Commission action on this filing by June 16, 2024, which is 61 days from the date of this filing.⁷ The software changes to effectuate these changes are significant. PJM requires this period between Commission action and the effective date of the proposed changes to allow that process to be undertaken in a deliberate way and allow for testing and customer education.

⁶ In preparing the market rule revisions for filing, PJM has made several non-substantive revisions to the versions of the tariff records approved by the Members Committee, e.g., correcting improper punctuation, integrating previously accepted language from overlapping eTariff records, etc. These changes are clerical in nature and do not alter the proposal approved by the Members Committee or its effectuation. For convenience and ease of understanding, in this letter, PJM cites only to the energy market rules in the Operating Agreement and does not include citations to the parallel rules (or proposed rules) in Tariff, Attachment K-Appendix.

⁷ PJM has assigned an effective date of June 16, 2024, to one eTariff record (Tariff, Attachment K-Appendix, section 3) submitted with this filing (in metadata only) in order to effectuate Commission action by this date.

I. BACKGROUND

Regulation is an essential reliability service that helps PJM balance supply and demand instantaneously, maintain system frequency, and keep PJM's area control error ("ACE") at or close to zero.⁸ Regulation allows PJM to balance the grid when supply and demand fluctuate, due to factors such as weather, wind or solar resource intermittency, interchange volatility, and generation fluctuations. While PJM commits resources to provide Regulation on an hourly basis, during that hour, committed resources follow PJM's dispatch signals, which PJM can send every 2 to 10 seconds, so as to keep the system in balance.

As required under the Commission's *pro forma* open access transmission tariff,⁹ PJM provides frequency Regulation to help manage the instantaneous balancing of supply and demand of electricity on the bulk power system. Because changes in supply and demand are not precisely predictable, real-time mismatches between supply and demand will occur, resulting in non-zero ACE. Regulation is an ancillary service and essential reliability product that PJM relies upon to provide its support to the maintenance of frequency throughout the Eastern Interconnection. PJM manages system frequency, through ACE, by sending Regulation resources an automatic generation control ("AGC")

⁸ ACE is the "instantaneous difference between a Balancing Authority's net actual and scheduled interchange," taking into account the effects of Frequency Bias and correction for meter error. *See Glossary of Terms Used in NERC Reliability Standards*, North American Electric Reliability Corporation (Apr. 1, 2024), https://www.nerc.com/pa/Stand/Glossary%20of%20Terms/Glossary_of_Terms.pdf.

⁹ *See Promoting Wholesale Competition Through Open Access Non-Discriminatory Transmission Services by Public Utilities; Recovery of Stranded Costs by Public Utilities and Transmitting Utilities*, Order No. 888, 75 FERC ¶ 61,080, FERC Stats. & Regs., Regs. Preambles ¶ 31,036, at 31,705 (1996), *order on reh'g*, Order No. 888-A, 75 FERC ¶ 61,080, FERC Stats. & Regs., Regs. Preambles ¶ 31,048 (1997), *order on reh'g*, Order No. 888-B, 81 FERC ¶ 61,248 (1997), *reh'g denied*, Order No. 888-C, 82 FERC ¶ 61,046 (1998), *aff'd in part and remanded in part sub nom. Transmission Access Policy Study Grp. v. FERC*, 225 F.3d 667 (D.C. Cir. 2000), *aff'd sub nom. New York v. FERC*, 535 U.S. 1 (2002).

signal to raise or lower output to correct for instantaneous changes in load and generation every few seconds when PJM's ACE calculation indicates an imbalance between supply and demand. The Regulation controller will send a signal for Regulation resources to move in the opposite direction of ACE to correct the imbalance.

In Order No. 755, the Commission recognized that regional transmission organizations ("RTOs") and independent system operators ("ISOs") deploy a variety of resources to meet Regulation needs and that these resources differ in both their ramping ability, which affects their ability to increase or decrease their output when providing Regulation service, and the accuracy with which they can respond to the system operator's AGC signal. The Commission issued Order No. 755 to ensure just and reasonable compensation for the provision of Regulation service by directing each RTO or ISO to modify their existing tariffs to provide for a two-part payment to frequency regulation resources. Specifically, the Commission regulations implementing Order No. 755 require the payment to be "based on the actual service provided, including a capacity payment that includes the marginal unit's opportunity cost and a payment for performance that reflects the quantity of frequency regulation service provided by a resource when the resource is accurately following the dispatch signal."¹⁰

In 2012, PJM introduced a performance-based Regulation market design in conjunction with a series of Order No. 755 compliance filings.¹¹ Under PJM's

¹⁰ 18 C.F.R. § 35.28(g)(8).

¹¹ See *PJM Interconnection, L.L.C.*, Order No. 755 Compliance Filing, Docket No. ER12-1204-000 (Mar. 5, 2012) ("March 2012 Compliance Filing"); see also *PJM Interconnection, L.L.C.*, Docket No. ER12-1204-001 (Aug. 15, 2012) ("August 2012 Compliance Filing"); *PJM Interconnection, L.L.C.*, Docket No. ER12-2391-002 (Aug. 23, 2012) ("August 2012 Companion Filing"); *PJM Interconnection, L.L.C.*, Performance-Based Regulation Revisions, Docket Nos. ER12-1204-004 (Jan. 15, 2013) ("January 2013 Compliance Filing").

performance-based methodology, resources offer, clear, and settle based on a measured ability to follow an assigned Regulation signal. Under PJM's current Regulation construct, resources are cleared and committed in PJM's Regulation market as one product, on an "Effective MW" basis, and then operationally can follow one of two signals PJM sends to Regulation resources: RegA or RegD. PJM uses a traditional signal, called RegA, to dispatch slower, sustained-output resources with limited ramp rates but unlimited duration of generation output, such as steam and combustion resources. PJM uses a faster signal, called RegD, to dispatch faster, dynamic resources, with high ramp rates and rapid turnaround but limited duration, such as battery storage. The RegA and RegD signals are not resource-type dependent, and any resource that is able to follow a given signal type can qualify to provide Regulation service using that signal. In fact, PJM has a number of resources today that are qualified and offer both RegA and RegD Regulation.

The RegA and RegD signals were initially designed to be complementary, where RegD resources respond quickly but lack duration while RegA resources require time to turn and follow the signal but have unlimited duration. However, inherent in this current market design are a number of complexities and inaccuracies in the market clearing, realized by the defined benefits factor curve (which attempts to provide an accurate rate of substitution between RegA and RegD signals, as discussed in detail below) and the translation of "RegD" MWs into "RegA" MWs. The benefits of the RegA and RegD construct are realized when the "right mix" of resources are providing Regulation service. This mix is dependent on real-time system conditions which cannot accurately be observed at the time of commitment. The defined benefits factor curve tries to approximate the "right mix" today, but is a static curve, meaning that it does not change dynamically in

response to system conditions and therefore it is not always able to capture the real-time system conditions and the needed Regulation. The benefits factor curve was largely put in place with PJM's implementation of performance-based Regulation in 2012,¹² and has not materially been updated since then to reflect any intervening Regulation market design changes that impact system dynamics and/or need for Regulation.

II. OVERVIEW AND JUSTIFICATION OF PROPOSAL

A. The Changing Resource Mix, Particularly the Growth of Renewable Resources, Support Updating the Current Regulation Market Design.

With an eye on the changing system conditions and on certain aspects of the existing market design that could use improvement, PJM, the Market Monitor, and stakeholders devoted considerable time and resources over the past 18 months evaluating the current Regulation market and identifying improvements that would: (1) increase transparency in market clearing prices and selection; (2) address notable inefficiencies resulting from the two-signal design; and (3) allow the market to foster the ramp-up and ramp-down capabilities necessary to meet operational challenges posed by the changes to the composition of supply and demand.

Indeed, the impetus for such changes grows more acute as solar and wind resources continue to comprise a greater proportion of PJM's resource mix. The intermittent production characteristic of such resources affects the need for Regulation to maintain system balance. Uncertainty associated with these resource types, on a minute-to-minute

¹² March 2012 Compliance Filing; August 2012 Compliance Filing; August 2012 Companion Filing; January 2013 Compliance Filing; see KEMA, Inc., *KERMIT Study Report*, PJM Interconnection, L.L.C., (Dec. 13, 2011), <https://www.pjm.com/~media/committees-groups/committees/oc/20150701-rpi/20150701-kema-study-report.ashx>

basis, and even on an hour look-ahead basis in the real-time market, is not insignificant.¹³

Thus, as additional forecast uncertainty is introduced to near-term operations and energy dispatch by the changing resource mix, to maintain operations and reliability, the Regulation market will need to foster certain resource attributes and properly incentivize performance. In particular, the ability for resources to ramp up and ramp down to maintain frequency is paramount, and therefore, PJM is proposing to switch to a market keyed to such ramping capabilities—i.e., one with separate market signals and resources compensation for providing RegUp and RegDown services, even if from the same resource. The changing resource mix will affect the resources available to PJM to provide Regulation, which in turn will increase the value (and importance) of the RegUp and RegDown services. For the same reasons, maintenance of the current one product market design, which values and procures up and down regulation capability equally and sees all Regulation resources as bidirectional, likely will introduce inefficiencies in reliability and market clearing, as discussed below.

Accordingly, taken together, the proposed revisions will allow the market to better respond to operational changes for which the Regulation dispatch signal will need to respond, by simplifying the Regulation market, through, for example, the removal of the complexities inherent in the two-signal design and the benefits factor curve, and increasing the efficiency by defining the specific and separate up and down capabilities distinctly, through which the market allows PJM to maintain balance across the PJM Region. Further, simplifying the market, PJM is adding greater market transparency regarding: clearing the

¹³ See *Modernizing Wholesale Electricity Market Design*, 179 FERC ¶ 61,029, at P 2 (2022).

market, pricing, and settlements. In turn, as demonstrated below, the market design changes will also foster more consistent pricing signals, by better aligning the clearing and settlement for Regulation, i.e., the settlement will be consistent with the value provided by the resource.¹⁴ Thus, Market Participants will be able to achieve a better understanding of why PJM did/did not clear a participant's resource for Regulation and how committed resources are compensated.

Similarly, the Commission has recognized that RTOs, like PJM, "are increasingly facing new operational challenges as the resource mix and customer electric loads change," and therefore should design market mechanisms to properly incentivize flexible resources and to procure products that can meet evolving system needs.¹⁵ In addition to increased prevalence of renewable, storage, and hybrid resources, "customer electric loads are changing due to increased deployment of distributed energy resources and electrification, among other factors."¹⁶ Thus, the Commission found, the "operational challenges created by these changes" provide the foundation "to consider [energy and ancillary services] market reforms to meet future system needs reliably and at just and reasonable rates."¹⁷

B. The Current Regulation Market Design is Characterized by Complexities that Can Be Reduced to Better Align with the Changing Resource Mix.

To understand how PJM's proposal will achieve these objectives, it is important to understand the complexities endemic to the current market design. Using two signals

¹⁴ See *2023 State of the Market Report for PJM*, Monitoring Analytics, section 10 at 532 (Mar. 14, 2024), https://www.monitoringanalytics.com/reports/PJM_State_of_the_Market/2023/2023-som-pjm-sec10.pdf (in the Regulation market, "all units are not paid the same price on an equivalent MW basis").

¹⁵ *Modernizing Wholesale Electricity Market Design*, 179 FERC ¶ 61,029, at P 2.

¹⁶ *Modernizing Wholesale Electricity Market Design*, 179 FERC ¶ 61,029, at P 2.

¹⁷ *Modernizing Wholesale Electricity Market Design*, 179 FERC ¶ 61,029, at P 2.

(RegA and RegD) to dispatch Regulation, but clearing them as a single product to meet a single reliability requirement requires an accurate marginal rate of substitution (as between RegA and RegD signals), referred to in the Regulation market as the “benefits factor,” to be utilized in the clearing optimization to most efficiently commit resources aligned with operational needs. The benefits factor is designed to facilitate the right mix of fast and slow resources and provide for the relative valuation of each to meeting the reliability goal. However, as explained below, the two-signal approach hinders PJM’s ability to monitor the Regulation being provided and unnecessarily complicates pricing and settlements. Such issues in particular arise from the benefits factor used to translate the RegD “dynamic” MWs into RegA “traditional” Regulation MWs.

Indeed, the benefits factor is sub-optimally applied in the optimization. The benefits factor is a static function that is used to translate RegD resources into “effective” RegA resources, in selecting resources for commitment to meet the Regulation Requirement. The benefits factor is a static measure developed on an analysis of relative impact of RegD and RegA resources to maintain ACE, and was not defined to change the relative value based on expected system conditions. However, the most optimal mix of RegD and RegA resources is dynamic in nature, evolving with changing system conditions. As the given set of system conditions cannot be accurately determined before the Regulation commitment period, PJM is finding it increasingly difficult to optimally capture the RegA/RegD tradeoff using a pre-defined “benefits factor.” In application, the current benefits factor captures an *average* trade-off based on study results, and does not always capture the optimal set of Regulation resources to meet the real-time system needs.

In addition, the current Regulation market rules inconsistently use the benefits factor in pricing and settlements, which can minimize the effectiveness of pricing signals. Under the current rules, resources are valued and committed to provide Regulation based on the benefits factor, but then compensated in settlements only on the total MWs the resources were assigned, with no consideration to the benefits factor of the resource, or the marginal benefits factor for that commitment period. For example, if, in clearing the Regulation market for a given interval, the benefits factor is “2”, that means that 1 MW of RegD can replace 2 MWs of RegA, and a resource would count as 2 MW to meet the Regulation requirement. However, when this resource is settled, it would only be compensated for 1 MW, ultimately sending a different price signal to the resource, than the assumed resource value in commitment and pricing. This can lead to over or under payment to resources, with respect to the value that resource provided to the system.¹⁸

Further, the operational signals are currently designed with considerations beyond ACE control that sometimes do not allow PJM’s operators to fully utilize the available Regulation. PJM’s signal design currently allows the RegA resources to be moved (up or down), not for ACE control, but rather to help maintain “neutrality” on the RegD resources.¹⁹ “Neutrality” is defined as keeping the RegD signal at net zero over a 30 minute

¹⁸ See 2023 *Quarterly State of the Market Report for PJM; January through September*, Monitoring Analytics, LLC, at 572 (Nov. 9, 2023), https://www.monitoringanalytics.com/reports/PJM_State_of_the_Market/2023/2023q3-som-pjm-sec10.pdf (“RegD resources continue to be incorrectly compensated relative to RegA resources due to an inconsistent application of the marginal benefit factor in the optimization, assignment and settlement processes. If the regulation market were functioning efficiently and competitively, RegD and RegA resources would be paid the same price per effective MW.”).

¹⁹ *Implementation and Rationale for PJM’s Conditional Neutrality Regulation Signals*, PJM Interconnection, L.L.C. (Jan. 2017), <https://www.pjm.com/~media/committees-groups/task-forces/rmistf/postings/regulation-market-whitepaper.ashx> (“2017 Whitepaper”); see *PJM Interconnection, L.L.C.*, 139 FERC ¶ 61.130, at P 43 (2012) (“We agree with PJM that providing an energy-neutral dynamic

period, which helps facilitate storage batteries to maintain a state of charge over each 30-minute period.²⁰ In other words, the PJM RegD signal is designed to facilitate resources following the RegD signal to spend equal time, over a 30-minute period, moving up and moving down. However, Regulation is a reliability product, designed to act to balance the system, and utilizing it for other means (e.g., help maintain neutrality) can displace Regulation MWs PJM dispatch needs for reliability.²¹ As a result, the neutrality function in the Regulation controller can sometimes actually work *against* Regulation's objective of maintaining balance in response to changing system conditions. In other words, the neutrality requirement introduces operational challenges and can hinder Regulation meeting its reliability objective. Further, neutrality hinders transparency to the market with respect to how much Regulation is needed, because (1) the signal development is internal to PJM's AGC controller so dispatch is unaware of the underlying purpose for which a resource is moving (for ACE control or neutrality), and (2) and the neutrality requirement affects how many Regulation MWs are available at any given time to maintain system balance.²²

regulation signal to an energy-limited resource makes it unlikely that such a resource will become constrained and unable to provide an adequate response.”).

²⁰ See 2017 Whitepaper at 6 (“Due to the energy-limited nature of storage resources, the Regulation D signal attempts to keep the signal neutral over time when the total regulation product has the capability to do so. This neutrality objective is intended to assist with any energy bias seen through these signals.”).

²¹ A simple illustration of how this can occur, assume ACE is zero, and at this point the system would not need any Regulation, so all resources should have their full range of capability (up and down) available. Nonetheless, in an effort to maintain “neutrality” on RegD, the regulation controller may move RegA resources up and RegD resources down to facilitate RegD resource charging.

²² PJM notes that the Commission did not require the adoption of neutrality, and in fact, the Commission explicitly declined to rule on the topic in Order No. 755. See Order No. 755 at P 184.

As a result, participants in the stakeholder process below found that switching to a single signal would operationally align with the PJM system needs and further eliminate the need for the benefits factor, or any other measure of the conversion relationship between the existing two signals in the clearing and commitment process, simplifying the Regulation market.

Evaluating and addressing these issues also provided PJM, the Market Monitor, and other stakeholders the opportunity to assess other operational and market components of the current Regulation market design to gauge whether they are in alignment with PJM's changing resource mix and operational needs.²³ Based upon such review, PJM and stakeholders agreed on additional revisions to several aspects of the Regulation market design, such as performance scoring, market clearing, settlement, and product definition.

C. Overview of PJM's Proposed Comprehensive Reforms to the Regulation Market.

As a result of the stakeholder process, PJM is proposing to substantially reform its Regulation market. PJM proposes to move from a two-signal, one-product market design to a one-signal, two-product market design. Under the proposal, PJM would replace the RegA and RegD signals—and all the associated complexity and inefficiency, with a simpler approach under which PJM would send a singular dispatch signal. The single dispatch signal would identify whether PJM needs resources to provide one of two products, i.e., RegUp or RegDown. Given that Regulation serves to maintain system

²³ See *PJM Interconnection, L.L.C.*, 186 FERC ¶ 61,080, at P 42 (recognizing that the PJM Region is facing an evolving resource mix), *reh'g denied*, 186 FERC ¶ 62,168 (2024); *Energy in Transition in PJM: Resource Retirements, Replacements & Risks*, PJM Interconnection, L.L.C. (Feb. 24, 2023), <https://www.pjm.com/-/media/library/reports-notice/special-reports/2023/energy-transition-in-pjm-resource-retirements-replacements-and-risks.ashx>.

balance and PJM sends Regulation signals every 2-10 seconds, the new approach will increase the tools and flexibility available to PJM to manage ACE. As two, distinct products, resources would offer RegUp and RegDown services separately, and PJM would separately procure and price them, in accordance with the RegUp and RegDown specific Regulation Requirements. Such change necessitates corresponding changes to offer structure and price formation, which are detailed below. As part of the design reforms, PJM is also proposing enhancements to the determination of both the lost opportunity cost resources may incur to provide Regulation instead of energy, and the performance scoring, used in commitment and compensation, to evaluate how well a resource is following PJM's Regulation signal.

As noted, PJM's proposed one-signal, two-product Regulation market design is similar in concept and product design to that currently employed in the SPP²⁴ and CAISO.²⁵ Significantly, these regions have some of the highest proportion of intermittent resources in their resource mix, and the regional operators have capably managed their systems using "regulation up" and "regulation down" products and the one-signal market design. PJM's proposal here similarly should allow PJM to manage its system in accommodation of the changing resource mix.

²⁴*Sw. Power Pool, Inc.*, 141 FERC ¶ 61,048 (2012), *order on reh'g*, 142 FERC ¶ 61,205 (2013); *see also Sw. Power Pool, Inc.*, 147 FERC ¶ 61,211 (2014) (accepting SPP's Order No. 755 compliance filings).

²⁵ *Cal. Indep. Sys. Operator Corp.*, 140 FERC ¶ 61,206 (2012); *Cal. Indep. Sys. Operator Corp.*, 142 FERC ¶ 61,233 (2013) (accepting CAISO's Order No. 755 compliance filing implementing regulation up and regulation down services).

D. To Accommodate Time Needed to Develop Necessary Software Changes, PJM Is Proposing to Implement the Proposal in Two Phases.

PJM is proposing the foregoing changes to the Regulation market over two phases. In the first tranche of changes, i.e., “Phase 1,” PJM is proposing all the enhancements and design changes, *except* the introduction of the two RegUp and RegDown products. These market rule changes have shorter development lead times. PJM projects that the Phase 1 changes should be ready for implementation in 16 months from the Commission order accepting this proposal, and accordingly, PJM proposes an effective date of October 1, 2025, for the changes included in Attachments A and B. Implementing the Phase 1 changes before the software and other changes necessary to implement the RegUp and RegDown products are ready is reasonable and appropriate as the switch to a simplified market design will avoid the problems discussed above and provide time for PJM and Market Participants to become familiar with the new signal and performance requirements before splitting the market clearing operational signal. Providing time for customer education and for stakeholders to orient themselves and ease into the new approach should allow for smoother implementation.

PJM proposes to implement the RegUp and RegDown products in the second tranche of changes, i.e., “Phase 2,” about two and half years from the Commission order accepting this proposal. Accordingly, PJM proposes an effective date of October 1, 2026, for the market rule changes included in Attachments C and D. A two-year developmental timeframe is required, as PJM will need to make significant software changes to the market clearing engine, the AGC, which is the program that runs every two seconds, calculating

ACE—the definitional focus of Regulation, Area Regulation, and economic dispatch, telemetry, and settlements.

III. PROPOSED REGULATION MARKET ENHANCEMENTS

A. PJM Is Proposing to Remove the RegA and RegD Regulation Signals, Remove the Benefits Factor, and Transition to a Single-Signal Market.

In order to fully obtain the system benefits of the Regulation MWs PJM is procuring, and provide efficient signals to the market place (having an internally consistent solution for markets and settlements), PJM is proposing to move to a one signal market design. This will provide simplicity in the market clearing, and obtain the resources needed to provide Regulation service. Further, the operational control signal can request the movement to meet the electric grid's reliability needs. This single signal will be sent to all resources providing Regulation service and allows for additional transparency for the system operation to operate and track. Switching to a single signal eliminates the needs for the benefits factor, or any other measure of the conversion relationship between the existing two operational signals. Accordingly, with the proposal to move to a single signal design, PJM is also proposing to eliminate the benefits factor throughout the Regulation market rules.²⁶

B. PJM Is Proposing to Transition from a Single Regulation Product to a Two-Product, Regulation-Up and Regulation-Down, Market Design.

PJM is proposing to bifurcate the single Regulation product into the Regulation-Up and Regulation-Down products. This will provide additional operational flexibility and allow PJM dispatch to define the up-ramping and down-ramping needs of the system. Both

²⁶ See Phase 1 proposed Operating Agreement, Schedule 1, sections 3.2.2(c), (g), (h), (j), (k), and section 3.2.2A.1(b)(i) and (iii).

up-ramping and down-ramping Regulation products will be used simultaneously to maintain and balance frequency. Specifically, up-ramping Regulation will be available to address, for example, such short-term reliability scenarios as increased load, slow moving generation, fluctuation of intermittent resources (e.g., cloud cover or decreased wind) and fast response to system contingencies, allowing PJM to have the resources to increase generation and balance out these needed MWs to serve load, while down-ramping Regulation will be available to manage, for example, such events as increased intermittent output (increased wind or solar), decreases in load, or increased generation, allowing PJM to have resources to decrease generation and balance out the system. The down-ramping capability will also be a valuable tool during high renewable/low load periods, minimizing intermittent, out of market renewable curtailment for system balance.


Market efficiencies can be realized through the new Regulation-Up and Regulation-Down market products. The new market design can foster innovation and additional resource participation by allowing participation in one-directional Regulation service (Regulation-Up *or* Regulation-Down) without necessarily impacting economic energy participation. For example, renewable resources would be able to offer and participate in Regulation-Down Services without having to first curtail to a lower economic set point (which is currently required, and would be required for RegUp). This would open participation opportunities for resources, like solar and wind, that generally cannot be dispatched up, as they are often generating at maximum capability due to economics, but can curtail output upon request. Conversely, a generation resource operating at economic minimum would be able to offer and participate in Regulation-Up Services without being

uneconomically moved up to provide symmetric, bidirectional Regulation service, as done today.

Further, the market clearing in a RegUp and RegDown market construct provides economic efficiencies when looking at the economic dispatch of the system. Such efficiencies can be achieved because most of the observed costs from PJM's Regulation service are associated with the resource's lost opportunity cost for providing Regulation when not economic relative to the energy price (see section III.F below). Bifurcating the current product into RegUp and RegDown will reduce the opportunity cost of each Regulation commitment and allow for the service to come from different resources that are most suitable and most economical for the purpose. Together, PJM expects its proposed approach to minimize or maintain the existing overall lost opportunity cost.

The following example demonstrates the expected economic efficiencies. Figure 1 outlines the system outcomes for a simple two-unit system in the current bidirectional Regulation product market. Figure 2 outlines the system outcomes with the bifurcated Regulation-Up and Regulation-Down products.

Figure 1: System Outcomes with Current Bidirectional Product

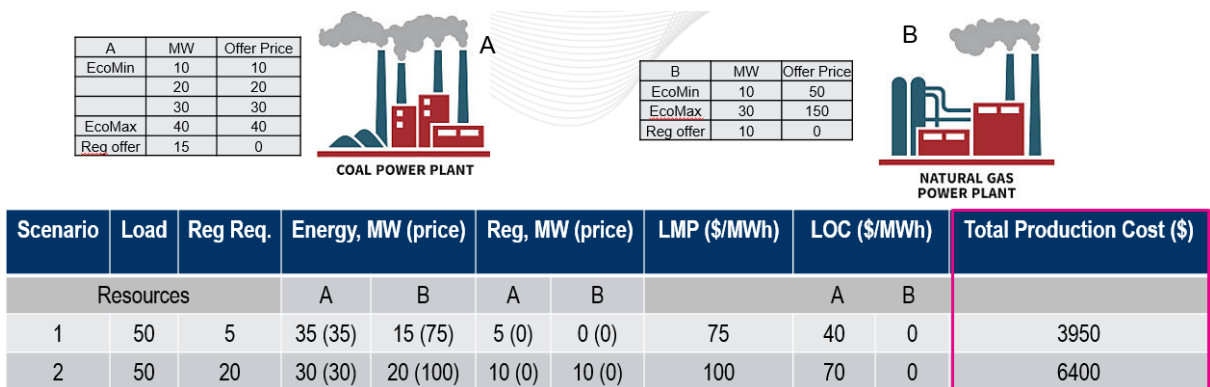


$$LOC (1A) = |LMP - MC| \times (\text{Desired MW @ LMP} - \text{Reg-Set-point}) / \text{RegMW} = (75-35) \times (40-35) / 5 = 40$$

$$\text{Total Production Cost (1)} = \text{Energy Cost} + \text{Regulation Cost} = (50 \times 75) + (5 \times 40) = \$3950$$

$$\text{Total Production Cost (2)} = \text{Energy Cost} + \text{Regulation Cost} = (50 \times 100) + (20 \times 70) = \$6400$$

Figure 2: System Outcomes with Proposed RegUp and RegDown Products

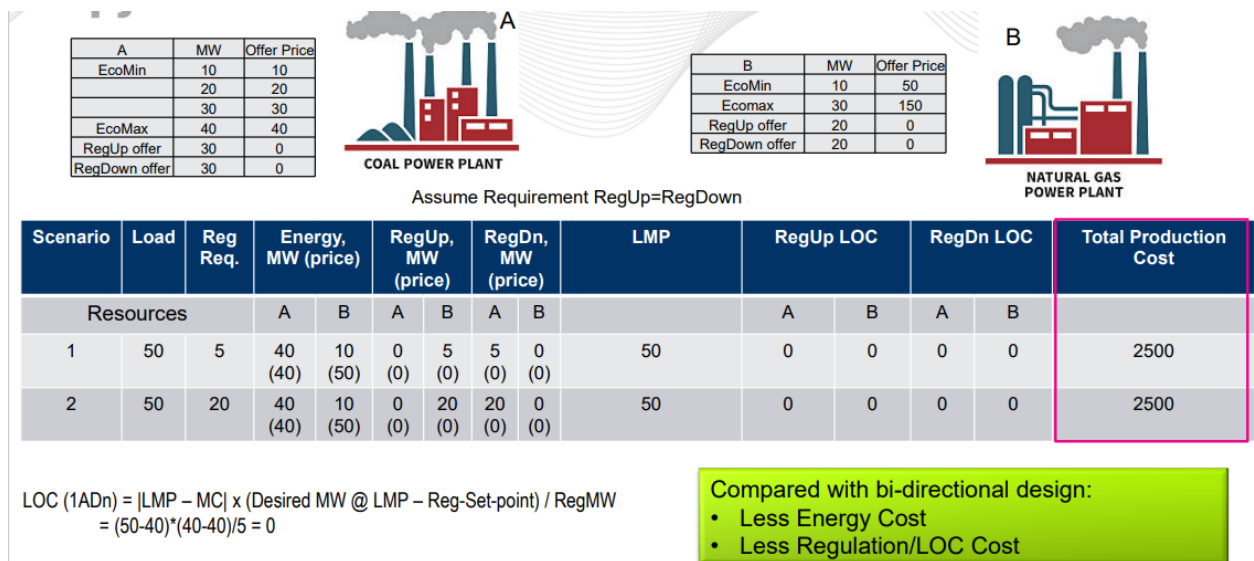

$$LOC (1ADn) = |LMP - MC| \times (\text{Desired MW @ LMP} - \text{Reg-Set-point}) / \text{RegMW} = (50-40) \times (40-40) / 5 = 0$$

Comparing the total production cost under the status quo in Figure 1 against that expected under the new, two-product Regulation market in Figure 2 reveals demonstrably lower total production cost. Much of that cost reduction is due to PJM being able to better isolate the least cost resource to provide RegUp or RegDown by minimizing the opportunity cost.

In addition, the new market design allows for operational flexibility in different requirements for Regulation-Up and Regulation-Down to more uniquely align with system needs through the energy transition. As the system may experience the need for more Regulation ramping capability in one direction (for example Regulation-Down), the Regulation market will be able to procure that capability without having to also (over) procure the capability in the other direction (for example Regulation-Up).

Because the RegUp and RegDown products will not be implemented into the new market design until the Phase 2 implementation, PJM is proposing a new definition for a single “Regulation Requirement” in Phase 1,²⁷ and in Phase 2, separate definitions for a Regulation-Up Requirement and a Regulation-Down Requirement.²⁸ PJM proposes to define the “Regulation Requirement” as the “required megawatts of performance-adjusted Regulation capability to be maintained in a Regulation Zone,” and is “a set megawatt value by commitment interval” which “can increase to account for additional operational uncertainty.”²⁹ Thus, the definition provides for a set value, based on the commitment interval, but provides PJM the ability to adjust that requirement if uncertainty is greater than expected. This is reasonable, and ensures PJM is authorized to procure sufficient amounts of Regulation. In Phase 2, PJM will replace the new defined term “Regulation Requirement” with “Regulation-Up Requirement” and “Regulation-Down Requirement.”³⁰ These defined terms similarly provide for PJM to acquire a set megawatt

²⁷ Phase 1 proposed Tariff, Definitions R-S.

²⁸ Phase 2 proposed Tariff, Definitions R-S.

²⁹ Phase 1 proposed Operating Agreement, Definitions Q-R (Regulation Requirement).

³⁰ See Phase 2 proposed Tariff, Definitions R-S.

value of Regulation to be maintain in a Regulation Zone, and that such value “can increase to account for additional operational uncertainty.”³¹

To install the new market design during Phase 2, PJM is adding definitions for the new Regulation-Down Service and Regulation-Up Service.³² Specifically, PJM is proposing to define Regulation-Up Service as “the capability of a specific generation resource or Demand Resource with appropriate telecommunications and response capability to increase and decrease its output in the upward range from a set point or adjust load in response to a regulating-up control signal, in accordance with the specification in the PJM Manuals.”³³ The Regulation set point is the MW point at which the resource is operating for the energy market (or current load point for a demand resource) and is the focal MW value for defining a resource’s “Regulation range.” Thus, when a resource increases output from the set point, it provides Regulation in the “upward” portion of the Regulation range, and when decreases output from the set point, it provides Regulation in the “downward” portion. In other words, Regulation-Up Service is the ability of a resource to *increase* its megawatt output (or decrease its megawatt consumption in the case of a Demand Resource) in the upward range from a specified point *in response to PJM’s signal*. The definition of “Regulation-Down Service” is similar but, as one would expect, requires the resource to “increase and decrease its output in the *downward* range from a set point or adjust load in response to a regulating-down control signal.”³⁴

³¹ Phase 2 proposed Operating Agreement, Definitions Q-R (Regulation-Up Requirement) and (Regulation-Down Requirement).

³² Phase 2 proposed Tariff, Definitions R-S.

³³ Phase 2 proposed Operating Agreement, Definitions Q-R (Regulation-Up Service).

³⁴ Phase 2 proposed Operating Agreement, Definitions Q-R (Regulation-Down Service) (emphasis added).

In each definition, the requirement that a resource can act in response to a signal is key to PJM's ability to maintain balance on the system. For this reason, the definitions require resources to have the appropriate telecommunications. Details about such equipment will be set forth in the PJM Manuals, as the definitions provide, and the equipment must allow the resource to accurately receive PJM's signal and to instantaneously communicate back to PJM when the resource is responding and by how much. Such information allows PJM to best manage ACE.

PJM is also proposing revisions to the market rules governing the submission of offers in Operating Agreement, Schedule 1, sections 3.2.2 (a), (c), (e), (g), (h), and (j) to transition to the Regulation-Down Service and Regulation-Up Service in PJM's existing market rules for Regulation service.³⁵ Given the switch to two distinct products, PJM is proposing similar revisions to Operating Agreement, Schedule 1, section 1.10.1A(e) to reflect the change from "Regulation service" to "Regulation-Up Service and Regulation-Down Service."³⁶ PJM is also proposing edits to the offer price caps in Operating Agreement, Schedule 1, section 3.2.2A.1(a) to clarify that "[t]he Regulation three-pivotal supplier test will be conducted separately for Regulation-Down Service and Regulation-Up Service in the same Regulation market clearing interval."³⁷

C. PJM Is Proposing to Clear the Regulation Market Twice as Often.

Given the expected increased reliance on Regulation to maintain the system, PJM is proposing a more granular market clearing approach, under which it will commit


³⁵ Phase 2 proposed Operating Agreement, Schedule 1, sections 3.2.2(a), (c), (e), (g), (h), and (j).

³⁶ Phase 2 proposed Tariff, Attachment K-Appendix Section 1.10(e).

³⁷ Phase 2 proposed Operating Agreement, Schedule 1, section 3.2.2A.1(a).

resources to provide Regulation every 30 minutes, in place of the current 60-minute commitment interval, as shown in Figure 3 below.³⁸ By committing resources twice an hour—i.e., at the top (at HH:00) and bottom (at HH:30) of the hour, instead of just at the top of the hour, PJM will be able to better adjust to changing system conditions. The 30-minute look-ahead provides a better forecast over a 60-minute look-ahead, and consequently a better least-cost set of resources commitment to satisfy each Regulation Requirement. That will translate to a reduced or minimized lost opportunity cost in the Regulation pricing in real-time, in addition to allowing PJM to better capture resource and system conditions.

Figure 3: Proposed 30-Minute Clearing Interval

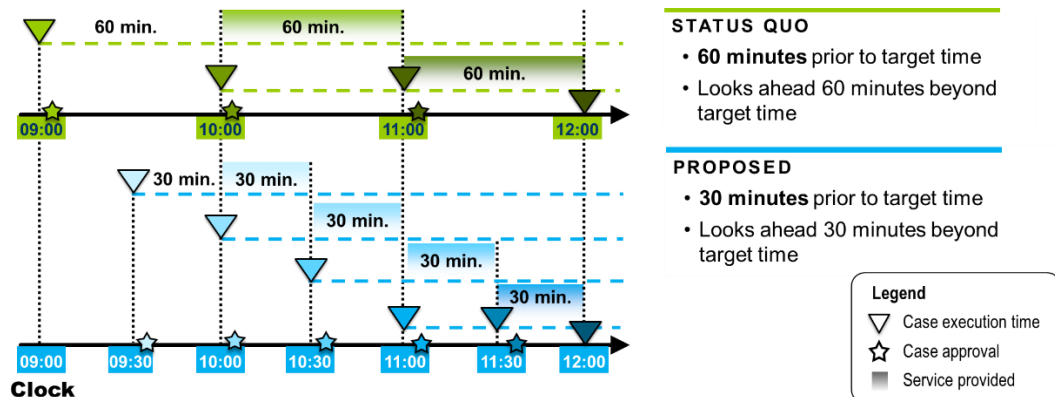

Further, clearing the market twice as often should reduce opportunities for out-of-market uplift payments to resources. By clearing for a shorter interval, PJM’s 30-minute look-ahead and lost opportunity cost calculations (discussed in part III.F.1 below), inherently should be more aligned with real-time system conditions, and minimized than under the current 60-minute dispatch/look-ahead approach.

³⁸ See Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(c).

Further detail may help understand how these benefits would be obtained. As noted, PJM's Regulation market uses an hour-ahead market clearing engine to clear the optimal set of resources to provide Regulation, based on what is known at that time, including load, generation, and constraints (which comprise the "dispatch profile"). As part of the clearing exercise, the engine forecasts energy market prices (i.e., Locational Marginal Prices, or "LMPs") to determine aid in selecting the set of resources to provide Regulation at least cost.³⁹ Using the dispatch profile and forecasted LMPs, PJM determines an estimated opportunity cost for each of the eligible resource offerings into the Regulation market for the hour. The estimated lost opportunity cost is then added to the resource Regulation offers, and the resulting stack of Regulation resources is then ordered by ascending total cost. The lowest cost set of resources necessary to meet the Regulation requirement for that hour is then selected and committed to provide Regulation.

However, the hour-out forecasting of LMPs to estimate a lost opportunity cost does not represent the dynamic real-time system conditions or LMPs. Thus, there is a tradeoff under the current approach of selecting resources to provide Regulation an hour in advance of the real-time operating hour for which the resources are to provide Regulation, i.e., the potential for not having the economically optimal least cost set of resources committed to provide Regulation. While these may be the least cost resource set at the time of

³⁹ See, e.g., Operating Agreement, Schedule 1, section 1.11.4(b) ("The Office of the Interconnection shall obtain Regulation service from the least-cost alternatives available from either pool-scheduled or self-scheduled generation resources and/or Economic Load Response Participant resources as needed to meet Regulation Zone requirements not otherwise satisfied by the Market Buyers. Generation resources or Economic Load Response Participant resources offering to sell Regulation shall be selected to provide Regulation on the basis of each generation resource's and Economic Load Response Participant resource's regulation offer and the estimated opportunity cost of a resource providing regulation and in accordance with the Office of the Interconnection's obligation to minimize the total cost of energy, Operating Reserves, Regulation, and other ancillary services.").

commitment, they often are not the most economical set to provide the Regulation during the hour-long Regulation operation interval. As a result, the opportunity cost component of resource commitment and settlement is most affected by this tradeoff; that is, generally speaking, the most economical set of resources to provide Regulation in a given interval is the set of resources that cumulatively have the least opportunity cost of providing Regulation instead of energy. Accordingly, the proposed approach—by selecting a more economically optimal set of resources as compared to the current approach—should act to reduce cost to consumers.

PJM recognizes that absent a co-optimization of energy, reserves, and Regulation every five minutes, some forecast and estimation will need to be used, but reducing the look-ahead window to 30 minutes will better align the data used in estimating opportunity costs (e.g., the dispatch profile and forecasted LMPs) at the time of commitment versus actual real-time operations. PJM’s proposed switch to a 30-minute commitment interval, using a 30-minute look-ahead would mitigate the disparity in the resource opportunity cost estimated in the clearing and commitment process with that observed in real-time. Thus, with opportunity cost evaluations made for smaller periods and closer to the real-time operation interval, the relative accuracy of such estimations should increase.

To implement this change, PJM is modifying Operating Agreement, Schedule 1 section 3.2.2(c) to allow PJM to “commit resources to provide Regulation every 30 minutes, for the clock intervals of the first 30 minutes of an hour and the second 30 minutes of an hour, up to the Regulation Requirement of such Regulation Zone.”⁴⁰ PJM also is

⁴⁰ Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(c).

clarifying that, regardless of the look ahead period or commitment interval, when clearing the Regulation market, it “shall select resources in merit order, taking into account the resource’s mileage Regulation offer, capability Regulation offer, and estimated resource-specific opportunity cost, all converted into their performance adjusted values as further detailed in the PJM Manuals.”⁴¹

D. PJM Is Proposing a Number of Enhancements and Updates to the Regulation Offer Rules.

- 1. PJM is renaming the “performance” Regulation offer as the “mileage” Regulation offer, and updating how PJM adjusts such offers, but is not changing the Regulation mileage-clearing price determination.*

As part of this proposal, PJM is renaming the “performance offer” as the “mileage offer.”⁴² This change in name will allow this offer component to better reflect what is actually being offered—the MW range of Regulation being offered at the $\$/\Delta\text{MW}$. The $\$/\Delta\text{MW}$ is converted to $\$/\text{MW}$ by multiplying with PJM calculated historic mileage of the applicable Regulation signal in $\Delta\text{MW}/\text{MW}$. Thus, the mileage offer provides the incremental cost per megawatt to provide Regulation movement.

PJM also is making two substantive changes to how it will consider a resource’s mileage offer. First, consistent with the elimination of the RegA and RegD signals, PJM will no longer adjust the offer by a unit-specific benefits factor,⁴³ but will retain the adjustment by the resource’s “historical performance score,” which is based on a 100-clock hour rolling average of the resource’s actual performance score.

⁴¹ Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(c).

⁴² See Phase 1 proposed Operating Agreement, Schedule 1, sections 1.10.1A(e)(ii), 3.2.2(g)

⁴³ See Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(g).

Second, in pricing, instead of adjusting the offer by the proxy Real-time amount of Regulation signal movement,⁴⁴ i.e., mileage, that the resource is dispatched, PJM will adjust each offer in each 5-minute settlement interval by the same 30-day rolling average of PJM's Regulation signal movement, i.e., "the amount of historically dispatched Regulation (mileage) calculated by [PJM]."⁴⁵ The historic mileage component allows for the conversion of the $\$/\Delta MW$ offer into a $\$/MW$ value. This is used to set the clearing price at the estimated cost of the wear and tear that will be requested from the resource providing Regulation service.

In sum, PJM will adjust a resource's submitted mileage offer consistent with (1) how well PJM can reasonably expect the resource to follow the Regulation signal based on its historical performance, and (2) how much Regulation signal movement PJM can reasonably expect for the commitment interval based on PJM's historical mileage need for Regulation. Formulaically, PJM considers a resource's mileage offer as follows:

$$\text{Adjusted mileage offer} = \frac{(\text{mileage offer } (\$/\Delta MW) * \text{historic mileage } (\Delta MW/MW))}{\text{Resource's historic performance score}}$$

Consistent with the current approach, the highest $\$/MW$ adjusted mileage offer from the set of resources providing Regulation service in a given 5-minute settlement interval will set the Regulation market mileage-clearing price,⁴⁶ which is used to

⁴⁴ See *PJM Manual 11: Energy & Ancillary Services Market Operations (Rev. 130)*, PJM Interconnection, L.L.C., at section 3.2.7.3 (Mar. 20 2024), <https://www.pjm.com/-/media/documents/manuals/m11.ashx> ("Manual 11") ("Mileage is the summation of movement requested by the regulation control signal a resource is following. It is calculated for the duration of the market hour for each regulation control signal (i.e. RegA and RegD).").

⁴⁵ See Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(g). The determination of the historic average mileage will be in accordance with the approach PJM will include in the PJM Manuals. As discussed during the stakeholder process, PJM intends to use a rolling 30-day average of the average mileage (or movement) requested in the regulation signal.

⁴⁶ See Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(g).

compensate resources based on their assigned Regulation, their actual performance (discussed below in section III.G),⁴⁷ the historic mileage, and the PJM-requested mileage (discussed below in section III.H).

2. *PJM is proposing minor changes to PJM's adjustment of a resource's capability Regulation offer, but is not changing the Regulation capability-clearing price determination.*

In the Regulation market, sellers submit capability offers to cover the price of reserving the resource to provide Regulation during the commitment interval (currently, one hour and as proposed, 30 minutes). To account for the fact that resources typically cannot be counted on to provide 100% performance in response to a Regulation dispatch signal, PJM adjusts the capability offer by the resource's historic performance score.⁴⁸ PJM is not revising this aspect of the rule. However, PJM is removing the requirement that PJM adjust the capability offer by the "unit-specific benefits factor," as this is no longer appropriate with the elimination of the RegA and RegD signals.⁴⁹ Formulaically, PJM considers a resource's capability offer as follows:

$$\text{Adjusted capability offer} = \frac{\text{(capability offer (\$/MW))}}{\text{Resource's historic performance score}}$$

PJM is also not proposing to change the determination of the Regulation market capability-clearing price for each 5-minute settlement interval. It will continue to be

⁴⁷ See Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(g).

⁴⁸ The Regulation market rules current refer to this as the "historic accuracy score." See, e.g., Operating Agreement, Schedule 1, sections 3.2.2(h) and 3.2.2(k). PJM is updating the market rules to use the term "performance" in place of "accuracy" in reference to the historic rating of a resource's behavior following the Regulation dispatch signal. This change will allow the terminology to better convey that PJM is adjusting the resource's offer based on its historic actual "performance."

⁴⁹ See Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(h).

determined as the difference of the “total Regulation market clearing price” minus the “Regulation market mileage-clearing price.”⁵⁰

3. *General changes to the submission of offers in the Regulation market that will occur in Phase 1.*

PJM is proposing revisions to the market rules governing the submission of offers in Operating Agreement, Schedule 1, section 1.10.1A(e) to clarify that offers are submitted for each “30 minute Regulation clearing interval.”⁵¹ Consistent with the change to a 30-minute clearing interval, PJM is proposing that sellers may still vary their offers hourly but update availability status in each 30-minute interval. Sellers may update their availability to provide Regulation service for each 30-minute interval, up to 35 minutes before the applicable 30-minute interval, which is a change from 65 minutes before each hour-long commitment period.⁵² Market Sellers that have not opted out of intraday hourly offers will continue to be able to update their Regulation offers hourly 35 minutes before the top of the hour.

In addition, PJM is proposing to limit that “[o]nly Regulation-only resources may include all variable operation and maintenance expenses in the mileage offer, as defined in the PJM Manuals.”⁵³ This change is reasonable as most generation resources can, and do, include variable operation and maintenance expenses in their energy market offers, and

⁵⁰ See Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(h).

⁵¹ See Phase 1 proposed Operating Agreement, Schedule 1, section 1.10.1A(e).

⁵² See Phase 1 proposed Operating Agreement, Schedule 1, section 1.10.1A(e).

⁵³ Phase 1 proposed Operating Agreement, Schedule 1, section 1.10.1A(e)(ii)(a). A “Regulation-only” resource in this context is a resource that participates *only* in the Regulation market, and does not participate in the energy market, or have any available energy market schedules from which PJM may commit or dispatch the resource.

therefore, precluding inclusion of the same costs in their Regulation offers avoids a “double recovery” issue.

4. *Market Participants will submit separate offers for Regulation-Up and Regulation-Down Services.*

Given that RegUp and RegDown are two distinct services, Market Participants will submit offers for each service separately. Accordingly, PJM is proposing to update the Regulation offer rules in Operating Agreement, Schedule 1, section 1.10.1A(e) to distinguish between the two types of Regulation services and offers for each.⁵⁴

As part of updating the current offer rules, which are designed for a single bidirectional product, PJM is adjusting the overall offer cap stated in the rules. Specifically, the current rules provide that a participant-submitted offer to provide Regulation (which would not include PJM-determined opportunity cost⁵⁵) cannot exceed \$100/MW-hour.⁵⁶ Reflecting the unidirectional nature of RegUp and RegDown and that each generally represents half of a bidirectional offer, PJM is proposing to halve the offer cap to \$50/MW-hour and clarify the language that the cap applies to the “applicable Regulation service” offer, whether RegUp or RegDown, “independently.”⁵⁷

In addition, PJM is updating the stated rules for cost-based offers to state which service, RegUp or RegDown, the specific cost may apply. Specifically, PJM is proposing that the capability offer cost component related to “the fuel cost increase due to the steady-

⁵⁴ See Phase 2 proposed Operating Agreement, Schedule 1, section 1.10.1A(e).

⁵⁵ See Operating Agreement, Schedule 1, sections 3.2.2(d) and (e).

⁵⁶ See Operating Agreement, Schedule 1, section 1.10.1A(e) (“The total of the performance offer multiplied by the historical average mileage used in the market clearing plus the capability offer shall not exceed \$100/megawatt-hour.”).

⁵⁷ Phase 2 proposed Operating Agreement, Schedule 1, section 1.10.1A(e).

state heat rate increase resulting from operating the unit at lower megawatt output incurred from the provision of Regulation” only may be included in offers for RegDown service.⁵⁸ Such limitation is reasonable as the cost is directly associated with unit-specific heat rate degradation, which increases per MW fuel costs, from operating at lower MW—i.e., moving to a lesser MW associated with the RegDown service. PJM is clarifying that both RegUp and RegDown services may include (1) in the mileage offer component “costs associated with movement of the Regulation resource incurred from the provision”⁵⁹ and (2) a cost adder of \$6/MW of Regulation that can be added to the capability offer.⁶⁰ The \$6/MW cost adder is half of the current allowed \$12/MW cost adder, but such halving reflects the change from a single bidirectional service to two unidirectional services.

5. *With the establishment of the Regulation-Up and Regulation-Down products, Regulation resources need only to have sufficient capability in the direction of the Regulation product they are committed to provide.*

The establishment of two Regulation products affects the way in which PJM will commit resources to provide Regulation. Currently, Tariff, Schedule 3 provides that for any resource committed to provide Regulation, “[t]he Regulation range of a resource [i.e., the operating band specified by the resource owner where a resource can reliably provide Regulation service, and limits the amount of Regulation MW a resource can be assigned] shall be at least twice the amount of Regulation assigned.”⁶¹ Thus, if a resource Regulation range is 100 MW, which is the difference between the resource’s Regulation high limit and

⁵⁸ Phase 2 proposed Operating Agreement, Schedule 1, section 1.10.1A(e)(i).

⁵⁹ Phase 2 proposed Operating Agreement, Schedule 1, section 1.10.1A(e)(ii).

⁶⁰ Phase 2 proposed Operating Agreement, Schedule 1, section 1.10.1A(e)(iii).

⁶¹ Tariff, Schedule 3(c).

low limit, its Regulation assignment may range between zero and offered MW but will be capped at 50 MW.

However, with the switch from a bidirectional product to two unidirectional products, there is no longer a need for the Regulation range to be double the amount assigned. Rather, PJM can assign a resource to provide RegUp up to the lesser of the Regulation offer megawatt or the full Regulation range determined as the difference between Regulation maximum and Regulation minimum parameters. Such a change provides additional flexibility for resources to have available Regulation capability and can increase the number of units available to bid which helps both maintain reliability and can increase competition and lower costs to customers.

Accordingly, PJM is proposing to revise Tariff, Schedule 3 to provide that the “Regulation megawatt range to a resource providing Regulation-Up Service shall be less than or equal to, and within the Regulation range specified.”⁶² PJM likewise proposes that the amount of Regulation-Down Service assigned must be “less than or equal to, and within the Regulation range specified” in the Market Participant’s offer.⁶³ And, consistent with the existing rules for the current bidirectional product, if a resource is assigned both Regulation-Up and Regulation-Down Services in the same interval, the amount assigned must be “less than or equal to *half of*, and within the Regulation range specified.”⁶⁴ Finally, PJM similarly proposes that a resource capable of automatic energy dispatch and providing Regulation will have “its energy dispatch range reduced from the Regulation range by at

⁶² Phase 2 proposed Tariff, Schedule 3(c).

⁶³ Phase 2 proposed Tariff, Schedule 3(c).

⁶⁴ Phase 2 proposed Tariff, Schedule 3(c) (emphasis added).

least the amount of Regulation assigned,” with the reduction “in the upward direction for Regulation-Up Service,” and downward for Regulation-Down Service.⁶⁵

While the foregoing revisions to Tariff, Schedule 3 are included in the Phase 2 set of changes, corresponding with the addition of Regulation-Up and Regulation-Down Services, PJM is also proposing several minor revisions to Tariff, Schedule 3 in the Phase 1 revisions. Specifically, PJM proposes to: (1) change a reference from “sixty” to “60;” (2) remove the redundant qualifier “on-line” in the description of resources providing Regulation and Frequency Response; (3) capitalize “requirement” in recognition of the newly defined term “Regulation Requirement;” (4) add “resources” to clarify that “Qualified Regulation *resources* must satisfy . . . ;” and (5) change “offered” to “committed” such that Schedule 3 provides that PJM sends Regulation signals to resources that have been committed to provide Regulation and not those that have offered to do so.⁶⁶

6. *PJM is proposing corresponding changes to the Regulation-specific offer price cap rules.*

As part of this proposal to update the Regulation market rules, PJM is proposing several ministerial changes to the Regulation market offer price cap rules in Operating Agreement, Schedule 1, section 3.2.2A. Specifically, PJM is: (1) changing the references to the commitment “hour” to “Regulation market clearing interval” or “interval,” as appropriate; (2) adding “Regulation” in front of “three-pivotal supplier test” to clarify that the relevant test is the one for the Regulation market; (3) removing references to the “benefits factor;” (4) changing references to the “accuracy score” to the “performance

⁶⁵ Phase 2 proposed Tariff, Schedule 3(d).

⁶⁶ Phase 1 proposed Tariff, Schedule 3 (emphasis added).

score;” (5) changing references to the “performance” offer to the “mileage” offer; and (6) capitalizing the Regulation “Requirement” consistent with PJM’s proposal to define that term in the Tariff.⁶⁷

E. PJM Is Proposing to Update the Compensation Determination (i.e., Settlements), While Ensuring Resources Continue to be Paid Based on Performance.

In Order No. 755, the Commission held that “a resource must be measured [and compensated accordingly] based on the absolute amount of Regulation-Up and Regulation-Down it provides in response to the system operator’s dispatch signal.”⁶⁸ The provision of Regulation is compensated through a two-part payment structure, mirroring its offer structure: a capability payment and a mileage (formerly, “performance”) payment.

The 5-minute capability payment compensates resources for making available a MW quantity of Regulation and equals the product of the resource’s cleared Regulation MW multiplied by the resource’s 5-minute actual performance score⁶⁹ and by the capability Regulation market clearing price divided by 12.⁷⁰ PJM is not proposing any changes to the determination of the settlement of the capability payment, except to reflect changing the name of “accuracy” score to “performance” score.⁷¹

The 5-minute mileage payment compensates resources for actually providing Regulation, and this purpose is reflected in the determination of the payment. The mileage

⁶⁷ See Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2A.1.

⁶⁸ Order No. 755-A at P 14 (quoting Order No. 755 at P 133).

⁶⁹ As noted, the current Regulation market rules call it an “accuracy” score, but for ease of understanding, PJM is using “performance” score consistently throughout this letter.

⁷⁰ See Operating Agreement, Schedule 1, section 3.2.2(h).

⁷¹ See Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(h).

payment is the product of the resource's cleared Regulation MW multiplied by (1) the resource's 5-minute actual performance score; (2) the mileage Regulation market clearing price divided by 12; and (3) the mileage ratio. PJM is proposing to retain the use of the performance score and the mileage Regulation market clearing price in the settlement determination, but PJM is proposing to update the mileage ratio formulation.

PJM's proposed move to a one signal, two product market design simplifies the settlement determination. With the advent of one signal, there is no need for any signal conversion to measure performance, or the quantity of movement of a signal type relative to the other (RegA/RegA or RegD/RegA), as the current mileage ratio does. Nonetheless, PJM proposes to retain a mileage ratio in the settlement determination, to compensate resources for the actual requested mileage in the commitment period. Specifically, PJM proposes a new mileage ratio that measures the resource's actual mileage in a given 5-minute settlement interval against "the historic requested mileage for the Regulation dispatch signal."⁷² This ratio accounts for the fact that, during real-time operations, PJM's Regulation signal may generate more or less mileage than the historic value used to determine the clearing price. Thus, to remain consistent and ensure the resource is being compensated for the *actual* mileage or movement requested during a given interval, PJM is proposing to multiply by a ratio of (actual mileage/historic mileage) in the settlement equation shown below.⁷³

⁷² See Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(g). While PJM proposes to implement this approach in Phase 1, PJM drafted the proposed language to apply to both RegUp and RegDown products.

⁷³ PJM is also proposing to remove references to the "mileage ratio" in the Market Suspension rules, such that "if the regulation mileage cannot be calculated during a Market Suspension, the mileage will be set to

$$\text{Mileage Credit (5-minute)} = \text{Reg Assigned MW} * \text{5-minute actual performance score} * \text{5-minute Mileage Ratio} * \text{Mileage Clearing Price} / 12$$

$$\text{Where 5-minute Mileage Ratio} = \frac{\text{Product Signal Actual 5-minute Mileage}}{\text{Product Signal Historical Mileage}}$$

Thus, under PJM’s proposed market design, mileage and “pay for performance” will remain foundational drivers of compensation, as the performance payment will continue to reflect both the megawatts of Regulation provided (i.e., the mileage up or down (or both)) and how well the resource provided Regulation in the given interval (performance score).

F. PJM is Refining the Lost Opportunity Cost Determinations to More Accurately Capture the Foregone Energy Market Revenues Associated with Providing Regulation Service.

A primary goal in designing reserve markets (like Regulation) is to ensure that resources are indifferent to providing energy or reserves. Thus, to ensure such indifference, Regulation clearing prices should account for the foregone above-cost revenue (i.e. profit) or increase in costs relative to the energy market associated with providing Regulation and not energy. In other words, resources should be compensated for their lost opportunity costs when being committed to provide Regulation. This ensures that when PJM dispatches a resource off its current energy assignment so that it can provide Regulation, the resource will follow dispatch and be capable of providing the Regulation needed. Current market rules apply this approach.⁷⁴ Clearing prices for Regulation are determined in part based on the “unit-specific opportunity costs” of a resource “equal to the product of:”

one (1) for the Market Suspension period.” Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(k)(ii).

⁷⁴ See Operating Agreement, Schedule 1, section 3.2.2(d).

(1) the difference on the resource’s energy market offer curve between the “set point” required for providing Regulation and the “resource’s expected output level if it had been dispatched in economic merit order;” and

(2) the difference (absolute value) between the Locational Marginal Price at the resource’s generation bus and the “lesser of the available market-based or highest available cost-based energy offer” of the resource “at the megawatt level of the Regulation set point.”⁷⁵

In short, the resource’s opportunity cost is based generally on the amount of money a resource would have earned in the energy market and what the resource may earn in the Regulation market.

However, upon review, PJM determined that the opportunity cost determination used to calculate the Regulation market clearing prices, as currently described in the Regulation market rules, incorporates certain assumptions that tend to result in opportunity costs that differ (both greater than and less than) from what the resource would otherwise earn in the energy market. Accordingly, to ensure resources have the proper incentive to participate in the Regulation market and are properly compensated for providing Regulation instead of energy, PJM is proposing several reforms to the lost opportunity cost determinations within the Regulation market. By better capturing the opportunity costs facing Regulation providers, these reforms will further refine the accuracy of Regulation clearing prices (which relies on resource opportunity cost) and dispatch/commitment decisions. Specifically, PJM is proposing to, in the determination of opportunity cost: (1) update the resource’s energy schedule used to determine lost opportunity costs for online resources; (2) modify the desired MW (also known as “expected output level if had been dispatched in economic merit order”) input value to the lost opportunity cost calculation,

⁷⁵ Operating Agreement, Schedule 1, section 3.2.2(d).

(3) modify the equation for lost opportunity cost, and (4) adjust the commitment shoulder periods used in the opportunity cost determination for unit coming into Regulation or going out of Regulation.

By more accurately determining a resource's lost opportunity cost, PJM's Regulation market can better select the least cost set of resources to provide Regulation, and operate more efficiently in real-time, with more accurate pricing. Further, more accurate lost opportunity determinations would (1) result in more appropriate compensation; (2) reduce the incentive for resources to ignore the Regulation signal and seek energy market revenues; and (3) facilitate more precise price formation.

1. *PJM proposes to use the energy schedule (i.e., Final Offer) on which an online resource is dispatched for energy to calculate lost opportunity costs.*

Currently, lost opportunity costs for online and offline resources are calculated using the lesser of the available market-based offer (sometimes referred to as a “price-based” offer) or highest cost-based energy offers from the resource.⁷⁶ However, for online resources, when the energy schedule used for the estimated lost opportunity cost evaluation and lost opportunity cost calculation for determining the 5-minute Regulation clearing prices differs from the energy schedule on which the resource is running to provide energy, the resulting lost opportunity cost value will be over- or under-stated. Thus, because, under the current rules, the baseline offer used to determine opportunity cost may not match what occurred in real-time, the lost opportunity cost can be over-stated when the resource is being backed down from its economic energy dispatch point and can be under-stated when

⁷⁶ See Operating Agreement, Schedule 1, sections 3.2.2(d) and (e).

the resource is being raised from its economic energy dispatch point to provide Regulation. To correct this issue, PJM is proposing to determine an online resource's lost opportunity cost calculation for determining the 5-minute Regulation clearing prices using the schedule on which the resource is running for energy, i.e., the resource's "Final Offer."⁷⁷

To calculate the estimated lost opportunity cost that will be used to select the set of resources to provide Regulation for a given 30-minute commitment window, PJM is proposing to use the same methodology as above for online resources. That is, to determine an online resource's estimated lost opportunity cost for commitment, PJM will use the schedule on which the resource is dispatched for energy, i.e., the resource's "Final Offer."⁷⁸ For offline resources that need to be brought online to provide Regulation, PJM will continue to use the cheapest of the price-based or cost-based available energy schedules to calculate the estimated lost opportunity costs for Regulation commitment decision.⁷⁹ Maintenance of the current "lesser of" approach is reasonable as the resource is offline and not currently running on any schedule. These resources will subsequently be online during the real-time commitment periods and will be priced and settled using the lost opportunity cost calculation methods for online resources.

The examples below illustrate how PJM's proposal will better identify a resource's lost opportunity cost. Both examples demonstrate the lost opportunity cost calculation for

⁷⁷ See Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(d).

⁷⁸ See Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(d).

⁷⁹ PJM intends to detail in Manual 11 the process for determining which schedule PJM will use for determining the lost opportunity cost for offline resources. To the extent, the Commission would like PJM to detail in the Regulation market rules stated in the Operating Agreement and Tariff that, for offline resources, PJM will continue to use the cheapest of the price-based or cost-based available energy schedules to calculate the estimated lost opportunity costs for regulation commitment decision, PJM is willing (and agrees) to add that through a compliance filing.

an online resource, providing energy on its market-based offer. The examples assume the resource’s seller did not fail the energy three pivotal supplier test, which resulted in the resource running on its market-based offer, and the resource had a cheaper cost-based offer available.


Figure 4 below shows that under the current rules the opportunity cost of the resource to provide Regulation is overvalued. The red line represents the “lesser” cost-based energy schedule, while the green line represents the market-based energy schedule on which the resource is currently providing energy. Under the current rules, the lost opportunity cost for this resource would be both the green shaded and red shaded portions of the graph when, because the resource is currently providing energy on its market-based schedule, the resource’s actual opportunity cost is the green shaded portion, as that portion is the revenues the resource would forego to provide Regulation.

Figure 4: Overvaluing Lost Opportunity Cost

$$LOC = |LMP_1 - MC| * |Economic Dispatch - Reg Basepoint|$$

$$LOC_{price} = |\$A - \$B| * |Economic Dispatch - Reg Basepoint|$$

$$LOC_{cost} = |\$A - \$C| * |Economic Dispatch - Reg Basepoint|$$

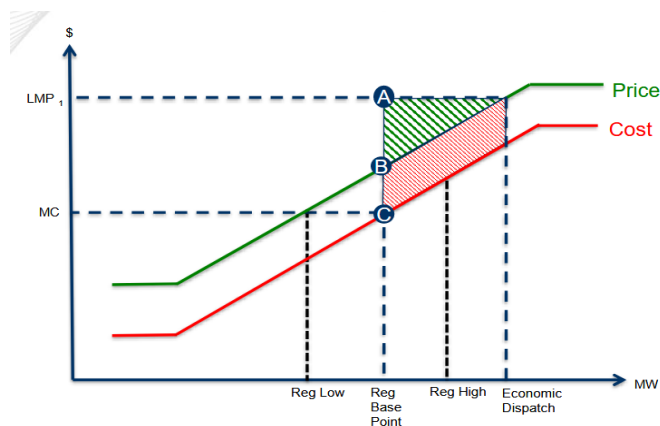


In the scenario shown in Figure 5 below, the cost of the resource to provide Regulation is undervalued. The red and green lines represent the same respective energy schedule as in Figure 4 above. Here, however, the resource is running for energy on its higher-cost, market-based schedule but current Regulation market rules call for the lost opportunity cost to be calculated using the cost schedule as it is the “lesser” available schedule. As a result, the resource’s lost opportunity cost would be only the red shaded portion, while it should be the combined green and red portions, given that the resource would actually be operating on the market-based offer.

Figure 5: Undervaluing Lost Opportunity Cost

$$RegLOC = |LMP_2 - MC| * |Reg\ Basepoint - Economic\ Dispatch|$$

$$RegLOC_{price} = |\$A - \$B| * |Reg\ Basepoint - Economic\ Dispatch|$$

$$RegLOC_{cost} = |\$A - \$C| * |Reg\ Basepoint - Economic\ Dispatch|$$

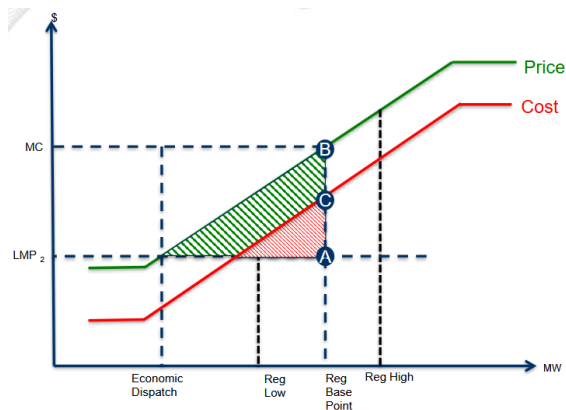

Using the energy schedule on which the online resource is already providing energy to calculate the lost opportunity cost will better determine a resource’s real-time opportunity cost of providing Regulation and not energy, and will better align the incremental costs of Regulation and energy to allow for a more efficient least-cost solution.

2. *PJM proposes to move the calculation of lost opportunity cost to a “tracking” ramp rate limited desired MW at LMP.*

The determination of an opportunity cost necessarily must consider the resource’s ability to actually follow the energy market price signal. That is, the amount of megawatts the opportunity cost determination posits that a resource could produce at any given moment must be achievable. To this end, the current Regulation market rules consider the “resource’s expected output level if it had been dispatched in economic merit order.”⁸⁰ However, this approach is not as accurate as it could be; it overstates a resource’s lost opportunity cost, as it neither consider the resource’s “ramp rate,” i.e., the speed at which the resource can produce additional energy, or whether the resource is consistently following the PJM energy dispatch signal.

To better account for the degree to which a resource is actually foregoing revenues to provide Regulation, PJM is proposing to increase the granularity of the “resource’s expected output level if it had been dispatched in economic merit order”⁸¹ so that PJM is evaluating the resource along its offer curve in accordance with the resource’s ramp rate. In other words, for the purpose of Regulation opportunity cost calculation, PJM will consider the energy market megawatts the Regulation resource would have produced if it had been economically dispatched based on its ramp rate, and using the last energy dispatched MW, as determined by PJM’s security-constrained economic dispatch, rather than the resource actual energy output. Accordingly, PJM is proposing to consider “the

⁸⁰ See Operating Agreement, Schedule 1, section 3.2.2 (d) and (e).

⁸¹ Operating Agreement, Schedule 1, section 3.2.2 (d) and (e).

resource's tracking ramp-rate limited expected output level if it had been dispatched for energy in economic merit order" as part of the lost opportunity cost determinations.⁸²

3. *PJM's proposed reformulation of the lost opportunity cost determination retains, as the final two data points in the Regulation lost opportunity cost determination, the resource's applicable LMP and the resource's Regulation set point.*

In addition to the resource's Final Offer and its tracking ramp-rate limited expected output level, PJM proposes to retain two data points from the current opportunity cost determination (1) the LMPs "at the generation bus for the regulating resource," and (2) the resource's "Regulation set point."⁸³ However, given that PJM is proposing to use the resource's current energy schedule, PJM proposes that the Regulation set point be determined as "the resource's regulation set point on the energy schedule curve on which the resource is running in the PJM Interchange Energy Market."⁸⁴

Taking all these changes together, PJM is reformulating the description of lost opportunity cost in the Regulation market rules. Currently, the rules describe it as the product of two values.⁸⁵ While true, this does not best convey lost opportunity cost. Rather, lost opportunity cost is the function of these four data points and is best understood as a geometric area, as shown in Figure 6 below. Accordingly, PJM proposes that each resource's opportunity cost "equal to the area bounded by:

- (i) the Locational Marginal Price at the generation bus for the regulating resource;

⁸² Phase 1 proposed Operating Agreement, Schedule 1, sections 3.2.2(d) and (e).

⁸³ Compare Operating Agreement, Schedule 1, section 3.2.2(d), with Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(d).


⁸⁴ Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(d).

⁸⁵ See Operating Agreement, Schedule 1, section 3.2.2(d).

- (ii) the resource’s Final Offer;
- (iii) the resource’s tracking ramp-rate limited expected output level if it had been dispatched for energy in economic merit order, as further described in the PJM Manuals; and
- (iv) the generation resource’s regulation set point on the energy schedule curve on which the resource is running in the PJM Interchange Energy Market.”⁸⁶

PJM proposes to use this same general approach for determining both the lost opportunity cost used in settlements and the inter-temporal opportunity cost used to price and select resources for commitment. Figure 6 below illustrates how PJM will determine lost opportunity cost under this formulation.

Figure 6: Determining Lost Opportunity Cost

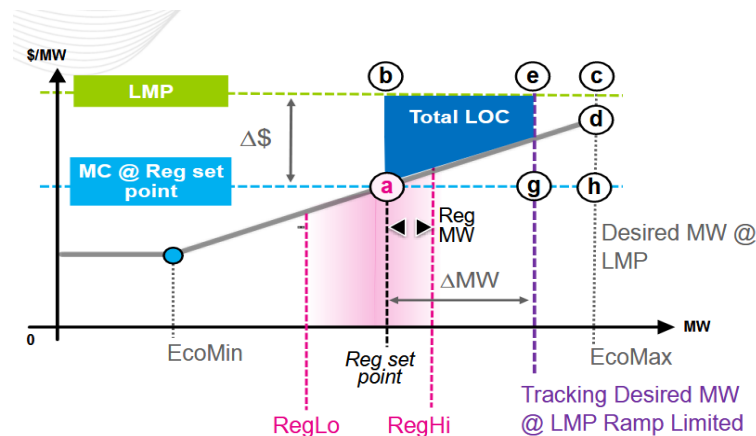

The blue shaded area represents the resource’s lost opportunity cost resulting from the new, more accurate approach.

PJM is proposing to further modify the value determined in accordance above for the final “inter-temporal opportunity cost” determination, which is the one used to set the clearing price and “represents the foregone value when a resource must operate at one time,

⁸⁶ Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(d); *see also id.*, section 3.2.2(e) (same).

and therefore must either forego a profit from selling energy at a later time or incur costs due to consuming at a later time.”⁸⁷ Specifically, unlike the settlement opportunity cost determination, to determine the lost opportunity cost for clearing and commitment purposes, PJM proposes to continue to divide the value determined in accordance with the above data points “by the resource performance score and further divided by the resource’s regulation assigned megawatt to convert to dollars per megawatt.”⁸⁸ These two steps will allow PJM to reflect a resource’s historical performance in its offer by the amount of Regulation PJM can reasonably expect the resource to provide based on its past behavior following the Regulation signal, while also converting the value into the \$/MW terms required to be an offer. As discussed above, the resultant lost opportunity cost value is added to the resource’s mileage offer and capability offer to yield the total offer considered by the clearing software in deciding which resources to commit for a given interval.

4. *PJM is updating the determination of the resource-specific lost opportunity cost credit used in settlements.*

PJM proposes to determine a resource’s specific opportunity cost for purposes of determining its Regulation credit (i.e., payment) using the formula outlined above, i.e., bounding the area using the same four data points, and then “adjusting for the performance score,” such the bounded area is multiplied by the resource’s performance score for that interval as one component of the total opportunity cost in settlements, to account for the

⁸⁷ Order No. 755 at P 80 n.124.

⁸⁸ Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(d). PJM is not proposing to change the inter-temporal opportunity cost determination for hydroelectric resources, except to clarify that PJM will use the day-ahead LMPs to calculate “the average of the [LMP] values used in the” lost opportunity cost calculation for both commitment and settlements. Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(d).

actual benefit (i.e., performance) the system received from this resource during the Regulation intervals and that the clearing calculated opportunity cost accounts for the historic performance of the resource. However, this is not a Regulation resource's only opportunity cost. The current rules also credit Regulation resources for lost opportunity costs for "the foregone revenue and increased costs incurred when a resource deviates from its economic output level in preparation for providing regulation service" and "returning to the economic output level" following the provision of Regulation service.⁸⁹ The current rules call for determining opportunity cost based on the three 5-minute Real-time Settlement Intervals preceding the Regulation commitment and the three 5 minute Real-time Settlement Intervals following the commitment.

PJM proposes to reduce both of these "shoulder" intervals to *two* 5-minute Real-time Settlement Intervals. The current 15-minute shoulder periods are a vestige of PJM's prior "real-time security-constrained economic dispatch software program [which began] sending signals to Regulation resources 15 minutes before the resource [was] scheduled to perform."⁹⁰ Since then, PJM has updated its security-constrained economic dispatch software to use a 10-minute look ahead and begin sending signals to Regulation resources 10 minutes ahead of their commitments. Accordingly, a 10-minute period for determining lost opportunity cost should be more in line with a Regulation resource's behavior.

In addition, consistent with the general changes to the lost opportunity cost determination, PJM is revising the lost opportunity cost determination for the two 5-minute

⁸⁹ *PJM Interconnection, L.L.C.*, 148 FERC ¶ 61,217, at P 2 (2014).

⁹⁰ *PJM Interconnection, L.L.C.*, Order No. 825 Compliance Filing of PJM Interconnection, L.L.C., Docket No. ER17-775-000, at 23 (Jan. 11, 2017).

interval shoulder periods before and after its “regulation commitment” to use the resource’s “tracking expected ramp-rate limited output” and the resource’s “Final Offer, at the megawatt level of the Regulation set point for the resource.”⁹¹ As a result, PJM is removing the reference to the “lesser of” the resource’s available market-based offer or highest cost based offer.⁹²

5. *PJM is clarifying that “Regulation only” resources do not get opportunity costs.*

There are a number of resources (mainly battery storage resources) that do not participate in the energy market, but do provide Regulation. Given that the lost opportunity costs PJM determines is based on the energy market revenues a resource foregoes to follow the Regulation signal, a resource that does not participate in the energy market does not incur any of those lost opportunity costs to provide Regulation. Accordingly, PJM proposes to update the Regulation market rules to state that the opportunity costs of “regulation only resources to provide Regulation are zero.”⁹³ PJM is making this change in the rules for inter-temporal lost opportunity cost⁹⁴ and for the settlements lost opportunity cost.⁹⁵

⁹¹ Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(e).

⁹² See Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(e).

⁹³ See Phase 1 proposed Operating Agreement, Schedule 1, sections 3.2.2(d) and (e).

⁹⁴ See Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(d).

⁹⁵ See Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(e).

6. *As part of adding the Regulation-Up and Regulation-Down products, PJM is proposing modification to the lost opportunity cost calculation used in settlements.*

As discussed, PJM intends to implement the Regulation market changes in two phases. The foregoing changes to the lost opportunity cost determinations will occur in Phase 1. In Phase 2, PJM proposes to change Regulation from a single bidirectional product to two products—Regulation-Up and Regulation-Down. The bifurcation of the Regulation product requires additional changes to the lost opportunity cost determination used for settlements.

First, PJM proposes to recognize that PJM will “consider both the Regulation-Up Service and Regulation-Down Service selected MW assignments” in the opportunity cost determination.⁹⁶ That is, PJM will consider whether the resource provided Regulation-Up, Regulation-Down, or both—and consider that simultaneously—in evaluating the foregone energy market revenues above cost or additional cost incurred to provide Regulation.

Second, PJM proposes that the resource-specific lost opportunity cost credit used in settlements (described above in section III.F.4) should be adjusted to account for the fact that the Regulation set point on which the resource was committed to provide Regulation did not necessarily reflect the amount of energy the resource produced while providing the Regulation service PJM actually asked the resource to provide in that interval. That is, PJM may have requested more or less energy from the resources providing the Regulation service (e.g., RegUp or RegDown) than was contemplated at the time of commitment, through the regulation set point. PJM refers to this discrepancy as “Regulation signal bias,”

⁹⁶ See Phase 2 proposed Operating Agreement, Schedule 1, section 3.2.2(e).

which explained in greater detail below, and it would result in the resource's opportunity cost to be over- or under-stated because the "Regulation set point" used in that determination ended up not being exactly correctly designated at the outset of the commitment.

Regulation signal bias will occur naturally. The dynamic nature of the electric grid means that PJM's ACE varies from second to second, but PJM generally attempts to maintain an ACE of zero over an interval. PJM's current bidirectional Regulation market was designed to assume PJM's ACE would be zero or close to zero over each hour-long Regulation commitment period, which would result in a Regulation signal bias of zero or close to zero. In other words, a resource following PJM's Regulation signal today would generally expect to move in the upward direction from its Regulation set point equally as much as the signal would request a resource to move in the downward direction from its Regulation set point. With the introduction of the Regulation-Up and Regulation-Down signals, a resource providing Regulation in a single direction may result in providing more or less energy over a given interval than accounted for in the Regulation set point. When such signal bias occurs, the foregoing lost opportunity cost determination will need to be adjusted to recognize the Regulation signal's operational request for any further adjustments to the resource's energy output compared to where the resource would have been operating economically, absent a Regulation commitment.

Accordingly, to capture the additional movement off the economic basepoint the resource was instructed to move to provide Regulation—i.e., the Regulation set point—PJM is proposing, in Phase 2, that, for purposes of settlements, the fourth data point used to determine the bounded area comprising a resource's lost opportunity cost, i.e., the

Regulation set point, is “offset by the Regulation signal bias.”⁹⁷ In addition to adjusting for signal bias, PJM also proposes to further adjust the lost opportunity cost value by the resource’s performance. This secondary adjustment is designed so that the resource does not get more (or less) credit than it earned by actually following the Regulation signal.

It bears emphasis that resources are only paid their lost opportunity cost if the value exceeds the Regulation market-clearing price. The current Regulation market rules provide (and PJM does not propose to change) that resources are credits based on the “higher of” the Regulation market-clearing price or the sum of resource’s lost opportunity costs.⁹⁸

G. PJM Proposes to Enhance Performance Scoring so that It Better Reflects the Resource’s Actual Performance Over the Relevant Interval.

An important feature of PJM’s Regulation market is that PJM continuously evaluates how a resource has performed relative to the Regulation signal it was requested to follow. As discussed, PJM relies on a resource’s historic performance score⁹⁹ in determining that resource’s adjusted offer, whether to clear that resource, and how much Regulation PJM can reasonably rely on that resource to provide, and PJM determines an interval-specific performance score to determine that resource’s compensation for providing Regulation.

Currently, the performance score is the “average of a delay score, correlation score, and energy score for each ten second interval,”¹⁰⁰ where the delay score measures the delay

⁹⁷ Phase 2 proposed Operating Agreement, Schedule 1, section 3.2.2(e).

⁹⁸ See Operating Agreement, Schedule 1, section 3.2.2(b).


⁹⁹ As discussed above, PJM is proposing to rename the “accuracy” score the “performance” score. To avoid confusion and aid understanding, PJM will use “performance” score when discussing the current-effecting and proposed market rules.

¹⁰⁰ Operating Agreement, Schedule 1, section 3.2.2(k).

in time between PJM sending the Regulation signal and the resource’s responsive change in output, the correlation score measures how closely the resource’s response correlates to what was requested via the Regulation dispatch signal, and the energy score measures the difference between the energy requested by PJM via the Regulation signal and the energy provided by the resource “while scaling for the number of samples.”¹⁰¹ In the stakeholder process, PJM, the Market Monitor, and other stakeholders reviewed and analyzed this current formula and found that it did not accurately reflect the resource’s performance.¹⁰² Specifically, the current calculation can inflate a resource’s performance score, which would indicate that a resource is providing more system benefit than the PJM Region is actually receiving.

The inflation of the performance score is the result of the correlation and delay components of the calculation, as can be seen from the following example.

Figure 7

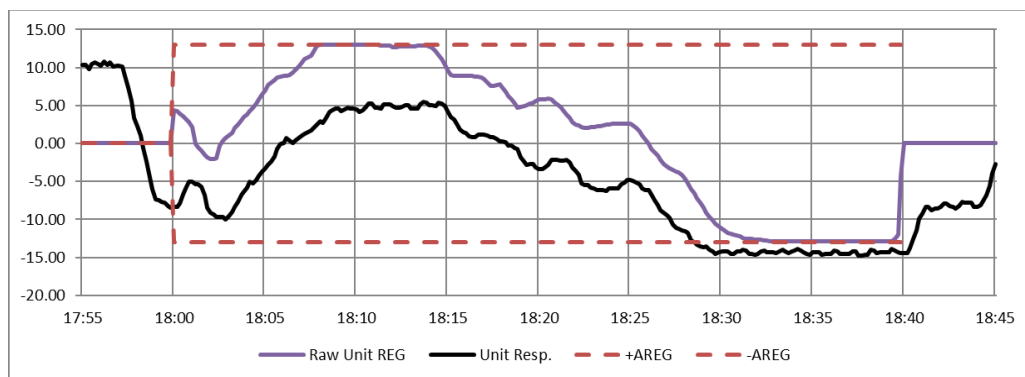

The purple line in Figure 7 (labeled “Raw Unit REG”) represents the Regulation signal sent by PJM, and the black line (labeled “Unit Resp.”) shows a resource’s responsive

¹⁰¹ See Operating Agreement, Schedule 1, section 3.2.2(k).

¹⁰² See *Performance Score Overview*, PJM Interconnection, L.L.C (Sept. 20, 2022), <https://pjm.com/-/media/committees-groups/task-forces/rmdstf/2022/20220920/item-04---performance-score-overview.ashx>.

change in output to the signal. As can be seen, the resource did not provide much benefit to the system as it did not closely follow PJM’s Regulation dispatch signal, but, as shown in Table 1, the resource’s performance score would be relatively high.

Table 1: Scoring the Resource’s Response Under Current Tariff

Components	Score
Performance Score	0.7068
Correlation Score	0.9459
Delay Score	0.9784
Energy Score	0.1962

Table 1 shows that resource’s accuracy and delay scores were calculated to be over 90%, while the resource’s poor performance in following the signal resulted in an energy score of less than 20%. Looking at Figure 7, each individual score makes sense, as the resource changed its output quickly and directionally in response to changes in PJM’s Regulation signal—resulting in high correlation and delay scores, but the resource never matched the signal’s desired output level—resulting in a low energy score. The equal weighting assigned to the correlation, delay, and energy score allows the correlation and delay components to inflate the overall score despite the resource’s failure to closely follow the PJM’s Regulation signal.

PJM and stakeholders determined that the energy score more accurately reflects the resource’s actual performance and value the resource brings to the system. Accordingly, PJM is proposing to drop the accuracy and delay components of the scoring and just use

the energy score to evaluate resource performance. However, PJM is also proposing modifications to the current energy score formula so that it better measures the instantaneous error between the Regulation signal and the resource's response.

Specifically, PJM is proposing to modify the denominator of the equation to reflect both the signal requested and the magnitude (in MWs) of the Regulation the resource is providing. As noted above, the energy score measures the difference between what the Regulation signal asked of the resource and what the resource actually provided, i.e., the "error" in the resource's performance. The current formula for determining the error is the average of the absolute value of the error for each 10-second sample in the settlement interval, which is determined as the [absolute value of the difference between the resource's response and the signal] divided by the hourly average Regulation signal.¹⁰³

To allow the score to better reflect the resource's performance over the interval, PJM proposes to modify the denominator to also include the Regulation assigned during the interval. The denominator will equal [the sum of the (half of the interval average Regulation signal) and (half of the assigned Regulation signal for the interval, which is referred to in the market rules as "AREG")].¹⁰⁴ Thus, the interval average Regulation signal and the assigned Regulation signal will be equally weighted in the performance evaluation. As such, the modified formula will better reflect resource performance independent of the magnitude of the Regulation assignment, and provide a more accurate measure of a resource's Regulation performance.

¹⁰³ See Operating Agreement, Schedule 1, section 3.2.2(k).

¹⁰⁴ See Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(j).

Using the same facts shown in Figure 7 above but applying the modified formula, the updated energy score as calculated by the proposed revisions approaches 35% as compared to around 20% under the status quo, as shown in Table 2.

Table 2: Energy Scoring Under Proposal

	Score
Status Quo Energy Score	0.1962
New Energy Score	0.3480

Indeed, a review of the new energy score value compared to the overall performance score determined under the current approach demonstrates that the proposed approach provides an improved metric for gauging how well a resource performed during the interval in which it was committed to provide Regulation. In this vein and because the energy score more accurately reflects the resource’s actual performance and value the resource brings to the system, PJM is proposing to amend the Regulation market rules to remove the correlation and delay scores from the determination of the overall “performance score” and to refer to the energy score as the performance score. Table 3 below reflects the change in name from energy score to performance score, and provides a comparison of the performance scores under the current and proposed approaches.

Table 3: Comparing Current Against Proposed Performance Scoring

	Score
Status Quo Performance Score	0.7068
New Performance Score	0.3480

Looking back at Figure 7, the 34.8% performance score that would be yielded under the proposed approach better reflects the resource’s actual performance in response to the Regulation dispatch signal than the current approach’s over 70% performance score. For that reason, the proposed approach provides a clear improvement over the status quo.

To effectuate this change PJM proposes to modify the performance scoring section of the Regulation market rules to remove the correlation and delay scores, including the relevant formulae, modify the formula for the energy score as described above, and remove references to the energy score.¹⁰⁵ As revised, Operating Agreement, Schedule 1, section 3.2.2(j) will detail the determination of the performance score “for each five-minute period the Regulation resource is assigned to provide Regulation.”¹⁰⁶ PJM proposes to make all these changes effective in Phase 1. In the Phase 2 set of changes, PJM proposes to specify that performance scores will be separately determined for “Regulation-Down Service and Regulation-Up Service.”¹⁰⁷

¹⁰⁵ See Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(j). Currently, the performance scoring rules are in section 3.2.2(k), but the removal of the benefits factor in section 3.2.2(j), calls for renumbering the performance scoring rules to section 3.2.2(j).

¹⁰⁶ See Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(j).

¹⁰⁷ See Phase 2 proposed Operating Agreement, Schedule 1, section 3.2.2(j).

H. PJM Proposes to Codify That Resources Must Meet Specific Performance Score-based Thresholds to Be Eligible to Provide Regulation or Be Compensated for Providing Regulation.

As discussed, Regulation provides a reliability benefit of keeping the system in balance. As such, it is important that PJM procures Regulation from resources that it can rely upon to provide it. It is for this reason that PJM’s evaluation of Regulation offers includes a historic performance score.¹⁰⁸ PJM proposes to codify a minimum historical performance score requirement of 40%, and resources with historical scores below that level will be ineligible to provide Regulation “until they are able to requalify, as defined in the PJM Manuals.”¹⁰⁹ A historic performance below 40% demonstrates that the resource is consistently performing poorly against the Regulation dispatch signal.¹¹⁰ Such a minimum historic performance eligibility threshold, which is continuously evaluated over a rolling 100 hours of providing Regulation service, is reasonable, and consistent with PJM’s longstanding practice, as currently provided in PJM’s Manuals¹¹¹ and implemented as part of the design reforms PJM put in place in response to Order No. 755.¹¹²

¹⁰⁸ See, e.g., Operating Agreement, Schedule 1, section 3.2.2(g) (adjusting a resource’s mileage offer by “the historical performance [score] of that resource.”).

¹⁰⁹ Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(j).

¹¹⁰ For new resources without 100 hours of operating history, PJM uses the resource’s qualification test scores as a proxy for historical performance. See Manual 12, section 4.4.5.

¹¹¹ See *PJM Manual 12: Balancing Operations (Rev. 51)*, PJM Interconnection, L.L.C., at section 4.4.5 (Dec. 20, 2023), <https://www.pjm.com/-/media/documents/manuals/m12.ashx> (“When the historical performance score falls below 40 percent by signal type, PJM will notify the resource owner and the resource will no longer be eligible to offer into the regulation market for the applicable signal type.”).

¹¹² March 2012 Compliance Filing at 17 (proposing to “calculate an accuracy score based on a resource’s historic performance to adjust each resource’s performance offer and capability offer. This average accuracy score for each resource will be based on a resource’s accuracy while providing regulation service averaged over a rolling one hundred hours”).

Additionally, consistent with the requirement in section 35.28(g)(8) of the Commission's regulations that PJM must provide "a payment for performance that reflects the quantity of frequency regulation service provided by a resource when the resource is *accurately* following the dispatch signal,"¹¹³ PJM is proposing that resources "that have a Real-time Settlement Interval performance score below 25% will be ineligible for Regulation credits for that Real-time Settlement Interval."¹¹⁴ That is, resources with performance scores below 25% have not accurately followed the Regulation signal sufficient to be compensated for that interval. Again, a longstanding practice in PJM's Regulation market that was implemented with the design reforms for Order No. 755 and currently provided in the PJM's Manuals.¹¹⁵

Both of these thresholds are aimed at ensuring PJM gets the best performance possible from resources committed to provide Regulation. Good performance is in the interest of each party: PJM, the Market Participant, and load. Accordingly, setting appropriate performance thresholds is just and reasonable.

IV. PROPOSED EFFECTIVE DATE

As discussed, PJM respectfully requests that the Commission accept the "Phase 1" Tariff and Operating Agreement revisions, included in Attachments A and B, with an effective date of October 1, 2025, and the "Phase 2" Tariff and Operating Agreement revisions, included in Attachments C and D, with an effective date of October 1, 2026.

¹¹³ 18 C.F.R. § 35.28(g)(8) (emphasis added).

¹¹⁴ Phase 1 proposed Operating Agreement, Schedule 1, section 3.2.2(j).

¹¹⁵ See Manual 11 at section 3.2.10 ("A resource whose performance score for the Real-time Settlement Interval that is below 25% will forfeit regulation credit and lost opportunity for that interval.").

However, to allow PJM to begin coding the software changes necessary for these market enhancements effective by those dates, PJM respectfully requests Commission action on this filing by June 16, 2024, which is 61 days from the date of this filing.¹¹⁶

V. DESCRIPTION OF SUBMITTAL

This filing consists of the following:

1. This transmittal letter;
2. Attachment A – “Phase 1” revised sections of the Tariff and Operating Agreement, Effective October 1, 2025 (redlined version);
3. Attachment B – “Phase 1” revised sections of the Tariff and Operating Agreement, Effective October 1, 2025 (clean version);
4. Attachment C – “Phase 2” revised sections of the Tariff and Operating Agreement, Effective October 1, 2026 (redlined version); and
5. Attachment B – “Phase 2” revised sections of the Tariff and Operating Agreement, Effective October 1, 2026 (clean version).

¹¹⁶ PJM has assigned an effective date of June 16, 2024, to one eTariff record (Tariff, Attachment K-Appendix, section 3) submitted with this filing (in metadata only) in order to effectuate Commission action by this date.

VI. CORRESPONDENCE

The following individuals are designated for inclusion on the official service list in this proceeding and for receipt of any communications regarding this filing:

Craig Glazer
Vice President–Federal Government Policy
PJM Interconnection, L.L.C.
1200 G Street, N.W., Suite 600
Washington, D.C. 20005
(202) 423-4743 (phone)
craig.glazer@pjm.com

Ryan J. Collins
Krystal A. Tapper
Wright & Talisman, P.C.
1200 G Street, N.W., Suite 600
Washington, D.C. 20005
(202) 393-1200 (phone)
collins@wrightlaw.com
tapper@wrightlaw.com

Thomas DeVita
Associate General Counsel
PJM Interconnection, L.L.C.
2750 Monroe Blvd.
Audubon, PA 19403
(610) 635-3042 (phone)
(610) 666-8211 (fax)
thomas.devita@pjm.com

VII. SERVICE

PJM has served a copy of this filing on all PJM Members and on all state utility regulatory commissions in the PJM Region by posting this filing electronically. In accordance with the Commission’s regulations,¹¹⁷ PJM will post a copy of this filing to the FERC filings section of its internet site, located at the following link: <https://www.pjm.com/library/filing-order.aspx> with a specific link to the newly-filed document, and will send an e-mail on the same date as this filing to all PJM Members and all state utility regulatory commissions in the PJM Region¹¹⁸ alerting them that this filing

¹¹⁷ See 18 C.F.R §§ 35.2(e) and 385.2010(f)(3).

¹¹⁸ PJM already maintains, updates and regularly uses e-mail lists for all PJM Members and affected state commissions.

has been made by PJM and is available by following such link. If the document is not immediately available by using the referenced link, the document will be available through the referenced link within 24 hours of the filing. Also, a copy of this filing will be available on the FERC's eLibrary website located at the following link: <http://www.ferc.gov/docs-filing/elibrary.asp> in accordance with the Commission's regulations and Order No. 714.¹¹⁹

VIII. CONCLUSION

For the reasons discussed herein, PJM respectfully requests the Commission accept the enclosed Tariff and Operating Agreement revisions, effective on the dates requested.

Respectfully submitted,

Craig Glazer
Vice President–Federal Government Policy
PJM Interconnection, L.L.C.
1200 G Street, N.W., Suite 600
Washington, D.C. 20005
(202) 423-4743 (phone)
craig.glazer@pjm.com

/s/ Ryan J. Collins
Ryan J. Collins
Krystal A. Tapper
Wright & Talisman, P.C.
1200 G Street, N.W., Suite 600
Washington, D.C. 20005
(202) 393-1200 (phone)
collins@wrightlaw.com
tapper@wrightlaw.com

Thomas DeVita
Associate General Counsel
PJM Interconnection, L.L.C.
2750 Monroe Blvd.
Audubon, PA 19403
(610) 635-3042 (phone)
(610) 666-8211 (fax)
thomas.devita@pjm.com

¹¹⁹ *Electronic Tariff Filings*, Order No. 714, 124 FERC ¶ 61,270 (2008), *final rule*, Order No. 714-A, 147 FERC ¶ 61,115 (2014).

Attachment A

Revisions to the PJM Open Access Transmission Tariff and Operating Agreement

(Phase 1)

(Marked/Redline Format)

Definitions – R - S

Ramping Capability:

“Ramping Capability” shall mean the sustained rate of change of generator output, in megawatts per minute.

Real-time Congestion Price:

“Real-time Congestion Price” shall mean the Congestion Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Loss Price:

“Real-time Loss Price” shall mean the Loss Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Energy Market:

“Real-time Energy Market” shall mean the purchase or sale of energy and payment of Transmission Congestion Charges for quantity deviations from the Day-ahead Energy Market in the Operating Day.

Real-time Offer:

“Real-time Offer” shall mean a new offer or an update to a Market Seller’s existing cost-based or market-based offer for a clock hour, submitted for use after the close of the Day-ahead Energy Market.

Real-time Prices:

“Real-time Prices” shall mean the Locational Marginal Prices resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Settlement Interval:

“Real-time Settlement Interval” shall mean the interval used by settlements, which shall be every five minutes.

Real-time System Energy Price:

“Real-time System Energy Price” shall mean the System Energy Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Reasonable Efforts:

“Reasonable Efforts” shall mean, with respect to any action required to be made, attempted, or taken by an Interconnection Party or by a Construction Party under Tariff, Part IV or Part VI, an Interconnection Service Agreement, or a Construction Service Agreement, such efforts as are timely and consistent with Good Utility Practice and with efforts that such party would undertake for the protection of its own interests.

Receiving Party:

“Receiving Party” shall mean the entity receiving the capacity and energy transmitted by the Transmission Provider to Point(s) of Delivery.

Referral:

“Referral” shall mean a formal report of the Market Monitoring Unit to the Commission for investigation of behavior of a Market Participant, of behavior of PJM, or of a market design flaw, pursuant to Tariff, Attachment M, section IV.I.

Reference Resource:

“Reference Resource” shall mean a combustion turbine generating station, configured with a single General Electric Frame 7HA turbine with evaporative cooling, Selective Catalytic Reduction technology all CONE Areas, dual fuel capability, and a heat rate of 9.134 Mmbtu/MWh.

Regional Entity:

“Regional Entity” shall have the same meaning specified in the Operating Agreement.

Regional Network Integration Transmission Service:

“Regional Network Integration Transmission Service” shall mean firm transmission service taken by Network Customers that involves the delivery of energy and/or capacity from Network Resources physically interconnected to the Transmission Provider’s transmission system to Network Load physically interconnected to the Transmission Provider’s transmission system.

Regional Transmission Expansion Plan:

“Regional Transmission Expansion Plan” shall mean the plan prepared by the Office of the Interconnection pursuant to Operating Agreement, Schedule 6 for the enhancement and expansion of the Transmission System in order to meet the demands for firm transmission service in the PJM Region.

Regional Transmission Group (RTG):

“Regional Transmission Group” or “RTG” shall mean a voluntary organization of transmission owners, transmission users and other entities approved by the Commission to efficiently

coordinate transmission planning (and expansion), operation and use on a regional (and interregional) basis.

Regulation:

“Regulation” shall mean the capability of a specific generation resource or Demand Resource with appropriate telecommunications, control and response capability to separately increase and decrease its output or adjust load in response to a regulating control signal, in accordance with the specifications in the PJM Manuals.

Regulation Requirement:

“Regulation Requirement” shall mean the required megawatts of performance-adjusted Regulation capability to be maintained in a Regulation Zone. The Regulation Requirement is defined as a set megawatt value by commitment interval and can increase to account for additional operational uncertainty, in accordance with the PJM Manuals.

Regulation Zone:

“Regulation Zone” shall mean any of those one or more geographic areas, each consisting of a combination of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, regulation service.

Relevant Electric Retail Regulatory Authority:

“Relevant Electric Retail Regulatory Authority” shall mean an entity that has jurisdiction over and establishes prices and policies for competition for providers of retail electric service to end-customers, such as the city council for a municipal utility, the governing board of a cooperative utility, the state public utility commission or any other such entity.

Reliability Assurance Agreement or PJM Reliability Assurance Agreement:

“Reliability Assurance Agreement” or “PJM Reliability Assurance Agreement” shall mean that certain Reliability Assurance Agreement Among Load Serving Entities in the PJM Region, on file with FERC as PJM Interconnection L.L.C. Rate Schedule FERC No. 44, and as amended from time to time thereafter.

Reliability Pricing Model Auction:

“Reliability Pricing Model Auction” or “RPM Auction” shall mean the Base Residual Auction or any Incremental Auction, or, for the 2016/2017 and 2017/2018 Delivery Years, any Capacity Performance Transition Incremental Auction.

Required Transmission Enhancements:

“Regional Transmission Enhancements” shall mean enhancements and expansions of the Transmission System that (1) a Regional Transmission Expansion Plan developed pursuant to Operating Agreement, Schedule 6 or (2) any joint planning or coordination agreement between PJM and another region or transmission planning authority set forth in Tariff, Schedule 12-Appendix B (“Appendix B Agreement”) designates one or more of the Transmission Owner(s) to construct and own or finance. Required Transmission Enhancements shall also include enhancements and expansions of facilities in another region or planning authority that meet the definition of transmission facilities pursuant to FERC’s Uniform System of Accounts or have been classified as transmission facilities in a ruling by FERC addressing such facilities constructed pursuant to an Appendix B Agreement cost responsibility for which has been assigned at least in part to PJM pursuant to such Appendix B Agreement.

Reserved Capacity:

“Reserved Capacity” shall mean the maximum amount of capacity and energy that the Transmission Provider agrees to transmit for the Transmission Customer over the Transmission Provider’s Transmission System between the Point(s) of Receipt and the Point(s) of Delivery under Tariff, Part II. Reserved Capacity shall be expressed in terms of whole megawatts on a sixty (60) minute interval (commencing on the clock hour) basis.

Reserve Penalty Factor:

“Reserve Penalty Factor” shall mean the cost, in \$/MWh, associated with being unable to meet a specific reserve requirement in a Reserve Zone or Reserve Sub-zone. A Reserve Penalty Factor will be defined for each reserve requirement in a Reserve Zone or Reserve Sub-zone.

Reserve Sub-zone:

“Reserve Sub-zone” shall mean any of those geographic areas wholly contained within a Reserve Zone, consisting of a combination of a portion of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, reserve service.

Reserve Zone:

“Reserve Zone” shall mean any of those geographic areas consisting of a combination of one or more Control Zone(s), as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, reserve service.

Residual Auction Revenue Rights:

“Residual Auction Revenue Rights” shall mean incremental stage 1 Auction Revenue Rights created within a Planning Period by an increase in transmission system capability, including the return to service of existing transmission capability, that was not modeled pursuant to Operating Agreement, Schedule 1, section 7.5 and the parallel provisions of Tariff, Attachment K-Appendix, section 7.5 in compliance with Operating Agreement, Schedule 1, section 7.4.2 (h)

and the parallel provisions of Tariff, Attachment K-Appendix, section 7.4.2(h), and, if modeled, would have increased the amount of stage 1 Auction Revenue Rights allocated pursuant to Operating Agreement, Schedule 1, section 7.4.2 and the parallel provisions of Tariff, Attachment K-Appendix, section 7.4.2; provided that, the foregoing notwithstanding, Residual Auction Revenue Rights shall exclude: 1) Incremental Auction Revenue Rights allocated pursuant to Tariff, Part VI; and 2) Auction Revenue Rights allocated to entities that are assigned cost responsibility pursuant to Operating Agreement, Schedule 6 for transmission upgrades that create such rights.

Residual Metered Load:

“Residual Metered Load” shall mean all load remaining in an electric distribution company’s fully metered franchise area(s) or service territory(ies) after all nodally priced load of entities serving load in such area(s) or territory(ies) has been carved out.

Resource Substitution Charge:

“Resource Substitution Charge” shall mean a charge assessed on Capacity Market Buyers in an Incremental Auction to recover the cost of replacement Capacity Resources.

Revenue Data for Settlements:

“Revenue Data for Settlements” shall mean energy quantities used in accounting and billing as determined pursuant to Tariff, Attachment K-Appendix and the corresponding provisions of Operating Agreement, Schedule 1.

RPM Seller Credit:

“RPM Seller Credit” shall mean an additional form of Unsecured Credit defined in Tariff, Attachment Q, section IV.

Scheduled Incremental Auctions:

“Scheduled Incremental Auctions” shall refer to the First, Second, or Third Incremental Auction.

Schedule of Work:

“Schedule of Work” shall mean that schedule attached to the Interconnection Construction Service Agreement setting forth the timing of work to be performed by the Constructing Entity pursuant to the Interconnection Construction Service Agreement, based upon the Facilities Study and subject to modification, as required, in accordance with Transmission Provider’s scope change process for interconnection projects set forth in the PJM Manuals.

Scope of Work:

“Scope of Work” shall mean that scope of the work attached as a schedule to the Interconnection Construction Service Agreement and to be performed by the Constructing Entity(ies) pursuant to the Interconnection Construction Service Agreement, provided that such Scope of Work may be modified, as required, in accordance with Transmission Provider’s scope change process for interconnection projects set forth in the PJM Manuals.

Seasonal Capacity Performance Resource:

“Seasonal Capacity Performance Resource” shall have the same meaning specified in Tariff, Attachment DD, section 5.5A.

Secondary Reserve:

“Secondary Reserve” shall mean the reserve capability of generation resources that can be converted fully into energy or Economic Load Response Participant resources whose demand can be reduced within 30 minutes (less the capability of such resources to provide Primary Reserve), from the request of the Office of the Interconnection, regardless of whether the equipment providing the reserve is electrically synchronized to the Transmission System or not.

Secondary Systems:

“Secondary Systems” shall mean control or power circuits that operate below 600 volts, AC or DC, including, but not limited to, any hardware, control or protective devices, cables, conductors, electric raceways, secondary equipment panels, transducers, batteries, chargers, and voltage and current transformers.

Second Incremental Auction:

“Second Incremental Auction” shall mean an Incremental Auction conducted ten months before the Delivery Year to which it relates.

Security:

“Security” shall mean the security provided by the New Service Customer pursuant to Tariff, section 212.4 or Tariff, Part VI, section 213.4 to secure the New Service Customer’s responsibility for Costs under the Interconnection Service Agreement or Upgrade Construction Service Agreement and Tariff, Part VI, section 217.

Segment:

“Segment” shall have the same meaning as described in Operating Agreement, Schedule 1, section 3.2.3(e).

Self-Supply:

“Self-Supply” shall mean Capacity Resources secured by a Load-Serving Entity, by ownership or contract, outside a Reliability Pricing Model Auction, and used to meet obligations under this

Attachment or the Reliability Assurance Agreement through submission in a Base Residual Auction or an Incremental Auction of a Sell Offer indicating such Market Seller's intent that such Capacity Resource be Self-Supply. Self-Supply may be either committed regardless of clearing price or submitted as a Sell Offer with a price bid. A Load Serving Entity's Sell Offer with a price bid for an owned or contracted Capacity Resource shall not be deemed "Self-Supply," unless it is designated as Self-Supply and used by the LSE to meet obligations under this Attachment or the Reliability Assurance Agreement.

Self-Supply Entity:

"Self-Supply Entity" shall mean the following types of Load Serving Entity that operate under long-standing business models: single customer entity, public power entity, or vertically integrated utility, where "vertically integrated utility" means a utility that owns generation, includes such generation in its regulated rates, and earns a regulated return on its investment in such generation or receives any cost recovery for such generation through bilateral contracts; "single customer entity" means a Load Serving Entity that serves at retail only customers that are under common control with such Load Serving Entity, where such control means holding 51% or more of the voting securities or voting interests of the Load Serving Entity and all its retail customers; and "public power entity" means cooperative and municipal utilities, including public power supply entities comprised of either or both of the same and rural electric cooperatives, and joint action agencies.

Self-Supply Seller:

"Self-Supply Seller" shall mean, for purposes of evaluating Buyer-Side Market Power, the following types of Load Serving Entities that operate under long-standing business models: vertically integrated utility or public power entity, where "vertically integrated utility" means a utility that owns generation, includes such generation in its state-regulated rates, and earns a state-regulated return on its investment in such generation; and "public power entity" means electric cooperatives that are either rate regulated by the state or have their long-term resource plan approved or otherwise reviewed and accepted by a Relevant Electric Retail Regulatory Authority and municipal utilities or joint action agencies that are subject to direct regulation by a Relevant Electric Retail Regulatory Authority.

Sell Offer:

"Sell Offer" shall mean an offer to sell Capacity Resources in a Base Residual Auction, Incremental Auction, or Reliability Backstop Auction.

Service Agreement:

"Service Agreement" shall mean the initial agreement and any amendments or supplements thereto entered into by the Transmission Customer and the Transmission Provider for service under the Tariff.

Service Commencement Date:

“Service Commencement Date” shall mean the date the Transmission Provider begins to provide service pursuant to the terms of an executed Service Agreement, or the date the Transmission Provider begins to provide service in accordance with Tariff, Part II, section 15.3 or Tariff, Part III, section 29.1.

Short-Term Firm Point-To-Point Transmission Service:

“Short-Term Firm Point-To-Point Transmission Service” shall mean Firm Point-To-Point Transmission Service under Tariff, Part II with a term of less than one year.

Short-term Project:

“Short-term Project” shall have the same meaning provided in the Operating Agreement.

Short-Term Resource Procurement Target:

“Short-Term Resource Procurement Target” shall mean, for Delivery Years through May 31, 2018, as to the PJM Region, for purposes of the Base Residual Auction, 2.5% of the PJM Region Reliability Requirement determined for such Base Residual Auction, for purposes of the First Incremental Auction, 2% of the of the PJM Region Reliability Requirement as calculated at the time of the Base Residual Auction; and, for purposes of the Second Incremental Auction, 1.5% of the of the PJM Region Reliability Requirement as calculated at the time of the Base Residual Auction; and, as to any Zone, an allocation of the PJM Region Short-Term Resource Procurement Target based on the Preliminary Zonal Forecast Peak Load, reduced by the amount of load served under the FRR Alternative. For any LDA, the LDA Short-Term Resource Procurement Target shall be the sum of the Short-Term Resource Procurement Targets of all Zones in the LDA.

Short-Term Resource Procurement Target Applicable Share:

“Short-Term Resource Procurement Target Applicable Share” shall mean, for Delivery Years through May 31, 2018: (i) for the PJM Region, as to the First and Second Incremental Auctions, 0.2 times the Short-Term Resource Procurement Target used in the Base Residual Auction and, as to the Third Incremental Auction for the PJM Region, 0.6 times such target; and (ii) for an LDA, as to the First and Second Incremental Auctions, 0.2 times the Short-Term Resource Procurement Target used in the Base Residual Auction for such LDA and, as to the Third Incremental Auction, 0.6 times such target.

Site:

“Site” shall mean all of the real property, including but not limited to any leased real property and easements, on which the Customer Facility is situated and/or on which the Customer Interconnection Facilities are to be located.

Small Commercial Customer:

“Small Commercial Customer,” as used in RAA, Schedule 6 and Tariff, Attachment DD-1, shall mean a commercial retail electric end-use customer of an electric distribution company that participates in a mass market demand response program under the jurisdiction of a RERRA and satisfies the definition of a “small commercial customer” under the terms of the applicable RERRA’s program, provided that the customer has an annual peak demand no greater than 100kW.

Small Generation Resource:

“Small Generation Resource” shall mean an Interconnection Customer’s device of 20 MW or less for the production and/or storage for later injection of electricity identified in an Interconnection Request, but shall not include the Interconnection Customer’s Interconnection Facilities. This term shall include Energy Storage Resources and/or other devices for storage for later injection of energy.

Small Inverter Facility:

“Small Inverter Facility” shall mean an Energy Resource that is a certified small inverter-based facility no larger than 10 kW.

Small Inverter ISA:

“Small Inverter ISA” shall mean an agreement among Transmission Provider, Interconnection Customer, and Interconnected Transmission Owner regarding interconnection of a Small Inverter Facility under Tariff, Part IV, section 112B.

Special Member:

“Special Member” shall mean an entity that satisfies the requirements of Operating Agreement, Schedule 1, section 1.5A.02, and the parallel provisions of Tariff, Attachment K-Appendix, section 1.5A.02, or the special membership provisions established under the Emergency Load Response and Pre-Emergency Load Response Programs.

Spot Market Backup:

“Spot Market Backup” shall mean the purchase of energy from, or the delivery of energy to, the PJM Interchange Energy Market in quantities sufficient to complete the delivery or receipt obligations of a bilateral contract that has been curtailed or interrupted for any reason.

Spot Market Energy:

“Spot Market Energy” shall mean energy bought or sold by Market Participants through the PJM Interchange Energy Market at System Energy Prices determined as specified in Operating Agreement, Schedule 1, section 2, and the parallel provisions of Tariff, Attachment K-Appendix, section 2.

Start Additional Labor Costs:

“Start Additional Labor Costs” shall mean additional labor costs for startup required above normal station manning levels.

Start Fuel:

For units without a soak process, “Start Fuel” shall consist of fuel consumed from first fire of the start process to first breaker closing, plus any fuel expended from last breaker opening to shutdown.

For units with a soak process, “Start Fuel” is fuel consumed from first fire of the start process (initial reactor criticality for nuclear units) to dispatchable output (including auxiliary boiler fuel), plus any fuel expended from last breaker opening to shutdown, excluding normal plant heating/auxiliary equipment fuel requirements. Start Fuel included for each temperature state from breaker closure to dispatchable output shall not exceed the unit specific soak time period reviewed and approved as part of the unit-specific parameter process detailed in Tariff, Attachment K-Appendix, section 6.6(c) or the defaults below:

- Cold Soak Time = 0.73 * unit specific Minimum Run Time (in hours)
- Intermediate Soak Time = 0.61 * unit specific Minimum Run Time (in hours)
- Hot Soak Time = 0.43 * unit specific Minimum Run Time (in hours)

Start-Up Costs:

“Start-Up Costs” shall consist primarily of the cost of fuel, as determined by the unit’s start heat input (adjusted by the performance factor) times the fuel cost. It also includes operating costs, Maintenance Adders, emissions allowances/adders, and station service cost. Start-Up Costs can vary with the unit offline time being categorized in three unit temperature conditions: hot, intermediate and cold.

For units with a steam turbine and a soak process (nuclear, steam, and combined cycle), “Start Fuel” is fuel consumed from first fire of start process (initial reactor criticality for nuclear units): Start-Up Costs shall mean the net unit costs from PJM’s notification to the level at which the unit can follow PJM’s dispatch, and from last breaker open to shutdown.

For units without a steam turbine and no soak process (engines, combustion turbines, Intermittent Resources, and Energy Storage Resources): Start-Up Costs shall mean the unit costs from PJM’s notification to first breaker close and from last breaker open to shutdown.

State:

“State” shall mean the District of Columbia and any State or Commonwealth of the United States.

State Commission:

“State Commission” shall mean any state regulatory agency having jurisdiction over retail electricity sales in any State in the PJM Region.

State Estimator:

“State Estimator” shall mean the computer model of power flows specified in Operating Agreement, Schedule 1, section 2.3 and the parallel provisions of Tariff, Attachment K-Appendix, section 2.3.

State Subsidy:

“State Subsidy” shall mean a direct or indirect payment, concession, rebate, subsidy, non-bypassable consumer charge, or other financial benefit that is as a result of any action, mandated process, or sponsored process of a state government, a political subdivision or agency of a state, or an electric cooperative formed pursuant to state law, and that

(1) is derived from or connected to the procurement of (a) electricity or electric generation capacity sold at wholesale in interstate commerce, or (b) an attribute of the generation process for electricity or electric generation capacity sold at wholesale in interstate commerce; or

(2) will support the construction, development, or operation of a new or existing Capacity Resource; or

(3) could have the effect of allowing the unit to clear in any PJM capacity auction.

Notwithstanding the foregoing, State Subsidy shall not include (a) payments, concessions, rebates, subsidies, or incentives designed to incent, or participation in a program, contract or other arrangement that utilizes criteria designed to incent or promote, general industrial development in an area or designed to incent siting facilities in that county or locality rather than another county or locality; (b) state action that imposes a tax or assesses a charge utilizing the parameters of a regional program on a given set of resources notwithstanding the tax or cost having indirect benefits on resources not subject to the tax or cost (e.g., Regional Greenhouse Gas Initiative); (c) any indirect benefits to a Capacity Resource as a result of any transmission project approved as part of the Regional Transmission Expansion Plan; (d) any contract, legally enforceable obligation, or rate pursuant to the Public Utility Regulatory Policies Act or any other state-administered federal regulatory program (e.g., the Cross-State Air Pollution Rule); (e) any revenues from the sale or allocation, either direct or indirect, to an Entity Providing Supply Services to Default Retail Service Provider where such entity’s obligations was awarded through a state default procurement auction that was subject to independent oversight by a consultant or manager who certifies that the auction was conducted through a non-discriminatory and competitive bidding process, subject to the below condition, and provided further that nothing herein would exempt a Capacity Resource that would otherwise be subject to the minimum offer price rule pursuant to this Tariff; (f) any revenues for providing capacity as part of an FRR Capacity Plan or through bilateral transactions with FRR Entities; or (g) any voluntary and arm’s length bilateral transaction (including but not limited to those reported pursuant to Tariff, Attachment DD, section 4.6), such as a power purchase agreement or other similar contract where the buyer is a Self-Supply Entity and the transaction is (1) a short term transaction (one-year or less) or (2) a long-term transaction that is the result of a competitive process that was not

fuel-specific and is not used for the purpose of supporting uneconomic construction, development, or operation of the subject Capacity Resource, provided however that if the Self-Supply Entity is responsible for offering the Capacity Resource into an RPM Auction, the specified amount of installed capacity purchased by such Self-Supply Entity shall be considered to receive a State Subsidy in the same manner, under the same conditions, and to the same extent as any other Capacity Resource of a Self-Supply Entity. For purposes of subsection (e) of this definition, a state default procurement auction that has been certified to be a result of a non-discriminatory and competitive bidding process shall:

- (i) have no conditions based on the ownership (except supplier diversity requirements or limits), location (except to meet PJM deliverability requirements), affiliation, fuel type, technology, or emissions of any resources or supply (except state-mandated renewable portfolio standards for which Capacity Resources are separately subject to the minimum offer price rule or eligible for an exemption);
- (ii) result in contracts between an Entity Providing Supply Services to Default Retail Service Provider and the electric distribution company for a retail default generation supply product and none of those contracts require that the retail obligation be sourced from any specific Capacity Resource or resource type as set forth in subsection (i) above; and
- (iii) establish market-based compensation for a retail default generation supply product that retail customers can avoid paying for by obtaining supply from a competitive retail supplier of their choice.

State of Charge:

“State of Charge” shall mean the quantity of physical energy stored in an Energy Storage Resource Model Participant or in a storage component of a Hybrid Resource in proportion to its maximum State of Charge capability. State of Charge is quantified as defined in the PJM Manuals.

State of Charge Management:

“State of Charge Management” shall mean the control of State of Charge of an Energy Storage Resource Market Participant or a storage component of a Hybrid Resource using minimum and maximum discharge (and, as applicable, charge) limits, changes in operating mode (as applicable), discharging (and, as applicable, charging) offer curves, and self-scheduling of non-dispatchable sales (and, as applicable, purchases) of energy in the PJM markets. State of Charge Management shall not interfere with the obligation of a Market Seller of an Energy Storage Resource Model Participant or of a Hybrid Resource to follow PJM dispatch, consistent with all other resources.

Station Power:

“Station Power” shall mean energy used for operating the electric equipment on the site of a generation facility located in the PJM Region or for the heating, lighting, air-conditioning and office equipment needs of buildings on the site of such a generation facility that are used in the

operation, maintenance, or repair of the facility. Station Power does not include any energy (i) used to power synchronous condensers; (ii) used for pumping at a pumped storage facility; (iii) used in association with restoration or black start service; or (iv) that is Direct Charging Energy.

Sub-Annual Resource Constraint:

“Sub-Annual Resource Constraint” shall mean, for the 2017/2018 Delivery Year and for FRR Capacity Plans the 2017/2018 and 2018/2019 Delivery Years, for the PJM Region or for each LDA for which the Office of the Interconnection is required under Tariff, Attachment DD, section 5.10(a) to establish a separate VRR Curve for a Delivery Year, a limit on the total amount of Unforced Capacity that can be committed as Limited Demand Resources and Extended Summer Demand Resources for the 2017/2018 Delivery Year in the PJM Region or in such LDA, calculated as the Sub-Annual Resource Reliability Target for the PJM Region or for such LDA, respectively, minus the Short-Term Resource Procurement Target for the PJM Region or for such LDA, respectively.

Sub-Annual Resource Price Decrement:

“Sub-Annual Resource Price Decrement” shall mean, for the 2017/2018 Delivery Year, a difference between the clearing price for Extended Summer Demand Resources and the clearing price for Annual Resources, representing the cost to procure additional Annual Resources out of merit order when the Sub-Annual Resource Constraint is binding.

Sub-Annual Resource Reliability Target:

“Sub-Annual Reliability Target” for the PJM Region or an LDA, shall mean the maximum amount of the combination of Extended Summer Demand Resources and Limited Demand Resources in Unforced Capacity determined by PJM to be consistent with the maintenance of reliability, stated in Unforced Capacity, that shall be used to calculate the Minimum Annual Resource Requirement for Delivery Years through May 31, 2017 and the Sub-Annual Resource Constraint for the 2017/2018 and 2018/2019 Delivery Years. As more fully set forth in the PJM Manuals, PJM calculates the Sub-Annual Resource Reliability Target, by first determining a reference annual loss of load expectation (“LOLE”) assuming no Demand Resources. The calculation for the unconstrained portion of the PJM Region uses a daily distribution of loads under a range of weather scenarios (based on the most recent load forecast and iteratively shifting the load distributions to result in the Installed Reserve Margin established for the Delivery Year in question) and a weekly capacity distribution (based on the cumulative capacity availability distributions developed for the Installed Reserve Margin study for the Delivery Year in question). The calculation for each relevant LDA uses a daily distribution of loads under a range of weather scenarios (based on the most recent load forecast for the Delivery Year in question) and a weekly capacity distribution (based on the cumulative capacity availability distributions developed for the Capacity Emergency Transfer Objective study for the Delivery Year in question). For the relevant LDA calculation, the weekly capacity distributions are adjusted to reflect the Capacity Emergency Transfer Limit for the Delivery Year in question.

For both the PJM Region and LDA analyses, PJM then models the commitment of varying amounts of DR (displacing otherwise committed generation) as interruptible from May 1 through October 31 and unavailable from November 1 through April 30 and calculates the LOLE at each DR level. The Extended Summer DR Reliability Target is the DR amount, stated as a percentage of the unrestricted peak load, that produces no more than a ten percent increase in the LOLE, compared to the reference value. The Sub-Annual Resource Reliability Target shall be expressed as a percentage of the forecasted peak load of the PJM Region or such LDA and is converted to Unforced Capacity by multiplying [the reliability target percentage] times [the Forecast Pool Requirement] times [the DR Factor] times [the forecasted peak load of the PJM Region or such LDA, reduced by the amount of load served under the FRR Alternative].

Sub-meter:

“Sub-meter” shall mean a metering point for electricity consumption that does not include all electricity consumption for the end-use customer as defined by the electric distribution company account number. PJM shall only accept sub-meter load data from end-use customers for measurement and verification of Regulation service as set forth in the Economic Load Response rules and PJM Manuals.

Summer-Period Capacity Performance Resource:

“Summer-Period Capacity Performance Resource” shall have the same meaning specified in Tariff, Attachment DD, section 5.5A.

Surplus Interconnection Customer:

“Surplus Interconnection Customer” shall mean either an Interconnection Customer whose Generating Facility is already interconnected to the PJM Transmission System or one of its affiliates, or an unaffiliated entity that submits a Surplus Interconnection Request to utilize Surplus Interconnection Service within the Transmission System in the PJM Region. A Surplus Interconnection Customer is not a New Service Customer.

Surplus Interconnection Request:

“Surplus Interconnection Request” shall mean a request submitted by a Surplus Interconnection Customer, pursuant to Tariff, Attachment RR, to utilize Surplus Interconnection Service within the Transmission System in the PJM Region. A Surplus Interconnection Request is not a New Service Request.

Surplus Interconnection Service:

“Surplus Interconnection Service” shall mean any unneeded portion of Interconnection Service established in an Interconnection Service Agreement, such that if Surplus Interconnection Service is utilized, the total amount of Interconnection Service at the Point of Interconnection would remain the same.

Switching and Tagging Rules:

“Switching and Tagging Rules” shall mean the switching and tagging procedures of Interconnected Transmission Owners and Interconnection Customer as they may be amended from time to time.

Synchronized Reserve:

“Synchronized Reserve” shall mean the reserve capability of generation resources that can be converted fully into energy or Economic Load Response Participant resources whose demand can be reduced within ten minutes from the request of the Office of the Interconnection dispatcher, and is provided by equipment that is electrically synchronized to the Transmission System.

Synchronized Reserve Event:

“Synchronized Reserve Event” shall mean a request from the Office of the Interconnection to generation resources and/or Economic Load Response Participant resources able, assigned or self-scheduled to provide Synchronized Reserve in one or more specified Reserve Zones or Reserve Sub-zones, within ten minutes, to increase the energy output or reduce load by the amount of assigned or self-scheduled Synchronized Reserve capability.

Synchronized Reserve Requirement:

“Synchronized Reserve Requirement” shall mean the megawatts required to be maintained in a Reserve Zone or Reserve Sub-zone as Synchronized Reserve, absent any increase to account for additional reserves scheduled to address operational uncertainty. The Synchronized Reserve Requirement is calculated in accordance with the PJM Manuals. This requirement can only be satisfied by Synchronized Reserve resources.

System Condition:

“System Condition” shall mean a specified condition on the Transmission Provider’s system or on a neighboring system, such as a constrained transmission element or flowgate, that may trigger Curtailment of Long-Term Firm Point-to-Point Transmission Service using the curtailment priority pursuant to Tariff, Part II, section 13.6. Such conditions must be identified in the Transmission Customer’s Service Agreement.

System Energy Price:

“System Energy Price” shall mean the energy component of the Locational Marginal Price, which is the price at which the Market Seller has offered to supply an additional increment of energy from a resource, calculated as specified in Operating Agreement, Schedule 1, section 2 and the parallel provisions of Tariff, Attachment K-Appendix, section 2.

System Impact Study:

“System Impact Study” shall mean an assessment by the Transmission Provider of (i) the adequacy of the Transmission System to accommodate a Completed Application, an Interconnection Request or an Upgrade Request, (ii) whether any additional costs may be incurred in order to provide such transmission service or to accommodate an Interconnection Request, and (iii) with respect to an Interconnection Request, an estimated date that an Interconnection Customer’s Customer Facility can be interconnected with the Transmission System and an estimate of the Interconnection Customer’s cost responsibility for the interconnection; and (iv) with respect to an Upgrade Request, the estimated cost of the requested system upgrades or expansion, or of the cost of the system upgrades or expansion, necessary to provide the requested incremental rights.

System Protection Facilities:

“System Protection Facilities” shall refer to the equipment required to protect (i) the Transmission System, other delivery systems and/or other generating systems connected to the Transmission System from faults or other electrical disturbance occurring at or on the Customer Facility, and (ii) the Customer Facility from faults or other electrical system disturbance occurring on the Transmission System or on other delivery systems and/or other generating systems to which the Transmission System is directly or indirectly connected. System Protection Facilities shall include such protective and regulating devices as are identified in the Applicable Technical Requirements and Standards or that are required by Applicable Laws and Regulations or other Applicable Standards, or as are otherwise necessary to protect personnel and equipment and to minimize deleterious effects to the Transmission System arising from the Customer Facility.

SCHEDULE 3 Regulation and Frequency Response Service

Regulation and Frequency Response Service is necessary to provide for the continuous balancing of resources with load and for maintaining scheduled Interconnection frequency at ~~sixty~~60 cycles per second (60 Hz). Regulation and Frequency Response Service is accomplished by committing ~~on-line~~ resources whose output is raised or lowered (predominantly through the use of automatic generating control equipment) and by other non-generation resources capable of providing this service as necessary to follow the moment-by-moment changes in load. The obligation to maintain this balance between resources and load lies with the Transmission Provider. The Transmission Provider must offer this service when the transmission service is used to serve load within its Control Area. The Transmission Customer must either purchase this service from the Transmission Provider or make alternative comparable arrangements to satisfy its Regulation and Frequency Response Service obligation. The Transmission Provider will take into account the speed and accuracy of Regulation resources in its determination of Regulation and Frequency Response reserve requirements, including as it reviews whether a self-supplying Transmission Customer has made alternative comparable arrangements. Upon request by the self-supplying Transmission Customer, the Transmission Provider will share with the Transmission Customer its reasoning and any related data used to make the determination of whether the Transmission Customer has made alternative comparable arrangements. The amount of and charges for Regulation and Frequency Response Service are set forth below. The Transmission Provider shall administer the purchases of Regulation Service in the PJM Interchange Energy Market. PJMSettlement shall be the Counterparty to the purchases by customers of Regulation Service in the PJM Interchange Energy Market; provided however, that PJMSettlement shall not be the contracting party to bilateral transactions between market participants or with respect to a self-schedule or self-supply of resources by a customer to satisfy its Regulation obligation.

For Regulation not satisfied by individual Transmission Owners on behalf of their Native Load Customers, Network Customers or other Transmission Customers serving load in the PJM Region, the Transmission Provider will order the lowest cost alternative for Regulation in service as needed to meet the Regulation ~~R~~requirements of each Regulation Zone (as may be set forth in the PJM Manuals and as specified below:

- a. Regulation shall be supplied to meet the Regulation objective of a Regulation Zone from resources located within the metered electrical boundaries of such Regulation Zone. Resources offering Regulation shall comply with applicable standards and requirements for Regulation capability and dispatch specified in the PJM Manuals.
- b. The Office of the Interconnection shall obtain and maintain an amount of Regulation for each Regulation Zone equal to the Regulation objective for such Regulation Zone, as specified in the PJM Manuals.
- c. The Regulation range of a resource shall be at least twice the amount of Regulation assigned.

d. A resource capable of automatic energy dispatch that is also providing Regulation shall have its energy dispatch range reduced from the Regulation range by at least twice the amount of the Regulation provided with consideration of the Regulation limits of the resource, as specified in the PJM Manuals.

e. Qualified Regulation resources must satisfy the measurement and verification tests described in the PJM Manuals.

f. A Transmission Owner, Network Customer or other Transmission Customer may satisfy its Regulation obligation from its own resources capable of performing Regulation service, by contractual arrangements with others able to provide Regulation service on a comparable basis, or by purchases from the PJM Regulation market.

g. The Office of the Interconnection shall obtain Regulation service from the least-cost alternatives available from either pool-scheduled or self-scheduled resources as needed to meet Regulation Zone requirements not otherwise satisfied by a Transmission Owner, Network Customer or other Transmission Customer, in accordance with Tariff, Attachment K-Appendix, section 1.11.4(b).

h. The Office of the Interconnection shall dispatch resources for Regulation by sending Regulation signals and instructions to resources from which Regulation service has been offered committed, in accordance with the PJM Manuals. Those resources shall comply with Regulation dispatch signals and instructions transmitted by the Office of the Interconnection and, in the event of conflict, Regulation dispatch signals and instructions shall take precedence over energy dispatch signals and instructions. Those providing Regulation shall exert all reasonable efforts to operate, or ensure the operation of, their resources supplying load in the PJM Region as close to desired output levels as practical, consistent with Good Utility Practice.

i. Each Transmission Owner (on behalf of its Native Load Customers), Network Customer or other Transmission Customer serving load within a Regulation Zone shall have an hourly Regulation objective equal to its pro rata share of the Regulation Rrequirements of such Regulation Zone for such hour, based on the entity's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Regulation Zone for such hour.

j. An entity supplying Regulation at the direction of the Office of the Interconnection in excess of its hourly Regulation obligation shall be credited for each increment of such Regulation at the price specified in Tariff, Attachment K-Appendix, section 3.2.2 and Tariff, Attachment K-Appendix, section 3.3.2 and the parallel provisions of Operating Agreement, Schedule 1, section 3.2.2 and Operating Agreement, Schedule 1, section 3.3.2. A Transmission Owner, Network Customer or other Transmission Customer that does not meet its hourly Regulation obligation shall be charged for Regulation dispatched by the Office of the Interconnection to meet such obligation at the price specified in Tariff, Attachment K-Appendix, section 3.2.2 and Tariff, Attachment K-Appendix, section 3.3.2 and the parallel provisions of Operating Agreement, Schedule 1, section 3.2.2 and Operating Agreement, Schedule 1, section 3.3.2.

1.10 Scheduling.

1.10.1 General.

(a) The Office of the Interconnection shall administer scheduling processes to implement a Day-ahead Energy Market and a Real-time Energy Market. PJMSettlement shall be the Counterparty to the purchases and sales of energy that clear the Day-ahead Energy Market and the Real-time Energy Market; provided that PJMSettlement shall not be a contracting party to bilateral transactions between Market Participants or with respect to a Generating Market Buyer's self-schedule or self-supply of its generation resources up to that Generating Market Buyer's Equivalent Load.

(b) The Day-ahead Energy Market shall enable Market Participants to purchase and sell energy through the PJM Interchange Energy Market at Day-ahead Prices and enable Transmission Customers to reserve transmission service with Transmission Congestion Charges and Transmission Loss Charges based on locational differences in Day-ahead Prices. Up-to Congestion Transactions submitted in the Day-ahead Energy Market shall not require transmission service and Transmission Customers shall not reserve transmission service for such Up-to Congestion Transactions. Market Participants whose purchases and sales, and Transmission Customers whose transmission uses are scheduled in the Day-ahead Energy Market, shall be obligated to purchase or sell energy, or pay Transmission Congestion Charges and Transmission Loss Charges, at the applicable Day-ahead Prices for the amounts scheduled.

(c) (i) In the Real-time Energy Market, Market Participants that deviate from the amounts of energy purchases or sales scheduled in the Day-ahead Energy Market shall be obligated to purchase or sell energy for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.

(ii) In the Real-time Energy Market, Transmission Customers that deviate from the transmission uses, scheduled in the Day-ahead Energy Market shall be obligated to pay Transmission Congestion Charges and Transmission Loss Charges for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.

(iii) Market Participants that deviate in real-time from the amounts of Secondary Reserve, Non-Synchronized Reserve, or Synchronized Reserve sales, scheduled day-ahead shall be obligated to purchase Secondary Reserve, Non-Synchronized Reserve, or Synchronized Reserve for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.

(d) The following scheduling procedures and principles shall govern the commitment of resources to the Day-ahead Energy Market and the Real-time Energy Market over a period extending from one week to one hour prior to the real-time dispatch. Scheduling encompasses the day-ahead and hourly scheduling process, through which the Office of the Interconnection determines the Day-ahead Energy Market and determines, based on changing forecasts of

conditions and actions by Market Participants and system constraints, a plan to serve the hourly energy and reserve requirements of the Internal Market Buyers and the purchase requests of the External Market Buyers in the least costly manner, subject to maintaining the reliability of the PJM Region. Scheduling does not encompass Coordinated External Transactions, which are subject to the procedures of Tariff, Attachment K-Appendix, section 1.13. Scheduling shall be conducted as specified in section 1.10.1A below, subject to the following condition. If the Office of the Interconnection's forecast for the next seven days projects a likelihood of Emergency conditions, the Office of the Interconnection may commit, for all or part of such seven day period, to the use of generation resources with notification or start-up times greater than one day as necessary in order to alleviate or mitigate such Emergency, in accordance with the Market Sellers' offers for such units for such periods and the specifications in the PJM Manuals. Such resources committed by the Office of the Interconnection to alleviate or mitigate an Emergency will not receive Operating Reserve Credits nor otherwise be made whole for its hours of operation for the duration of any portion of such commitment that exceeds the maximum start-up and notification times for such resources during Hot Weather Alerts and Cold Weather Alerts, consistent with Tariff, Attachment K-Appendix, section 3.2.3 and Tariff, Attachment K-Appendix, section 6.6.

1.10.1A Day-ahead and Real-time Energy Market Scheduling.

The following actions shall occur not later than 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled, or such other deadline as may be specified by the Office of the Interconnection in order to comply with the practical requirements and the economic and efficiency objectives of the scheduling process specified in this Schedule.

(a) Each Market Participant may submit to the Office of the Interconnection specifications of the amount and location of its customer loads and/or energy purchases to be included in the Day-ahead Energy Market for each hour of the next Operating Day, such specifications to comply with the requirements set forth in the PJM Manuals. Each Market Buyer shall inform the Office of the Interconnection of the prices, if any, at which it desires not to include its load in the Day-ahead Energy Market rather than pay the Day-ahead Price. PRD Providers that have committed Price Responsive Demand in accordance with the Reliability Assurance Agreement shall submit to the Office of the Interconnection, in accordance with procedures specified in the PJM Manuals, any desired updates to their previously submitted PRD Curves, provided that such updates are consistent with their Price Responsive Demand commitments, and provided further that PRD Providers that are not Load Serving Entities for the Price Responsive Demand at issue may only submit PRD Curves for the Real-time Energy Market. Price Responsive Demand that has been committed in accordance with the Reliability Assurance Agreement shall be presumed available for the next Operating Day in accordance with the most recently submitted PRD Curve unless the PRD Curve is updated to indicate otherwise. PRD Providers may also submit PRD Curves for any Price Responsive Demand that is not committed in accordance with the Reliability Assurance Agreement; provided that PRD Providers that are not Load Serving Entities for the Price Responsive Demand at issue may only submit PRD Curves for the Real-time Energy Market. All PRD Curves shall be on a PRD Substation basis, and shall specify the maximum time period required to implement load reductions.

(b) Each Generating Market Buyer shall submit to the Office of the Interconnection: (i) hourly schedules for resource increments, including hydropower units, self-scheduled by the Market Buyer to meet its Equivalent Load; and (ii) the Dispatch Rate at which each such self-scheduled resource will disconnect or reduce output, or confirmation of the Market Buyer's intent not to reduce output.

(c) All Market Participants shall submit to the Office of the Interconnection schedules for any energy exports, energy imports, and wheel through transactions involving use of generation or Transmission Facilities as specified below, and shall inform the Office of the Interconnection if the transaction is to be scheduled in the Day-ahead Energy Market. Any Market Participant that elects to schedule an export, import or wheel through transaction in the Day-ahead Energy Market may specify the price (such price not to exceed \$2,000/MWh), if any, at which the export, import or wheel through transaction will be wholly or partially curtailed. The foregoing price specification shall apply to the applicable interface pricing point. Any Market Participant that elects not to schedule its export, import or wheel through transaction in the Day-ahead Energy Market shall inform the Office of the Interconnection if the parties to the transaction are not willing to incur Transmission Congestion and Loss Charges in the Real-time Energy Market in order to complete any such scheduled transaction. Such transactions in the Real-time Energy Market, other than Coordinated Transaction Schedules and emergency energy sales and purchases, may specify a price up to \$2,000/MWh. Scheduling of such transactions shall be conducted in accordance with the specifications in the PJM Manuals and the following requirements:

i) Market Participants shall submit schedules for all energy purchases for delivery within the PJM Region, whether from resources inside or outside the PJM Region;

ii) Market Participants shall submit schedules for exports for delivery outside the PJM Region from resources within the PJM Region that are not Dynamic Transfers to such entities pursuant to Tariff, Attachment K-Appendix, section 1.12; and

iii) In addition to the foregoing schedules for exports, imports and wheel through transactions, Market Participants shall submit confirmations of each scheduled transaction from each other party to the transaction in addition to the party submitting the schedule, or the adjacent Control Area.

(c-1) A Market Participant may elect to submit in the Day-ahead Energy Market a form of Virtual Transaction that combines an offer to sell energy at a source, with a bid to buy the same megawatt quantity of energy at a sink where such transaction specifies the maximum difference between the Locational Marginal Prices at the source and sink. The Office of Interconnection will schedule these transactions only to the extent this difference in Locational Marginal Prices is within the maximum amount specified by the Market Participant. A Virtual Transaction of this type is referred to as an "Up-to Congestion Transaction." Such Up-to Congestion Transactions may be wholly or partially scheduled depending on the price difference between the source and sink locations in the Day-ahead Energy Market. The maximum

difference between the source and sink prices that a participant may specify shall be limited to +/- \$50/MWh. The foregoing price specification shall apply to the price difference between the specified source and sink in the day-ahead scheduling process only. An accepted Up-to Congestion Transaction results in scheduled injection at a specified source and scheduled withdrawal of the same megawatt quantity at a specified sink in the Day-ahead Energy Market.

(c-2) A Market Participant may elect to submit an Increment Offer and/or Decrement Bid form of Virtual Transaction in the Day-ahead Energy Market and shall specify the price for such transaction which shall be limited to \$2,000/megawatt-hour.

(c-3) Up-to Congestion Transactions may only be submitted at hubs, Residual Metered Load and interfaces not described in Tariff, Attachment K-Appendix, section 2.6A(b). Increment Offers and Decrement Bids may be only submitted at hubs, nodes at which physical generation or load is settled, Residual Metered Load and interfaces not described in Tariff, Attachment K-Appendix, section 2.6A(b).

(d) Market Sellers in the Day-ahead Energy Market shall submit offers for the supply of energy, demand reductions, or other services for the following Operating Day for each clock hour for which the Market Seller desires or is required to make its resource available to the Office of the Interconnection. Offers for the supply of energy may be cost-based, market-based, or both, and may vary hourly. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, Operating Agreement, Schedule 2, and the PJM Manuals, as applicable. Market Sellers owning or controlling the output of a Generation Capacity Resource that is committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1, and that has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage shall submit offers for the available capacity of such Generation Capacity Resource, including any portion that is self-scheduled by the Generating Market Buyer. Such offers shall be based on the ICAP equivalent of the Market Seller's cleared UCAP capacity commitment, provided, however, where the underlying resource is a Capacity Storage Resource or an Intermittent Resource, the Market Seller shall satisfy the must offer requirement by either self-scheduling or offering the unit as a dispatchable resource, in accordance with the PJM Manuals, where the hourly day-ahead self-scheduled values for such Capacity Storage Resources and Intermittent Resources may vary hour to hour from the capacity commitment. Any offer not designated as a Maximum Emergency offer shall be considered available for scheduling and dispatch under both Emergency and non-Emergency conditions. Offers may only be designated as Maximum Emergency offers to the extent that the Generation Capacity Resource falls into at least one of the following categories:

i) Environmental limits. If the resource has a limit on its run hours imposed by a federal, state, or other governmental agency that will significantly limit its availability, on either a temporary or long-term basis. This includes a resource that is limited to operating only during declared PJM capacity emergencies by a governmental authority.

ii) Fuel limits. If physical events beyond the control of the resource owner result in the temporary interruption of fuel supply and there is limited on-site fuel storage. A fuel supplier's exercise of a contractual right to interrupt supply or delivery under an interruptible service agreement shall not qualify as an event beyond the control of the resource owner.

iii) Temporary emergency conditions at the unit. If temporary emergency physical conditions at the resource significantly limit its availability.

iv) Temporary megawatt additions. If a resource can provide additional megawatts on a temporary basis by oil topping, boiler over-pressure, or similar techniques, and such megawatts are not ordinarily otherwise available.

The submission of offers for resource increments that are not committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1 shall be optional, but any such offers must contain the information specified in the Office of the Interconnection's Offer Data specification, Operating Agreement, Schedule 1, sections 1.10.1A(d) and 1.10.9B, Operating Agreement, Schedule 2, and the PJM Manuals, as applicable. Energy offered from generation resources that are not committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1 shall not be supplied from resources that are included in or otherwise committed to supply the Operating Reserves of a Control Area outside the PJM Region.

The foregoing offers:

i) Shall specify the Generation Capacity Resource or Economic Load Response Participant resource and energy or demand reduction amount, respectively, for each clock hour in the offer period;

ii) Shall specify the amounts and prices for each clock hour during the entire Operating Day for each resource component offered by the Market Seller to the Office of the Interconnection;

iii) May specify for generation resources offer parameters for each clock hour during the entire Operating Day, as applicable and in accordance with section 1.10.9B below, including: (1) Minimum Run Time; (2) maximum run time; (3) Start-up Costs; (4) No-load Costs; (5) Incremental Energy Offer; (6) notification time; (7) availability; (8) ramp rate; (9) Economic Minimum; (10) Economic Maximum; (11) emergency minimum MW; (12) emergency maximum MW; (13) Synchronized Reserve maximum MW; (14) Secondary Reserve maximum MW; and (15) condense to generation time constraints, and may specify offer parameters for Economic Load Response Participant resources for each clock hour during the entire Operating Day, as applicable and in accordance with section 1.10.9B below, including: (1) minimum down time; (2) shutdown costs; (3) Incremental Energy Offer; (4) notification time; (5) Economic Minimum; and (6) Economic Maximum;

iv) Shall set forth any special conditions upon which the Market Seller proposes to supply a resource increment, including any curtailment rate specified in a bilateral contract for the output of the resource, or any cancellation fees;

v) May include a schedule of offers for prices and operating data contingent on acceptance by the deadline specified in this Schedule, with additional schedules applicable if accepted after the foregoing deadline;

vi) Shall constitute an offer to submit the resource increment to the Office of the Interconnection for scheduling and dispatch in accordance with the terms of the offer for the clock hour, which offer shall remain open through the Operating Day, for which the offer is submitted, unless the Market Seller a) submits a Real-time Offer for the applicable clock hour, or b) updates the availability of its offer for that hour, as further described in the PJM Manuals;

vii) Shall be final as to the price or prices at which the Market Seller proposes to supply energy or other services to the PJM Interchange Energy Market, such price or prices being guaranteed by the Market Seller for the period extending through the end of the following Operating Day, unless modified after the close of the Day-ahead Energy Market as permitted pursuant to sections 1.10.9A or 1.10.9B below;

viii) Shall not exceed an energy offer price of \$1,000/megawatt-hour for all generation resources, except (1) when a Market Seller's cost-based offer is above \$1,000/megawatt-hour and less than or equal to \$2,000/megawatt-hour, then its market-based offer must be less than or equal to the cost-based offer; and (2) when a Market Seller's cost-based offer is greater than \$2,000/megawatt-hour, then its market-based offer must be less than or equal to \$2,000/megawatt-hour;

ix) Shall not exceed a demand reduction offer price of \$1,000/megawatt-hour, except when an Economic Load Response Participant submits a cost-based offer that includes an incremental cost component that is above \$1,000/megawatt-hour, then its market-based offer must be less than or equal to the cost-based offer but in no event greater than \$2,000/megawatt-hour;

x) Shall not exceed an offer price as follows for Emergency Load Response and Pre-Emergency Load Response participants with:

a) a 30 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provision of RAA, Schedule 6, \$1,000/megawatt-hour, plus the applicable Reserve Penalty Factor for the Primary Reserve Requirement, minus \$1.00;

b) an approved 60 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provision of RAA, Schedule 6, \$1,000/megawatt hour, plus [the applicable Reserve Penalty Factor for the Primary Reserve Requirement divided by 2]; and

c) an approved 120 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provisions of RAA, Schedule 6, \$1,100/megawatt-hour; and

xi) Shall not exceed an energy offer price of \$0.00/MWh for pumped storage hydropower units scheduled by the Office of the Interconnection pursuant to the hydro optimization tool in the Day-ahead Energy Market.

(e) A Market Seller that wishes to make a resource available to sell Regulation service shall submit an offer for Regulation for each ~~clock-hour~~30 minute Regulation clearing interval for which the Market Seller desires to make its resource available to the Office of the Interconnection to provide Regulation that shall specify the megawatts of Regulation being offered, which must equal or exceed 0.1 megawatts, in the Regulation Zone for which such Regulation is offered, the price of the capability offer in dollars per MW, the price of the ~~performance-mileage~~ offer in Dollars per change in MW, and such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer and the resource's opportunity costs. Such offers may vary ~~hourly~~for each 30 minute Regulation clearing interval, and may be updated each 30 minute Regulation clearing interval~~hour~~, up to ~~60~~35 minutes before the applicable ~~clock-hour~~30 minute Regulation clearing interval during the Operating Day. The total of the ~~performance-mileage~~ offer multiplied by the historical average mileage used in the market clearing plus the capability offer shall not exceed \$100/megawatt-hour, ~~in the case of Regulation offered for all Regulation Zones~~. In addition to any market-based offer for Regulation, the Market Seller also shall submit a cost-based offer. A cost-based offer must be in the form specified in the PJM Manuals and consist of the following components as well as any other components specified in the PJM Manuals:

i. The costs (in \$/MW) of the fuel cost increase due to the steady-state heat rate increase resulting from operating the unit at lower megawatt output incurred from the provision of Regulation shall apply to the capability offer;

ii. The cost increase (in \$/ΔMW) in costs associated with movement of the regulation resource incurred from the provision of Regulation shall apply to the ~~performance-mileage~~ offer; and

a. Only Regulation-only resources may include all variable operation and maintenance expenses in the mileage offer, as defined in the PJM Manuals.

iii. An adder of up to \$12.00 per megawatt of Regulation provided applied to the capability offer.

Qualified Regulation capability must satisfy the measurement and verification tests specified in the PJM Manuals.

(f) Each Market Seller owning or controlling the output of a Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed

Resource Requirement Alternative shall submit a forecast of the availability of each such Generation Capacity Resource for the next seven days. A Market Seller (i) may submit a non-binding forecast of the price at which it expects to offer a generation resource increment to the Office of the Interconnection over the next seven days, and (ii) shall submit a binding offer for energy, along with Start-up Costs and No-load Costs, if any, for the next seven days or part thereof, for any generation resource with minimum notification or start-up requirement greater than 24 hours. Such resources committed by the Office of the Interconnection will not receive Operating Reserve Credits nor otherwise be made whole for its hours of operation for the duration of any portion of such commitment that exceeds the maximum start-up and notification times for such resources during Hot Weather Alerts and Cold Weather Alerts, consistent with Tariff, Attachment K-Appendix, section 3.2.3 and Tariff, Attachment K-Appendix, section 6.6.

(g) Each component of an offer by a Market Seller of a Generation Capacity Resource that is constant for the entire Operating Day and does not vary hour to hour shall remain in effect for subsequent Operating Days until superseded or canceled.

(h) The Office of the Interconnection shall post the total hourly loads scheduled in the Day-ahead Energy Market, as well as, its estimate of the combined hourly load of the Market Buyers for the next four days, and peak load forecasts for an additional three days.

(i) Except for Economic Load Response Participants, all Market Participants may submit Virtual Transactions that apply to the Day-ahead Energy Market only. Such Virtual Transactions must comply with the requirements set forth in the PJM Manuals and must specify amount, location and price, if any, at which the Market Participant desires to purchase or sell energy in the Day-ahead Energy Market. The Office of the Interconnection may require that a market participant shall not submit in excess of a defined number of bid/offer segments in the Day-ahead Energy Market, as specified in the PJM Manuals, when the Office of the Interconnection determines that such limit is required to avoid or mitigate significant system performance problems related to bid/offer volume. Notice of the need to impose such limit shall be provided prior to 10:00 a.m. EPT on the day that the Day-ahead Energy Market will clear. For purposes of this provision, a bid/offer segment is each pairing of price and megawatt quantity submitted as part of an Increment Offer or Decrement Bid. For purposes of applying this provision to an Up-to Congestion Transaction, a bid/offer segment shall refer to the pairing of a source and sink designation, as well as price and megawatt quantity, that comprise each Up-to Congestion Transaction.

(j) (i) Offers to Supply Synchronized and Non-Synchronized Reserves By Generation Resources in the Day-ahead and Real-time Reserve Markets

(1) Market Sellers owning or controlling the output of a Generation Capacity Resource that was committed in an FRR Capacity Plan, self-supplied, offered and cleared in a Base Residual Auction or Incremental Auction, or designated as replacement capacity, as specified in Tariff, Attachment DD, is capable of providing Synchronized Reserve or Non-Synchronized Reserve as specified in section 1.7.19A(a), in section 1.7.19A.01(a) and in the PJM Manuals, and has not been rendered unavailable by a Generator Planned Outage, a

Generator Maintenance Outage, or a Generator Forced Outage, shall submit offers or otherwise make their 10-minute reserve capability available to supply Synchronized Reserve or, as applicable, Non-Synchronized Reserve, including any portion that is self-scheduled by the Generating Market Buyer, in an amount equal to the available 10-minute reserve capability of such Generation Capacity Resource. Market Sellers of Generation Capacity Resources subject to this must-offer requirement that do not make the reserve capability of such resources available when such resource is able to operate with a dispatchable range (e.g. through offering a fixed output) will be in violation of this provision.

(2) Market Sellers of all other generation resources that (A) are capable of providing Synchronized Reserve or Non-Synchronized Reserve, as specified in section 1.7.19A(a), in section 1.7.19A.01(a) and in the PJM Manuals, (B) are located within the metered boundaries of the PJM Region, and (C) have submitted offers for the supply of energy into the Day-ahead Energy Market and/or Real-time Energy Market shall be deemed to have made their reserve capability available to provide Synchronized Reserve or Non-Synchronized Reserve in the Day-ahead Energy Market and/or Real-time Energy Market for each clock hour for which the Market Seller submits an available offer to supply energy; provided, however that hydroelectric generation resources and Energy Storage Resources are not automatically deemed available to provide reserves based on the submission of an available energy offer but may submit offers to supply Synchronized Reserve and Non-Synchronized Reserve, as applicable.

(3) Offers for the supply of Synchronized Reserve by all generation resources must be cost-based. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A, section 1.10.9B below, and the PJM Manuals, as applicable. For offers to supply Synchronized Reserve, the offer price shall not exceed the expected value of the penalty for failing to provide Synchronized Reserve, where such expected value shall be recalculated annually, in accordance with the PJM Manuals, and posted on PJM's website. The expected value of the penalty is calculated as the product of: (A) the average penalty, expressed in \$/MWh, multiplied by (B) the average rate of non-performance during Synchronized Reserve events multiplied by (C) the probability a Synchronized Reserve event that will qualify for non-performance assessments will occur.

The expected value of the penalty shall be determined by an annual review of the twelve-month period ending October 31 of the calendar year in which the review is performed. The Office of the Interconnection shall post the results of its annual review by no later than December 15, and the revised offer price cap shall be effective as of the following January 1; provided, however, that at the time of

implementation of this rule the expected value of the penalty shall be \$0.02/MWh, and for the period from the second month after implementation through the second December 31 following such date of implementation, the expected value of the penalty shall be recalculated on a monthly basis using data from the implementation date of this rule through the 15th day of the current month, and the revised value shall be effective the 1st day of the following month.

(4) All Non-Synchronized Reserve offers shall be for \$0.00/MWh. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this subsection (d) of this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(ii) Determination of Available Synchronized Reserve Capability of Generation Resources

(1) For each offer to supply reserves by a synchronized resource, the Office of the Interconnection shall determine the MW of available Synchronized Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market, in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Hydroelectric generation resources and Energy Storage Resources may submit offers for their available Synchronized Reserve capability as part of their offer into the Synchronized Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(j)(i) above must submit a Synchronized Reserve offer which specifies the MW of available Synchronized Reserve capability in order to remain compliant with such requirements.

(2) An on-line generation resource's available Synchronized Reserve capability, except for generation resources capable of synchronous condensing, shall be determined in accordance with the PJM Manuals and based on the resource's current performance and initial energy output and the following offer parameters submitted as part of the resource's energy offer: (A) ramp rate; (B) Economic Minimum; and (C) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Synchronized Reserves above the Synchronized Reserve maximum MW.

For generation resources capable of synchronous condensing, the resource's available Synchronized Reserve capability shall be based on the following offer parameters submitted as part of the resource's energy offer: (D) ramp rate; (E) condense to generation time constraints; (F) Economic Minimum; and (G) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Synchronized Reserves above the Synchronized Reserve maximum MW.

(3) Any Market Seller that believes its generating unit has operating modes, limits, or conditions where the unit would not be capable of providing Synchronized Reserves in real time, can submit to the Office of the Interconnection with a copy to the Market Monitoring Unit a request for an exception from being assigned Synchronized Reserves in the Real-time Synchronized Reserve Market during time periods in which the generating unit is in those operating modes, limits, or conditions. As part of the request, the Market Seller shall supply, for each generating unit, technical information about the operational modes, limits, or conditions to support the requested exception, as further detailed in the PJM Manuals. The Office of the Interconnection shall consult with the Market Monitoring Unit, and consider any input received from the Market Monitoring Unit, in its determination of a request for such an exception. Within 60 days of the submission of the request, the Office of the Interconnection shall notify the Market Seller in writing, with a copy to the Market Monitoring Unit, whether the request is approved or denied. The effective date of any approved request will be provided in the written notification. If a Market Seller has an approved exception, the Market Seller must communicate to the Office of the Interconnection when the unit cannot provide reserves, and the Office of the Interconnection will provide a mechanism for Market Sellers with an approved exception to provide such communication to the Office of the Interconnection in real time, as further detailed in the PJM Manuals. An approved exception will remain applicable to the unit until such time as the Office of the Interconnection determines that a change is needed or the Market Seller notifies the Office of the Interconnection, with a copy to the Market Monitoring Unit, that a change is needed based on changed operational capabilities of the unit. Market Sellers must notify the Office of the Interconnection, with a copy to the Market Monitoring Unit, within 30 days of any changed operational capabilities that necessitate a change in an approved exception.

(iii) Determination of Available Non-Synchronized Reserve Capability of Generation Resources

(1) For each offer to supply reserves by an off-line generation resource, the Office of the Interconnection shall determine the MW of available

Non-Synchronized Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Such hydroelectric generation resources or Energy Storage Resources may submit offers for their available Non-Synchronized Reserve capability as part of their offer into the Non-Synchronized Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(j)(i) above must submit a Non-Synchronized Reserve offer which specifies the MW of available Non-Synchronized Reserve capability in order to remain compliant with such requirements.

(2) An off-line generation resource's available Non-Synchronized Reserve capability shall be determined in accordance with the PJM Manuals and based on the following offer parameters submitted as part of the resource's energy offer: (A) startup time; (B) notification time; (C) ramp rate; (D) Economic Minimum; and (E) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Non-Synchronized Reserves above its Synchronized Reserve maximum MW.

(iv) Offers to Supply Synchronized Reserves by Economic Load Response Participant Resources in the Day-ahead and Real-time Reserve Markets

(1) Economic Load Response Participants that submit offers to reduce demand into the Day-ahead Energy Market and Real-time Energy Market and wish to make their resources available to supply Synchronized Reserve may submit offers to supply Synchronized Reserve from such resources, where such offers shall specify the megawatts of Synchronized Reserve being offered, which must equal or exceed 0.1 megawatts and such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer. Such offers may vary hourly, and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day.

(2) All offers to supply Synchronized Reserve offers from Economic Load Response Participant resources shall not exceed the expected value of the penalty for failing to provide Synchronized Reserve, as determined in accordance with section 1.10.1A(j)(i)(3) above. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(k) An Economic Load Response Participant that wishes to participate in the Day-ahead Energy Market by reducing demand shall submit an offer to reduce demand to the Office of the Interconnection for each clock hour for which the Economic Load Response Participant desires to make its resource available to the Office of the Interconnection to reduce demand. The offer must equal or exceed 0.1 megawatts, may vary hourly, and shall specify: (i) the amount of the offered curtailment in minimum increments of .1 megawatts; (ii) the Day-ahead Locational Marginal Price above which the end-use customer will reduce load, subject to section 1.10.1A(d)(ix); and (iii) at the Economic Load Response Participant's option, shutdown costs associated with reducing load, including direct labor and equipment costs, opportunity costs, and/or a minimum of number of contiguous hours for which the load reduction must be committed. Such offers may be updated each hour, up to 65 minutes before the applicable clock hour during the Operating Day. Economic Load Response Participants submitting offers to reduce demand in the Day-ahead Energy Market may establish an incremental offer curve, provided that such offer curve shall be limited to ten price pairs (in MWs) per hour.

(l) Market Sellers owning or controlling the output of an Economic Load Response Participant resource that was committed in an FRR Capacity Plan, or that was self-supplied or that offered and cleared in a Base Residual Auction or Incremental Auction, may submit demand reduction bids for the available load reduction capability of the Economic Load Response Participant resource. The submission of demand reduction bids for Economic Load Response Participant resource increments that were not committed in an FRR Capacity Plan, or that have not cleared in a Base Residual Auction or Incremental Auction, shall be optional, but any such bids must contain the information required to be included in such bids, as specified in the PJM Economic Load Response Program. An Economic Load Response Participant resource that was committed in an FRR Capacity Plan, or that was self-supplied or offered and cleared in a Base Residual Auction or Incremental Auction, may submit a demand reduction bid in the Day-ahead Energy Market as specified in the Economic Load Response Program; provided, however, that in the event of an Emergency PJM shall require Economic Load Response Participant resources to reduce load, notwithstanding that the Zonal LMP at the time such Emergency is declared is below the price identified in the demand reduction bid.

(m) (i) Offers to Supply Secondary Reserve By Generation Resources

(1) Market Sellers owning or controlling the output of a Generation Capacity Resource that was committed in an FRR Capacity Plan, self-supplied, offered and cleared in a Base Residual Auction or Incremental Auction, or designated as replacement capacity, as specified in Tariff, Attachment DD, that is available for energy, is capable of providing Secondary Reserve, as specified in section 1.7.19A.02(a) and in the PJM Manuals, and has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage shall submit offers to supply Secondary Reserve, or otherwise make their Secondary Reserve capability available. Such offers shall be for an amount equal to the resource's available energy output achievable within thirty minutes (less its energy output achievable within ten minutes) from a request of the Office of the Interconnection. Market Sellers of Generation Capacity Resources subject to this must-offer requirement that do not make the

reserve capability of such resources available when such resource is able to operate with a dispatchable range (e.g. through offering a fixed output) will be in violation of this provision.

(2) Market Sellers of all other generation resources located within the metered boundaries of the PJM Region that submit offers for the supply of energy into the Day-ahead Energy Market and/or Real-time Energy Market and are capable of providing Secondary Reserve, as specified in the PJM Manuals, shall be deemed to have made their reserve capability available to provide Secondary Reserve in the Day-ahead Energy Market and/or Real-time Energy Market for each clock hour for which the Market Seller submits an available offer to supply energy; provided, however that hydroelectric generation resources and Energy Storage Resources are not automatically deemed available to provide reserves based on the submission of an available energy offer but may submit offers to supply Secondary Reserve, as applicable.

(3) Offers for the supply of Secondary Reserve shall be for \$0.00/MWh. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this subsection (d) above, section 1.10.9B below, and the PJM Manuals, as applicable.

(ii) Determination of Available Secondary Reserve Capability of Generation Resources

(1) For each offer to supply Secondary Reserve by a generation resource, the Office of the Interconnection shall determine the MW of available Secondary Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Hydroelectric generation resources or Energy Storage Resources may submit their available Secondary Reserve capability as part of their offer into the Secondary Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(m)(i) above must submit a Secondary Reserve offer which specifies the MW of available Secondary Reserve capability in order to remain compliant with such requirements.

(2) (A) An on-line generation resource's available Secondary Reserve capability, except for generation resources capable of synchronous condensing, shall be based on the resource's current performance and initial energy output, the resource's available

Synchronized Reserve capability; and the following offer parameters submitted as part of the energy offer: (i) ramp rate; (ii) Economic Minimum; and (iii) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(B) For generation resources capable of synchronous condensing, the resource's available Secondary Reserve capability shall be based on the following offer parameters submitted as part of the energy offer: (i) ramp rate; (ii) condense to generation time constraints; (iii) Economic Minimum; and (iv) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(C) An off-line generation resource's available Secondary Reserve capability, shall be based on the resource's available Secondary Reserve capability and the following offer parameters submitted as part of the resource's energy offer: (i) startup time; (ii) notification time; (iii) ramp rate; (iv) Economic Minimum; and (v) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(3) Any Market Seller that believes its generating unit has operating modes, limits, or conditions where the unit would not be capable of providing Secondary Reserves in real time, can submit to the Office of the Interconnection with a copy to the Market Monitoring Unit a request for an exception from being assigned Secondary Reserves in the Real-time Secondary Reserve Market during time periods in which the generating unit is in those operating modes, limits, or conditions. As part of the request, the Market Seller shall supply, for each generating unit, technical information about the operational modes, limits, or conditions to support the requested exception, as further detailed in the PJM Manuals. The

Office of the Interconnection shall consult with the Market Monitoring Unit, and consider any input received from the Market Monitoring Unit, in its determination of a request for such an exception. Within 60 days of the submission of the request, the Office of the Interconnection shall notify the Market Seller in writing, with a copy to the Market Monitoring Unit, whether the request is approved or denied. The effective date of any approved request will be provided in the written notification. If a Market Seller has an approved exception, the Market Seller must communicate to the Office of the Interconnection when the unit cannot provide reserves, and the Office of the Interconnection will provide a mechanism for Market Sellers with an approved exception to provide such communication to the Office of the Interconnection in real time, as further detailed in the PJM Manuals. An approved exception will remain applicable to the unit until such time as the Office of the Interconnection determines that a change is needed or the Market Seller notifies the Office of the Interconnection, with a copy to the Market Monitoring Unit, that a change is needed based on changed operational capabilities of the unit. Market Sellers must notify the Office of the Interconnection, with a copy to the Market Monitoring Unit, within 30 days of any changed operational capabilities that necessitate a change in an approved exception.

(iii) Offers to Supply Secondary Reserves by Economic Load Response Participant resources

(1) Each Economic Load Response Participant that submits offers to reduce demand into the Day-ahead Energy Market and Real-time Energy Market and wishes to make their resources available to supply Secondary Reserve shall submit offers to supply Secondary Reserve from such resources, where such offers shall specify the megawatts of Secondary Reserve being offered, which must equal or exceed 0.1 megawatts and include such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer. Such offers may vary hourly, and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day.

(2) All Secondary Reserve offers by Economic Load Response Participant resources shall be for \$0.00/MWh. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(n) A Market Participant may submit a Day-Ahead Pseudo-Tie Transaction for a Market Participant's generator within the PJM balancing authority area that is a Pseudo-Tie into the MISO balancing authority area. Day-Ahead Pseudo-Tie Transactions combine an offer to sell energy at a source with a bid to buy the same megawatt quantity of energy at a sink where such transaction specifies the maximum difference between the Locational Marginal Prices at the source and sink.

Each Day-Ahead Pseudo-Tie Transaction shall: (1) source at a Market Participant's generator within the PJM balancing authority area that Pseudo-Ties into MISO; and (2) sink at the PJM-MISO interface. A Market Participant must reserve transmission service in accordance with the PJM Tariff for each Day-Ahead Pseudo-Tie Transaction. Megawatt quantities for Day-Ahead Pseudo-Tie Transactions shall be greater than zero and less than or equal to the transmission service reserved for the Day-Ahead Pseudo-Tie Transaction. An accepted Day-Ahead Pseudo-Tie Transaction results in scheduled injection at a specified source and scheduled withdrawal of the same megawatt quantity at a specified sink in the Day-Ahead Energy Market.

1.10.1B Demand Bid Scheduling and Screening

(a) The Office of the Interconnection shall apply Demand Bid Screening to all Demand Bids submitted in the Day-ahead Energy Market for each Load Serving Entity, separately by Zone. Using Demand Bid Screening, the Office of the Interconnection will automatically reject a Load Serving Entity's Demand Bids in any future Operating Day for which the Load Serving Entity submits bids if the total megawatt volume of such bids would exceed the Load Serving Entity's Demand Bid Limit for any hour in such Operating Day, unless the Office of the Interconnection permits an exception pursuant to subsection (d) below.

(b) On a daily basis, PJM will update and post each Load Serving Entity's Demand Bid Limit in each applicable Zone. Such Demand Bid Limit will apply to all Demand Bids submitted by that Load Serving Entity for each future Operating Day for which it submits bids. The Demand Bid Limit is calculated using the following equation:

Demand Bid Limit = greater of (Zonal Peak Demand Reference Point * 1.3), or (Zonal Peak Demand Reference Point + 10MW)

Where:

1. Zonal Peak Demand Reference Point = for each Zone: the product of (a) LSE Recent Load Share, multiplied by (b) Peak Daily Load Forecast.
2. LSE Recent Load Share is the Load Serving Entity's highest share of Network Load in each Zone for any hour over the most recently available seven Operating Days for which PJM has data.
3. Peak Daily Load Forecast is PJM's highest available peak load forecast for each applicable Zone that is calculated on a daily basis.

(c) A Load Serving Entity whose Demand Bids are rejected as a result of Demand Bid Screening may change its Demand Bids to reduce its total megawatt volume to a level that does not exceed its Demand Bid Limit, and may resubmit them subject to the applicable rules related to bid submission outlined in Tariff, Operating Agreement and PJM Manuals.

(d) PJM may allow a Load Serving Entity to submit bids in excess of its Demand Bid Limit when circumstances exist that will cause, or are reasonably expected to cause, a Load Serving Entity's actual load to exceed its Demand Bid Limit on a given Operating Day. Examples of such circumstances include, but are not limited to, changes in load commitments due to state sponsored auctions, mergers and acquisitions between PJM Members, and sales and

divestitures between PJM Members. A Load Serving Entity may submit a written exception request to the Office of Interconnection for a higher Demand Bid Limit for an affected Operating Day. Such request must include a detailed explanation of the circumstances at issue and supporting documentation that justify the Load Serving Entity's expectation that its actual load will exceed its Demand Bid Limit.

1.10.2 Pool-scheduled Resources.

Pool-scheduled resources are those resources for which Market Participants submitted offers to sell energy in the Day-ahead Energy Market and offers to reduce demand in the Day-ahead Energy Market, which the Office of the Interconnection scheduled in the Day-ahead Energy Market as well as generators committed by the Office of the Interconnection subsequent to the Day-ahead Energy Market. Such resources shall be committed to provide energy in the real-time dispatch unless the schedules for such units are revised pursuant to section 1.10.9 below or Tariff, Attachment K-Appendix, section 1.11. Pool-scheduled resources shall be governed by the following principles and procedures.

(a) Pool-scheduled resources shall be selected by the Office of the Interconnection on the basis of the prices offered for energy and demand reductions and related services, whether the resource is expected to be needed to maintain system reliability during the Operating Day, Start-up Costs, No-load Costs and cancellation fees, and the specified operating characteristics, offered by Market Sellers to the Office of the Interconnection by the offer deadline specified in section 1.10.1A above. Hydropower units can only be pool-scheduled if they are pumped storage units and scheduled by the Office of the Interconnection pursuant to the hydro optimization tool in the Day-ahead Energy Market.

(b) A resource that is scheduled by a Market Participant to support a bilateral sale, or that is self-scheduled by a Generating Market Buyer, shall not be selected by the Office of the Interconnection as a pool-scheduled resource except in an Emergency.

(c) Market Sellers offering energy from hydropower or other facilities with fuel or environmental limitations may submit data to the Office of the Interconnection that is sufficient to enable the Office of the Interconnection to determine the available operating hours of such facilities.

(d) The Market Seller of a resource selected as a pool-scheduled resource shall receive payments or credits for energy, demand reductions or related services, or for Start-up Costs and No-load Costs, from the Office of the Interconnection on behalf of the Market Buyers in accordance with Tariff, Attachment K-Appendix, section 3. Alternatively, the Market Seller shall receive, in lieu of Start-up Costs and No-load Costs, its actual costs incurred, if any, up to a cap of the resource's Start-up Costs, if the Office of the Interconnection cancels its selection of the resource as a pool-scheduled resource and so notifies the Market Seller before the resource is synchronized.

(e) Market Participants shall make available their pool-scheduled resources to the Office of the Interconnection for coordinated operation to supply the Operating Reserves needs of the applicable Control Zone.

(f) Economic Load Response Participants offering to reduce demand shall specify: (i) the amount of the offered curtailment, which must equal or exceed 0.1 megawatts, in minimum increments of 0.1 megawatts; (ii) the real-time Locational Marginal Price above which the end-use customer will reduce load; and (iii) at the Economic Load Response Participant's option, shut-down costs associated with reducing load, including direct labor and equipment costs, opportunity costs, and/or a minimum number of contiguous hours for which the load reduction must be committed. Economic Load Response Participants submitting offers to reduce demand in the Day-ahead Energy Market and/or the Real-time Energy Market may establish an incremental offer curve, provided that such offer curve shall be limited to ten price pairs (in MWs). Economic Load Response Participants offering to reduce demand shall also indicate the hours that the demand reduction is not available.

1.10.3 Self-scheduled Resources.

Self-scheduled resources shall be governed by the following principles and procedures.

(a) Each Generating Market Buyer shall use all reasonable efforts, consistent with Good Utility Practice, not to self-schedule resources in excess of its Equivalent Load.

(b) The offered prices of resources that are self-scheduled and not dispatchable by the Office of the Interconnection shall not be considered by the Office of the Interconnection in determining Locational Marginal Prices.

(c) Market Participants shall make available their self-scheduled resources to the Office of the Interconnection for coordinated operation to supply the Operating Reserves needs of the applicable Control Zone, by submitting an offer as to such resources.

(d) A Market Participant self-scheduling a resource in the Day-ahead Energy Market that does not deliver the energy in the Real-time Energy Market, shall replace the energy not delivered with energy from the Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(e) A Market Participant self-scheduling a resource to supply Synchronized Reserve in the Day-ahead Synchronized Reserve Market that does not deliver the scheduled megawatt quantity in the applicable real-time reserve market, shall replace the Synchronized Reserve not delivered and shall pay for such Synchronized Reserve at the applicable Real-time Synchronized Reserve Market Clearing Price. Market Participants shall not self-schedule a resource to provide Secondary Reserve or Non-Synchronized Reserve.

(f) For energy, hydropower units, excluding pumped storage units, may only be self-scheduled.

(g) A resource that has been self-scheduled shall not receive payments or credits for Start-up Costs or No-load Costs.

1.10.4 Capacity Resources.

(a) A Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative that is selected as a pool-scheduled resource shall be made available for scheduling and dispatch at the direction of the Office of the Interconnection. Such a Generation Capacity Resource that does not deliver energy as scheduled shall be deemed to have experienced a Generator Forced Outage to the extent of such energy not delivered. A Market Participant offering such Generation Capacity Resource in the Day-ahead Energy Market shall replace the energy not delivered with energy from the Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(b) Energy from a Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative that has not been scheduled in the Day-ahead Energy Market may be sold on a bilateral basis by the Market Seller, may be self-scheduled, or may be offered for dispatch during the Operating Day in accordance with the procedures specified in this Schedule. Such a Generation Capacity Resource that has not been scheduled in the Day-ahead Energy Market and that has been sold on a bilateral basis must be made available upon request to the Office of the Interconnection for scheduling and dispatch during the Operating Day if the Office of the Interconnection declares a Maximum Generation Emergency. Any such resource so scheduled and dispatched shall receive the applicable Real-time Price for energy delivered.

1.10.5 External Resources.

(a) External Resources may submit offers to the PJM Interchange Energy Market, in accordance with the day-ahead and real-time scheduling processes specified above. An External Resource selected as a pool-scheduled resource shall be made available for scheduling and dispatch at the direction of the Office of the Interconnection, and except as specified below shall be compensated on the same basis as other pool-scheduled resources. External Resources that are not capable of Dynamic Transfer shall, if selected by the Office of the Interconnection on the basis of the Market Seller's Offer Data, be block loaded on an hourly scheduled basis. Market Sellers shall offer External Resources to the PJM Interchange Energy Market on either a resource-specific or an aggregated resource basis. A Market Participant whose pool-scheduled resource does not deliver the energy scheduled in the Day-ahead Energy Market shall replace such energy not delivered as scheduled in the Day-ahead Energy Market with energy from the PJM Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(b) Offers for External Resources from an aggregation of two or more generating units shall so indicate, and shall specify, in accordance with the Offer Data requirements specified by the Office of the Interconnection: (i) energy prices; (ii) hours of energy availability; (iii) a minimum dispatch level; (iv) a maximum dispatch level; and (v) unless such information has previously been made available to the Office of the Interconnection, sufficient information, as specified in the PJM Manuals, to enable the Office of the Interconnection to model the flow

into the PJM Region of any energy from the External Resources scheduled in accordance with the Offer Data.

(c) Offers for External Resources on a resource-specific basis shall specify the resource being offered, along with the information specified in the Offer Data as applicable.

1.10.6 External Market Buyers.

(a) Deliveries to an External Market Buyer not subject to Dynamic Transfer by the Office of the Interconnection shall be delivered on a block loaded basis to the bus or buses at the electrical boundaries of the PJM Region, or in such area with respect to an External Market Buyer's load within such area not served by Network Service, at which the energy is delivered to or for the External Market Buyer. External Market Buyers shall be charged (which charge may be positive or negative) at either the Day-ahead Prices or Real-time Prices, whichever is applicable, for energy at the foregoing bus or buses.

(b) An External Market Buyer's hourly schedules for energy purchased from the PJM Interchange Energy Market shall conform to the ramping and other applicable requirements of the interconnection agreement between the PJM Region and the Control Area to which, whether as an intermediate or final point of delivery, the purchased energy will initially be delivered.

(c) The Office of the Interconnection shall curtail deliveries to an External Market Buyer if necessary to maintain appropriate reserve levels for a Control Zone as defined in the PJM Manuals, or to avoid shedding load in such Control Zone.

1.10.7 Bilateral Transactions.

Bilateral transactions as to which the parties have notified the Office of the Interconnection by the deadline specified in section 1.10.1A above that they elect not to be included in the Day-ahead Energy Market and that they are not willing to incur Transmission Congestion Charges in the Real-time Energy Market shall be curtailed by the Office of the Interconnection as necessary to reduce or alleviate transmission congestion. Bilateral transactions that were not included in the Day-ahead Energy Market and that are willing to incur congestion charges and bilateral transactions that were accepted in the Day-ahead Energy Market shall continue to be implemented during periods of congestion, except as may be necessary to respond to Emergencies.

1.10.8 Office of the Interconnection Responsibilities.

(a) The Office of the Interconnection shall use its best efforts to determine (i) the least-cost means of satisfying the projected hourly requirements for energy, Operating Reserves, and other ancillary services of the Market Buyers, including the reliability requirements of the PJM Region, of the Day-ahead Energy Market, and (ii) the least-cost means of satisfying the Operating Reserve and other ancillary service requirements for any portion of the load forecast of the Office of the Interconnection for the Operating Day in excess of that scheduled in the Day-ahead Energy Market. In making these determinations, the Office of the Interconnection shall

take into account: (i) the Office of the Interconnection's forecasts of PJM Interchange Energy Market and PJM Region energy requirements, giving due consideration to the energy requirement forecasts and purchase requests submitted by Market Buyers and PRD Curves properly submitted by PRD Providers; (ii) the offers submitted by Market Sellers; (iii) the availability of limited energy resources; (iv) the capacity, location, and other relevant characteristics of self-scheduled resources; (v) the objectives of each Control Zone for Operating Reserves, as specified in the PJM Manuals; (vi) the requirements of each Regulation Zone for Regulation and other ancillary services, as specified in the PJM Manuals; (vii) the benefits of avoiding or minimizing transmission constraint control operations, as specified in the PJM Manuals; and (viii) such other factors as the Office of the Interconnection reasonably concludes are relevant to the foregoing determination, including, without limitation, transmission constraints on external coordinated flowgates to the extent provided by Tariff, Attachment K-Appendix, section 1.7.6. The Office of the Interconnection shall develop a Day-ahead Energy Market based on the foregoing determination, and shall determine the Day-ahead Prices resulting from such schedule. The Office of the Interconnection shall report the planned schedule for a hydropower resource to the operator of that resource as necessary for plant safety and security, and legal limitations on pond elevations.

(b) By 1:30 p.m., or as soon as practicable thereafter, of the day before each Operating Day, or such other deadline as may be specified by the Office of the Interconnection in the PJM Manuals, the Office of the Interconnection shall: (i) post the aggregate Day-ahead Energy Market results; (ii) post the Day-ahead Prices; and (iii) inform the Market Sellers, Market Buyers, and Economic Load Response Participants of their scheduled injections, withdrawals, and demand reductions respectively. The foregoing notwithstanding, the deadlines set forth in this subsection shall not apply if the Office of the Interconnection is unable to obtain Market Participant bid/offer data due to extraordinary circumstances. For purposes of this subsection, extraordinary circumstances shall mean a technical malfunction that limits, prohibits or otherwise interferes with the ability of the Office of the Interconnection to obtain Market Participant bid/offer data prior to 11:59 p.m. on the day before the affected Operating Day. Extraordinary circumstances do not include a Market Participant's inability to submit bid/offer data to the Office of the Interconnection. If the Office of the Interconnection is unable to clear the Day-ahead Energy Market prior to 11:59 p.m. on the day before the affected Operating Day as a result of such extraordinary circumstances, the Office of the Interconnection shall notify Members as soon as practicable.

(c) Following posting of the information specified in section 1.10.8(b), and absent extraordinary circumstances preventing the clearing of the Day-ahead Energy Market, the Office of the Interconnection shall revise its schedule of generation resources to reflect updated projections of load, conditions affecting electric system operations in the PJM Region, the availability of and constraints on limited energy and other resources, transmission constraints, and other relevant factors.

(d) Market Buyers shall pay PJMSettlement and Market Sellers shall be paid by PJMSettlement for the quantities of energy scheduled in the Day-ahead Energy Market at the Day-ahead Prices when the Day-ahead Price is positive. Market Buyers shall be paid by PJMSettlement and Market Sellers shall pay PJMSettlement for the quantities of energy

scheduled in the Day-ahead Energy Market at the Day-ahead Prices when the Day-ahead Price is negative. Economic Load Response Participants shall be paid for scheduled demand reductions pursuant to Tariff, Attachment K-Appendix, section 3.3A. Notwithstanding the foregoing, if the Office of the Interconnection is unable to clear the Day-ahead Energy Market prior to 11:59 p.m. on the day before the affected Operating Day due to extraordinary circumstances as described in subsection (b) above, it will be declared a Market Suspension, and Day-ahead Prices shall be determined pursuant to Operating Agreement, Schedule 1, section 2.6.1. If the Office of the Interconnection declares a Market Suspension, it shall notify Market Participants of the Market Suspension as soon as practicable.

(e) If the Office of the Interconnection discovers a *potential* error in prices and/or cleared quantities in the Day-ahead Energy Market or Day-ahead Ancillary Services Markets, or the Real-time Energy Market or Real-time Ancillary Services Markets after it has posted the results for these markets on its Web site, the Office of the Interconnection shall notify Market Participants as soon as possible after it is found, but in no event later than 12:00 p.m. of the second Business Day following the Operating Day for the Real-time Energy Market and Real-time Ancillary Services Markets, and no later than 5:00 p.m. of the second Business Day following the initial publication of the results for the Day-ahead Energy Market and Day-ahead Ancillary Services Markets. After this initial notification, if the Office of the Interconnection determines it is necessary to post modified results, it shall provide notification of its intent to do so, *along with a description detailing the cause and scope of the error*, by no later than 5:00 p.m. of the fifth Business Day following the Operating Day for the Real-time Energy Market and Real-time Ancillary Services Markets, and no later than 5:00 p.m. of the fifth Business Day following the initial publication of the results in the Day-ahead Energy Market and Day-ahead Ancillary Services Markets. *The provided description will not contain information that is market sensitive or confidential.* Thereafter, the Office of the Interconnection must post on its Web site the corrected results by no later than 5:00 p.m. of the tenth calendar day following the Operating Day for the Day-ahead Energy Market, Real-time Energy Market, and Day-ahead Ancillary Services Markets, and Real-time Ancillary Service Markets. Should any of the above deadlines pass without the associated action on the part of the Office of the Interconnection, the originally posted results will be considered final. Notwithstanding the foregoing, the deadlines set forth above shall not apply if the referenced market results are under publicly noticed review by the FERC.

(f) Consistent with Operating Agreement, section 18.17.1, and notwithstanding anything to the contrary in the Operating Agreement or in the PJM Tariff, to allow the tracking of Market Participants' non-aggregated bids and offers over time as required by FERC Order No. 719, the Office of the Interconnection shall post on its Web site the non-aggregated bid data and Offer Data submitted by Market Participants (for participation in the PJM Interchange Energy Market) approximately four months after the bid or offer was submitted to the Office of the Interconnection.

1.10.9 Hourly Scheduling.

(a) Following the initial posting by the Office of the Interconnection of the Locational Marginal Prices resulting from the Day-ahead Energy Market, and subject to the right

of the Office of the Interconnection to schedule and dispatch pool-scheduled resources and to direct that schedules be changed in an Emergency, and absent extraordinary circumstances preventing the clearing of the Day-ahead Energy Market, a generation rebidding period shall exist. Typically the rebidding period shall be from the time the Office of the Interconnection posts the results of the Day-ahead Energy Market until 2:15 p.m. on the day before each Operating Day. However, should the clearing of the Day-ahead Energy Market be significantly delayed, the Office of the Interconnection may establish a revised rebidding period. During the rebidding period, Market Participants may submit revisions to generation Offer Data for the next Operating Day. Adjustments to the Day-ahead Energy Market shall be settled at the applicable Real-time Prices, and shall not affect the obligation to pay or receive payment for the quantities of energy scheduled in the Day-ahead Energy Market at the applicable Day-ahead Prices.

(b) A Market Participant may adjust the schedule of a resource under its dispatch control on an hour-to-hour basis beginning at 6:30 p.m. of the day before each Operating Day, provided that the Office of the Interconnection is notified not later than 65 minutes prior to the hour in which the adjustment is to take effect, as follows and as specified in section 1.10.9A below:

i) A Generating Market Buyer may self-schedule any of its resource increments, including hydropower resources, not previously designated as self-scheduled and not selected as a pool-scheduled resource in the Day-ahead Energy Market;

ii) A Market Participant may request the scheduling of a non-firm bilateral transaction; or

iii) A Market Participant may request the scheduling of deliveries or receipts of Spot Market Energy; or

iv) A Generating Market Buyer may remove from service a resource increment, including a hydropower resource, that it had previously designated as self-scheduled, provided that the Office of the Interconnection shall have the option to schedule energy from any such resource increment that is a Capacity Resource at the price offered in the scheduling process, with no obligation to pay any Start-Up Costs.

(c) An External Market Buyer may refuse delivery of some or all of the energy it requested to purchase in the Day-ahead Energy Market by notifying the Office of the Interconnection of the adjustment in deliveries not later than 65 minutes prior to the hour in which the adjustment is to take effect, but any such adjustment shall not affect the obligation of the External Market Buyer to pay for energy scheduled on its behalf in the Day-ahead Energy Market at the applicable Day-ahead Prices.

(d) The Office of the Interconnection shall provide External Market Buyers and External Market Sellers and parties to bilateral transactions with any revisions to their schedules resulting from the rebidding period by 6:30 p.m. on the day before each Operating Day. The Office of the Interconnection may also commit additional resources after such time as system conditions require. For each hour in the Operating Day, as soon as practicable after the deadlines

specified in the foregoing subsection of this section 1.10, the Office of the Interconnection shall provide External Market Buyers and External Market Sellers and parties to bilateral transactions with any revisions to their schedules for the hour.

1.10.9A Updating Offers in Real-time

(a) Each Market Seller may submit Real-time Offers for a resource up to 65 minutes before the applicable clock hour, and such Real-time Offers shall supersede any previous offer for that resource for the clock hour, as further described in the PJM Manuals and subject to the following conditions:

(i) A market-based Real-time Offer shall not exceed the applicable energy offer caps specified in this Schedule. Once a Market Seller's resource is committed for an applicable clock hour, the Market Seller may not increase its Incremental Energy Offer and may only submit a market-based Real-time Offer that is higher than its market-based offer that was in effect at the time of commitment to reflect increases in the resource's cost-based Start-up Costs and cost-based No-load Costs. The Market Seller may elect not to have its market-based offer considered for dispatch and to have only its lowest cost-based offer considered for the remainder of the Operating Day.

(ii) Cost-based Real-time Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection's Offer Data specification, Operating Agreement, Schedule 1, sections 1.10.1A(d) and 1.10.9B, Operating Agreement, Schedule 2 and the PJM Manuals, as applicable. If a Market Seller submits a market-based Real-time Offer for a particular clock hour in accordance with subsection (c) below, or if updates to a cost-based offer are required by the Market Seller's approved Fuel Cost Policy, the Market Seller shall update its previously submitted cost-based Real-time Offer.

(iii) If a Market Seller's available cost-based offer is not compliant with Operating Agreement, Schedule 2 and the PJM Manuals at the time a Market Seller submits a market-based Real-time Offer for an applicable clock hour during the Operating Day, the Market Seller must submit an updated cost-based Real-time Offer consisting of an Incremental Energy Offer, Start-up Cost and No-load Cost for that clock hour that is compliant with Operating Agreement, Schedule 2 and the PJM Manuals.

(b) Each Market Seller may submit Real-time Offers for a resource during and through the end of the applicable clock hour to update only the following offer parameters, as further described in the PJM Manuals: (1) Economic Minimum; (2) Economic Maximum; (3) emergency minimum MW; (4) emergency maximum MW; (5) unit availability status; (6) fixed output indicator; (7) Synchronized Reserve maximum MW; and (8) Secondary Reserve maximum MW. Such Real-time Offers shall supersede any previous offer for that resource for the clock hour.

1.10.9B Offer Parameter Flexibility

(a) Market Sellers may, in accordance with sections 1.10.1A and 1.10.9A above, this section 1.10.9B, and the PJM Manuals, update offer parameters at any time up to 65 minutes before the applicable clock hour, including prior to the close of the Day-ahead Energy Market and prior to the close of the rebidding period specified in section 1.10.9, except that Market Sellers may not update their offers for the supply of energy, Secondary Reserve, Synchronized Reserve, Non-Synchronized Reserve, or demand reduction: (1) during the period after the close the Day-ahead Energy Market and prior to the posting of the Day-ahead Energy Market results pursuant to section 1.10.8(b); or (2) during the period after close of the rebidding period and prior to PJM announcing the results of the rebidding period pursuant to section 1.10.9(d).

(b) For generation resource offers, Market Sellers may vary for each clock hour during the entire Operating Day the following offer parameters: (1) cost-based Start-up Costs; (2) cost-based No-load Costs; (3) Incremental Energy Offer; (4) Economic Minimum and Economic Maximum; (5) emergency minimum MW and emergency maximum MW; (6) ramp rate; (7) Synchronized Reserve maximum MW; (8) Secondary Reserve maximum MW; and (9) for Real-time Offers only, (i) notification time and (ii) for uncommitted hours only, Minimum Run Time.

(c) For Economic Load Response Participant resource offers, Market Sellers may vary for each clock hour during the entire Operating Day the following offer parameters: (1) shutdown costs, (2) Incremental Energy Offer; (3) Economic Minimum; (4) Economic Maximum; and (5) for Real-time Offers only, (i) notification time and (ii) for uncommitted hours only, minimum down time.

(d) After the announcement of the results of the rebidding period pursuant to section 1.10.9(d), a Market Seller may submit a Real-time Offer where offer parameters may differ from the offer originally submitted in the Day-ahead Energy Market, except that a Market Seller may not submit a Real-time Offer that changes, of the offer parameters listed in section 1.10.1A(d), the MW amounts specified in the Incremental Energy Offer, MW amounts specified in the ramp rate, maximum run time, and availability; provided, however, Market Sellers of dual-fueled resources may submit Real-time Offers for such resources that change the availability of a submitted cost-based offer.

3.2 Market Settlements.

If a dollar-per-MW-hour value is applied in a calculation under this section 3.2 where the interval of the value produced in that calculation is less than an hour, then for purposes of that calculation the dollar-per-MW hour value is divided by the number of Real-time Settlement Intervals in the hour.

3.2.1 Spot Market Energy.

(a) The Office of the Interconnection shall calculate System Energy Prices in the form of Day-ahead System Energy Prices and Real-time System Energy Prices for the PJM Region, in accordance with Tariff, Attachment K-Appendix, section 2.

(b) Each Market Participant shall be charged for all of its Market Participant Energy Withdrawals scheduled in the Day-ahead Energy Market at the Day-ahead System Energy Price to be served in the PJM Interchange Energy Market.

(c) Each Market Participant shall be paid for all of its Market Participant Energy Injections scheduled in the Day-ahead Energy Market at the Day-ahead System Energy Price to be delivered to the PJM Interchange Energy Market.

(d) For each Day-ahead Settlement Interval during an Operating Day, the Office of the Interconnection shall calculate Spot Market Energy charges for each Market Participant as the difference between the sum of its Market Participant Energy Withdrawals scheduled times the Day-ahead System Energy Price and the sum of its Market Participant Energy Injections scheduled times the Day-ahead System Energy Price.

(e) For each Real-time Settlement Interval during an Operating Day, the Office of the Interconnection shall calculate Spot Market Energy charges for each Market Participant as the difference between the sum of its real-time Market Participant Energy Withdrawals less its scheduled Market Participant Energy Withdrawals times the Real-time System Energy Price and the sum of its real-time Market Participant Energy Injections less scheduled Market Participant Energy Injections times the Real-time System Energy Price. The Revenue Data for Settlements determined for each Real-time Settlement Interval in accordance with Tariff, Attachment K-Appendix, section 3.1A shall be used in determining the real-time Market Participant Energy Withdrawals and Market Participant Energy Injections used to calculate Spot Market Energy charges under this subsection (e).

(f) For pool External Resources, the Office of the Interconnection shall model, based on an appropriate flow analysis, the megawatts of real-time energy injections to be delivered from each such resource to the corresponding Interface Pricing Point between adjacent Control Areas and the PJM Region.

3.2.2 Regulation.

(a) Each Market Participant that is a Load Serving Entity in a Regulation Zone shall have an hourly Regulation objective equal to its pro rata share of the Regulation ~~R~~requirements of such Regulation Zone for the hour, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Regulation Zone for the hour ("Regulation Obligation"). A Market Participant with an hourly Regulation Obligation shall be charged the pro rata share of the sum of the Regulation market ~~performance~~ mileage clearing price credits and Regulation market capability clearing price credits for the Real-time Settlement Intervals in an hour.

Regulation Charge = Hourly Regulation Obligation Share * (sum of the Real-time Settlement Interval Regulation credits in an hour)

(b) Each Market Participant supplying Regulation in a Regulation Zone at the direction of the Office of the Interconnection shall be credited for each of its resources such that the calculated credit for each increment of Regulation provided by each resource shall be the higher of: (i) the Regulation market-clearing price; or (ii) the sum of the applicable Regulation offers for a resource determined pursuant to section 3.2.2A.1 below, the ~~unit~~resource-specific shoulder ~~hour~~opportunity costs described in subsection (e) of this section, the ~~unit~~resource-specific inter-temporal opportunity costs discussed in subsection (d), and the ~~unit~~resource-specific opportunity costs discussed in subsection (~~de~~) of this section.

(c) The Office of the Interconnection shall commit resources to provide Regulation every 30 minutes, for the clock intervals of the first 30 minutes of an hour and the second 30 minutes of an hour, up to the Regulation Requirement of such Regulation Zone. The Office of the Interconnection shall select resources in merit order, taking into account the resource's mileage Regulation offer, capability Regulation offer, and estimated resource-specific opportunity cost, all converted into their performance adjusted values as further detailed in the PJM Manuals. The total Regulation market-clearing price in each Regulation Zone shall be determined in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval. The total Regulation market-clearing price shall include: (i) the ~~performance-mileage~~ Regulation market-clearing price in a Regulation Zone that shall be calculated in accordance with subsection (g) of this section; (ii) the capability Regulation market-clearing price that shall be calculated in accordance with subsection (h) of this section; and (iii) a Regulation resource's unit-specific opportunity costs during the 5-minute period, determined as described in subsection (d) below, ~~divided by the unit-specific benefits factor described in subsection (j) of this section and divided by the historic accuracy score of the resource from among the resources selected to provide Regulation.~~ A resource's Regulation offer by any Market Seller that fails the three-pivotal supplier test set forth in section 3.2.2A.1 below shall not exceed the cost of providing Regulation from such resource, plus twelve dollars, as determined pursuant to the formula in Tariff, Attachment K-Appendix, section 1.10.1A(e).

(d) In determining the Regulation 5-minute clearing price for each Regulation Zone, the ~~estimated unit~~resource-specific opportunity costs (in dollars) of a ~~generation~~resource offering to sell Regulation in each regulating ~~hour~~interval, except for hydroelectric resources,

shall be equal to the area bounded by (i) Locational Marginal Price at the generation bus for the regulating resource, (ii) the resource's Final Offer, (iii) the resource's tracking ramp-rate limited expected output level if it had been dispatched for energy in economic merit order, as further described in the PJM Manuals, and (iv) the resource's regulation set point on the energy schedule curve on which the resource is running in the PJM Interchange Energy Market. The area is divided by the resource performance score and further divided by the resource's regulation assigned megawatt to convert to dollars per megawatt. ~~product of (i) the deviation of the set point of the generation resource that is expected to be required in order to provide Regulation from the generation resource's expected output level if it had been dispatched in economic merit order times, (ii) the absolute value of the difference between the expected Locational Marginal Price at the generation bus for the generation resource and the lesser of the available market-based or highest available cost-based energy offer from the generation resource (at the megawatt level of the Regulation set point for the resource) in the PJM Interchange Energy Market.~~

For hydroelectric resources offering to sell Regulation in a regulating ~~hour~~interval, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the full value of the Locational Marginal Price at that generation bus for each megawatt of Regulation capability.

The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead megawatt commitment greater than zero shall be equal to the product of (i) the deviation of the set point of the hydroelectric resource that is expected to be required in order to provide Regulation from the hydroelectric resource's expected output level if it had been dispatched in economic merit order times (ii) the difference between the expected Locational Marginal Price at the generation bus for the hydroelectric resource and the average of the Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. Estimated opportunity costs shall be zero for hydroelectric resources for which the average Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period, excluding those Real-time Settlement Intervals during which all available units at the hydroelectric resource were operating is higher than the actual Locational Marginal Price at the generator bus for the Real-time Settlement Interval.

The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead megawatt commitment greater than zero shall be equal to the product of (i) the deviation of the set point of the hydroelectric resource that is expected to be required in order to provide Regulation from the hydroelectric resource's expected output level if it had been dispatched in economic merit order times (ii) the difference between the average of the Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating and the expected Locational Marginal Price at the generation bus for the hydroelectric resource. Estimated opportunity costs shall be zero for hydroelectric resources for which the actual Locational Marginal Price at the generator bus for the Real-time Settlement Interval is higher than the average Locational Marginal Price at the generation bus for the appropriate on-peak or

off-peak period, excluding those Real-time Settlement Intervals during which all available units at the hydroelectric resource were operating.

For the purpose of committing resources and setting Regulation market clearing prices, the Office of the Interconnection shall utilize day-ahead Locational Marginal Prices to calculate the average of the Locational Marginal Price values used in the calculation for opportunity costs for hydroelectric resources. For the purposes of settlements, the Office of the Interconnection shall utilize the real-time Locational Marginal Prices to calculate the average of the Locational Marginal Price used in the calculation for opportunity costs for hydroelectric resources.

~~Estimated~~ Opportunity costs for Economic Load Response Participant resources and regulation-only resources to provide Regulation are zero for the purpose of committing resources, setting Regulation clearing prices, and settlements.

(e) In determining the credit under subsection (b) to a Market Participant selected to provide Regulation in a Regulation Zone and that actively follows the Office of the Interconnection's Regulation signals and instructions, the unit-specific opportunity cost of a generation resource shall be determined for (1) each Real-time Settlement Interval that the Office of the Interconnection requires a generation resource to provide Regulation, and (2) the ~~last threetwo~~ Real-time Settlement Intervals ~~of the~~ preceding the regulation commitment shoulder hour and the ~~first threetwo~~ Real-time Settlement Intervals ~~of the~~ following the regulation commitment shoulder hour in accordance with the PJM Manuals and below.

The unit-specific opportunity cost in dollars, incurred during the Real-time Settlement Interval, in which the Regulation obligation is fulfilled, shall be equal to the area bounded by product of (i) the Locational Marginal Price at the generation bus for the regulating resource, (ii) the resource's Final Offer, (iii) ~~deviation of~~ the generation resource's tracking ramp-rate limited output necessary to follow the Office of the Interconnection's Regulation signals from the generation resource's expected output level if it had been dispatched in economic merit order times, as further described in the PJM Manuals, and (iii) the generation resource's regulation set point, and adjusted for the performance score of the resource, ~~the absolute value of the difference between the Locational Marginal Price at the generation bus for the generation resource and the lesser of the available market-based or highest available cost-based energy offer from the generation resource (at the actual megawatt level of the resource when the actual megawatt level is within the tolerance defined in the PJM Manuals for the Regulation set point, or at the Regulation set point for the resource when it is not within the corresponding tolerance) in the PJM Interchange Energy Market.~~ Opportunity costs for Economic Load Response Participant or regulation only resources to provide Regulation are zero.

The unit-specific opportunity costs associated with uneconomic operation during each of the preceding ~~twothree~~ Real-time Settlement Intervals of the ~~shoulder hour~~ regulation commitment shall be equal to the product of (i) the deviation between the set point of the generation resource that is expected to be required in the initial regulating Real-time Settlement Interval in order to provide Regulation and the resource's tracking expected ramp rate limited output in each of the preceding ~~three-two~~ Real-time Settlement Intervals of the ~~shoulder hour~~ regulation commitment times (ii) the absolute value of the difference between the Locational Marginal Price at the

generation bus for the generation resource in each of the preceding ~~three-two~~ Real-time Settlement Intervals of the ~~regulation commitment~~ ~~shoulder hour~~ and the ~~lesser of the available market based or highest available cost based~~ energy offer, ~~using the Final Offer, from the generation resource~~ (at the megawatt level of the Regulation set point for the resource in the initial regulating Real-time Settlement Interval,) in the PJM Interchange Energy Market, all as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals.

The unit-specific opportunity costs associated with uneconomic operation during each of the following ~~three-two~~ Real-time Settlement Intervals of the ~~shoulder hour~~ ~~regulation commitment~~ shall be equal to the product of (i) the deviation between the set point of the generation resource that is expected to be required in the final regulating Real-time Settlement Interval in order to provide Regulation and the resource's ~~tracking~~ expected ~~ramp-rate limited~~ output in each of the following ~~three-two~~ Real-time Settlement Intervals of the ~~shoulder hour~~ ~~regulation commitment~~ times, ~~and~~ (ii) the absolute value of the difference between the Locational Marginal Price at the generation bus for the generation resource in each of the following ~~three-two~~ Real-time Settlement Intervals of the ~~shoulder hour~~ ~~regulation commitment~~ and the ~~lesser of the available market based or highest available cost based~~ energy offer, ~~using the Final Offer, from the generation resource~~ (at the megawatt level of the Regulation set point for the resource in final regulating hour,) in the PJM Interchange Energy Market all as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals.

(f) Any amounts credited for Regulation in an hour in excess of the Regulation market-clearing price in that hour shall be allocated and charged to each Market Participant in a Regulation Zone that does not meet its hourly Regulation obligation in proportion to its purchases of Regulation in such Regulation Zone in megawatt-hours during that hour.

(g) To determine the Regulation market ~~performance~~ ~~mileage~~-clearing price ~~for each Regulation Zone~~, the Office of the Interconnection shall adjust the submitted ~~performance~~ ~~mileage~~ offer for each resource in accordance with the historical performance ~~score~~ of that resource, ~~and~~ the amount of ~~historically dispatched~~ Regulation (~~mileage~~) ~~that resource will be dispatched based on the ratio of control signals~~ calculated by the Office of the Interconnection; ~~and the unit-specific benefits factor described in subsection (j) of this section for which that resource is qualified~~. The maximum adjusted ~~performance~~ ~~mileage~~ offer of all cleared resources will set the Regulation market ~~performance~~ ~~mileage~~-clearing price.

The owner of each Regulation resource that actively follows the Office of the Interconnection's Regulation signals and instructions, will be credited for Regulation ~~performance~~ ~~mileage~~ by multiplying the assigned MW(s) by the Regulation market ~~performance~~ ~~mileage~~-clearing price, by the ratio between the requested mileage for the Regulation dispatch signal ~~assigned to the Regulation resource~~ and the ~~historic requested mileage for the~~ Regulation dispatch signal, ~~calculated by the Office of the Interconnection assigned to traditional resources~~, and by the Regulation resource's ~~accuracy~~ ~~performance~~ score calculated in accordance with subsection (j) of this section.

(h) The Office of the Interconnection shall divide each Regulation resource's capability offer by the ~~unit-specific benefits factor described in subsection (j) of this section and divided by the~~ historic accuracy performance score for the resource for the purposes of committing resources and setting the market clearing prices.

The Office of the Interconnection shall calculate the Regulation market capability-clearing price for each Regulation Zone by subtracting the Regulation market ~~performance~~ emileage-clearing price described in subsection (g) from the total Regulation market clearing price described in subsection (c). This residual sets the Regulation market capability-clearing price for that market Real-time Settlement Interval.

The owner of each Regulation resource that actively follows the Office of the Interconnection's Regulation signals and instructions will be credited for Regulation capability based on the assigned MW and the capability Regulation market-clearing price multiplied by the Regulation resource's accuracy performance score calculated in accordance with subsection ~~(j)~~ (k) of this section.

(i) In accordance with the processes described in the PJM Manuals, the Office of the Interconnection shall: (i) calculate inter-temporal opportunity costs for each applicable resource; (ii) include such inter-temporal opportunity costs in each applicable resource's offer to sell frequency Regulation service; and (iii) account for such inter-temporal opportunity costs in the Regulation market-clearing price.

~~(j) The Office of the Interconnection shall calculate a unit-specific benefits factor for each of the dynamic Regulation signal and traditional Regulation signal in accordance with the PJM Manuals. Each resource shall be assigned a unit-specific benefits factor based on their order in the merit order stack for the applicable Regulation signal. The unit-specific benefits factor is the point on the benefits factor curve that aligns with the last megawatt, adjusted by historical performance, that resource will add to the dynamic resource stack. Resources following the dynamic Regulation signal which have a unit-specific benefits factor less than 0.1 will not be considered for the purposes of committing resources. The unit-specific benefits factor for the traditional Regulation signal shall be equal to one.~~

~~(k) The Office of the Interconnection shall calculate each Regulation resource's accuracy performance score. The accuracy performance score shall be the average of a delay score, correlation score, and energy score for each ten-second interval. For purposes of setting the interval to be used for the correlation score and delay scores, PJM will use the maximum of the correlation score plus the delay score for each interval.~~

~~The Office of the Interconnection shall calculate the correlation score using the following statistical correlation function (r) that measures the delay in response between the Regulation signal and the resource change in output:~~

$$\text{Correlation Score} = r_{\text{Signal, Response}(\delta, \delta+5 \text{ Min})}$$

~~$\delta = 0 \text{ to } 5 \text{ Min}$~~

~~where δ is delay.~~

~~The Office of the Interconnection shall calculate the delay score using the following equation:~~

$$\text{Delay Score} = \text{Abs}((\delta - 5 \text{ Minutes}) / (5 \text{ Minutes})).$$

~~The Office of the Interconnection shall calculate an energy score as a function of the difference in the energy provided versus the energy requested by the Regulation signal while scaling for the number of samples. The error measured shall be the difference of the resources response and the dispatch signal, adjusted by the assigned MW and signal dispatch of the Regulation resource.~~

~~The energy performance score is calculated using the absolute error (ϵ) as a function of the resource's Regulation capacity using the following equations:~~

$$\text{Energy Performance Score} = 1 - 1/n \sum \text{Abs}(\text{Error});$$

~~Error = Average of Abs (Abs (Response - Regulation Signal) / (0.5*HourlyInterval Average Regulation Signal + 0.5*AREG)); and~~

~~n = the number of samples in the hour and the energy interval.
AREG = assigned regulation megawatt.~~

~~The Office of the Interconnection shall calculate an accuracy performance score for each Regulation resource that is the average of the delay score, correlation score, and energy score for each five-minute period the Regulation resource is assigned to provide Regulation using the following equation where the energy score, the delay score, and the correlation score are each weighted equally:~~

$$\text{Accuracy Score} = \text{max}((\text{Delay Score}) + (\text{Correlation Score}) + (\text{Energy Score})).$$

~~The historic accuracy performance score will be based on a 100 clock-hour rolling average of the Real-time Settlement Interval accuracy performance scores, with consideration of the qualification score, for resources without adequate historical data, as defined in the PJM Manuals.~~

~~Regulation resources that have a Real-time Settlement Interval performance score below 25% will be ineligible for Regulation credits for that Real-time Settlement Interval.~~

~~Regulation resources that have historical performance scores fall below 40% shall be disqualified from providing Regulation until they are able to re-qualify, as defined in the PJM Manuals.~~

~~(k1) During a Market Suspension where the suspension is less than or equal to ~~twenty-four~~ (24) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Regulation, the resources providing Regulation at the direction of the Office of the Interconnection will be compensated based on a calculated Regulation market-clearing price. Regulation market-clearing prices for each Real-time Settlement Interval associated with such Market Suspension shall be the average of the Regulation market-clearing~~

prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

During a Market Suspension where the suspension is greater than ~~twenty four (24)~~ consecutive hours, if the Office of the Interconnection is assigning Regulation, resources providing Regulation at the direction of the Office of the Interconnection will be compensated based on a calculated Regulation clearing price. The Regulation clearing price for each Real-time Settlement Interval will be determined by calculating a Regulation clearing cost for the online resources providing Regulation during the Market Suspension. The resource's Regulation clearing cost is determined by the summation of their adjusted Regulation offer and adjusted opportunity cost. The opportunity cost will be based on the resource's cost-based offer and will be determined as follows:

For online resources providing Regulation on a cost-based offer at the time of the Market Suspension, that cost-based offer will be used.

For online resources providing Regulation on a price-based offer at the time of the Market Suspension, the Office of the Interconnection shall use the cheapest available cost-based offer based on the dispatch cost formula as defined in Operating Agreement, Schedule 1, section 6.4.1(g) using the available cost-based offers in the Office of the Interconnection system at the time of the Market Suspension.

The highest cost resource, based on this Regulation clearing cost, will set the Regulation market-clearing price for each hour of the Market Suspension.

During a Market Suspension, if the Office of the Interconnection is not assigning Regulation resources, then the Regulation market-clearing price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period and no resource-specific opportunity cost will be calculated.

During a Market Suspension, the following Regulation components for all Real-time Settlement Intervals in the Market Suspension period will be determined as follows:

- (i) If the regulation ~~accuracy performance~~ score cannot be calculated during a Market Suspension, the ~~100-hour rolling average accuracy~~ historic performance score will be used for the Market Suspension period.
- (ii) If the regulation mileage ~~ratio~~ cannot be calculated during a Market Suspension, the mileage ~~ratio~~ will be set to one (1) for the Market Suspension period.

~~(iii) If the unit-specific benefits factor cannot be calculated during a Market Suspension, the unit-specific benefits factor would be based on the historical average unit-specific benefits factor over past hours that shared the same penetration of Regulation D resources that exist for the given Market Suspension hour.~~

3.2.2A Offer Price Caps.

3.2.2A.1 Applicability.

(a) ~~For Each hour~~Regulation market clearing interval, the Office of the Interconnection shall conduct a Regulation three-pivotal supplier test as described in this section. Regulation offers from Market Sellers that fail the Regulation three-pivotal supplier test shall be capped in the ~~hour~~interval in which they failed the test at their cost based offers as determined pursuant to Tariff, Attachment K-Appendix, section 1.10.1A(e). A Regulation supplier fails the three-pivotal supplier test in any ~~hour~~Regulation market clearing interval in which such Regulation supplier and the two largest other Regulation suppliers are jointly pivotal.

(b) For the purposes of conducting the three-pivotal supplier test pursuant to this section, the following applies:

(i) The Regulation three-pivotal supplier test will include in the definition of available supply all offers megawatts from resources capable of satisfying the Regulation Rrequirement of the PJM Region multiplied by the historic ~~accuracy-performance~~ score of the resource ~~and multiplied by the unit-specific benefits factor~~ for which the capability cost-based offer plus the performance-mileage cost-based offer plus any eligible opportunity costs is no greater than 150%~~-percent~~ of the clearing price that would be calculated if all offers were limited to cost (plus eligible opportunity costs).

(ii) The Regulation three-pivotal supplier test will apply on a Regulation supplier basis (i.e. not a resource by resource basis) and only the Regulation suppliers that fail the three-pivotal supplier test will have their Regulation offers capped. A Regulation supplier for the purposes of this section includes corporate affiliates. Regulation from resources controlled by a Regulation supplier or its affiliates, whether by contract with unaffiliated third parties or otherwise, will be included as Regulation of that Regulation supplier. Regulation provided by resources owned by a Regulation supplier but controlled by an unaffiliated third party, whether by contract or otherwise, will be included as Regulation of that third party.

(iii) Each supplier shall be ranked from the largest to the smallest offered megawatt of eligible Regulation supply adjusted by the historic performance of each resource ~~and the unit-specific benefits factor~~. Suppliers are then tested in order, starting with the three largest suppliers. For each iteration of the test, the two largest suppliers are combined with a third supplier, and the combined supply is subtracted from total effective supply. The resulting net amount of eligible supply is divided by the Regulation ~~R~~requirement for the ~~hour~~Regulation clearing interval to determine the residual supply

index. Where the residual supply index for Regulation three pivotal suppliers is less than or equal to 1.0, then the three suppliers are jointly pivotal and the suppliers being tested fail the three pivotal supplier test. Iterations of the test continue until the combination of the two largest suppliers and a third supplier result in a residual supply index greater than 1.0, at which point the remaining suppliers pass the test. Any resource owner that fails the three-pivotal supplier test will be offer-capped.

3.2.3 Operating Reserves.

(a) A Market Seller's pool-scheduled resources capable of providing Operating Reserves shall be credited as specified below based on the applicable offer for the operation of such resource, provided that the resource was available for the entire time specified in the Offer Data for such resource. To the extent that sections 3.2.3A, 3.2.3A.001, and 3.2.3A.01 below do not meet the Synchronized Reserve Requirements, the Primary Reserve Requirements, and the 30-minute Reserve Requirements, the Office of the Interconnection shall schedule additional Operating Reserves pursuant to Section 1.7.17 and 1.10 of Schedule 1 of this Agreement. In addition the Office of the Interconnection shall schedule Operating Reserves pursuant to those sections to satisfy any unforeseen Operating Reserve requirements that are not reflected in the day-ahead market. PJMSettlement shall be the Counterparty to the purchases and sales of Operating Reserve in the PJM Interchange Energy Market.

(b) The following determination shall be made for each pool-scheduled resource that is scheduled in the Day-ahead Energy Market: the total offered price for Start-up Costs and No-load Costs and energy, determined on the basis of the resource's scheduled output, shall be compared to the total value of that resource's energy – as determined by the Day-ahead Energy Market and the Day-ahead Prices applicable to the relevant generation bus in the Day-ahead Energy Market. PJM shall also (i) determine whether any resources were scheduled in the Day-ahead Energy Market to provide Black Start service, Reactive Services or transfer interface control during the Operating Day because they are known or expected to be needed to maintain system reliability in a Zone during the Operating Day in order to minimize the total cost of Operating Reserves associated with the provision of such services and reflect the most accurate possible expectation of real-time operating conditions in the day-ahead model, which resources would not have otherwise been committed in the day-ahead security-constrained dispatch and (ii) report on the day following the Operating Day the megawatt quantities scheduled in the Day-ahead Energy Market for the above-enumerated purposes for the entire RTO.

Except as provided in section 3.2.3(n) below, if the total offered price for Start-up Costs (shutdown costs for Economic Load Response Participant resources) and No-load Costs and energy summed over all Day-ahead Settlement Intervals exceeds the total value summed over all Day-ahead Settlement Intervals, the difference shall be credited to the Market Seller as a day-ahead Operating Reserve credit.

However, for the Day-ahead Settlement Intervals in which the resource is scheduled to provide energy in the Operating Day and the resource actually provides energy in at least one Real-time Settlement Interval in an hour that corresponds to such scheduled Day-ahead Settlement Intervals, a resource's day-ahead Operating Reserve credit shall be reduced by the greater of zero

or the difference of the resource's Day-ahead Operating Reserve Target and the Balancing Operating Reserve Target, as determined below.

A resource's Day-ahead Operating Reserve Target shall be determined in accordance with the following equation:

$$(A + B) - C$$

Where:

A = Start-up Costs

B = the sum of day-ahead No-load Costs and energy over the applicable Real-time Settlement Intervals that correspond with Day-ahead Settlement Intervals in which the resource is scheduled. The day-ahead No-load Costs and energy are divided by twelve to determine the cost for each Real-time Settlement Interval.

C = the sum of the day-ahead revenues calculated for each Real-time Settlement Interval that corresponds with a Day-ahead Settlement Interval in which the resource is scheduled, where the day-ahead revenue for each such Real-time Settlement Interval equals the product of the megawatt amount of energy scheduled in the Day-ahead Energy Market and the Day-ahead Price at the applicable pricing point for the resource divided by twelve.

A resource's Balancing Operating Reserve Target shall be determined in accordance with the following equation:

$$D - (E + F)$$

Where:

D = the sum of Start-up Costs and No-load Costs and the incremental cost of energy summed over all Real-time Settlement Intervals that correspond to the Day-ahead Settlement Intervals in which the resource was scheduled;

E = [(the megawatt amount of energy provided in the Real-time Energy Market minus the megawatt amount of energy scheduled in the Day-ahead Energy Market) multiplied by the Real-time Price at the applicable pricing point for the resource] plus the sum of the day-ahead revenues as determined in part C of the above formula for determining the Day-ahead Operating Reserve Target, summed over the applicable Real-time Settlement Intervals; and

F = the sum of all revenues earned for providing Secondary Reserves, Synchronized Reserves, Non-Synchronized Reserves, and Reactive Services over the applicable Real-time Settlement Intervals.

The Office of the Interconnection shall apply any balancing Operating Reserve credits allocated pursuant to this section 3.2.3(b) to real-time deviations or real-time load share plus exports, pursuant to Tariff, Attachment K-Appendix, section 3.2.3(p), depending on whether the balancing Operating Reserve credits are related to resources scheduled during the reliability analysis for an Operating Day, or during the actual Operating Day.

(i) For resources scheduled by the Office of the Interconnection during the reliability analysis for an Operating Day, the associated balancing Operating Reserve credits shall be allocated based on the reason the resource was scheduled according to the following provisions:

(A) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to operate in real-time to augment the physical resources committed in the Day-ahead Energy Market to meet the forecasted real-time load plus the Operating Reserve requirement, the associated balancing Operating Reserve credits, identified as RA Credits for Deviations, shall be allocated to real-time deviations.

(B) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to maintain system reliability, the associated balancing Operating Reserve credits, identified as RA Credits for Reliability, shall be allocated according to ratio share of real time load plus export transactions.

(C) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource with a day-ahead schedule is required to deviate from that schedule to provide balancing Operating Reserves, the associated balancing Operating Reserve credits shall be segmented and separately allocated pursuant to subsections 3.2.3(b)(i)(A) or 3.2.3(b)(i)(B) hereof. Balancing Operating Reserve credits for such resources will be identified in the same manner as units committed during the reliability analysis pursuant to subsections 3.2.3(b)(i)(A) and 3.2.3(b)(i)(B) hereof.

(ii) For resources scheduled during an Operating Day, the associated balancing Operating Reserve credits shall be allocated according to the following provisions:

(A) If the Office of the Interconnection directs a resource to operate during an Operating Day to provide balancing Operating Reserves, the associated balancing Operating Reserve credits, identified as RT Credits for Reliability, shall be allocated according to ratio share of load plus exports. The foregoing notwithstanding, credits will be applied pursuant to this section only if the LMP at the resource's bus does not meet or exceed the applicable offer of the resource for at least four 5-minute intervals during one or more discrete clock hours during each period the resource operated and produced MWs during the relevant Operating Day. If a resource operated and produced MWs for less than four 5-

minute intervals during one or more discrete clock hours during the relevant Operating Day, the credits for that resource during the hour it was operated less than four 5-minute intervals will be identified as being in the same category (RT Credits for Reliability or RT Credits for Deviations) as identified for the Operating Reserves for the other discrete clock hours.

(B) If the Office of the Interconnection directs a resource not covered by section 3.2.3(b)(ii)(A) hereof to operate in real-time during an Operating Day, the associated balancing Operating Reserve credits, identified as RT Credits for Deviations, shall be allocated according to real-time deviations from day-ahead schedules.

(iii) PJM shall post on its Web site the aggregate amount of MWs committed that meet the criteria referenced in subsections (b)(i) and (b)(ii) hereof.

(c) The sum of the foregoing credits calculated in accordance with section 3.2.3(b) plus any unallocated charges from section 3.2.3(h) and Tariff, Attachment K-Appendix, section 5.1.7, and any shortfalls paid pursuant to the Market Settlement provision of the Day-ahead Economic Load Response Program, shall be the cost of Operating Reserves in the Day-ahead Energy Market.

(d) The cost of Operating Reserves in the Day-ahead Energy Market shall be allocated and charged to each Market Participant in proportion to the sum of its (i) scheduled load (net of Behind The Meter Generation expected to be operating, but not to be less than zero), accepted Decrement Bids in the Day-ahead Energy Market in megawatt-hours for that Operating Day and accepted Up-to Congestion Transactions in the Day-ahead Energy Market in megawatt-hours for the Operating Day at the sink of the transaction; and (ii) scheduled energy sales in the Day-ahead Energy Market from within the PJM Region to load outside such region in megawatt-hours for that Operating Day, but not including its bilateral transactions that are Dynamic Transfers to load outside such area pursuant to Tariff, Attachment K-Appendix, section 1.12, except to the extent PJM scheduled resources to provide Black Start service, Reactive Services or transfer interface control. The cost of Operating Reserves in the Day-ahead Energy Market for resources scheduled to provide Black Start service for the Operating Day which resources would not have otherwise been committed in the day-ahead security constrained dispatch shall be allocated by ratio share of the monthly transmission use of each Network Customer or Transmission Customer serving Zone Load or Non-Zone Load, as determined in accordance with the formulas contained in Tariff, Schedule 6A. The cost of Operating Reserves in the Day-ahead Energy Market for resources scheduled to provide Reactive Services or transfer interface control because they are known or expected to be needed to maintain system reliability in a Zone during the Operating Day and would not have otherwise been committed in the day-ahead security constrained dispatch shall be allocated and charged to each Market Participant in proportion to the sum of its real-time deliveries of energy to load (net of operating Behind The Meter Generation) in such Zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such Zone.

(e) At the end of each Operating Day, the following determination shall be made for each synchronized pool-scheduled resource of each Market Seller that operates as requested by the Office of the Interconnection. For each calendar day, pool-scheduled resources in the Real-time Energy Market shall be made whole for each of the following Segments: 1) the greater of their day-ahead schedules and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Economic Load Response Participant resources); and 2) any block of Real-time Settlement Intervals the resource operates at PJM's direction in excess of the greater of its day-ahead schedule and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Economic Load Response Participant resources). For each calendar day, and for each synchronized start of a generation resource or PJM-dispatched economic load reduction, there will be a maximum of two Segments for each resource. Segment 1 will be the greater of the day-ahead schedule and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Demand Resources) and Segment 2 will include the remainder of the contiguous Real-time Settlement Intervals when the resource is operating at the direction of the Office of the Interconnection, provided that a segment is limited to the Operating Day in which it commenced and cannot include any part of the following Operating Day.

A Generation Capacity Resource that operates outside of its unit-specific parameters will not receive Operating Reserve Credits nor be made whole for such operation when not dispatched by the Office of the Interconnection, unless the Market Seller of the Generation Capacity Resource can justify to the Office of the Interconnection that operation outside of such unit-specific parameters was the result of an actual constraint. Such Market Seller shall provide to the Market Monitoring Unit and the Office of the Interconnection its request to receive Operating Reserve Credits and/or to be made whole for such operation, along with documentation explaining in detail the reasons for operating its resource outside of its unit-specific parameters, within thirty calendar days following the issuance of billing statement for the Operating Day. The Market Seller shall also respond to additional requests for information from the Market Monitoring Unit and the Office of the Interconnection. The Market Monitoring Unit shall evaluate such request for compensation and provide its determination of whether there was an exercise of market power to the Office of the Interconnection by no later than twenty-five calendar days after receiving the Market Seller's request for compensation. The Office of the Interconnection shall make its determination whether the Market Seller justified that it is entitled to receive Operating Reserve Credits and/or be made whole for such operation of its resource for the day(s) in question, by no later than thirty calendar days after receiving the Market Seller's request for compensation.

Nuclear generation resources shall not be eligible for Operating Reserve payments unless: 1) the Office of the Interconnection directs such resources to reduce output, in which case, such units shall be compensated in accordance with Tariff, Attachment K-Appendix, section 3.2.3(f) and the parallel provision of Operating Agreement, Schedule 1, section 3.2.3(f); or 2) the resource submits a request for a risk premium to the Market Monitoring Unit under the procedures specified in Tariff, Attachment M – Appendix, section II.B. A nuclear generation resource (i) must submit a risk premium consistent with its agreement under such process, or, (ii) if it has not agreed with the Market Monitoring Unit on an appropriate risk premium, may submit its own determination of an appropriate risk premium to the Office of the Interconnection, subject to

acceptance by the Office of the Interconnection, with or without prior approval from the Commission.

Credits received pursuant to this section shall be equal to the positive difference between a resource's Total Operating Reserve Offer, and the total value of the resource's energy in the Day-ahead Energy Market plus any credit or change for quantity deviations, at PJM dispatch direction (excluding quantity deviations caused by an increase in the Market Seller's Real-time Offer), from the Day-ahead Energy Market during the Operating Day at the real-time LMP(s) applicable to the relevant generation bus in the Real-time Energy Market. The foregoing notwithstanding, credits for Segment 2 shall exclude start up (shutdown costs for Economic Load Response Participant resources) costs for generation resources.

Except as provided in section 3.2.3(m), if the total offered price exceeds the total value, the difference less any credit as determined pursuant to section 3.2.3(b), and less the absolute value of any negative Synchronized Reserve lost opportunity cost credit, as determined in section 3.2.3A(f)(iv) below, and less the absolute value of any negative Non-Synchronized Reserve lost opportunity cost credit determined in section 3.2.3.A.001(d)(iii) below, and less any amounts credited for providing Reactive Services as specified in section 3.2.3B, and the absolute value of any negative Secondary Reserve lost opportunity cost credit, as determined in section 3.2.3A.01(f)(iv) below, and plus the sum of the Market Revenue Neutrality Offsets for Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve, shall be credited to the Market Seller.

Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve credits applied against Operating Reserve credits pursuant to this section shall be netted against the Operating Reserve credits earned in the corresponding Real-time Settlement Interval(s) in which the Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve credits accrued, provided that for condensing combustion turbines, Synchronized Reserve credits will be netted against the total Operating Reserve credits accrued during each Real-time Settlement Interval the unit operates in condensing and generation mode.

(f) A Market Seller of a unit not defined in subsection (f-1), (f-2), or (f-4) hereof (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3(c) hereof), the output of which is reduced or suspended at the request of the Office of the Interconnection due to a transmission constraint or other reliability issue, and for which the real-time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall be credited for each Real-time Settlement Interval in an amount equal to the product of (A) the LOC Deviation times (B) the Locational Marginal Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A * B) - C$. If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.11.6, where the suspension is greater than twenty-four (24) consecutive hours, resources will not be compensated for lost opportunity costs.

(f-1) With the exception of Market Sellers of Flexible Resources that submit a Real-time Offer greater than their resource's Committed Offer in the Day-ahead Energy Market, a Market Seller of a Flexible Resource shall be compensated for lost opportunity cost, and shall be limited to the lesser of the unit's Economic Maximum or the unit's Generation Resource Maximum Output, if either of the following conditions occur:

- (i) if the unit output is reduced at the direction of the Office of the Interconnection and the real time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as directed by the PJM dispatcher), then the Market Seller shall be credited in a manner consistent with that described in section 3.2.3(f).
- (ii) If the unit is scheduled to produce energy in the Day-ahead Energy Market for a Day-ahead Settlement Interval, but the unit is not called on by the Office of the Interconnection and does not operate in the corresponding Real-time Settlement Interval(s), then the Market Seller shall be credited in an amount equal to the higher of:
 - 1) the product of (A) the amount of megawatts committed in the Day-ahead Energy Market for the generating unit, and (B) the Real-time Price at the generation bus for the generating unit, minus the sum of (C) the Total Lost Opportunity Cost Offer plus No-load Costs, plus (D) the Start-up Cost, divided by the Real-time Settlement Intervals committed for each set of contiguous hours for which the unit was scheduled in Day-ahead Energy Market. This equation is represented as $(A*B) - (C+D)$. The startup cost, (D), shall be excluded from this calculation if the unit operates in real time following the Office of the Interconnection's direction during any portion of the set of contiguous hours for which the unit was scheduled in Day-ahead Energy Market, or
 - 2) the Real-time Price at the unit's bus minus the Day-ahead Price at the unit's bus, multiplied by the number of megawatts committed in the Day-ahead Energy Market for the generating unit.

(f-2) A Market Seller of a hydroelectric resource that is pool-scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3(c) hereof), the output of which is altered at the request of the Office of the Interconnection from the schedule submitted by the owner, due to a transmission constraint or other reliability issue, shall be compensated for lost opportunity cost in the same manner as provided in sections 3.2.2(d) and 3.2.3A(f) and further detailed in the PJM Manuals.

(f-3) If a Market Seller believes that, due to specific pre-existing binding commitments to which it is a party, and that properly should be recognized for purposes of this section, the

above calculations do not accurately compensate the Market Seller for opportunity cost associated with following PJM dispatch instructions and reducing or suspending a unit's output due to a transmission constraint or other reliability issue, then the Office of the Interconnection, the Market Monitoring Unit and the individual Market Seller will discuss a mutually acceptable, modified amount of opportunity cost compensation, taking into account the specific circumstances binding on the Market Seller. Following such discussion, if the Office of the Interconnection accepts a modified amount of opportunity cost compensation, the Office of the Interconnection shall invoice the Market Seller accordingly. If the Market Monitoring Unit disagrees with the modified amount of opportunity cost compensation, as accepted by the Office of the Interconnection, it will exercise its powers to inform the Commission staff of its concerns.

(f-4) A Market Seller of a wind generating unit that is pool-scheduled or self-scheduled, has SCADA capability to transmit and receive instructions from the Office of the Interconnection, has provided data and established processes to follow PJM basepoints pursuant to the requirements for wind generating units as further detailed in this Agreement, the Tariff and the PJM Manuals, and which is operating as requested by the Office of the Interconnection, the output of which is reduced or suspended at the request of the Office of the Interconnection due to a transmission constraint or other reliability issue, and for which the , real-time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall be credited for each Real-time Settlement Interval in an amount equal to the product of (A) the LOC Deviation times (B) the Real-time Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A*B) - C$.

(f-5) (i) A Market Seller of a pool-scheduled resource or a dispatchable self-scheduled resource shall receive Dispatch Differential Lost Opportunity Cost credits as calculated under subsection (iv) below if the resource is dispatched to provide energy in the Real-time Energy Market, provided such resource is not committed to provide real-time ancillary services (Regulation, reserves, reactive service) or instructed to reduce or suspend output due to a transmission constraint or other reliability issue pursuant to Tariff, Attachment K-Appendix, section 3.2.3(f-1) through Tariff, Attachment K-Appendix, section (f-4).

(ii) PJM will calculate the revenue above cost for the pricing run for each Real-time Settlement Interval in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = the resource's expected output level based on its resource parameters at the Real-time Price at the applicable pricing point;

B = the Real-time Price at the applicable pricing point; and

C = the sum of the resource's Real-time Energy Market offer integrated under the Final Offer for the resource's expected output level based on its resource parameters at the Real-time Price at the applicable pricing point.

(iii) PJM will calculate the revenue above cost for the dispatch run for each Real-time Settlement Interval in accordance with the following equation:

$$(\text{greater of A and B}) - (\text{lesser of C and D})$$

Where:

A = the product of the amount of megawatts of energy dispatched in the Real-time Energy Market dispatch run for the resource in that Real-time Settlement Interval and the Real-time Price at the applicable pricing point;

B = the product of the amount of megawatts of energy the resource actually provided in that Real-time Settlement Interval and the Real-time Price at the applicable pricing point;

C = the resource's Real-time Energy Market offer integrated under the Final Offer for the amount of megawatts dispatched in the Real-time Energy Market dispatch run;

D = the resource's Real-time Energy Market offer integrated under the Final Offer for the amount of megawatts the resource actually provided in that Real-time Settlement Interval.

(iv) The Dispatch Differential Lost Opportunity Cost credit shall equal the greater of (A) the difference between the revenue above cost based on the pricing run determined in subsection (f-5)(ii) and the revenue above cost based on the dispatch run determined in subsection (f-5)(iii) or (B) zero.

(v) For each hour in an Operating Day, the total cost of the Dispatch Differential Lost Opportunity Cost credits shall be allocated and charged to each Market Participant in proportion to the sum of its (i) deliveries of energy to load ((a) net of operating Behind The Meter Generation, but not to be less than zero; and (b) excluding Direct Charging Energy) in the PJM Region, served under Network Transmission Service, in megawatt-hours; and (ii) deliveries of energy sales from within the PJM Region to load outside such region in megawatt-hours but not including its bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Tariff, Attachment K-Appendix, section 1.12, as compared to the sum of all such deliveries for all Market Participants.

(g) The sum of the foregoing credits in Tariff, Attachment K-Appendix, section 3.2.3(f-1) through Tariff, Attachment K-Appendix, section 3.2.3(f-4), plus any cancellation fees paid in accordance with Tariff, Attachment K-Appendix, section 1.10.2(d), such cancellation fees to be applied to the Operating Day for which the unit was scheduled, plus any shortfalls paid

pursuant to the Market Settlement provision of the real-time Economic Load Response Program, less any payments received from another Control Area for Operating Reserves shall be the cost of Operating Reserves for the Real-time Energy Market in each Operating Day.

(h) The cost of Operating Reserves for the Real-time Energy Market for each Operating Day, except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, shall be allocated and charged to each Market Participant based on their daily total of hourly deviations determined in accordance with the following equation:

$$\sum_h (A + B + C)$$

Where:

h = the hours in the applicable Operating Day;

A = For each Real-time Settlement Interval in an hour, the sum of the absolute value of the withdrawal deviations (in MW) between the quantities scheduled in the Day-ahead Energy Market and the Market Participant's energy withdrawals (net of operating Behind The Meter Generation) in the Real-time Energy Market, except as noted in subsection (h)(ii) below and in the PJM Manuals divided by the number of Real-time Settlement Intervals for that hour. The summation of each Real-time Settlement Interval's withdrawal deviation in an hour will be the Market Participant's total hourly withdrawal deviations. Market Participant bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Tariff, Attachment K-Appendix, section 1.12 are not included in the determination of withdrawal deviations;

B = For each Real-time Settlement Interval in an hour, the sum of the absolute value of generation deviations (in MW and not including deviations in Behind The Meter Generation) as determined in subsection (o) divided by the number of Real-time Settlement Intervals for that hour;

C = For each Real-time Settlement Interval in an hour, the sum of the absolute value of the injection deviations (in MW) between the quantities scheduled in the Day-ahead Energy Market and the Market Participant's energy injections in the Real-time Energy Market divided by the number of Real-time Settlement Intervals for that hour. The summation of the injection deviations for each Real-time Settlement Interval in an hour will be the Market Participant's total hourly injection deviations. The determination of injection deviations does not include generation resources.

The Revenue Data for Settlements determined for each Real-time Settlement Interval in accordance with Tariff, Attachment K-Appendix, section 3.1A shall be used in determining the real-time withdrawal deviations, generation deviations and injection deviations used to calculate Operating Reserve under this subsection (e).

The costs associated with scheduling of units for Black Start service or testing of Black Start Units shall be allocated by ratio share of the monthly transmission use of each Network Customer or Transmission Customer serving Zone Load or Non-Zone Load, as determined in accordance with the formulas contained in Tariff, Schedule 6A.

Notwithstanding section (h)(1) above, as more fully set forth in the PJM Manuals, load deviations from the Day-ahead Energy Market shall not be assessed Operating Reserves charges to the extent attributable to reductions in the load of Price Responsive Demand that is in response to an increase in Locational Marginal Price from the Day-ahead Energy Market to the Real-time Energy Market and that is in accordance with a properly submitted PRD Curve.

Deviations that occur within a single Zone shall be associated with the Eastern or Western Region, as defined in section 3.2.3(q) below, and shall be subject to the regional balancing Operating Reserve rate determined in accordance with Section 3.2.3(q). Deviations at a hub shall be associated with the Eastern or Western Region if all the buses that define the hub are located in the region. Deviations at an Interface Pricing Point shall be associated with whichever region, the Eastern or Western Region, with which the majority of the buses that define that Interface Pricing Point are most closely electrically associated. If deviations at interfaces and hubs are associated with the Eastern or Western region, they shall be subject to the regional balancing Operating Reserve rate. Demand and supply deviations shall be based on total activity in a Zone, including all aggregates and hubs defined by buses that are wholly contained within the same Zone.

The foregoing notwithstanding, netting deviations shall be allowed for each Real-time Settlement Interval in accordance with the following provisions:

- (i) Generation resources with multiple units located at a single bus shall be able to offset deviations in accordance with the PJM Manuals to determine the net deviation MW at the relevant bus.
- (ii) Demand deviations will be assessed by comparing all day-ahead demand transactions, which include the components referenced in section 3.2.3(d) regarding the cost of Operating Reserves in the Day-ahead Energy Market, at a single transmission zone, hub, or interface against the real-time demand transactions at that same transmission zone, hub, or interface; except that the positive values of demand deviations, as set forth in the PJM Manuals, will not be assessed Operating Reserve charges in the event of a Primary Reserve or Synchronized Reserve shortage in real-time or where PJM initiates the request for emergency load reductions in real-time in order to avoid a Primary Reserve or Synchronized Reserve shortage.
- (iii) Supply deviations will be assessed by comparing all day-ahead transactions at a single transmission zone, hub, or interface against the real-time transactions at that same transmission zone, hub, or interface.
- (iv) Bilateral transactions inside the PJM Region, as defined in Operating Agreement, Schedule 1, section 1.7.10, will not be included in the determination of Supply or Demand deviations.

(i) At the end of each Operating Day, Market Sellers shall be credited on the basis of their offered prices for synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, as well as the credits calculated as specified in Section 3.2.3(b) for those generators committed solely for the purpose of providing synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, at the request of the Office of the Interconnection.

(j) The sum of the foregoing credits as specified in section 3.2.3(i) shall be the cost of Operating Reserves for synchronous condensing for the PJM Region for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, or in association with post-contingency operation for the Operating Day and shall be separately determined for the PJM Region.

(k) The cost of Operating Reserves for synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, or in association with post-contingency operation for each Operating Day shall be allocated and charged to each Market Participant in proportion to the sum of its (i) deliveries of energy to load (net of operating Behind The Meter Generation, but not to be less than zero) in the PJM Region, served under Network Transmission Service, in megawatt-hours during that Operating Day; and (ii) deliveries of energy sales from within the PJM Region to load outside such region in megawatt-hours during that Operating Day, but not including its bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Tariff, Attachment K-Appendix, section 1.12, as compared to the sum of all such deliveries for all Market Participants.

(l) For any Operating Day in either, as applicable, the Day-ahead Energy Market or the Real-time Energy Market for which, for all or any part of such Operating Day, the Office of the Interconnection: (i) declares a Maximum Generation Emergency; (ii) issues an alert that a Maximum Generation Emergency may be declared (“Maximum Generation Emergency Alert”); or (iii) schedules units based on the anticipation of a Maximum Generation Emergency or a Maximum Generation Emergency Alert, the Operating Reserves credit otherwise provided by section 3.2.3(b) or section 3.2.3(e) in connection with market-based offers shall be limited as provided in subsections (n) or (m), respectively. The Office of the Interconnection shall provide timely notice on its internet site of the commencement and termination of any of the actions described in subsection (i), (ii), or (iii) of this subsection (l) (collectively referred to as “MaxGen Conditions”). Following the posting of notice of the commencement of a MaxGen Condition, a Market Seller may elect to submit a cost-based offer in accordance with Operating Agreement, Schedule 2, in which case subsections (m) and (n) shall not apply to such offer; provided, however, that such offer must be submitted in accordance with the deadlines in Tariff, Attachment K-Appendix, section 1.10 for the submission of offers in the Day-ahead Energy Market or Real-time Energy Market, as applicable. Submission of a cost-based offer under such conditions shall not be precluded by Tariff, Attachment K-Appendix, section 1.9.7(b); provided, however, that the Market Seller must return to compliance with Tariff, Attachment K-Appendix, section 1.9.7(b) when it submits its bid for the first Operating Day after termination of the MaxGen Condition.

(m) For the Real-time Energy Market, if the Effective Offer Price (as defined below) for a market-based offer is greater than \$1,000/MWh and greater than the Market Seller's lowest available and applicable cost-based offer, the Market Seller shall not receive any credit for Operating Reserves. For purposes of this subsection (m), the Effective Offer Price shall be the amount that, absent subsections (l) and (m), would have been credited for Operating Reserves for such Operating Day pursuant to section 3.2.3(e) plus the Real-time Energy Market revenues for the Real-time Settlement Intervals that the offer is economic divided by the megawatt hours of energy provided during the Real-time Settlement Intervals that the offer is economic. The Real-time Settlement Intervals that the offer is economic shall be: (i) the Real-time Settlement Intervals that the offer price for energy is less than or equal to the Real-time Price for the relevant generation bus, (ii) the Real-time Settlement Intervals in which the offer for energy is greater than Locational Marginal Price and the unit is operated at the direction of the Office of the Interconnection that are in addition to any Real-time Settlement Intervals required due to the minimum run time or other operating constraint of the unit, and (iii) for any unit with a minimum run time of one hour or less and with more than one start available per day, any hours the unit operated at the direction of the Office of the Interconnection.

(n) For the Day-ahead Energy Market, if notice of a MaxGen Condition is provided prior to 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled and the Effective Offer Price for a market-based offer is greater than \$1,000/MWh and greater than the Market Seller's lowest available and applicable cost-based offer, the Market Seller shall not receive any credit for Operating Reserves. If notice of a MaxGen Condition is provided after 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled and the Effective Offer Price is greater than \$1,000/MWh, the Market Seller shall receive credit for Operating Reserves determined in accordance with section 3.2.3(b), subject to the limit on total compensation stated below. If the Effective Offer Price is less than or equal to \$1,000/MWh, regardless of when notice of a MaxGen Condition is provided, the Market Seller shall receive credit for Operating Reserves determined in accordance with section 3.2.3(b), subject to the limit on total compensation stated below. For purposes of this subsection (n), the Effective Offer Price shall be the amount that, absent subsections (l) and (n), would have been credited for Operating Reserves for such Operating Day divided by the megawatt hours of energy offered during the Specified Hours, plus the offer for energy during such hours. The Specified Hours shall be the lesser of: (1) the minimum run hours stated by the Market Seller in its Offer Data; and (2) either (i) for steam-electric generating units and for combined-cycle units when such units are operating in combined-cycle mode, the six consecutive hours of highest Day-ahead Price during such Operating Day when such units are running or (ii) for combustion turbine units and for combined-cycle units when such units are operating in combustion turbine mode, the two consecutive hours of highest Day-ahead Price during such Operating Day when such units are running. Notwithstanding any other provision in this subsection, the total compensation to a Market Seller on any Operating Day that includes a MaxGen Condition shall not exceed \$1,000/MWh during the Specified Hours, where such total compensation in each such hour is defined as the amount that, absent subsections (l) and (n), would have been credited for Operating Reserves for such Operating Day pursuant to section 3.2.3(b) divided by the Specified Hours, plus the Day-ahead Price for such hour, and no Operating Reserves payments shall be made for any other hour of such Operating Day. If a unit operates in real time at the

direction of the Office of the Interconnection consistently with its day-ahead clearing, then subsection (m) does not apply.

(o) Dispatchable pool-scheduled generation resources and dispatchable self-scheduled generation resources that follow dispatch shall not be assessed balancing Operating Reserve deviations. Pool-scheduled generation resources and dispatchable self-scheduled generation resources that do not follow dispatch shall be assessed balancing Operating Reserve deviations in accordance with the calculations described below and in the PJM Manuals.

The Office of the Interconnection shall calculate a ramp-limited desired MW value for generation resources where the economic minimum and economic maximum are at least as far apart in real-time as they are in day-ahead according to the following parameters:

(i) real-time economic minimum \leq 105% of day-ahead economic minimum or day-ahead economic minimum plus 5 MW, whichever is greater.

(ii) real-time economic maximum \geq 95% day-ahead economic maximum or day-ahead economic maximum minus 5 MW, whichever is lower.

The ramp-limited desired MW value for a generation resource shall be equal to:

$$Ramp_Request_t = \frac{(Dispatchtarget_{t-1} - AOutput_{t-1})}{(LAtime_{t-1})}$$

$$RL_Desired_t = AOutput_{t-1} + (Ramp_Request_t * Case_Eff_time_{t-1})$$

where:

1. Dispatchtarget = Dispatch Signal for the previous approved Dispatch case
2. AOutput = Unit's achievable target MW at case solution time as defined in the PJM Manuals
3. LAtime = Dispatch look ahead time
4. Case_Eff_time = Time between signal changes
5. RL_Desired = Ramp-limited desired MW

To determine if a generation resource is following dispatch the Office of the Interconnection shall determine the unit's MW off dispatch and % off dispatch by using the lesser of the difference between the actual output and the dispatch signal or the actual output and ramp-limited desired MW value for each Real-time Settlement Interval. If the dispatch signal and the ramp-limited desired MW for the resource are unavailable, the Office of the Interconnection will determine the unit's MW off dispatch and % off dispatch by calculating the lesser of the difference between the actual output and the dispatch LMP Desired MW for each Real-time Settlement Interval.

A pool-scheduled or dispatchable self-scheduled resource is considered to be following dispatch if its actual output is between its ramp-limited desired MW value and dispatch signal, or if its % off dispatch is ≤ 10 , or its Real-time Settlement Interval MWh is within 5% of the Real-time Settlement Interval ramp-limited desired MW. A self-scheduled generator must also be dispatched above economic minimum. The degree of deviations for resources that are not following dispatch shall be determined for each Real-time Settlement Interval in accordance with the following provisions:

- A dispatchable self-scheduled resource that is not dispatched above economic minimum shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – Day-Ahead MWh.
- A resource that is dispatchable day-ahead but is Fixed Gen in real-time shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – dispatch LMP Desired MW.
- Pool-scheduled generators that are not following dispatch shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – Ramp-Limited Desired MW.
- If a resource's real-time economic minimum is greater than its day-ahead economic minimum by 5% or 5 MW, whichever is greater, or its real-time economic maximum is less than its Day Ahead economic maximum by 5% or 5 MW, whichever is lower, and dispatch LMP Desired MWh for the Real-time Settlement Interval is either below the real time economic minimum or above the real time economic maximum, then balancing Operating Reserve deviations for the resource shall be assessed according to the following formula: Real time Settlement Interval MWh – dispatch LMP Desired MWh.
- If a resource is not following dispatch and its % Off Dispatch is $\leq 20\%$, balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – Ramp-Limited Desired MW. If deviation value is within 5% of Ramp-Limited Desired MW, balancing Operating Reserve deviations shall not be assessed.
- If a resource is not following dispatch and its % off Dispatch is $> 20\%$, balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – dispatch LMP Desired MWh.
- If a resource is not following dispatch, and the resource has tripped, for the Real-time Settlement Interval the resource tripped and the Real-time Settlement Intervals it remains offline throughout its day-ahead schedule balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – Day-Ahead MWh.

- For resources that are not dispatchable in both the Day-Ahead and Real-time Energy Markets balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh - Day-ahead MWh.

If a resource has a sum of the absolute value of generator deviations for an hour that is less than 5 MWh, then the resource shall not be assessed balancing Operating Reserve deviations for that hour.

(o-1) Dispatchable economic load reduction resources that follow dispatch shall not be assessed balancing Operating Reserve deviations. Economic Load Response Participant resources that do not follow dispatch shall be assessed balancing Operating Reserve deviations as described in this subsection and as further specified in the PJM Manuals.

The Desired MW quantity for such resources for each hour shall be the hourly integrated MW quantity to which the load reduction resource was dispatched for each hour (where the hourly integrated value is the average of the dispatched values as determined by the Office of the Interconnection for the resource for each hour).

If the actual reduction quantity for the load reduction resource for a given hour deviates by no more than 20% above or below the Desired MW quantity, then no balancing Operating Reserve deviation will accrue for that hour. If the actual reduction quantity for the load reduction resource for a given hour is outside the 20% bandwidth, the balancing Operating Reserve deviations will accrue for that hour in the amount of the absolute value of (Desired MW – actual reduction quantity). For those hours where the actual reduction quantity is within the 20% bandwidth specified above, the load reduction resource will be eligible to be made whole for the total value of its offer as defined in Tariff, Attachment K-Appendix, section 3.3A. Hours for which the actual reduction quantity is outside the 20% bandwidth will not be eligible for the make-whole payment. If at least one hour is not eligible for make-whole payment based on the 20% criteria, then the resource will also not be made whole for its shutdown cost.

(p) The Office of the Interconnection shall allocate the charges assessed pursuant to Tariff, Attachment K-Appendix, section 3.2.3(h) except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, to real-time deviations from day-ahead schedules or real-time load share plus exports depending on whether the underlying balancing Operating Reserve credits are related to resources scheduled during the reliability analysis for an Operating Day, or during the actual Operating Day. If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, section 1.11.6, the Office of the Interconnection shall allocate the charges to the ratio share of real-time load plus export transactions.

- (i) For resources scheduled by the Office of the Interconnection during the reliability analysis for an Operating Day, the associated balancing Operating Reserve charges shall be allocated based on the reason the resource was scheduled according to the following provisions:

(A) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to operate in real-time to augment the physical resources committed in the Day-ahead Energy Market to meet the forecasted real-time load plus the Operating Reserve requirement, the associated balancing Operating Reserve charges shall be allocated to real-time deviations from day-ahead schedules.

(B) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to maintain system reliability, the associated balancing Operating Reserve charges shall be allocated according to ratio share of real time load plus export transactions.

(C) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource with a day-ahead schedule is required to deviate from that schedule to provide balancing Operating Reserves, the associated balancing Operating Reserve charges shall be allocated pursuant to (A) or (B) above.

(ii) For resources scheduled during an Operating Day, the associated balancing Operating Reserve charges shall be allocated according to the following provisions:

(A) If the Office of the Interconnection directs a resource to operate during an Operating Day to provide balancing Operating Reserves, the associated balancing Operating Reserve charges shall be allocated according to ratio share of load plus exports. The foregoing notwithstanding, charges will be assessed pursuant to this section only if the LMP at the resource's bus does not meet or exceeds the applicable offer of the resource for at least four 5-minute intervals during one or more discrete clock hours during each period the resource operated and produced MWs during the relevant Operating Day. If a resource operated and produced MWs for less than four 5-minute intervals during one or more discrete clock hours during the relevant Operating Day, the charges for that resource during the hour it was operated less than four 5-minute intervals will be identified as being in the same category as identified for the Operating Reserves for the other discrete clock hours.

(B) If the Office of the Interconnection directs a resource not covered by Tariff, Attachment K-Appendix, section 3.2.3(h)(ii)(A) to operate in real-time during an Operating Day, the associated balancing Operating Reserve charges shall be allocated according to real-time deviations from day-ahead schedules.

(q) The Office of the Interconnection shall determine regional balancing Operating Reserve rates for the Western and Eastern Regions of the PJM Region. For the purposes of this section, the Western Region shall be the AEP, APS, ComEd, Duquesne, Dayton, ATSI, DEOK, EKPC, OVEC transmission Zones, and the Eastern Region shall be the AEC, BGE, Dominion,

PENELEC, PEPCO, ME, PPL, JCPL, PECO, DPL, PSEG, RE transmission Zones. The regional balancing Operating Reserve rates shall be determined in accordance with the following provisions:

(i) The Office of the Interconnection shall calculate regional adder rates for the Eastern and Western Regions. Regional adder rates shall be equal to the total balancing Operating Reserve credits paid to generators for transmission constraints that occur on transmission system capacity equal to or less than 345kv. The regional adder rates shall be separated into reliability and deviation charges, which shall be allocated to real-time load or real-time deviations, respectively. Whether the underlying credits are designated as reliability or deviation charges shall be determined in accordance with section 3.2.3(p).

(ii) The Office of the Interconnection shall calculate RTO balancing Operating Reserve rates. RTO balancing Operating Reserve rates shall be equal to balancing Operating Reserve credits except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, in excess of the regional adder rates calculated pursuant to Tariff, Attachment K-Appendix, section 3.2.3(q)(i) of Schedule 1 of this Agreement. The RTO balancing Operating Reserve rates shall be separated into reliability and deviation charges, which shall be allocated to real-time load or real-time deviations, respectively. Whether the underlying credits are allocated as reliability or deviation charges shall be determined in accordance with section 3.2.3(p).

(iii) Reliability and deviation regional balancing Operating Reserve rates shall be determined by summing the relevant RTO balancing Operating Reserve rates and regional adder rates.

(iv) If the Eastern and/or Western Regions do not have regional adder rates, the relevant regional balancing Operating Reserve rate shall be the reliability and/or deviation RTO balancing Operating Reserve rate.

(r) Market Sellers that incur incremental operating costs for a generation resource that are either greater than \$1,000/MWh as determined in accordance with the Market Seller's PJM-approved Fuel Cost Policy, Operating Agreement, Schedule 2 and PJM Manual 15, but are not verified at the time of dispatch of the resource under section 6.4.3 of this Schedule, or greater than \$2,000/MWh as determined in accordance with the Market Seller's PJM-approved Fuel Cost Policy, Operating Agreement, Schedule 2, and PJM Manual 15, will be eligible to receive credit for Operating Reserves upon review of the Market Monitoring Unit and the Office of the Interconnection, and approval of the Office of the Interconnection. Market Sellers must submit to the Office of the Interconnection and the Market Monitoring Unit all relevant documentation demonstrating the calculation of costs greater than \$2,000/MWh, and costs greater than \$1,000/MWh which were not verified at the time of dispatch of the resource under Tariff, Attachment K-Appendix, section 6.4.3. The Office of the Interconnection must approve any Operating Reserve credits paid to a Market Seller under this subsection (r).

3.2.3A Synchronized Reserve.

(a) Each Market Participant that is a Load Serving Entity that is not part of an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have an obligation for hourly Synchronized Reserve equal to its pro rata share of Synchronized Reserve requirements for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone or Reserve Sub-zone for the hour ("Synchronized Reserve Obligation"), less any amount obtained from condensers associated with provision of Reactive Services as described in section 3.2.3B(i) and any amount obtained from condensers associated with post-contingency operations, as described in section 3.2.3C(b). Those entities that participate in an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have their reserve obligations determined based on the stipulations in such agreement. A Market Participant's hourly Synchronized Reserve Obligation shall be adjusted by any Synchronized Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Synchronized Reserve Obligation shall be charged the pro rata share of the sum of day-ahead and real-time credits for Synchronized Reserve as defined in sections 3.2.3A(b)(i) and (ii) below.

(b) A resource supplying Synchronized Reserve at the direction of the Office of the Interconnection shall be credited as follows:

i) Credits for Synchronized Reserve provided by generation and Economic Load Response Participant resources assigned to provide Synchronized Reserve by the Office of the Interconnection or self-scheduled in the Day-ahead Synchronized Reserve Market shall be equal to the product of the Day-ahead Synchronized Reserve Market Clearing Price multiplied by the megawatt amount of Synchronized Reserve such resource is assigned to provide..

ii) Credits for Synchronized Reserve provided by generation resources and Economic Load Response Participant resources assigned to provide Synchronized Reserve by the Office of the Interconnection or self-scheduled in the Real-time Synchronized Reserve Market shall be determined for each operating hour based on the sum of their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Synchronized Reserve from that resource assigned by the Office of the Interconnection or self-scheduled in the Real-time Synchronized Reserve Market. The megawatt value is capped at the lesser of the Economic Maximum and the Synchronized Reserve

maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval where there is not a Synchronized Reserve event;

B = For each Real-time Settlement Interval, the megawatts of Synchronized Reserve from that resource assigned by the Office of the Interconnection or self-scheduled in the Day-ahead Synchronized Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Synchronized Reserve Market Clearing Price.

If a Synchronized Reserve Event is initiated by the Office of the Interconnection and the Economic Load Response Participant resource reduced its load in response to the event, the resource shall be eligible to receive a credit for the fixed costs associated with achieving the load reduction, as specified in the PJM Manuals.

iii) Pool-scheduled resources shall be credited a Synchronized Reserve lost opportunity cost credit, where positive, as described in subsection (f)(iv) below.

(c) [Reserved for future use]

(d) Synchronized Reserve Market Clearing Prices

(i) For the Day-ahead Synchronized Reserve Market, the Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Synchronized Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for Synchronized Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Synchronized Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Synchronized Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Synchronized Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute and (B) the price of serving the next increment of demand for Primary Reserve and 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute, provided that the Synchronized Reserve Market Clearing Price shall be less than or equal to the sum of no more than two of the Reserve Penalty Factors for the Synchronized Reserve Requirement, the Primary Reserve Requirement, and the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Synchronized Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a

scheduled megawatt quantity and Day-ahead Synchronized Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Synchronized Reserve market quantities and prices as determined pursuant to subsection (d)(ii) hereof.

(ii) For the Real-time Synchronized Reserve Market, the Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for Synchronized Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Synchronized Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Synchronized Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Synchronized Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute and (B) the price of serving the next increment of demand for Primary Reserve and 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute, provided that the Synchronized Reserve Market Clearing Price shall be less than or equal to the sum of no more than two of the Reserve Penalty Factors for the Synchronized Reserve Requirement, the Primary Reserve Requirement, and the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Synchronized Reserves, then the Synchronized Reserve Market Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Synchronized Reserves, then the Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Synchronized Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Synchronized

Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Synchronized Reserve Market Clearing Prices exist, then the Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, and the Office of the Interconnection is assigning Synchronized Reserves, the Office of the Interconnection will set the Synchronized Reserve Market Clearing Price to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period. Resources will be compensated for lost opportunity cost per subsection (f) hereof using the energy price as determined in Operating Agreement, Schedule 1, section 2.5.2.iii. The opportunity cost shall be zero for all resources self-scheduled to provide Synchronized Reserve, synchronous condensers and Economic Load Response Participant resources.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action as described in the PJM Manuals or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Synchronized Reserve Market Clearing Price shall be the sum of the Reserve Penalty Factors for the Primary Reserve Requirement, and the Synchronized Reserve Requirement for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the Synchronized Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended Synchronized Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Synchronized Reserve Penalty Factors are warranted for subsequent Delivery Year(s).

(e) (i) For determining the Synchronized Reserve Market Clearing Price in each hour of the Day-ahead Synchronized Reserve Market, the estimated resource-specific opportunity cost for a generation resource or Economic Load Response Participant resource shall be the difference between the Locational Marginal Price at the generation or Economic Load Response Participant resource bus and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) or offer price to reduce energy from the Economic Load Response Participant resource in the PJM Interchange Energy Market when the Locational Marginal Price at the generation or Economic Load Participant resource bus is greater than the offer price

for energy from the generation resource or the offer price to reduce energy from the Economic Load Response Participant resource.

However, the opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve and for synchronous condensers and for Economic Load Response Participant resources that do not receive a day-ahead commitment to provide energy in the same operating hour in which such resource is committed to provide Synchronized Reserve.

(ii) For determining the Synchronized Reserve Market Clearing Price for each Real-time Settlement Interval in the Real-time Synchronized Reserve Market, the estimated unit-specific opportunity cost for a generation resource that is not a hydroelectric resource shall be the difference between the Locational Marginal Price at the generation bus for the generation resource and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) in the PJM Interchange Energy Market when the Locational Marginal Price at the generation bus is greater than the offer price for energy from the generation resource.

For hydroelectric resources, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the expected real-time Locational Marginal Price at that generation bus. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions, as defined in the PJM Manuals, and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the expected real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average day-ahead Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

The opportunity costs shall be zero for all resources self-scheduled to provide Synchronized Reserve, synchronous condensers and Economic Load Response Participant resources.

(f) (i) In determining the credit under subsection (b) to a generation resource, except a generation resource that is operating as a synchronous condenser, selected to provide Synchronized Reserve in the Day-ahead Synchronized Reserve Market, or an Economic Load Response Participant resource that is selected to provide Synchronized Reserve in the Day-ahead Synchronized Reserve Market for the same operating hour in which such resource receives a day-ahead commitment to provide energy, the opportunity cost of a resource shall be determined for each operating hour that the Office of the Interconnection requires a resource to provide Synchronized Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Day-ahead Locational Marginal Price at the generation bus of the generation resource or the applicable pricing point for the Economic Load Response Participant resource;

B = The deviation of the resource's energy output or load reduction necessary to supply a Day-ahead Synchronized Reserve assignment from the resource's energy expected output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load; and

C = The Day-ahead Energy market offer integrated under the applicable energy offer curve for the resource's energy output or load reduction necessary to provide a Day-ahead Synchronized Reserve Market assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load.

For a generation resource that is operating as a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [energy use for providing synchronous condensing multiplied by A] plus [the applicable condense start-up cost divided by the number of hours the resource is assigned Synchronized Reserve].

(ii) In determining the credit under subsection (b) to a generation resource, except a generation resource that is operating as a synchronous condenser, selected to provide Synchronized Reserve in the Real-time Synchronized Reserve Market in excess of the resource's Day-ahead Synchronized Reserve Market assignment and that actively follows the Office of the Interconnection's signals and instructions, the unit-specific opportunity cost of that generation resource shall be determined for each Real-time Settlement Interval that the Office of the Interconnection requires that generation resource to provide Synchronized Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Real-time Locational Marginal Price at the generation bus of the generation resource;

B = The deviation of the generation resource's output necessary to supply Synchronized Reserve in real-time, reduced by the amount of Synchronized Reserve the resource failed to respond during a Synchronized Reserve Event during the Operating Day, in excess of its Day-ahead Synchronized Reserve Market assignment and follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy; and

C = The energy offer integrated under the applicable energy offer curve for the generation resource's output necessary to supply Synchronized Reserve in real-time from the lesser of the generation resource's output necessary to provide a Day-ahead Synchronized Reserve Market assignment or follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [additional energy use in excess of day-ahead energy use for providing synchronous condensing in real-time multiplied by A] plus [any applicable condense start-up costs due to additional condense start-ups in real-time in excess of day-ahead condense start-ups allocated to each Real-time Settlement Interval as described in PJM Manuals].

For hydroelectric resources, the unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the real-time Locational Marginal Price at that generation bus multiplied by the additional megawatts assigned to supply Synchronized Reserve in real-time in excess of its Day-ahead Synchronized Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average real-time Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating multiplied by the additional megawatts assigned to supply the hourly Synchronized Reserve in real-time in excess of its Day-ahead Synchronized Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

(iii) For each Real-time Settlement Interval, a Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in the resource's real-time reserve MW from a day-ahead market assignment in more than one market for that Real-time Settlement Interval, the total Market Revenue Neutrality Offset is allocated to the Synchronized Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Synchronized Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Synchronized Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Synchronized Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Synchronized Reserve assignment decreases due to the resource being self-scheduled to provide energy or Regulation;

(B) A resource reduces its flexibility in real-time such that the resource no longer qualifies to provide Synchronized Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time;

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above; or

(F) A resource increases its Synchronized Reserve offer price in the Real-time Synchronized Reserve Market from its offer price in the Day-ahead Synchronized Reserve Market.

(iv) A Synchronized Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(A + B + C + D) - (E + F + G + H)$$

Where:

A = day-ahead Synchronized Reserve offer price times the Synchronized Reserve MW assignment;

B = real-time Synchronized Reserve offer price times the Synchronized Reserve MW assigned in real-time in excess of the Synchronized Reserve MW assigned day-ahead, where the Synchronized Reserve MW assigned is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval where there is not a Synchronized Reserve event;

C = day-ahead opportunity cost as determined in subsection (f)(i) above;

D = real-time opportunity cost as determined in subsection (f)(ii) above;

E = day-ahead clearing price credits as determined in subsection (b)(i) above;

F = real-time clearing price credits as determined in subsection (b)(ii) above less any applicable charges for failure to respond to a Synchronized Reserve Event as determined in subsection (j) below;

G = the applicable Market Revenue Neutrality Offset as determined in subsection (f)(iii) above; and

H = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A(f)(iii) above if not eligible for Market Revenue Neutrality Offset.

(v) The opportunity costs for an Economic Load Response Participant resource assigned Synchronized Reserve in real-time or any resource self-scheduled for Synchronized Reserves shall be zero.

(g) [Reserved for future use]

(h) For each operating hour, the sum of the Synchronized Reserve lost opportunity cost credits credited in accordance with subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Synchronized Reserve Obligation in proportion to its real-time purchases of Synchronized Reserve in megawatt-hours during that hour.

(i) [Reserved for future use]

(j) In the event a generation resource or Economic Load Response Participant Resource that either has been assigned by the Office of the Interconnection or self-scheduled to provide Synchronized Reserve in real-time fails to provide the assigned or self-scheduled amount of Synchronized Reserve in response to a Synchronized Reserve Event, the resource will be charged at the Real-time Synchronized Reserve Market Clearing Price for the real-time Synchronized Reserve assignment, in excess of amount that actually responded for all Real-time Settlement Intervals the resource was assigned or self-scheduled Synchronized Reserve real-time, which is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements for the resource on the Operating Day during which the event occurred. The determination of the amount of Synchronized Reserve credited to a resource shall be on an individual resource basis, not on an aggregate basis.

The resource shall refund payments received for Synchronized Reserve it failed to provide. For purposes of determining the amount of the payments to be refunded by a Market Participant, the Office of the Interconnection shall calculate the shortfall of Synchronized Reserve on an individual resource basis unless the Market Participant had multiple resources that were assigned or self-scheduled to provide Synchronized Reserve, in which case the shortfall will be determined on an aggregate basis. For performance determined on an aggregate basis, the response of any resource that provided more Synchronized Reserve than it was assigned or self-scheduled to provide will be used to offset the performance of other resources that provided less Synchronized Reserve than they were assigned or self-scheduled to provide during a

Synchronized Reserve Event, as calculated in the PJM Manuals. The determination of a Market Participant's aggregate response shall not be taken into consideration in the determination of the amount of Synchronized Reserve credited to each individual resource.

The amount refunded shall be determined by multiplying the retroactive penalty megawatts by the Real-time Synchronized Reserve Market Clearing Price for all intervals the resource was assigned or self-scheduled to provide Synchronized Reserve for a period of time immediately preceding the Synchronized Reserve Event equal to the lesser of the average number of days between Synchronized Reserve Events, or the number of days since the resource last failed to provide the amount of Synchronized Reserve it was assigned or self-scheduled to provide in response to a Synchronized Reserve Event. The retroactive penalty megawatts for each interval shall be the lesser of the amount of the shortfall of Synchronized Reserve, measured in megawatts, and the real-time Synchronized Reserve assignment for each interval, which is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements for the resource. The average number of days between Synchronized Reserve Events for purposes of this calculation shall be determined by an annual review of the twenty-four month period ending October 31 of the calendar year in which the review is performed, and shall be rounded down to a whole day value. The Office of the Interconnection shall report the results of its annual review to stakeholders by no later than December 31, and the average number of days between Synchronized Reserve Events shall be effective as of the following January 1. The refunded charges shall be allocated as credits to Market Participants based on its pro rata share of the Synchronized Reserve Obligation megawatts in the hour(s) of the Synchronized Reserve Event for the Reserve Sub-zone or Reserve Zone, except that Market Participants that incur a refund obligation and also have an applicable Synchronized Reserve Obligation during the hour(s) of the Synchronized Reserve Event shall not be included in the allocation of such refund credits. If the event spans multiple hours, the refund credits will be prorated hourly based on the duration of the event within each clock hour.

(k) The magnitude of response to a Synchronized Reserve Event by a generation resource or an Economic Load Response Participant resource, except for Batch Load Economic Load Response Participant resources covered by section 3.2.3A(l), is the difference between the generation resource's output or the Economic Load Response Participant resource's consumption at the start of the event and its output or consumption 10 minutes after the start of the event. In order to allow for small fluctuations and possible telemetry delays, generation resource output or Economic Load Response Participant resource consumption at the start of the event is defined as the lowest telemetered generator resource output or greatest Economic Load Response Participant resource consumption between one minute prior to and one minute following the start of the event. Similarly, a generation resource's output or an Economic Load Response Participant resource's consumption 10 minutes after the event is defined as the greatest generator resource output or lowest Economic Load Response Participant resource consumption achieved between 9 and 11 minutes after the start of the event. The response actually credited to a generation resource will be reduced by the amount the megawatt output of the generation resource falls below the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter. The response actually credited to an Economic Load Response Participant resource will be reduced by the amount the megawatt

consumption of the Economic Load Response Participant resource exceeds the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter.

(l) The magnitude of response by a Batch Load Economic Load Response Participant resource that is at the stage in its production cycle when its energy consumption is less than the level of megawatts in its offer at the start of a Synchronized Reserve Event shall be the difference between (i) the Batch Load Economic Load Response Participant resource's consumption at the end of the Synchronized Reserve Event and (ii) the Batch Load Economic Load Response Participant resource's consumption during the minute within the ten minutes after the end of the Synchronized Reserve Event in which the Batch Load Economic Load Response Participant resource's consumption was highest and for which its consumption in all subsequent minutes within the ten minutes was not less than fifty percent of the consumption in such minute; provided that, the magnitude of the response shall be zero if, when the Synchronized Reserve Event commences, the scheduled off-cycle stage of the production cycle is greater than ten minutes. .

3.2.3A.001 Non-Synchronized Reserve.

(a) Each Market Participant that is a Load Serving Entity that is not part of an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have an obligation for hourly Non-Synchronized Reserve equal to its pro rata share of Non-Synchronized Reserve assigned for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone and Reserve Sub-zone for the hour ("Non-Synchronized Reserve Obligation"). Those entities that participate in an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have their reserve obligations determined based on the stipulations in such agreement. A Market Participant's hourly Non-Synchronized Reserve Obligation shall be adjusted by any Non-Synchronized Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Non-Synchronized Reserve Obligation shall be charged the pro rata share of the sum day-ahead and real-time credits for Non-Synchronized Reserve as defined in sections 3.2.3A.001(b)(i) and (ii) below.

(b) Resources assigned to provide Non-Synchronized Reserve at the direction of the Office of the Interconnection shall be credited as follows:

(i) Credits for Non-Synchronized Reserve provided by generation resources assigned to provide Non-Synchronized Reserve by the Office of the Interconnection in the Day-ahead Non-Synchronized Reserve Market shall be equal to the product of the Day-ahead Non-Synchronized Market Clearing Price multiplied by the megawatt amount of Non-Synchronized Reserve such resource is assigned to provide.

(ii) Credits for Non-Synchronized Reserve provided by generation resources assigned to provide Non-Synchronized Reserve by the Office of the Interconnection in the Real-time Non-Synchronized Reserve Market shall be determined for each operating

hour based on the sum on their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Non-Synchronized Reserve from that resource assigned by the Office of the Interconnection in the Real-time Non-Synchronized Reserve Market;

B = For each Real-time Settlement Interval, the megawatts of Non-Synchronized Reserve from that resource assigned by the Office of the Interconnection in the Day-ahead Non-Synchronized Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Non-Synchronized Reserve Market Clearing Price.

(iii) Pool-scheduled generation resources assigned to provide Non-Synchronized Reserve in the Day-ahead Non-Synchronized Reserve Market shall be credited a Non-Synchronized Reserve lost opportunity cost credit, where positive, as determined in accordance with subsection (d)(iii) below, to recover any net monetary loss to the Market Seller of such resource associated with the purchase of Non-Synchronized Reserve in the Real-time Non-Synchronized Reserve Market as a result of following the dispatch direction of the Office of the Interconnection.

(c) Non-Synchronized Reserve Market Clearing Prices

(i) For the Day-ahead Non-Synchronized Reserve Market, the Non-Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Non-Synchronized Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for Primary Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Non-Synchronized Reserve offer prices and the applicable Operating Reserve Demand Curve for Non-Synchronized Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Primary Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute and (B) the price of serving the next increment of demand for 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute, provided that the Non-Synchronized Reserve Market Clearing Price shall be less than or equal to the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for the

Reserve Zone or Reserve Sub-zone to which the next increment of demand for Non-Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Non-Synchronized Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Non-Synchronized Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Non-Synchronized Reserve market quantities and prices as determined pursuant to subsection (c)(ii) hereof.

(ii) For the Real-time Non-Synchronized Reserve Market, the Non-Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for Primary Reserve in a Reserve Zone or Reserve Sub-zone determined by the interaction between a supply curve formed using Non-Synchronized Reserve offer prices and the applicable Operating Reserve Demand Curve for Non-Synchronized Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Primary Reserve for any other Reserve Zone or Reserve Subzone to which the next increment of demand for Primary Reserve can contribute and (B) the price of serving the next increment of demand for 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute, provided that the Non-Synchronized Reserve Market Clearing Price shall be less than or equal to the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Non-Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Non-Synchronized Reserves, then the Non-Synchronized Reserve Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Non-Synchronized Reserves, then the Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Non-Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Non-Synchronized Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Non-Synchronized Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Non-Synchronized Reserve Market Clearing Prices exist, then the Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Non-Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, the Non-Synchronized Reserve Market Clearing Price will be set to zero dollars per megawatt-hour regardless of whether the Office of the Interconnection is assigning Non-Synchronized Reserves.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action as described in the PJM Manuals or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Non-Synchronized Reserve Market Clearing Price shall be the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the Primary Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended Primary Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Primary Reserve Penalty Factors are warranted for subsequent Delivery Year(s).

(d) (i) For determining the Non-Synchronized Reserve clearing price for each hour in the Day-ahead Non-Synchronized Reserve Market and for each Real-time Settlement Interval in the Real-time Non-Synchronized Reserve Market, including during a declaration of a Market Suspension, the unit-specific opportunity cost for a generation resource that is not providing energy because they are providing Non-Synchronized Reserves will be zero.

(ii) For each Real-time Settlement Interval, a total Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in real-time

reserve MW from a day-ahead market assignment in more than one market for that Real-time Settlement Interval, the total Market Revenue Neutrality Offset is allocated to the Non-Synchronized Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Non-Synchronized Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Non-Synchronized Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Non-Synchronized Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Non-Synchronized Reserve assignment decreases due to the resource being self-scheduled to provide energy, Synchronized Reserve, or Regulation;

(B) A resource reduces flexibility in real-time such that the resource no longer qualifies to provide Non-Synchronized Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time; or

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above.

(iii) A Non-Synchronized Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(\text{zero}) - (A + B + C + D)$$

Where:

A = day-ahead clearing price credits as determined in subsection (b)(i) above;

B = real-time clearing price credits as determined in subsection (b)(ii) above;

C = the applicable Market Revenue Neutrality Offset as determined in subsection (d)(ii) above; and

D = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A.001(d)(ii) above if not eligible for Market Revenue Neutrality Offset.

(e) [Reserved for future use]

(f) For each operating hour, the sum of the Non-Synchronized Reserve lost opportunity cost credits credited in subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Non-Synchronized Reserve Obligation in proportion to its real-time purchases of Non-Synchronized Reserve in megawatt-hours during that hour.

(g) The magnitude of response to a Non-Synchronized Reserve Event by a generation resource is the difference between the generation resource's output at the start of the event and its output 10 minutes after the start of the event. In order to allow for small fluctuations and possible telemetry delays, generation resource output at the start of the event is defined as the lowest telemetered generator resource output between one minute prior to and one minute following the start of the event. Similarly, a generation resource's output 10 minutes after the start of the event is defined as the greatest generator resource output achieved between 9 and 11 minutes after the start of the event. The response actually credited to a generation resource will be reduced by the amount the megawatt output of the generation resource falls below the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter.

(h) In the event a generation resource that has been assigned by the Office of the Interconnection to provide Non-Synchronized Reserve fails to provide the assigned amount of Non-Synchronized Reserve in response to a Non-Synchronized Reserve Event, the resource will be credited for Non-Synchronized Reserve capacity in the amount that actually responded for the contiguous Real-time Settlement Interval the resource was assigned Non-Synchronized Reserve during which the event occurred.

3.2.3A.01 Secondary Reserve.

(a) Each Market Participant that is a Load Serving Entity shall have an obligation for hourly Secondary Reserve equal to its pro rata share of Secondary Reserve assigned for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone and Reserve Sub-zone for the hour ("Secondary Reserve Obligation"). A Market Participant's hourly Secondary Reserve Obligation shall be adjusted by any Secondary Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Secondary Reserve Obligation shall be charged the pro rata share of the sum of day-ahead and real-time credits for Secondary Reserve as defined in sections 3.2.3A.01(b)(i) and (ii) below.

(b) Resources assigned to provide Secondary Reserve at the direction of the Office of the Interconnection shall be credited as follows:

(i) Credits for Secondary Reserve provided by generation resources and Economic Load Response Participant resources assigned to provide Secondary Reserve by the Office of the Interconnection in the Day-ahead Secondary Reserve Market shall be equal to the product of the Day-ahead Secondary Reserve Market Clearing Price multiplied by the megawatt amount of Secondary Reserve such resource is scheduled to provide.

(ii) Credits for Secondary Reserve provided by generation resources and Economic Load Response Participant resources scheduled to provide Secondary Reserve by the Office of the Interconnection in the Real-time Secondary Reserve Market shall be determined for each operating hour based on the sum of their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Secondary Reserve from that resource assigned by the Office of the Interconnection in the Real-time Secondary Reserve Market. The megawatt value is capped at the lesser of the Economic Maximum or Secondary Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval minus the Real-time Synchronized Reserve assignment;

B = For each Real-time Settlement Interval, the megawatts of Secondary Reserve from that resource scheduled by the Office of the Interconnection in the Day-ahead Secondary Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Secondary Reserve Market Clearing Price.

(iii) Pool-scheduled resources and Economic Load Response Participant resources shall be credited a Secondary Reserve lost opportunity cost credit, where positive, as described in subsection (f)(iv) below.

(c) [Reserved for future use]

(d) Secondary Reserve Market Clearing Prices

(i) For the Day-ahead Secondary Reserve Market, the Secondary Reserve Market Clearing Price shall be determined for each Reserve Zone and, as applicable, Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Secondary Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for 30-minute Reserve in a Reserve Zone

or Reserve Sub-zone, determined by the interaction between a supply curve formed using Secondary Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Secondary Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus the price of serving the next increment of demand for 30-minute Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute, but the Secondary Reserve Market Clearing Price shall not exceed the Reserve Penalty Factor for the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Secondary Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Secondary Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Secondary Reserve market quantities and prices as determined pursuant to subsection (d)(ii) hereof.

(ii) For the Real-time Secondary Reserve Market, the Secondary Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for 30-minute Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Secondary Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Secondary Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus the price of serving the next increment of demand for 30-minute Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute but the Secondary Reserve Market Clearing Price shall not exceed the Reserve Penalty Factor for the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Secondary Reserves, then the Secondary Reserve Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Secondary Reserves, then the Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the

average of the Secondary Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Secondary Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Secondary Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Secondary Reserve Market Clearing Prices exist, then the Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Secondary Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, and the Office of the Interconnection is assigning Secondary Reserves, the Secondary Reserve Market Clearing Price will be set to zero dollars per megawatt-hour. Resources will be compensated for lost opportunity cost per subsection (f) hereof using the energy price as determined in Operating Agreement, Schedule 1, section 2.5.2.iii.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Secondary Reserve Market Clearing Price for a given Reserve Zone or Sub-zone shall be the Reserve Penalty Factor for the 30-minute Reserve Requirements for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the 30-minute Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended 30-minute Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Reserve Penalty Factor for 30-minute Reserve are warranted for subsequent Delivery Year(s).

(e) (i) For determining the Secondary Reserve Market Clearing Price for each hour in the Day-ahead Secondary Reserve Market, the estimated resource-specific opportunity cost for a generation resource or Economic Load Response Participant resources shall be the difference between the Locational Marginal Price at the generation or Economic Load Response Participant resource bus and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) or offer price to reduce energy from the Economic Load Response Participant

resource in the PJM Interchange Energy Market when the Locational Marginal Price at the Economic Load Response Participant resource bus is greater than the offer price for energy from the generation resource or the offer price to reduce energy from the Economic Load Response Participant resource.

However, opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve, and for synchronous condensers and for Economic Load Response Participant resources that do not receive a day-ahead commitment to provide energy in the same operating hour in which such resource is committed to provide Secondary Reserve.

(ii) For determining the Secondary Reserve Market Clearing Price for each Real-time Settlement Interval in the Real-time Secondary Reserve Market, the estimated unit-specific opportunity cost for a generation resource that is not a hydroelectric resource shall be the difference between the Locational Marginal Price at the generation bus for the generation resource and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) in the PJM Interchange Energy Market when the Locational Marginal Price at the generation bus is greater than the offer price for energy from the generation resource.

For hydroelectric resources, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the expected real-time Locational Marginal Price at that generation bus. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the expected real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average day-ahead Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

However, the opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve, and for synchronous condensers and Economic Load Response Participant resources.

(f) (i) In determining the credit under subsection (b) to a generation resource, except a generation resource that is a synchronous condenser, selected to provide Secondary Reserve in the Day-ahead Secondary Reserve Market or an Economic Load Response Participant resource that is selected to provide Secondary Reserve in the Day-ahead Secondary Reserve Market in the same operating hour in which such resource receives a day-ahead commitment to provide energy, the opportunity cost of a resource shall be determined for each operating hour that the Office of the Interconnection

requires a resource to provide Secondary Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Day-ahead Locational Marginal Price at the generation bus of the generation resource or the applicable pricing point for the Economic Load Response Participant resource;

B= The deviation of the resource's energy output or load reduction necessary to supply a Day-ahead Secondary Reserve assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load less any Day-ahead Synchronized Reserve Market assignment; and

C = The Day-ahead Energy Market offer integrated under the applicable energy offer curve for the resource's energy output or load reduction necessary to provide a Day-ahead Secondary Reserve Market assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load less any Day-ahead Synchronized Reserve Market assignment.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [energy use for providing synchronous condensing multiplied by A] plus [the applicable condense start-up cost divided by the number of hours the resource is assigned Secondary Reserve].

(ii) In determining the credit under subsection (b) to a generation resource, except a generation that is a synchronous condenser, selected to provide Secondary Reserve in the Real-time Secondary Reserve Market in excess of the resource's Day-ahead Secondary Reserve Market assignment and that actively follows the Office of the Interconnection's signals and instructions, the unit-specific opportunity cost of that generation resource shall be determined for each Real-time Settlement Interval that the Office of the Interconnection requires that generation resource to provide Secondary Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Real-time Locational Marginal Price at the generation bus of the generation resource;

B= The deviation of the generation resource's output necessary to supply Secondary Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment and follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy less any Real-time Synchronized Reserve Market assignment; and

C = The energy offer integrated under the applicable energy offer curve for the generation resource's output necessary to supply Secondary Reserve in real-time from the lesser of the generation resource's output necessary to provide a Day-ahead Secondary Reserve Market assignment or follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy less any Real-time Synchronized Reserve Market assignment.

For hydroelectric resources, the unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the real-time Locational Marginal Price at that generation bus multiplied by the additional megawatts assigned to supply Synchronized Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average real-time Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating multiplied by the additional megawatts assigned to supply Secondary Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: additional energy use in excess of day-ahead energy use for providing synchronous condensing in real-time multiplied by A plus [any applicable condense start-up costs due to additional condense start-ups in real-time in excess of day-ahead condense start-ups allocated to each Real-time Settlement Interval as described in PJM Manuals]. If the generation resource is operating as a synchronous condenser and also has a Real-time Synchronized Reserve assignment, resource's unit-specific opportunity cost in the Secondary Reserve Market shall be zero,

(iii) For each Real-time Settlement Interval, a total Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in real-time

reserve MW from a day-ahead market assignment in more than one market for that real-time settlement interval, the total Market Revenue Neutrality Offset is allocated to the Secondary Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Secondary Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Secondary Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Secondary Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Secondary Reserve assignment decreases due to the resource being self-scheduled to provide energy, Synchronized Reserve, or Regulation;

(B) A resource reduces flexibility in real-time such that the resource no longer qualifies to provide Secondary Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time;

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above; or

(F) A resource that fails to come online and reach Economic Minimum output within 30 minutes as described in section 3.2.3A.01(h)(i) below.

(iv) A Secondary Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(A + B) - (C + D + E + F)$$

Where:

A = day-ahead opportunity cost as determined in subsection (f)(i) above;

B = real-time opportunity cost as determined in subsection (f)(ii) above;

C = day-ahead clearing price credits as determined in subsection (b)(i) above;

D = real-time clearing price credits as determined subsection (b)(ii) above;

E = the applicable Market Revenue Neutrality Offset as determined in subsection (f)(iii) above; and

F = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A.01(f)(iii) above if not eligible for Market Revenue Neutrality Offset.

(v) The opportunity costs for Economic Load Response Participant resources and generation resources not synchronized to the grid shall be zero, except that Economic Load Response Participant resources may have a day-ahead opportunity cost, as determined in subsection (f)(i) above.

(g) For each operating hour, the sum of the Secondary Reserve lost opportunity cost credits credited in accordance with subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Secondary Reserve Obligation in proportion to its real-time purchases of Secondary Reserve in megawatt-hours during that hour.

(h) (i) In the event an offline generation resource has been assigned by the Office of the Interconnection to provide Secondary Reserve in real-time and is subsequently dispatched by the Office of the Interconnection to supply energy during that Operating Day and the resource qualifies as a Secondary Reserve resource at the time it is dispatched to provide energy, the Office of the Interconnection will assess the resource's performance as follows:

For each generation resource that fails to come online and reach Economic Minimum output within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval and for all prior intervals in which the resource was assigned to provide Secondary Reserve in the Real-time Secondary Reserve Market starting at the later of (A) the last interval the resource was online or (B) the beginning of that Operating Day and continuing up to the interval the resource failed to come online. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time not being paid for the assigned MW.

(ii) In the event an Economic Load Response Participant resource has been assigned by the Office of the Interconnection to provide Secondary Reserve in real-time and is subsequently dispatched to supply the Secondary Reserve assignment as a load reduction, the Office of the Interconnection will assess the resource's performance as follows:

For the purposes of this subsection, a resource's starting MW usage shall be the greatest telemetered consumption between one minute prior to and one minute following the issuance of a dispatch instruction from the Office of the Interconnection, and a resource's ending MW usage shall be the lowest consumption between 29 and 31 minutes after the issuance of a dispatch instruction from the Office of the Interconnection.

For each Economic Load Response Participant resource that fails to reduce load by at least the Economic Minimum, where the measured response is the difference between the resource's starting MW usage and the resource's ending MW usage as described above, within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval, and for all prior intervals in which the resource was assigned to provide Secondary Reserve in the Real-time Secondary Reserve Market between such non-performance event starting at the later of (A) the last interval the resource reduced load at the instruction of the Office of the Interconnection or (B) the beginning of that Operating Day, and for all subsequent intervals through the earlier of (C) the next interval in which the resource is dispatched to reduce load or (D) the end of the Operating Day. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time, refunding all payments due for Secondary Reserve during such period.

(iii) For Batch Load Economic Load Response Participant Resources, a second method of verification will be used for instances where a Secondary Reserve assignment dispatched as an energy load reduction is initiated and the resource is operating at the minimum consumption level of its duty cycle. In this case, the magnitude of the response will be measured as the difference between (A) the minimum of the resource's consumption between the minute before and the minute after the end of the last settlement interval the resource reduced load at the instruction of the Office of the Interconnection and (B) the maximum consumption within a ten (10) minute period following the end of the last settlement interval the resource reduced load provided that all subsequent minutes following that minute are no less than 50% of the consumption in that minute.

For each Batch Load Economic Load Response Participant Resource that fails to reduce load by at least the Economic Minimum, where the measured response is the difference between the resource's starting MW usage and the resource's ending MW usage as described in section (ii) above or the difference between (A) and (B) as described in section (iii) above, within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval, and for all prior intervals in which the resource was assigned to provide Secondary Reserve in either the Day-ahead or Real-time Secondary Reserve Markets between such non-performance event starting at the later of (A) the last interval the resource reduced load at the instruction of the Office of the Interconnection or (B) the beginning of that Operating Day, and for all subsequent intervals through the earlier of (C) the next interval in which the resource is dispatched to reduce load or (D) the end of the Operating Day. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time, refunding all payments due for Secondary Reserve during such period.

3.2.3A.02 Operating Reserve Demand Curves

The Office of the Interconnection shall establish Operating Reserve Demand Curves for clearing 30-minute Reserve, Primary Reserve, and Synchronized Reserve, for, as applicable, each Reserve Zone or Reserve Sub-zone to procure sufficient reserves to meet, as applicable, (a) 30-minute Reserve Requirement and Extended 30-minute Reserve Requirement; (b) Primary Reserve Requirement and Extended Primary Reserve Requirement; and (c) Synchronized Reserve Requirement and Extended Synchronized Reserve Requirement. The Operating Reserve Demand Curves established for each reserve type shall be used to commit such reserves in both the day-ahead and real-time reserve markets. The Operating Reserve Demand Curves shall be determined in accordance with the applicable Reserve Penalty Factors and PJM Manuals.

3.2.3B Reactive Services.

(a) A Market Seller providing Reactive Services at the direction of the Office of the Interconnection shall be credited as specified below for the operation of its resource. These provisions are intended to provide payments to generating units when the LMP dispatch algorithms would not result in the dispatch needed for the required reactive service. LMP will be used to compensate generators that are subject to redispatch for reactive transfer limits.

(b) At the end of each Operating Day, where the active energy output of a Market Seller's resource is reduced or suspended at the request of the Office of the Interconnection for the purpose of maintaining reactive reliability within the PJM Region, the Market Seller shall be credited according to sections 3.2.3B(c) & 3.2.3B(d).

(c) A Market Seller providing Reactive Services from either a steam-electric generating unit or combined cycle unit operating in combined cycle mode, where such unit is pool-scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3 (c) hereof), and where the real time LMP at the unit's bus is higher than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override) shall be compensated for lost opportunity cost by receiving a credit for each Real-time Settlement Interval in an amount equal to the product of (A) the deviation of the generating unit's output necessary to follow the Office of the Interconnection's signals and the generating unit's expected output level if it had been dispatched in economic merit order, times (B) the Real-time Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A*B) - C$.

(d) A Market Seller providing Reactive Services from either a combustion turbine unit or combined cycle unit operating in simple cycle mode that is pool scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3 (c) hereof), operated as requested by the Office of the Interconnection, shall be compensated for lost opportunity cost for each Real-time Settlement Interval, limited to the lesser of the unit's Economic Maximum or the unit's Generation Resource Maximum Output, if the unit output is reduced at the direction of the Office of the Interconnection and the real time LMP at the unit's

bus is higher than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection as directed by the PJM dispatcher, then the Market Seller shall be credited in a manner consistent with that described above in section 3.2.3B(c) for a steam unit or a combined cycle unit operating in combined cycle mode.

(e) At the end of each Operating Day, where the active energy output of a Market Seller's unit is increased at the request of the Office of the Interconnection for the purpose of maintaining reactive reliability within the PJM Region and the offered price of the energy is above the real-time LMP at the unit's bus, the Market Seller shall be credited according to section 3.2.3B(f).

(f) A Market Seller providing Reactive Services from either a steam-electric generating unit, combined cycle unit or combustion turbine unit, where such unit is pool scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3 (c) hereof), and where the real time LMP at the unit's bus is lower than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall receive a credit in an amount equal to $\{(AG - LMPDMW) \times (UB - URTLMP)\}$ where:

AG equals the actual output of the unit;

LMPDMW equals the level of output for the unit determined according to the point on the scheduled offer curve on which the unit was operating corresponding to the real time LMP at the unit's bus and adjusted for any Regulation or Tier 2 Synchronized Reserve assignments;

UB equals the unit offer for that unit for which output is increased, determined according to the lesser of the Final Offer or Committed Offer;

URLTMP equals the real time LMP at the unit's bus; and

where $UB - URTLMP$ shall not be negative.

(g) A Market Seller providing Reactive Services from a hydroelectric resource where such resource is pool scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3 (c) hereof), and where the output of such resource is altered from the schedule submitted by the Market Seller for the purpose of maintaining reactive reliability at the request of the Office of the Interconnection, shall be compensated for lost opportunity cost in the same manner as provided in sections 3.2.2(d) and 3.2.3A(f) and further detailed in the PJM Manuals.

(h) If a Market Seller believes that, due to specific pre-existing binding commitments to which it is a party, and that properly should be recognized for purposes of this section, the above calculations do not accurately compensate the Market Seller for lost opportunity cost associated with following the Office of the Interconnection's dispatch instructions to reduce or

suspend a unit's output for the purpose of maintaining reactive reliability, then the Office of the Interconnection, the Market Monitoring Unit and the individual Market Seller will discuss a mutually acceptable, modified amount of such alternate lost opportunity cost compensation, taking into account the specific circumstances binding on the Market Seller. Following such discussion, if the Office of the Interconnection accepts a modified amount of alternate lost opportunity cost compensation, the Office of the Interconnection shall invoice the Market Participant accordingly. If the Market Monitoring Unit disagrees with the modified amount of alternate lost opportunity cost compensation, as accepted by the Office of the Interconnection, it will exercise its powers to inform the Commission staff of its concerns.

(i) The amount of Synchronized Reserve provided by generating units maintaining reactive reliability shall be counted as Synchronized Reserve satisfying the overall PJM Synchronized Reserve requirements. Operators of these generating units shall be notified of such provision, and to the extent a generating unit's operator indicates that the generating unit is capable of providing Synchronized Reserve, shall be subject to the same requirements contained in section 3.2.3A regarding provision of Synchronized Reserve. At the end of each Operating Day, to the extent a condenser operated to provide Reactive Services also provided Synchronized Reserve, a Market Seller shall be credited for providing synchronous condensing for the purpose of maintaining reactive reliability at the request of the Office of the Interconnection, in an amount equal to the higher of (i) the Synchronized Reserve Market Clearing Price for each Real-time Settlement Interval a generating unit provided synchronous condensing multiplied by the amount of Synchronized reserve provided by the synchronous condenser or (ii) the sum of (A) the generating unit's cost to provide synchronous condensing, calculated in accordance with the PJM Manuals, (B) the product of MW energy usage for providing synchronous condensing multiplied by the real time LMP at the generating unit's bus, (C) the generating unit's startup-cost of providing synchronous condensing, and (D) the unit-specific lost opportunity cost of the generating resource supplying the increment of Synchronized Reserve as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals. To the extent a condenser operated to provide Reactive Services was not also providing Synchronized Reserve, the Market Seller shall be credited only for the generating unit's cost to condense, as described in (ii) above. The total Synchronized Reserve Obligations of all Load Serving Entities under section 3.2.3A(a) in the zone where these condensers are located shall be reduced by the amount counted as satisfying the PJM Synchronized Reserve requirements. The Synchronized Reserve Obligation of each Load Serving Entity in the zone under section 3.2.3A(a) shall be reduced to the same extent that the costs of such condensers counted as Synchronized Reserve are allocated to such Load Serving Entity pursuant to subsection (l) below.

(j) A Market Seller's pool scheduled steam-electric generating unit or combined cycle unit operating in combined cycle mode, that is not committed to operate in the Day-ahead Market, but that is directed by the Office of the Interconnection to operate solely for the purpose of maintaining reactive reliability, at the request of the Office of the Interconnection, shall be credited in the amount of the unit's offered price for start-up and no-load fees. The unit also shall receive, if applicable, compensation in accordance with Sections 3.2.3B(e)-(f).

(k) The sum of the foregoing credits as specified in Sections 3.2.3B(b)-(j) shall be the cost of Reactive Services for the purpose of maintaining reactive reliability for the Operating Day and shall be separately determined for each transmission zone in the PJM Region based on whether the resource was dispatched for the purpose of maintaining reactive reliability in such transmission zone.

(l) The cost of Reactive Services for the purpose of maintaining reactive reliability in a transmission zone in the PJM Region for each Operating Day shall be allocated and charged to each Market Participant in proportion to its deliveries of energy to load (net of operating Behind The Meter Generation) in such transmission zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such transmission zone.

(m) Generating units receiving dispatch instructions from the Office of the Interconnection under the expectation of increased actual or reserve reactive shall inform the Office of the Interconnection dispatcher if the requested reactive capability is not achievable. Should the operator of a unit receiving such instructions realize at any time during which said instruction is effective that the unit is not, or likely would not be able to, provide the requested amount of reactive support, the operator shall as soon as practicable inform the Office of the Interconnection dispatcher of the unit's inability, or expected inability, to provide the required reactive support, so that the associated dispatch instruction may be cancelled. PJM Performance Compliance personnel will audit operations after-the-fact to determine whether a unit that has altered its active power output at the request of the Office of the Interconnection has provided the actual reactive support or the reactive reserve capability requested by the Office of the Interconnection. PJM shall utilize data including, but not limited to, historical reactive performance and stated reactive capability curves in order to make this determination, and may withhold such compensation as described above if reactive support as requested by the Office of the Interconnection was not or could not have been provided.

3.2.3C Synchronous Condensing for Post-Contingency Operation.

(a) Under normal circumstances, PJM operates generation out of merit order to control contingency overloads when the flow on the monitored element for loss of the contingent element ("contingency flow") exceeds the long-term emergency rating for that facility, typically a 4-hour or 2-hour rating. At times however, and under certain, specific system conditions, PJM does not operate generation out of merit order for certain contingency overloads until the contingency flow on the monitored element exceeds the 30-minute rating for that facility ("post-contingency operation"). In conjunction with such operation, when the contingency flow on such element exceeds the long-term emergency rating, PJM operates synchronous condensers in the areas affected by such constraints, to the extent they are available, to provide greater certainty that such resources will be capable of producing energy in sufficient time to reduce the flow on the monitored element below the normal rating should such contingency occur.

(b) The amount of Synchronized Reserve provided by synchronous condensers associated with post-contingency operation shall be counted as Synchronized Reserve satisfying the applicable Synchronized Reserve Requirements. Operators of these generation units shall be

notified of such provision, and to the extent a generation unit's operator indicates that the generation unit is capable of providing Synchronized Reserve, shall be subject to the same requirements contained in section 3.2.3A regarding provision of Synchronized Reserve. At the end of each Operating Day, to the extent a condenser operated in conjunction with post-contingency operation also provided Synchronized Reserve, a Market Seller shall be credited for providing synchronous condensing in conjunction with post-contingency operation at the request of the Office of the Interconnection, in an amount equal to the higher of (i) the Real-time Synchronized Reserve Market Clearing Price for each applicable interval a generation resource provided synchronous condensing multiplied by the amount of Synchronized Reserve provided by the synchronous condenser or (ii) the sum of (A) the generation resource's applicable interval cost to provide synchronous condensing, calculated in accordance with the PJM Manuals, (B) the applicable interval product of the megawatts of energy used to provide synchronous condensing multiplied by the real-time LMP at the generation bus of the generation resource, (C) the generation resource's start-up cost of providing synchronous condensing, and (D) the unit-specific lost opportunity cost of the generation resource supplying the increment of Synchronized Reserve as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals. To the extent a condenser operated in association with post-contingency constraint control was not also providing Synchronized Reserve, the Market Seller shall be credited only for the generation unit's cost to condense, as described in (ii) above. The total Synchronized Reserve Obligations of all Load Serving Entities under section 3.2.3A(a) in the zone where these condensers are located shall be reduced by the amount counted as satisfying the PJM Synchronized Reserve requirements. The Synchronized Reserve Obligation of each Load Serving Entity in the zone under section 3.2.3A(a) shall be reduced to the same extent that the costs of such condensers counted as Synchronized Reserve are allocated to such Load Serving Entity pursuant to subsection (d) below.

(c) The sum of the foregoing credits as specified in section 3.2.3C(b) shall be the cost of synchronous condensers associated with post-contingency operations for the Operating Day and shall be separately determined for each transmission zone in the PJM Region based on whether the resource was dispatched in association with post-contingency operation in such transmission zone.

(d) The cost of synchronous condensers associated with post-contingency operations in a transmission zone in the PJM Region for each Operating Day shall be allocated and charged to each Market Participant in proportion to its deliveries of energy to load (net of operating Behind The Meter Generation) in such transmission zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such transmission zone.

3.2.4 Transmission Congestion Charges.

Each Market Buyer shall be assessed Transmission Congestion Charges as specified in Tariff, Attachment K-Appendix, section 5.

3.2.5 Transmission Loss Charges.

Each Market Buyer shall be assessed Transmission Loss Charges as specified in Tariff, Attachment K-Appendix, section 5.

3.2.6 Emergency Energy.

(a) When the Office of the Interconnection has implemented Emergency procedures, resources offering Emergency energy are eligible to set real-time Locational Marginal Prices, capped at the energy offer cap plus sum of the applicable Reserve Penalty Factors for the Synchronized Reserved Requirement and Primary Reserve Requirement, provided that the Emergency energy is needed to meet demand in the PJM Region.

(b) Market Participants shall be allocated a proportionate share of the net cost of Emergency energy purchased by the Office of the Interconnection. Such allocated share during each applicable interval of such Emergency energy purchase shall be in proportion to the amount of each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Energy Market, whenever that deviation increases the Market Participant's spot market purchases or decreases its spot market sales. This deviation shall not include any reduction or suspension of output of pool scheduled resources requested by PJM to manage an Emergency within the PJM Region.

(c) Net revenues in excess of Real-time Prices attributable to sales of energy in connection with Emergencies to other Control Areas shall be credited to Market Participants during each applicable interval of such Emergency energy sale in proportion to the sum of (i) each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Energy Market, whenever that deviation increases the Market Participant's spot market purchases or decreases its spot market sales, and (ii) each Market Participant's energy sales from within the PJM Region to entities outside the PJM Region that have been curtailed by PJM.

(d) The net costs or net revenues associated with sales or purchases of energy in connection with a Minimum Generation Emergency in the PJM Region, or in another Control Area, shall be allocated during each applicable interval of such Emergency sale or purchase to each Market Participant in proportion to the amount of each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Market, whenever that deviation increases the Market Participant's spot market sales or decreases its spot market purchases.

3.2.7 Billing.

(a) PJMSettlement shall prepare a billing statement each billing cycle for each Market Participant in accordance with the charges and credits specified in Tariff, Attachment K-Appendix, sections 3.2.1 through 3.2.6, and showing the net amount to be paid or received by the Market Participant. Billing statements shall provide sufficient detail, as specified in the PJM Manuals, to allow verification of the billing amounts and completion of the Market Participant's internal accounting.

(b) If deliveries to a Market Participant that has PJM Interchange meters in accordance with Operating Agreement, section 14 include amounts delivered for a Market

Participant that does not have PJM Interchange meters separate from those of the metered Market Participant, PJMSettlement shall prepare a separate billing statement for the unmetered Market Participant based on the allocation of deliveries agreed upon between the Market Participant and the unmetered Market Participant specified by them to the Office of the Interconnection.

Definitions Q - R

Ramping Capability:

“Ramping Capability” shall mean the sustained rate of change of generator output, in megawatts per minute.

Real-time Congestion Price:

“Real-time Congestion Price” shall mean the Congestion Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Loss Price:

“Real-time Loss Price” shall mean the Loss Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Offer:

“Real-time Offer” shall mean a new offer or an update to a Market Seller’s existing cost-based or market-based offer for a clock hour, submitted for use after the close of the Day-ahead Energy Market.

Real-time Prices:

“Real-time Prices” shall mean the Locational Marginal Prices resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Energy Market:

“Real-time Energy Market” shall mean the purchase or sale of energy and payment of Transmission Congestion Charges for quantity deviations from the Day-ahead Energy Market in the Operating Day.

Real-time Settlement Interval:

“Real-time Settlement Interval” shall mean the interval used by settlements, which shall be every five minutes.

Real-time State of Charge:

“Real-time State of Charge” shall mean the current State of Charge of an Energy Storage Resource Model Participant, measured in units of megawatt-hours.

Real-time System Energy Price:

“Real-time System Energy Price” shall mean the System Energy Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Regional Entity:

“Regional Entity” shall mean an organization that NERC has delegated the authority to propose and enforce reliability standards pursuant to the Federal Power Act.

Regional RTEP Project:

“Regional RTEP Project” shall mean a transmission expansion or enhancement rated at 230 kV or above which is required for compliance with the following PJM criteria: system reliability, operational performance or economic criteria, pursuant to a determination by the Office of the Interconnection.

Registered Entity:

“Registered Entity” shall mean the entity registered under the NERC Functional Model and NERC Rules of Procedures for the purpose of compliance with NERC Reliability Standards and responsible for carrying out the tasks within a NERC function without regard to whether a task or tasks are performed by another entity pursuant to the terms of the PJM Governing Agreements.

Regulation:

“Regulation” shall mean the capability of a specific generation resource or Demand Resource with appropriate telecommunications, control and response capability to separately increase and decrease its output or adjust load in response to a regulating control signal, in accordance with the specifications in the PJM Manuals.

Regulation Requirement:

“Regulation Requirement” shall mean the required megawatts of performance-adjusted Regulation capability to be maintained in a Regulation Zone. The Regulation Requirement is defined as a set megawatt value by commitment interval and can increase to account for additional operational uncertainty, in accordance with the PJM Manuals.

Regulation Zone:

“Regulation Zone” shall mean any of those one or more geographic areas, each consisting of a combination of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, regulation service.

Related Parties:

“Related Parties” shall mean, solely for purposes of the governance provisions of the Operating Agreement: (i) any generation and transmission cooperative and one of its distribution cooperative members; and (ii) any joint municipal agency and one of its members. For purposes of the Operating Agreement, representatives of state or federal government agencies shall not be deemed Related Parties with respect to each other, and a public body's regulatory authority, if any, over a Member shall not be deemed to make it a Related Party with respect to that Member.

Relevant Electric Retail Regulatory Authority:

“Relevant Electric Retail Regulatory Authority” shall mean an entity that has jurisdiction over and establishes prices and policies for competition for providers of retail electric service to end-customers, such as the city council for a municipal utility, the governing board of a cooperative utility, the state public utility commission or any other such entity.

Reliability Assurance Agreement or PJM Reliability Assurance Agreement:

“Reliability Assurance Agreement” or “PJM Reliability Assurance Agreement” shall mean that certain Reliability Assurance Agreement Among Load-Serving Entities in the PJM Region, on file with FERC as PJM Interconnection, L.L.C. Rate Schedule FERC. No. 44, and as amended from time to time thereafter.

Reliability Coordinator:

“Reliability Coordinator” shall have the same meaning set forth in the NERC Glossary of Terms used in NERC Reliability Standards.

Reserve Penalty Factor:

“Reserve Penalty Factor” shall mean the cost, in \$/MWh, associated with being unable to meet a specific reserve requirement in a Reserve Zone or Reserve Sub-zone. A Reserve Penalty Factor will be defined for each reserve requirement in a Reserve Zone or Reserve Sub-zone.

Reserve Sub-zone:

“Reserve Sub-zone” shall mean any of those geographic areas wholly contained within a Reserve Zone, consisting of a combination of a portion of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, reserve service.

Reserve Zone:

“Reserve Zone” shall mean any of those geographic areas consisting of a combination of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, reserve service.

Residual Auction Revenue Rights:

“Residual Auction Revenue Rights” shall mean incremental stage 1 Auction Revenue Rights created within a Planning Period by an increase in transmission system capability, including the return to service of existing transmission capability, that was not modeled pursuant to Operating Agreement, Schedule 1, section 7.5, and the parallel provisions of Tariff, Attachment K-Appendix, section 7.5 in compliance with Operating Agreement, Schedule 1, section 7.4.2(h), and the parallel provisions of Tariff, Attachment K-Appendix, section 7.4.2(h), and, if modeled, would have increased the amount of stage 1 Auction Revenue Rights allocated pursuant to Operating Agreement, Schedule 1, section 7.4.2, and the parallel provisions of Attachment K-Appendix, section 7.4.2; provided that, the foregoing notwithstanding, Residual Auction Revenue Rights shall exclude: 1) Incremental Auction Revenue Rights allocated pursuant to Tariff, Part VI; and 2) Auction Revenue Rights allocated to entities that are assigned cost responsibility pursuant to Operating Agreement, Schedule 6 for transmission upgrades that create such rights.

Residual Metered Load:

“Residual Metered Load” shall mean all load remaining in an electric distribution company’s fully metered franchise area(s) or service territory(ies) after all nodally priced load of entities serving load in such area(s) or territory(ies) has been carved out.

Revenue Data for Settlements:

“Revenue Data for Settlements” shall mean energy quantities used in accounting and billing as determined pursuant to Tariff, Attachment K-Appendix and the corresponding provisions of Operating Agreement, Schedule 1.

1.10 Scheduling.

1.10.1 General.

- (a) The Office of the Interconnection shall administer scheduling processes to implement a Day-ahead Energy Market and a Real-time Energy Market. PJMSettlement shall be the Counterparty to the purchases and sales of energy that clear the Day-ahead Energy Market and the Real-time Energy Market; provided that PJMSettlement shall not be a contracting party to bilateral transactions between Market Participants or with respect to a Generating Market Buyer's self-schedule or self-supply of its generation resources up to that Generating Market Buyer's Equivalent Load.
- (b) The Day-ahead Energy Market shall enable Market Participants to purchase and sell energy through the PJM Interchange Energy Market at Day-ahead Prices and enable Transmission Customers to reserve transmission service with Transmission Congestion Charges and Transmission Loss Charges based on locational differences in Day-ahead Prices. Up-to Congestion Transactions submitted in the Day-ahead Energy Market shall not require transmission service and Transmission Customers shall not reserve transmission service for such Up-to Congestion Transactions. Market Participants whose purchases and sales, and Transmission Customers whose transmission uses are scheduled in the Day-ahead Energy Market, shall be obligated to purchase or sell energy, or pay Transmission Congestion Charges and Transmission Loss Charges, at the applicable Day-ahead Prices for the amounts scheduled.
- (c) (i) In the Real-time Energy Market, Market Participants that deviate from the amounts of energy purchases or sales scheduled in the Day-ahead Energy Market shall be obligated to purchase or sell energy for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.
- (ii) In the Real-time Energy Market, Transmission Customers that deviate from the transmission uses, scheduled in the Day-ahead Energy Market shall be obligated to pay Transmission Congestion Charges and Transmission Loss Charges for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.
- (iii) Market Participants that deviate in real-time from the amounts of Secondary Reserve, Non-Synchronized Reserve, or Synchronized Reserve sales, scheduled day-ahead shall be obligated to purchase Secondary Reserve, Non-Synchronized Reserve, or Synchronized Reserve for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.
- (d) The following scheduling procedures and principles shall govern the commitment of resources to the Day-ahead Energy Market and the Real-time Energy Market over a period extending from one week to one hour prior to the real-time dispatch. Scheduling encompasses the day-ahead and hourly scheduling process, through which the Office of the Interconnection determines the Day-ahead Energy Market and determines, based on changing forecasts of conditions and actions by Market Participants and system constraints, a plan to serve the hourly

energy and reserve requirements of the Internal Market Buyers and the purchase requests of the External Market Buyers in the least costly manner, subject to maintaining the reliability of the PJM Region. Scheduling does not encompass Coordinated External Transactions, which are subject to the procedures of Operating Agreement, Schedule 1, section 1.13. Scheduling shall be conducted as specified in section 1.10.1A below, subject to the following condition. If the Office of the Interconnection's forecast for the next seven days projects a likelihood of Emergency conditions, the Office of the Interconnection may commit, for all or part of such seven day period, to the use of generation resources with notification or start-up times greater than one day as necessary in order to alleviate or mitigate such Emergency, in accordance with the Market Sellers' offers for such units for such periods and the specifications in the PJM Manuals. Such resources committed by the Office of the Interconnection to alleviate or mitigate an Emergency will not receive Operating Reserve Credits nor otherwise be made whole for its hours of operation for the duration of any portion of such commitment that exceeds the maximum start-up and notification times for such resources during Hot Weather Alerts and Cold Weather Alerts, consistent with Operating Agreement, Schedule 1, section 3.2.3 and Operating Agreement, Schedule 1, section 6.6.

1.10.1A Day-ahead and Real-time Energy Market Scheduling.

The following actions shall occur not later than 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled, or such other deadline as may be specified by the Office of the Interconnection in order to comply with the practical requirements and the economic and efficiency objectives of the scheduling process specified in this Schedule.

(a) Each Market Participant may submit to the Office of the Interconnection specifications of the amount and location of its customer loads and/or energy purchases to be included in the Day-ahead Energy Market for each hour of the next Operating Day, such specifications to comply with the requirements set forth in the PJM Manuals. Each Market Buyer shall inform the Office of the Interconnection of the prices, if any, at which it desires not to include its load in the Day-ahead Energy Market rather than pay the Day-ahead Price. PRD Providers that have committed Price Responsive Demand in accordance with the Reliability Assurance Agreement shall submit to the Office of the Interconnection, in accordance with procedures specified in the PJM Manuals, any desired updates to their previously submitted PRD Curves, provided that such updates are consistent with their Price Responsive Demand commitments, and provided further that PRD Providers that are not Load Serving Entities for the Price Responsive Demand at issue may only submit PRD Curves for the Real-time Energy Market. Price Responsive Demand that has been committed in accordance with the Reliability Assurance Agreement shall be presumed available for the next Operating Day in accordance with the most recently submitted PRD Curve unless the PRD Curve is updated to indicate otherwise. PRD Providers may also submit PRD Curves for any Price Responsive Demand that is not committed in accordance with the Reliability Assurance Agreement; provided that PRD Providers that are not Load Serving Entities for the Price Responsive Demand at issue may only submit PRD Curves for the Real-time Energy Market. All PRD Curves shall be on a PRD Substation basis, and shall specify the maximum time period required to implement load reductions.

(b) Each Generating Market Buyer shall submit to the Office of the Interconnection:
(i) hourly schedules for resource increments, including hydropower units, self-scheduled by the Market Buyer to meet its Equivalent Load; and (ii) the Dispatch Rate at which each such self-scheduled resource will disconnect or reduce output, or confirmation of the Market Buyer's intent not to reduce output.

(c) All Market Participants shall submit to the Office of the Interconnection schedules for any energy exports, energy imports, and wheel through transactions involving use of generation or Transmission Facilities as specified below, and shall inform the Office of the Interconnection if the transaction is to be scheduled in the Day-ahead Energy Market. Any Market Participant that elects to schedule an export, import or wheel through transaction in the Day-ahead Energy Market may specify the price (such price not to exceed \$2,000/MWh), if any, at which the export, import or wheel through transaction will be wholly or partially curtailed. The foregoing price specification shall apply to the applicable interface pricing point. Any Market Participant that elects not to schedule its export, import or wheel through transaction in the Day-ahead Energy Market shall inform the Office of the Interconnection if the parties to the transaction are not willing to incur Transmission Congestion and Loss Charges in the Real-time Energy Market in order to complete any such scheduled transaction. Such transactions in the Real-time Energy Market, other than Coordinated Transaction Schedules and emergency energy sales and purchases, may specify a price up to \$2,000/MWh. Scheduling of such transactions shall be conducted in accordance with the specifications in the PJM Manuals and the following requirements:

- i) Market Participants shall submit schedules for all energy purchases for delivery within the PJM Region, whether from resources inside or outside the PJM Region;
- ii) Market Participants shall submit schedules for exports for delivery outside the PJM Region from resources within the PJM Region that are not Dynamic Transfers to such entities pursuant to Operating Agreement, Schedule 1, section 1.12; and
- iii) In addition to the foregoing schedules for exports, imports and wheel through transactions, Market Participants shall submit confirmations of each scheduled transaction from each other party to the transaction in addition to the party submitting the schedule, or the adjacent Control Area.

(c-1) A Market Participant may elect to submit in the Day-ahead Energy Market a form of Virtual Transaction that combines an offer to sell energy at a source, with a bid to buy the same megawatt quantity of energy at a sink where such transaction specifies the maximum difference between the Locational Marginal Prices at the source and sink. The Office of Interconnection will schedule these transactions only to the extent this difference in Locational Marginal Prices is within the maximum amount specified by the Market Participant. A Virtual Transaction of this type is referred to as an "Up-to Congestion Transaction." Such Up-to Congestion Transactions may be wholly or partially scheduled depending on the price difference between the source and sink locations in the Day-ahead Energy Market. The maximum difference between the source

and sink prices that a participant may specify shall be limited to +/- \$50/MWh. The foregoing price specification shall apply to the price difference between the specified source and sink in the day-ahead scheduling process only. An accepted Up-to Congestion Transaction results in scheduled injection at a specified source and scheduled withdrawal of the same megawatt quantity at a specified sink in the Day-ahead Energy Market.

(c-2) A Market Participant may elect to submit an Increment Offer and/or Decrement Bid form of Virtual Transaction in the Day-ahead Energy Market and shall specify the price for such transaction which shall be limited to \$2,000/megawatt-hour.

(c-3) Up-to Congestion Transactions may only be submitted at hubs, Residual Metered Load and interfaces not described in Tariff, Attachment K-Appendix, section 2.6A(b). Increment Offers and Decrement Bids may be only submitted at hubs, nodes at which physical generation or load is settled, Residual Metered Load and interfaces not described in Tariff, Attachment K-Appendix, section 2.6A(b).

(d) Market Sellers in the Day-ahead Energy Market shall submit offers for the supply of energy, demand reductions, or other services for the following Operating Day for each clock hour for which the Market Seller desires or is required to make its resource available to the Office of the Interconnection. Offers for the supply of energy may be cost-based, market-based, or both, and may vary hourly. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, Operating Agreement, Schedule 2, and the PJM Manuals, as applicable. Market Sellers owning or controlling the output of a Generation Capacity Resource that is committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1, and that has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage shall submit offers for the available capacity of such Generation Capacity Resource, including any portion that is self-scheduled by the Generating Market Buyer. Such offers shall be based on the ICAP equivalent of the Market Seller's cleared UCAP capacity commitment, provided, however, where the underlying resource is a Capacity Storage Resource or an Intermittent Resource, the Market Seller shall satisfy the must offer requirement by either self-scheduling or offering the unit as a dispatchable resource, in accordance with the PJM Manuals, where the hourly day-ahead self-scheduled values for such Capacity Storage Resources and Intermittent Resources may vary hour to hour from the capacity commitment. Any offer not designated as a Maximum Emergency offer shall be considered available for scheduling and dispatch under both Emergency and non-Emergency conditions. Offers may only be designated as Maximum Emergency offers to the extent that the Generation Capacity Resource falls into at least one of the following categories:

- i) Environmental limits. If the resource has a limit on its run hours imposed by a federal, state, or other governmental agency that will significantly limit its availability, on either a temporary or long-term basis. This includes a resource that is limited to operating only during declared PJM capacity emergencies by a governmental authority.

- ii) Fuel limits. If physical events beyond the control of the resource owner result in the temporary interruption of fuel supply and there is limited on-site fuel storage. A fuel supplier's exercise of a contractual right to interrupt supply or delivery under an interruptible service agreement shall not qualify as an event beyond the control of the resource owner.
- iii) Temporary emergency conditions at the unit. If temporary emergency physical conditions at the resource significantly limit its availability.
- iv) Temporary megawatt additions. If a resource can provide additional megawatts on a temporary basis by oil topping, boiler over-pressure, or similar techniques, and such megawatts are not ordinarily otherwise available.

The submission of offers for resource increments that are not committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1 shall be optional, but any such offers must contain the information specified in the Office of the Interconnection's Offer Data specification, Operating Agreement, Schedule 1, sections 1.10.1A(d) and 1.10.9B, Operating Agreement, Schedule 2, and the PJM Manuals, as applicable. Energy offered from generation resources that are not committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1 shall not be supplied from resources that are included in or otherwise committed to supply the Operating Reserves of a Control Area outside the PJM Region.

The foregoing offers:

- i) Shall specify the Generation Capacity Resource or Economic Load Response Participant resource and energy or demand reduction amount, respectively, for each clock hour in the offer period;
- ii) Shall specify the amounts and prices for each clock hour during the entire Operating Day for each resource component offered by the Market Seller to the Office of the Interconnection;
- iii) May specify for generation resources offer parameters for each clock hour during the entire Operating Day, as applicable and in accordance with section 1.10.9B below, including: (1) Minimum Run Time; (2) maximum run time; (3) Start-up Costs; (4) No-load Costs; (5) Incremental Energy Offer; (6) notification time; (7) availability; (8) ramp rate; (9) Economic Minimum; (10) Economic Maximum; (11) emergency minimum MW; (12) emergency maximum MW; (13) Synchronized Reserve maximum MW; (14) Secondary Reserve maximum MW; and (15) condense to generation time constraints, and may specify offer parameters for Economic Load Response Participant resources for each clock hour during the entire Operating Day, as applicable and in accordance with section 1.10.9B below, including: (1) minimum down time; (2) shutdown costs;

(3) Incremental Energy Offer; (4) notification time; (5) Economic Minimum; and (6) Economic Maximum;

- iv) Shall set forth any special conditions upon which the Market Seller proposes to supply a resource increment, including any curtailment rate specified in a bilateral contract for the output of the resource, or any cancellation fees;
- v) May include a schedule of offers for prices and operating data contingent on acceptance by the deadline specified in this Schedule, with additional schedules applicable if accepted after the foregoing deadline;
- vi) Shall constitute an offer to submit the resource increment to the Office of the Interconnection for scheduling and dispatch in accordance with the terms of the offer for the clock hour, which offer shall remain open through the Operating Day, for which the offer is submitted, unless the Market Seller a) submits a Real-time Offer for the applicable clock hour, or b) updates the availability of its offer for that hour, as further described in the PJM Manuals;
- vii) Shall be final as to the price or prices at which the Market Seller proposes to supply energy or other services to the PJM Interchange Energy Market, such price or prices being guaranteed by the Market Seller for the period extending through the end of the following Operating Day, unless modified after the close of the Day-ahead Energy Market as permitted pursuant to sections 1.10.9A or 1.10.9B below;
- viii) Shall not exceed an energy offer price of \$1,000/megawatt-hour for all generation resources, except (1) when a Market Seller's cost-based offer is above \$1,000/megawatt-hour and less than or equal to \$2,000/megawatt-hour, then its market-based offer must be less than or equal to the cost-based offer; and (2) when a Market Seller's cost-based offer is greater than \$2,000/megawatt-hour, then its market-based offer must be less than or equal to \$2,000/megawatt-hour;
- ix) Shall not exceed a demand reduction offer price of \$1,000/megawatt-hour, except when an Economic Load Response Participant submits a cost-based offer that includes an incremental cost component that is above \$1,000/megawatt-hour, then its market-based offer must be less than or equal to the cost-based offer but in no event greater than \$2,000/megawatt-hour;
- x) Shall not exceed an offer price as follows for Emergency Load Response and Pre-Emergency Load Response participants with:
 - a) a 30 minute lead time, pursuant to Tariff, Attachment DD-1,

section A.2 and the parallel provision of RAA, Schedule 6, \$1,000/megawatt-hour, plus the applicable Reserve Penalty Factor for the Primary Reserve Requirement, minus \$1.00;

b) an approved 60 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provision of RAA, Schedule 6, \$1,000/megawatt-hour, plus [the applicable Reserve Penalty Factor for the Primary Reserve Requirement divided by 2]; and

c) an approved 120 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provisions of RAA, Schedule 6, \$1,100/megawatt-hour; and

xi) Shall not exceed an energy offer price of \$0.00/MWh for pumped storage hydropower units scheduled by the Office of the Interconnection pursuant to the hydro optimization tool in the Day-ahead Energy Market.

(e) A Market Seller that wishes to make a resource available to sell Regulation service shall submit an offer for Regulation for each ~~clock-hour~~30 minute Regulation clearing interval for which the Market Seller desires to make its resource available to the Office of the Interconnection to provide Regulation that shall specify the megawatts of Regulation being offered, which must equal or exceed 0.1 megawatts, in the Regulation Zone for which such Regulation is offered, the price of the capability offer in dollars per MW, the price of the ~~performance-mileage~~ offer in Dollars per change in MW, and such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer and the resource's opportunity costs. Such offers may vary ~~hourly~~for each 30 minute Regulation clearing interval, and may be updated each ~~30 minute Regulation clearing interval~~hour, up to ~~63~~5 minutes before the applicable ~~clock-hour~~30 minute Regulation clearing interval during the Operating Day. The total of the ~~performance-mileage~~ offer multiplied by the historical average mileage used in the market clearing plus the capability offer shall not exceed \$100/megawatt-hour. ~~in the case of Regulation offered for all Regulation Zones.~~ In addition to any market-based offer for Regulation, the Market Seller also shall submit a cost-based offer. A cost-based offer must be in the form specified in the PJM Manuals and consist of the following components as well as any other components specified in the PJM Manuals:

i. The costs (in \$/MW) of the fuel cost increase due to the steady-state heat rate increase resulting from operating the unit at lower megawatt output incurred from the provision of Regulation shall apply to the capability offer;

ii. The cost increase (in \$/ΔMW) in costs associated with movement of the regulation resource incurred from the provision of Regulation shall apply to the ~~performance-mileage~~ offer; and

a. Only Regulation-only resources may include all variable operation and maintenance expenses in the mileage offer, as defined in the PJM Manuals.

iii. An adder of up to \$12.00 per megawatt of Regulation provided applied to the capability offer.

Qualified Regulation capability must satisfy the measurement and verification tests specified in the PJM Manuals.

(f) Each Market Seller owning or controlling the output of a Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative shall submit a forecast of the availability of each such Generation Capacity Resource for the next seven days. A Market Seller (i) may submit a non-binding forecast of the price at which it expects to offer a generation resource increment to the Office of the Interconnection over the next seven days, and (ii) shall submit a binding offer for energy, along with Start-up Costs and No-load Costs, if any, for the next seven days or part thereof, for any generation resource with minimum notification or start-up requirement greater than 24 hours. Such resources committed by the Office of the Interconnection will not receive Operating Reserve Credits nor otherwise be made whole for its hours of operation for the duration of any portion of such commitment that exceeds the maximum start-up and notification times for such resources during Hot Weather Alerts and Cold Weather Alerts, consistent with Operating Agreement, Schedule 1, section 3.2.3 and Operating Agreement, Schedule 1, section 6.6.

(g) Each component of an offer by a Market Seller of a Generation Capacity Resource that is constant for the entire Operating Day and does not vary hour to hour shall remain in effect for subsequent Operating Days until superseded or canceled.

(h) The Office of the Interconnection shall post the total hourly loads scheduled in the Day-ahead Energy Market, as well as, its estimate of the combined hourly load of the Market Buyers for the next four days, and peak load forecasts for an additional three days.

(i) Except for Economic Load Response Participants, all Market Participants may submit Virtual Transactions that apply to the Day-ahead Energy Market only. Such Virtual Transactions must comply with the requirements set forth in the PJM Manuals and must specify amount, location and price, if any, at which the Market Participant desires to purchase or sell energy in the Day-ahead Energy Market. The Office of the Interconnection may require that a market participant shall not submit in excess of a defined number of bid/offer segments in the Day-ahead Energy Market, as specified in the PJM Manuals, when the Office of the Interconnection determines that such limit is required to avoid or mitigate significant system performance problems related to bid/offer volume. Notice of the need to impose such limit shall be provided prior to 10:00 a.m. EPT on the day that the Day-ahead Energy Market will clear. For purposes of this provision, a bid/offer segment is each pairing of price and megawatt quantity submitted as part of an Increment Offer or Decrement Bid. For purposes of applying this provision to an Up-to Congestion Transaction, a bid/offer segment shall refer to the pairing of a source and sink

designation, as well as price and megawatt quantity, that comprise each Up-to Congestion Transaction.

(j) (i) Offers to Supply Synchronized and Non-Synchronized Reserves By Generation Resources in the Day-ahead and Real-time Reserve Markets

(1) Market Sellers owning or controlling the output of a Generation Capacity Resource that was committed in an FRR Capacity Plan, self-supplied, offered and cleared in a Base Residual Auction or Incremental Auction, or designated as replacement capacity, as specified in Tariff, Attachment DD, is capable of providing Synchronized Reserve or Non-Synchronized Reserve as specified in section 1.7.19A(a), in section 1.7.19A.01(a) and in the PJM Manuals, and has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage, shall submit offers or otherwise make their 10-minute reserve capability available to supply Synchronized Reserve or, as applicable, Non-Synchronized Reserve, including any portion that is self-scheduled by the Generating Market Buyer, in an amount equal to the available 10-minute reserve capability of such Generation Capacity Resource. Market Sellers of Generation Capacity Resources subject to this must-offer requirement that do not make the reserve capability of such resources available when such resource is able to operate with a dispatchable range (e.g. through offering a fixed output) will be in violation of this provision.

(2) Market Sellers of all other generation resources that (A) are capable of providing Synchronized Reserve or Non-Synchronized Reserve, as specified in section 1.7.19A(a), in section 1.7.19A.01(a) and in the PJM Manuals, (B) are located within the metered boundaries of the PJM Region, and (C) have submitted offers for the supply of energy into the Day-ahead Energy Market and/or Real-time Energy Market shall be deemed to have made their reserve capability available to provide Synchronized Reserve or Non-Synchronized Reserve in the Day-ahead Energy Market and/or Real-time Energy Market for each clock hour for which the Market Seller submits an available offer to supply energy; provided, however that hydroelectric generation resources and Energy Storage Resources are not automatically deemed available to provide reserves based on the submission of an available energy offer but may submit offers to supply Synchronized Reserve and Non-Synchronized Reserve, as applicable.

(3) Offers for the supply of Synchronized Reserve by all generation resources must be cost-based. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A, section 1.10.9B below, and the PJM Manuals, as applicable. For offers to supply Synchronized Reserve, the offer price shall not exceed the expected value of the penalty for

failing to provide Synchronized Reserve, where such expected value shall be recalculated annually, in accordance with the PJM Manuals, and posted on PJM's website. The expected value of the penalty is calculated as the product of: (A) the average penalty, expressed in \$/MWh, multiplied by (B) the average rate of non-performance during Synchronized Reserve events multiplied by (C) the probability a Synchronized Reserve event that will qualify for non-performance assessments will occur.

The expected value of the penalty shall be determined by an annual review of the twelve-month period ending October 31 of the calendar year in which the review is performed. The Office of the Interconnection shall post the results of its annual review by no later than December 15, and the revised offer price cap shall be effective as of the following January 1; provided, however, that at the time of implementation of this rule the expected value of the penalty shall be \$0.02/MWh, and for the period from the second month after implementation through the second December 31 following such date of implementation, the expected value of the penalty shall be recalculated on a monthly basis using data from the implementation date of this rule through the 15th day of the current month, and the revised value shall be effective the 1st day of the following month.

(4) All Non-Synchronized Reserve offers shall be for \$0.00/MWh. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this subsection (d) of this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(ii) Determination of Available Synchronized Reserve Capability of Generation Resources

(1) For each offer to supply reserves by a synchronized resource, the Office of the Interconnection shall determine the MW of available Synchronized Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market, in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Hydroelectric generation resources and Energy Storage Resources may submit offers for their available Synchronized Reserve capability as part of their offer into the Synchronized Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(j)(i) above must submit a Synchronized Reserve offer which specifies the MW of available Synchronized Reserve capability in order to remain compliant with such requirements.

(2) An on-line generation resource's available Synchronized Reserve capability, except for generation resources capable of synchronous condensing, shall be determined in accordance with the PJM Manuals and based on the resource's current performance and initial energy output and the following offer parameters submitted as part of the resource's energy offer: (A) ramp rate; (B) Economic Minimum; and (C) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Synchronized Reserves above the Synchronized Reserve maximum MW.

For generation resources capable of synchronous condensing, the resource's available Synchronized Reserve capability shall be based on the following offer parameters submitted as part of the resource's energy offer: (D) ramp rate; (E) condense to generation time constraints; (F) Economic Minimum; and (G) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Synchronized Reserves above the Synchronized Reserve maximum MW.

(3) Any Market Seller that believes its generating unit has operating modes, limits, or conditions where the unit would not be capable of providing Synchronized Reserves in real time, can submit to the Office of the Interconnection with a copy to the Market Monitoring Unit a request for an exception from being assigned Synchronized Reserves in the Real-time Synchronized Reserve Market during time periods in which the generating unit is in those operating modes, limits, or conditions. As part of the request, the Market Seller shall supply, for each generating unit, technical information about the operational modes, limits, or conditions to support the requested exception, as further detailed in the PJM Manuals. The Office of the Interconnection shall consult with the Market Monitoring Unit, and consider any input received from the Market Monitoring Unit, in its determination of a request for such an exception. Within 60 days of the submission of the request, the Office of the Interconnection shall notify the Market Seller in writing, with a copy to the Market Monitoring Unit, whether the request is approved or denied. The effective date of any approved request will be provided in the written notification. If a Market Seller has an approved exception, the Market Seller must communicate to the Office of the Interconnection when the unit cannot provide reserves, and the Office of the Interconnection will provide a mechanism for Market Sellers with an approved exception to provide such communication to the Office of the Interconnection in real time, as further detailed in the PJM Manuals. An

approved exception will remain applicable to the unit until such time as the Office of the Interconnection determines that a change is needed or the Market Seller notifies the Office of the Interconnection, with a copy to the Market Monitoring Unit, that a change is needed based on changed operational capabilities of the unit. Market Sellers must notify the Office of the Interconnection, with a copy to the Market Monitoring Unit, within 30 days of any changed operational capabilities that necessitate a change in an approved exception.

(iii) Determination of Available Non-Synchronized Reserve Capability of Generation Resources

(1) For each offer to supply reserves by an off-line generation resource, the Office of the Interconnection shall determine the MW of available Non-Synchronized Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Such hydroelectric generation resources or Energy Storage Resources may submit offers for their available Non-Synchronized Reserve capability as part of their offer into the Non-Synchronized Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(j)(i) above must submit a Non-Synchronized Reserve offer which specifies the MW of available Non-Synchronized Reserve capability in order to remain compliant with such requirements.

(2) An off-line generation resource's available Non-Synchronized Reserve capability shall be determined in accordance with the PJM Manuals and based on the following offer parameters submitted as part of the resource's energy offer: (A) startup time; (B) notification time; (C) ramp rate; (D) Economic Minimum; and (E) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Non-Synchronized Reserves above its Synchronized Reserve maximum MW.

(iv) Offers to Supply Synchronized Reserves by Economic Load Response Participant Resources in the Day-ahead and Real-time Reserve Markets

(1) Economic Load Response Participants that submit offers to reduce demand into the Day-ahead Energy Market and Real-time Energy Market and wish to make their resources available to supply Synchronized Reserve may submit offers to supply Synchronized Reserve from such resources, where such offers shall specify the megawatts of Synchronized Reserve being offered, which

must equal or exceed 0.1 megawatts and such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer. Such offers may vary hourly, and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day.

(2) All offers to supply Synchronized Reserve offers from Economic Load Response Participant resources shall not exceed the expected value of the penalty for failing to provide Synchronized Reserve, as determined in accordance with section 1.10.1A(j)(i)(3) above. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(k) An Economic Load Response Participant that wishes to participate in the Day-ahead Energy Market by reducing demand shall submit an offer to reduce demand to the Office of the Interconnection for each clock hour for which the Economic Load Response Participant desires to make its resource available to the Office of the Interconnection to reduce demand. The offer must equal or exceed 0.1 megawatts, may vary hourly, and shall specify: (i) the amount of the offered curtailment in minimum increments of .1 megawatts; (ii) the Day-ahead Locational Marginal Price above which the end-use customer will reduce load, subject to section 1.10.1A(d)(ix); and (iii) at the Economic Load Response Participant's option, shutdown costs associated with reducing load, including direct labor and equipment costs, opportunity costs, and/or a minimum of number of contiguous hours for which the load reduction must be committed. Such offers may be updated each hour, up to 65 minutes before the applicable clock hour during the Operating Day. Economic Load Response Participants submitting offers to reduce demand in the Day-ahead Energy Market may establish an incremental offer curve, provided that such offer curve shall be limited to ten price pairs (in MWs) per hour.

(l) Market Sellers owning or controlling the output of an Economic Load Response Participant resource that was committed in an FRR Capacity Plan, or that was self-supplied or that offered and cleared in a Base Residual Auction or Incremental Auction, may submit demand reduction bids for the available load reduction capability of the Economic Load Response Participant resource. The submission of demand reduction bids for Economic Load Response Participant resource increments that were not committed in an FRR Capacity Plan, or that have not cleared in a Base Residual Auction or Incremental Auction, shall be optional, but any such bids must contain the information required to be included in such bids, as specified in the PJM Economic Load Response Program. An Economic Load Response Participant resource that was committed in an FRR Capacity Plan, or that was self-supplied or offered and cleared in a Base Residual Auction or Incremental Auction, may submit a demand reduction bid in the Day-ahead Energy Market as specified in the Economic Load Response Program; provided, however, that in the event of an Emergency PJM shall require Economic Load Response Participant resources to reduce load, notwithstanding that the Zonal LMP at the time such Emergency is declared is below the price identified in the demand reduction bid.

(m) (i) Offers to Supply Secondary Reserve By Generation Resources

(1) Market Sellers owning or controlling the output of a Generation Capacity Resource that was committed in an FRR Capacity Plan, self-supplied, offered and cleared in a Base Residual Auction or Incremental Auction, or designated as replacement capacity, as specified in Tariff, Attachment DD, that is available for energy, is capable of providing Secondary Reserve, as specified in section 1.7.19A.02(a) and in the PJM Manuals, and has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage shall submit offers to supply Secondary Reserve, or otherwise make their Secondary Reserve capability available. Such offers shall be for an amount equal to the resource's available energy output achievable within thirty minutes (less its energy output achievable within ten minutes) from a request of the Office of the Interconnection. Market Sellers of Generation Capacity Resources subject to this must-offer requirement that do not make the reserve capability of such resources available when such resource is able to operate with a dispatchable range (e.g. through offering a fixed output) will be in violation of this provision.

(2) Market Sellers of all other generation resources located within the metered boundaries of the PJM Region that submit offers for the supply of energy into the Day-ahead Energy Market and/or Real-time Energy Market and are capable of providing Secondary Reserve, as specified in the PJM Manuals, shall be deemed to have made their reserve capability available to provide Secondary Reserve in the Day-ahead Energy Market and/or Real-time Energy Market for each clock hour for which the Market Seller submits an available offer to supply energy; provided, however that hydroelectric generation resources and Energy Storage Resources are not automatically deemed available to provide reserves based on the submission of an available energy offer but may submit offers to supply Secondary Reserve, as applicable.

(3) Offers for the supply of Secondary Reserve shall be for \$0.00/MWh. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this subsection (d) above, section 1.10.9B below, and the PJM Manuals, as applicable.

(ii) Determination of Available Secondary Reserve Capability of Generation Resources

(1) For each offer to supply Secondary Reserve by a generation resource, the Office of the Interconnection shall determine the MW of available Secondary Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market in accordance with the PJM Manuals; except, however, that the Office of

the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Hydroelectric generation resources or Energy Storage Resources may submit their available Secondary Reserve capability as part of their offer into the Secondary Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(m)(i) above must submit a Secondary Reserve offer which specifies the MW of available Secondary Reserve capability in order to remain compliant with such requirements.

(2) (A) An on-line generation resource's available Secondary Reserve capability, except for generation resources capable of synchronous condensing, shall be based on the resource's current performance and initial energy output, the resource's available Synchronized Reserve capability; and the following offer parameters submitted as part of the energy offer: (i) ramp rate; (ii) Economic Minimum; and (iii) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(B) For generation resources capable of synchronous condensing, the resource's available Secondary Reserve capability shall be based on the following offer parameters submitted as part of the energy offer: (i) ramp rate; (ii) condense to generation time constraints; (iii) Economic Minimum; and (iv) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(C) An off-line generation resource's available Secondary Reserve capability, shall be based on the resource's available Secondary Reserve capability and the following offer parameters submitted as part of the resource's energy offer: (i) startup time; (ii) notification time; (iii) ramp rate; (iv) Economic Minimum; and (v) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating

configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(3) Any Market Seller that believes its generating unit has operating modes, limits, or conditions where the unit would not be capable of providing Secondary Reserves in real time, can submit to the Office of the Interconnection with a copy to the Market Monitoring Unit a request for an exception from being assigned Secondary Reserves in the Real-time Secondary Reserve Market during time periods in which the generating unit is in those operating modes, limits, or conditions. As part of the request, the Market Seller shall supply, for each generating unit, technical information about the operational modes, limits, or conditions to support the requested exception, as further detailed in the PJM Manuals. The Office of the Interconnection shall consult with the Market Monitoring Unit, and consider any input received from the Market Monitoring Unit, in its determination of a request for such an exception. Within 60 days of the submission of the request, the Office of the Interconnection shall notify the Market Seller in writing, with a copy to the Market Monitoring Unit, whether the request is approved or denied. The effective date of any approved request will be provided in the written notification. If a Market Seller has an approved exception, the Market Seller must communicate to the Office of the Interconnection when the unit cannot provide reserves, and the Office of the Interconnection will provide a mechanism for Market Sellers with an approved exception to provide such communication to the Office of the Interconnection in real time, as further detailed in the PJM Manuals. An approved exception will remain applicable to the unit until such time as the Office of the Interconnection determines that a change is needed or the Market Seller notifies the Office of the Interconnection, with a copy to the Market Monitoring Unit, that a change is needed based on changed operational capabilities of the unit. Market Sellers must notify the Office of the Interconnection, with a copy to the Market Monitoring Unit, within 30 days of any changed operational capabilities that necessitate a change in an approved exception.

(iii) Offers to Supply Secondary Reserves by Economic Load Response Participant resources

(1) Each Economic Load Response Participant that submits offers to reduce demand into the Day-ahead Energy Market and Real-time Energy Market and wishes to make their resources available to supply Secondary Reserve shall submit offers to supply Secondary Reserve from such resources, where such offers shall specify the megawatts of Secondary Reserve being offered, which must equal or exceed 0.1 megawatts and include such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer. Such offers may vary hourly, and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day.

(2) All Secondary Reserve offers by Economic Load Response Participant resources shall be for \$0.00/MWh. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(n) A Market Participant may submit a Day-Ahead Pseudo-Tie Transaction for a Market Participant's generator within the PJM balancing authority area that is a Pseudo-Tie into the MISO balancing authority area. Day-Ahead Pseudo-Tie Transactions combine an offer to sell energy at a source with a bid to buy the same megawatt quantity of energy at a sink where such transaction specifies the maximum difference between the Locational Marginal Prices at the source and sink.

Each Day-Ahead Pseudo-Tie Transaction shall: (1) source at a Market Participant's generator within the PJM balancing authority area that Pseudo-Ties into MISO; and (2) sink at the PJM-MISO interface. A Market Participant must reserve transmission service in accordance with the PJM Tariff for each Day-Ahead Pseudo-Tie Transaction. Megawatt quantities for Day-Ahead Pseudo-Tie Transactions shall be greater than zero and less than or equal to the transmission service reserved for the Day-Ahead Pseudo-Tie Transaction. An accepted Day-Ahead Pseudo-Tie Transaction results in scheduled injection at a specified source and scheduled withdrawal of the same megawatt quantity at a specified sink in the Day-Ahead Energy Market.

1.10.1B Demand Bid Scheduling and Screening

(a) The Office of the Interconnection shall apply Demand Bid Screening to all Demand Bids submitted in the Day-ahead Energy Market for each Load Serving Entity, separately by Zone. Using Demand Bid Screening, the Office of the Interconnection will automatically reject a Load Serving Entity's Demand Bids in any future Operating Day for which the Load Serving Entity submits bids if the total megawatt volume of such bids would exceed the Load Serving Entity's Demand Bid Limit for any hour in such Operating Day, unless the Office of the Interconnection permits an exception pursuant to subsection (d) below.

(b) On a daily basis, PJM will update and post each Load Serving Entity's Demand Bid Limit in each applicable Zone. Such Demand Bid Limit will apply to all Demand Bids submitted by that Load Serving Entity for each future Operating Day for which it submits bids. The Demand Bid Limit is calculated using the following equation:

Demand Bid Limit = greater of (Zonal Peak Demand Reference Point * 1.3), or (Zonal Peak Demand Reference Point + 10MW)

Where:

1. Zonal Peak Demand Reference Point = for each Zone: the product of (a) LSE Recent Load Share, multiplied by (b) Peak Daily Load Forecast.

2. LSE Recent Load Share is the Load Serving Entity's highest share of Network Load in each Zone for any hour over the most recently available seven Operating Days for which PJM has data.
3. Peak Daily Load Forecast is PJM's highest available peak load forecast for each applicable Zone that is calculated on a daily basis.

(c) A Load Serving Entity whose Demand Bids are rejected as a result of Demand Bid Screening may change its Demand Bids to reduce its total megawatt volume to a level that does not exceed its Demand Bid Limit, and may resubmit them subject to the applicable rules related to bid submission outlined in Tariff, Operating Agreement and PJM Manuals.

(d) PJM may allow a Load Serving Entity to submit bids in excess of its Demand Bid Limit when circumstances exist that will cause, or are reasonably expected to cause, a Load Serving Entity's actual load to exceed its Demand Bid Limit on a given Operating Day. Examples of such circumstances include, but are not limited to, changes in load commitments due to state sponsored auctions, mergers and acquisitions between PJM Members, and sales and divestitures between PJM Members. A Load Serving Entity may submit a written exception request to the Office of Interconnection for a higher Demand Bid Limit for an affected Operating Day. Such request must include a detailed explanation of the circumstances at issue and supporting documentation that justify the Load Serving Entity's expectation that its actual load will exceed its Demand Bid Limit.

1.10.2 Pool-scheduled Resources.

Pool-scheduled resources are those resources for which Market Participants submitted offers to sell energy in the Day-ahead Energy Market and offers to reduce demand in the Day-ahead Energy Market, which the Office of the Interconnection scheduled in the Day-ahead Energy Market as well as generators committed by the Office of the Interconnection subsequent to the Day-ahead Energy Market. Such resources shall be committed to provide energy in the real-time dispatch unless the schedules for such units are revised pursuant to section 1.10.9 below or Operating Agreement, Schedule 1, section 1.11. Pool-scheduled resources shall be governed by the following principles and procedures.

(a) Pool-scheduled resources shall be selected by the Office of the Interconnection on the basis of the prices offered for energy and demand reductions and related services, whether the resource is expected to be needed to maintain system reliability during the Operating Day, Start-up Costs, No-load Costs, and cancellation fees, and the specified operating characteristics, offered by Market Sellers to the Office of the Interconnection by the offer deadline specified in section 1.10.1A above. Hydropower units can only be pool-scheduled if they are pumped storage units and scheduled by the Office of the Interconnection pursuant to the hydro optimization tool in the Day-ahead Energy Market.

(b) A resource that is scheduled by a Market Participant to support a bilateral sale, or that is self-scheduled by a Generating Market Buyer, shall not be selected by the Office of the Interconnection as a pool-scheduled resource except in an Emergency.

(c) Market Sellers offering energy from hydropower or other facilities with fuel or environmental limitations may submit data to the Office of the Interconnection that is sufficient to enable the Office of the Interconnection to determine the available operating hours of such facilities.

(d) The Market Seller of a resource selected as a pool-scheduled resource shall receive payments or credits for energy, demand reductions or related services, or for Start-up Costs and No-load Costs, from the Office of the Interconnection on behalf of the Market Buyers in accordance with Operating Agreement, Schedule 1, section 3. Alternatively, the Market Seller shall receive, in lieu of Start-up Costs and No-load Costs, its actual costs incurred, if any, up to a cap of the resource's Start-up Costs, if the Office of the Interconnection cancels its selection of the resource as a pool-scheduled resource and so notifies the Market Seller before the resource is synchronized.

(e) Market Participants shall make available their pool-scheduled resources to the Office of the Interconnection for coordinated operation to supply the Operating Reserves needs of the applicable Control Zone.

(f) Economic Load Response Participants offering to reduce demand shall specify: (i) the amount of the offered curtailment, which must equal or exceed 0.1 megawatts, in minimum increments of 0.1 megawatts; (ii) the real-time Locational Marginal Price above which the end-use customer will reduce load; and (iii) at the Economic Load Response Participant's option, shut-down costs associated with reducing load, including direct labor and equipment costs, opportunity costs, and/or a minimum number of contiguous hours for which the load reduction must be committed. Economic Load Response Participants submitting offers to reduce demand in the Day-ahead Energy Market and/or the Real-time Energy Market may establish an incremental offer curve, provided that such offer curve shall be limited to ten price pairs (in MWs). Economic Load Response Participants offering to reduce demand shall also indicate the hours that the demand reduction is not available.

1.10.3 Self-scheduled Resources.

Self-scheduled resources shall be governed by the following principles and procedures.

(a) Each Generating Market Buyer shall use all reasonable efforts, consistent with Good Utility Practice, not to self-schedule resources in excess of its Equivalent Load.

(b) The offered prices of resources that are self-scheduled and not dispatchable by the Office of the Interconnection shall not be considered by the Office of the Interconnection in determining Locational Marginal Prices.

(c) Market Participants shall make available their self-scheduled resources to the Office of the Interconnection for coordinated operation to supply the Operating Reserves needs of the applicable Control Zone, by submitting an offer as to such resources.

(d) A Market Participant self-scheduling a resource in the Day-ahead Energy Market that does not deliver the energy in the Real-time Energy Market, shall replace the energy not delivered with energy from the Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(e) A Market Participant self-scheduling a resource to supply Synchronized Reserve in the Day-ahead Synchronized Reserve Market that does not deliver the scheduled megawatt quantity in the applicable real-time reserve market, shall replace the Synchronized Reserve not delivered and shall pay for such Synchronized Reserve at the applicable Real-time Synchronized Reserve Market Clearing Price. Market Participants shall not self-schedule a resource to provide Secondary Reserve or Non-Synchronized Reserve.

(f) For energy, hydropower units, excluding pumped storage units, may only be self-scheduled.

(g) A resource that has been self-scheduled shall not receive payments or credits for Start-up Costs or No-load Costs.

1.10.4 Capacity Resources.

(a) A Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative that is selected as a pool-scheduled resource shall be made available for scheduling and dispatch at the direction of the Office of the Interconnection. Such a Generation Capacity Resource that does not deliver energy as scheduled shall be deemed to have experienced a Generator Forced Outage to the extent of such energy not delivered. A Market Participant offering such Generation Capacity Resource in the Day-ahead Energy Market shall replace the energy not delivered with energy from the Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(b) Energy from a Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative that has not been scheduled in the Day-ahead Energy Market may be sold on a bilateral basis by the Market Seller, may be self-scheduled, or may be offered for dispatch during the Operating Day in accordance with the procedures specified in this Schedule. Such a Generation Capacity Resource that has not been scheduled in the Day-ahead Energy Market and that has been sold on a bilateral basis must be made available upon request to the Office of the Interconnection for scheduling and dispatch during the Operating Day if the Office of the Interconnection declares a Maximum Generation Emergency. Any such resource so scheduled and dispatched shall receive the applicable Real-time Price for energy delivered.

1.10.5 External Resources.

(a) External Resources may submit offers to the PJM Interchange Energy Market, in accordance with the day-ahead and real-time scheduling processes specified above. An External Resource selected as a pool-scheduled resource shall be made available for scheduling and

dispatch at the direction of the Office of the Interconnection, and except as specified below shall be compensated on the same basis as other pool-scheduled resources. External Resources that are not capable of Dynamic Transfer shall, if selected by the Office of the Interconnection on the basis of the Market Seller's Offer Data, be block loaded on an hourly scheduled basis. Market Sellers shall offer External Resources to the PJM Interchange Energy Market on either a resource-specific or an aggregated resource basis. A Market Participant whose pool-scheduled resource does not deliver the energy scheduled in the Day-ahead Energy Market shall replace such energy not delivered as scheduled in the Day-ahead Energy Market with energy from the PJM Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(b) Offers for External Resources from an aggregation of two or more generating units shall so indicate, and shall specify, in accordance with the Offer Data requirements specified by the Office of the Interconnection: (i) energy prices; (ii) hours of energy availability; (iii) a minimum dispatch level; (iv) a maximum dispatch level; and (v) unless such information has previously been made available to the Office of the Interconnection, sufficient information, as specified in the PJM Manuals, to enable the Office of the Interconnection to model the flow into the PJM Region of any energy from the External Resources scheduled in accordance with the Offer Data.

(c) Offers for External Resources on a resource-specific basis shall specify the resource being offered, along with the information specified in the Offer Data as applicable.

1.10.6 External Market Buyers.

(a) Deliveries to an External Market Buyer not subject to Dynamic Transfer by the Office of the Interconnection shall be delivered on a block loaded basis to the bus or buses at the electrical boundaries of the PJM Region, or in such area with respect to an External Market Buyer's load within such area not served by Network Service, at which the energy is delivered to or for the External Market Buyer. External Market Buyers shall be charged (which charge may be positive or negative) at either the Day-ahead Prices or Real-time Prices, whichever is applicable, for energy at the foregoing bus or buses.

(b) An External Market Buyer's hourly schedules for energy purchased from the PJM Interchange Energy Market shall conform to the ramping and other applicable requirements of the interconnection agreement between the PJM Region and the Control Area to which, whether as an intermediate or final point of delivery, the purchased energy will initially be delivered.

(c) The Office of the Interconnection shall curtail deliveries to an External Market Buyer if necessary to maintain appropriate reserve levels for a Control Zone as defined in the PJM Manuals, or to avoid shedding load in such Control Zone.

1.10.7 Bilateral Transactions.

Bilateral transactions as to which the parties have notified the Office of the Interconnection by the deadline specified in section 1.10.1A above that they elect not to be included in the Day-ahead Energy Market and that they are not willing to incur Transmission Congestion Charges in the Real-time Energy Market shall be curtailed by the Office of the Interconnection as necessary

to reduce or alleviate transmission congestion. Bilateral transactions that were not included in the Day-ahead Energy Market and that are willing to incur congestion charges and bilateral transactions that were accepted in the Day-ahead Energy Market shall continue to be implemented during periods of congestion, except as may be necessary to respond to Emergencies.

1.10.8 Office of the Interconnection Responsibilities.

(a) The Office of the Interconnection shall use its best efforts to determine (i) the least-cost means of satisfying the projected hourly requirements for energy, Operating Reserves, and other ancillary services of the Market Buyers, including the reliability requirements of the PJM Region, of the Day-ahead Energy Market, and (ii) the least-cost means of satisfying the Operating Reserve and other ancillary service requirements for any portion of the load forecast of the Office of the Interconnection for the Operating Day in excess of that scheduled in the Day-ahead Energy Market. In making these determinations, the Office of the Interconnection shall take into account: (i) the Office of the Interconnection's forecasts of PJM Interchange Energy Market and PJM Region energy requirements, giving due consideration to the energy requirement forecasts and purchase requests submitted by Market Buyers and PRD Curves properly submitted by PRD Providers; (ii) the offers submitted by Market Sellers; (iii) the availability of limited energy resources; (iv) the capacity, location, and other relevant characteristics of self-scheduled resources; (v) the objectives of each Control Zone for Operating Reserves, as specified in the PJM Manuals; (vi) the requirements of each Regulation Zone for Regulation and other ancillary services, as specified in the PJM Manuals; (vii) the benefits of avoiding or minimizing transmission constraint control operations, as specified in the PJM Manuals; and (viii) such other factors as the Office of the Interconnection reasonably concludes are relevant to the foregoing determination, including, without limitation, transmission constraints on external coordinated flowgates to the extent provided by Operating Agreement, Schedule 1, section 1.7.6. The Office of the Interconnection shall develop a Day-ahead Energy Market based on the foregoing determination, and shall determine the Day-ahead Prices resulting from such schedule. The Office of the Interconnection shall report the planned schedule for a hydropower resource to the operator of that resource as necessary for plant safety and security, and legal limitations on pond elevations.

(b) By 1:30 p.m., or as soon as practicable thereafter, of the day before each Operating Day, or such other deadline as may be specified by the Office of the Interconnection in the PJM Manuals, the Office of the Interconnection shall: (i) post the aggregate Day-ahead Energy Market results; (ii) post the Day-ahead Prices; and (iii) inform the Market Sellers, Market Buyers, and Economic Load Response Participants of their scheduled injections, withdrawals, and demand reductions respectively. The foregoing notwithstanding, the deadlines set forth in this subsection shall not apply if the Office of the Interconnection is unable to obtain Market Participant bid/offer data due to extraordinary circumstances. For purposes of this subsection, extraordinary circumstances shall mean a technical malfunction that limits, prohibits or otherwise interferes with the ability of the Office of the Interconnection to obtain Market Participant bid/offer data prior to 11:59 p.m. on the day before the affected Operating Day. Extraordinary circumstances do not include a Market Participant's inability to submit bid/offer data to the Office of the Interconnection. If the Office of the Interconnection is unable to clear

the Day-ahead Energy Market prior to 11:59 p.m. on the day before the affected Operating Day as a result of such extraordinary circumstances, the Office of the Interconnection shall notify Members as soon as practicable.

(c) Following posting of the information specified in section 1.10.8(b), and absent extraordinary circumstances preventing the clearing of the Day-ahead Energy Market, the Office of the Interconnection shall revise its schedule of generation resources to reflect updated projections of load, conditions affecting electric system operations in the PJM Region, the availability of and constraints on limited energy and other resources, transmission constraints, and other relevant factors.

(d) Market Buyers shall pay PJMSettlement and Market Sellers shall be paid by PJMSettlement for the quantities of energy scheduled in the Day-ahead Energy Market at the Day-ahead Prices when the Day-ahead Price is positive. Market Buyers shall be paid by PJMSettlement and Market Sellers shall pay PJMSettlement for the quantities of energy scheduled in the Day-ahead Energy Market at the Day-ahead Prices when the Day-ahead Price is negative. Economic Load Response Participants shall be paid for scheduled demand reductions pursuant to Operating Agreement, Schedule 1, section 3.3A. Notwithstanding the foregoing, if the Office of the Interconnection is unable to clear the Day-ahead Energy Market prior to 11:59 p.m. on the day before the affected Operating Day due to extraordinary circumstances as described in subsection (b) above, it will be declared a Market Suspension, and Day-ahead Prices shall be determined pursuant to Operating Agreement, Schedule 1, section 2.6.1. If the Office of the Interconnection declares a Market Suspension, it shall notify Market Participants of the Market Suspension as soon as practicable.

(e) If the Office of the Interconnection discovers a *potential* error in prices and/or cleared quantities in the Day-ahead Energy Market or Day-ahead Ancillary Services Markets, or the Real-time Energy Market or Real-time Ancillary Services Markets after it has posted the results for these markets on its Web site, the Office of the Interconnection shall notify Market Participants as soon as possible after it is found, but in no event later than 12:00 p.m. of the second Business Day following the Operating Day for the Real-time Energy Market and Real-time Ancillary Services Markets, and no later than 5:00 p.m. of the second Business Day following the initial publication of the results for the Day-ahead Energy Market and Day-ahead Ancillary Services Markets. After this initial notification, if the Office of the Interconnection determines it is necessary to post modified results, it shall provide notification of its intent to do so, *along with a description detailing the cause and scope of the error*, by no later than 5:00 p.m. of the fifth Business Day following the Operating Day for the Real-time Energy Market and Real-time Ancillary Services Markets, and no later than 5:00 p.m. of the fifth Business Day following the initial publication of the results in the Day-ahead Energy Market and Day-ahead Ancillary Services Markets. *The provided description will not contain information that is market sensitive or confidential.* Thereafter, the Office of the Interconnection must post on its Web site the corrected results by no later than 5:00 p.m. of the tenth calendar day following the Operating Day for the Day-ahead Energy Market, Real-time Energy Market, and Day-ahead Ancillary Services Markets, and Real-time Ancillary Service Markets. Should any of the above deadlines pass without the associated action on the part of the Office of the Interconnection, the originally posted results will be considered final. Notwithstanding the foregoing, the deadlines set forth

above shall not apply if the referenced market results are under publicly noticed review by the FERC.

(f) Consistent with Operating Agreement, section 18.17.1, and notwithstanding anything to the contrary in the Operating Agreement or in the PJM Tariff, to allow the tracking of Market Participants' non-aggregated bids and offers over time as required by FERC Order No. 719, the Office of the Interconnection shall post on its Web site the non-aggregated bid data and Offer Data submitted by Market Participants (for participation in the PJM Interchange Energy Market) approximately four months after the bid or offer was submitted to the Office of the Interconnection.

1.10.9 Hourly Scheduling.

(a) Following the initial posting by the Office of the Interconnection of the Locational Marginal Prices resulting from the Day-ahead Energy Market, and subject to the right of the Office of the Interconnection to schedule and dispatch pool-scheduled resources and to direct that schedules be changed in an Emergency, and absent extraordinary circumstances preventing the clearing of the Day-ahead Energy Market, a generation rebidding period shall exist. Typically the rebidding period shall be from the time the Office of the Interconnection posts the results of the Day-ahead Energy Market until 2:15 p.m. on the day before each Operating Day. However, should the clearing of the Day-ahead Energy Market be significantly delayed, the Office of the Interconnection may establish a revised rebidding period. During the rebidding period, Market Participants may submit revisions to generation Offer Data for the next Operating Day. Adjustments to the Day-ahead Energy Market shall be settled at the applicable Real-time Prices, and shall not affect the obligation to pay or receive payment for the quantities of energy scheduled in the Day-ahead Energy Market at the applicable Day-ahead Prices.

(b) A Market Participant may adjust the schedule of a resource under its dispatch control on an hour-to-hour basis beginning at 6:30 p.m. of the day before each Operating Day, provided that the Office of the Interconnection is notified not later than 65 minutes prior to the hour in which the adjustment is to take effect, as follows and as specified in section 1.10.9A below:

- i) A Generating Market Buyer may self-schedule any of its resource increments, including hydropower resources, not previously designated as self-scheduled and not selected as a pool-scheduled resource in the Day-ahead Energy Market;
- ii) A Market Participant may request the scheduling of a non-firm bilateral transaction; or
- iii) A Market Participant may request the scheduling of deliveries or receipts of Spot Market Energy; or
- iv) A Generating Market Buyer may remove from service a resource increment, including a hydropower resource, that it had previously designated as self-scheduled, provided that the Office of the

Interconnection shall have the option to schedule energy from any such resource increment that is a Capacity Resource at the price offered in the scheduling process, with no obligation to pay any Start-Up Costs.

(c) An External Market Buyer may refuse delivery of some or all of the energy it requested to purchase in the Day-ahead Energy Market by notifying the Office of the Interconnection of the adjustment in deliveries not later than 65 minutes prior to the hour in which the adjustment is to take effect, but any such adjustment shall not affect the obligation of the External Market Buyer to pay for energy scheduled on its behalf in the Day-ahead Energy Market at the applicable Day-ahead Prices.

(d) The Office of the Interconnection shall provide External Market Buyers and External Market Sellers and parties to bilateral transactions with any revisions to their schedules resulting from the rebidding period by 6:30 p.m. on the day before each Operating Day. The Office of the Interconnection may also commit additional resources after such time as system conditions require. For each hour in the Operating Day, as soon as practicable after the deadlines specified in the foregoing subsection of this section 1.10, the Office of the Interconnection shall provide External Market Buyers and External Market Sellers and parties to bilateral transactions with any revisions to their schedules for the hour.

1.10.9A Updating Offers in Real-time

(a) Each Market Seller may submit Real-time Offers for a resource up to 65 minutes before the applicable clock hour, and such Real-time Offers shall supersede any previous offer for that resource for the clock hour, as further described in the PJM Manuals and subject to the following conditions:

(i) A market-based Real-time Offer shall not exceed the applicable energy offer caps specified in this Schedule. Once a Market Seller's resource is committed for an applicable clock hour, the Market Seller may not increase its Incremental Energy Offer and may only submit a market-based Real-time Offer that is higher than its market-based offer that was in effect at the time of commitment to reflect increases in the resource's cost-based Start-up Costs and cost-based No-load Costs. The Market Seller may elect not to have its market-based offer considered for dispatch and to have only its lowest cost-based offer considered for the remainder of the Operating Day.

(ii) Cost-based Real-time Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection's Offer Data specification, Operating Agreement, Schedule 1, sections 1.10.1A(d) and 1.10.9B, Operating Agreement, Schedule 2 and the PJM Manuals, as applicable. If a Market Seller submits a market-based Real-time Offer for a particular clock hour in accordance with subsection (c) below, or if updates to a cost-based offer are required by the Market Seller's approved Fuel Cost Policy, the Market Seller shall update its previously submitted cost-based Real-time Offer.

(iii) If a Market Seller's available cost-based offer is not compliant with Operating Agreement, Schedule 2 and the PJM Manuals at the time a Market Seller submits a market-based Real-time Offer for an applicable clock hour during the Operating Day, the Market Seller must submit an updated cost-based Real-time Offer consisting of an Incremental Energy Offer, Start-up Cost, and No-load Cost for that clock hour that is compliant with Operating Agreement, Schedule 2 and the PJM Manuals.

(b) Each Market Seller may submit Real-time Offers for a resource during and through the end of the applicable clock hour to update only the following offer parameters, as further described in the PJM Manuals: (1) Economic Minimum; (2) Economic Maximum; (3) emergency minimum MW; (4) emergency maximum MW; (5) unit availability status; (6) fixed output indicator; (7) Synchronized Reserve maximum MW; and (8) Secondary Reserve maximum MW. Such Real-time Offers shall supersede any previous offer for that resource for the clock hour.

1.10.9B Offer Parameter Flexibility

(a) Market Sellers may, in accordance with sections 1.10.1A and 1.10.9A above, this section 1.10.9B, and the PJM Manuals, update offer parameters at any time up to 65 minutes before the applicable clock hour, including prior to the close of the Day-ahead Energy Market and prior to the close of the rebidding period specified in section 1.10.9, except that Market Sellers may not update their offers for the supply of energy, Secondary Reserve, Synchronized Reserve, Non-Synchronized Reserve, or demand reduction: (1) during the period after the close the Day-ahead Energy Market and prior to the posting of the Day-ahead Energy Market results pursuant to section 1.10.8(b); or (2) during the period after close of the rebidding period and prior to PJM announcing the results of the rebidding period pursuant to section 1.10.9(d).

(b) For generation resource offers, Market Sellers may vary for each clock hour during the entire Operating Day the following offer parameters: (1) cost-based Start-up Costs; (2) cost-based No-load Costs; (3) Incremental Energy Offer; (4) Economic Minimum and Economic Maximum; (5) emergency minimum MW and emergency maximum MW; (6) ramp rate; (7) Synchronized Reserve maximum MW; (8) Secondary Reserve maximum MW; and (9) for Real-time Offers only, (i) notification time and (ii) for uncommitted hours only, Minimum Run Time.

(c) For Economic Load Response Participant resource offers, Market Sellers may vary for each clock hour during the entire Operating Day the following offer parameters: (1) shutdown costs, (2) Incremental Energy Offer; (3) Economic Minimum; (4) Economic Maximum; and (5) for Real-time Offers only, (i) notification time and (ii) for uncommitted hours only, minimum down time.

(d) After the announcement of the results of the rebidding period pursuant to section 1.10.9(d), a Market Seller may submit a Real-time Offer where offer parameters may differ from the offer originally submitted in the Day-ahead Energy Market, except that a Market Seller may not submit a Real-time Offer that changes, of the offer parameters listed in section 1.10.1A(d), the MW amounts specified in the Incremental Energy Offer, MW amounts specified in the ramp

rate, maximum run time, and availability; provided, however, Market Sellers of dual-fueled resources may submit Real-time Offers for such resources that change the availability of a submitted cost-based offer.

3.2 Market Settlements.

If a dollar-per-MW-hour value is applied in a calculation under this section 3.2 where the interval of the value produced in that calculation is less than an hour, then for purposes of that calculation the dollar-per-MW hour value is divided by the number of Real-time Settlement Intervals in the hour.

3.2.1 Spot Market Energy.

(a) The Office of the Interconnection shall calculate System Energy Prices in the form of Day-ahead System Energy Prices and Real-time System Energy Prices for the PJM Region, in accordance with Operating Agreement, Schedule 1, section 2.

(b) Each Market Participant shall be charged for all of its Market Participant Energy Withdrawals scheduled in the Day-ahead Energy Market at the Day-ahead System Energy Price to be served in the PJM Interchange Energy Market.

(c) Each Market Participant shall be paid for all of its Market Participant Energy Injections scheduled in the Day-ahead Energy Market at the Day-ahead System Energy Price to be delivered to the PJM Interchange Energy Market.

(d) For each Day-ahead Settlement Interval during an Operating Day, the Office of the Interconnection shall calculate Spot Market Energy charges for each Market Participant as the difference between the sum of its Market Participant Energy Withdrawals scheduled times the Day-ahead System Energy Price and the sum of its Market Participant Energy Injections scheduled times the Day-ahead System Energy Price.

(e) For each Real-time Settlement Interval during an Operating Day, the Office of the Interconnection shall calculate Spot Market Energy charges for each Market Participant as the difference between the sum of its real-time Market Participant Energy Withdrawals less its scheduled Market Participant Energy Withdrawals times the Real-time System Energy Price and the sum of its real-time Market Participant Energy Injections less scheduled Market Participant Energy Injections times the Real-time System Energy Price. The Revenue Data for Settlements determined for each Real-time Settlement Interval in accordance with Operating Agreement, Schedule 1, section 3.1A shall be used in determining the real-time Market Participant Energy Withdrawals and Market Participant Energy Injections used to calculate Spot Market Energy charges under this subsection (e).

(f) For pool External Resources, the Office of the Interconnection shall model, based on an appropriate flow analysis, the megawatts of real-time energy injections to be delivered from each such resource to the corresponding Interface Pricing Point between adjacent Control Areas and the PJM Region.

3.2.2 Regulation.

(a) Each Market Participant that is a Load Serving Entity in a Regulation Zone shall have an hourly Regulation objective equal to its pro rata share of the Regulation ~~Requirements~~ of such Regulation Zone for the hour, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Regulation Zone for the hour ("Regulation Obligation"). A Market Participant with an hourly Regulation Obligation shall be charged the pro rata share of the sum of the Regulation market ~~performance~~ mileage clearing price credits and Regulation market capability clearing price credits for the Real-time Settlement Intervals in an hour.

Regulation Charge = Hourly Regulation Obligation Share * (sum of the Real-time Settlement Interval Regulation credits in an hour)

(b) Each Market Participant supplying Regulation in a Regulation Zone at the direction of the Office of the Interconnection shall be credited for each of its resources such that the calculated credit for each increment of Regulation provided by each resource shall be the higher of: (i) the Regulation market-clearing price; or (ii) the sum of the applicable Regulation offers for a resource determined pursuant to section 3.2.2A.1 below, the ~~unit~~resource-specific shoulder ~~hour~~-opportunity costs described in subsection (e) of this section, the ~~unit~~resource-specific inter-temporal opportunity costs discussed in subsection (d), and the ~~unit~~resource-specific opportunity costs discussed in subsection (~~ed~~) of this section.

(c) The Office of the Interconnection shall commit resources to provide Regulation every 30 minutes, for the clock intervals of the first 30 minutes of an hour and the second 30 minutes of an hour, up to the Regulation Requirement of such Regulation Zone. The Office of the Interconnection shall select resources in merit order, taking into account the resource's mileage Regulation offer, capability Regulation offer, and estimated resource-specific opportunity cost, all converted into their performance adjusted values as further detailed in the PJM Manuals. The total Regulation market-clearing price in each Regulation Zone shall be determined in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval. The total Regulation market-clearing price shall include: (i) the ~~performance-mileage~~ Regulation market-clearing price in a Regulation Zone that shall be calculated in accordance with subsection (g) of this section; (ii) the capability Regulation market-clearing price that shall be calculated in accordance with subsection (h) of this section; and (iii) a Regulation resource's unit-specific opportunity costs during the 5-minute period, determined as described in subsection (d) below, ~~divided by the unit-specific benefits factor described in subsection (j) of this section and divided by the historic accuracy score of the resource from among the resources selected to provide Regulation.~~ A resource's Regulation offer by any Market Seller that fails the three-pivotal supplier test set forth in section 3.2.2A.1 below shall not exceed the cost of providing Regulation from such resource, plus twelve dollars, as determined pursuant to the formula in Operating Agreement, Schedule 1, section 1.10.1A(e).

(d) In determining the Regulation 5-minute clearing price for each Regulation Zone, the ~~estimated unit~~resource-specific opportunity costs (in dollars) of a ~~generation~~-resource offering to sell Regulation in each regulating ~~hour~~interval, except for hydroelectric resources,

shall be equal to the area bounded by (i) Locational Marginal Price at the generation bus for the regulating resource, (ii) the resource's Final Offer, (iii) the resource's tracking ramp-rate limited expected output level if it had been dispatched for energy in economic merit order, as further described in the PJM Manuals, and (iv) the resource's regulation set point on the energy schedule curve on which the resource is running in the PJM Interchange Energy Market. The area is divided by the resource performance score and further divided by the resource's regulation assigned megawatt to convert to dollars per megawatt. ~~product of (i) the deviation of the set point of the generation resource that is expected to be required in order to provide Regulation from the generation resource's expected output level if it had been dispatched in economic merit order times, (ii) the absolute value of the difference between the expected Locational Marginal Price at the generation bus for the generation resource and the lesser of the available market-based or highest available cost-based energy offer from the generation resource (at the megawatt level of the Regulation set point for the resource) in the PJM Interchange Energy Market.~~

For hydroelectric resources offering to sell Regulation in a regulating ~~hour~~interval, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the full value of the Locational Marginal Price at that generation bus for each megawatt of Regulation capability.

The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead megawatt commitment greater than zero shall be equal to the product of (i) the deviation of the set point of the hydroelectric resource that is expected to be required in order to provide Regulation from the hydroelectric resource's expected output level if it had been dispatched in economic merit order times (ii) the difference between the expected Locational Marginal Price at the generation bus for the hydroelectric resource and the average of the Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. Estimated opportunity costs shall be zero for hydroelectric resources for which the average Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period, excluding those Real-time Settlement Intervals during which all available units at the hydroelectric resource were operating is higher than the actual Locational Marginal Price at the generator bus for the Real-time Settlement Interval.

The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead megawatt commitment greater than zero shall be equal to the product of (i) the deviation of the set point of the hydroelectric resource that is expected to be required in order to provide Regulation from the hydroelectric resource's expected output level if it had been dispatched in economic merit order times (ii) the difference between the average of the Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating and the expected Locational Marginal Price at the generation bus for the hydroelectric resource. Estimated opportunity costs shall be zero for hydroelectric resources for which the actual Locational Marginal Price at the generator bus for the Real-time Settlement Interval is higher than the average Locational Marginal Price at the generation bus for the appropriate on-peak or

off-peak period, excluding those Real-time Settlement Intervals during which all available units at the hydroelectric resource were operating.

For the purpose of committing resources and setting Regulation market clearing prices, the Office of the Interconnection shall utilize day-ahead Locational Marginal Prices to calculate the average of the Locational Marginal Price values used in the calculation for opportunity costs for hydroelectric resources. For the purposes of settlements, the Office of the Interconnection shall utilize the real-time Locational Marginal Prices to calculate the average of the Locational Marginal Price used in the calculation for opportunity costs for hydroelectric resources.

~~Estimated~~ Opportunity costs for Economic Load Response Participant resources and regulation-only resources to provide Regulation are zero for the purpose of committing resources, setting Regulation clearing prices, and settlements.

(e) In determining the credit under subsection (b) to a Market Participant selected to provide Regulation in a Regulation Zone and that actively follows the Office of the Interconnection's Regulation signals and instructions, the unit-specific opportunity cost of a generation resource shall be determined for (1) each Real-time Settlement Interval that the Office of the Interconnection requires a generation resource to provide Regulation, and (2) the ~~last three~~ two Real-time Settlement Intervals ~~of the~~ preceding the regulation commitment shoulder hour and the ~~first three~~ two Real-time Settlement Intervals ~~of the~~ following the regulation commitment shoulder hour in accordance with the PJM Manuals and below.

The unit-specific opportunity cost in dollars, incurred during the Real-time Settlement Interval in which the Regulation obligation is fulfilled, shall be equal to the area bounded by product of (i) the Locational Marginal Price at the generation bus for the regulating resource, (ii) the resource's Final Offer, (iii) ~~deviation of~~ the generation resource's tracking ramp-rate limited output necessary to follow the Office of the Interconnection's Regulation signals from the generation resource's expected output level if it had been dispatched in economic merit order times, as further described in the PJM Manuals, and (iv) the generation resource's regulation set point, and adjusted for the performance score of the resource. ~~the absolute value of the difference between the Locational Marginal Price at the generation bus for the generation resource and the lesser of the available market-based or highest available cost-based energy offer from the generation resource (at the actual megawatt level of the resource when the actual megawatt level is within the tolerance defined in the PJM Manuals for the Regulation set point, or at the Regulation set point for the resource when it is not within the corresponding tolerance) in the PJM Interchange Energy Market.~~ Opportunity costs for Economic Load Response Participant or regulation only resources to provide Regulation are zero.

The unit-specific opportunity costs associated with uneconomic operation during each of the preceding ~~three~~ two Real-time Settlement Intervals of the regulation commitment shoulder hour shall be equal to the product of (i) the deviation between the set point of the generation resource that is expected to be required in the initial regulating Real-time Settlement Interval in order to provide Regulation and the resource's tracking expected ramp rate limited output in each of the preceding ~~three~~ two Real-time Settlement Intervals of the regulation commitments ~~shoulder hour~~ times (ii) the absolute value of the difference between the Locational Marginal Price at the

generation bus for the generation resource in each of the preceding ~~three-two~~ Real-time Settlement Intervals of the ~~regulation commitment shoulder hour~~ and the ~~lesser of the available market based or highest available cost based~~ energy offer, ~~using the Final Offer, from the generation resource~~ (at the megawatt level of the Regulation set point for the resource in the initial regulating Real-time Settlement Interval,) in the PJM Interchange Energy Market, all as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals.

The unit-specific opportunity costs associated with uneconomic operation during each of the following ~~three-two~~ Real-time Settlement Intervals of the ~~regulation commitment shoulder hour~~ shall be equal to the product of (i) the deviation between the set point of the generation resource that is expected to be required in the final regulating Real-time Settlement Interval in order to provide Regulation and the resource's ~~tracking~~ expected ~~ramp-rate limited~~ output in each of the following ~~three-two~~ Real-time Settlement Intervals of the ~~regulation commitment shoulder hour~~ times, ~~and~~ (ii) the absolute value of the difference between the Locational Marginal Price at the generation bus for the generation resource in each of the following ~~three-two~~ Real-time Settlement Intervals of the ~~regulation commitment shoulder hour~~ and the ~~lesser of the available market based or highest available cost based~~ energy offer, ~~using the Final Offer, from the generation resource~~ (at the megawatt level of the Regulation set point for the resource in final regulating hour,) in the PJM Interchange Energy Market all as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals.

(f) Any amounts credited for Regulation in an hour in excess of the Regulation market-clearing price in that hour shall be allocated and charged to each Market Participant in a Regulation Zone that does not meet its hourly Regulation obligation in proportion to its purchases of Regulation in such Regulation Zone in megawatt-hours during that hour.

(g) To determine the Regulation market ~~mileage-performance~~-clearing price ~~for each Regulation Zone~~, the Office of the Interconnection shall adjust the submitted ~~performance mileage~~ offer for each resource in accordance with the historical performance ~~score~~ of that resource, ~~and~~ the amount of ~~historically dispatched~~ Regulation (~~mileage~~) ~~that resource will be dispatched based on the ratio of control signals~~ calculated by the Office of the Interconnection; ~~and the unit-specific benefits factor described in subsection (j) of this section for which that resource is qualified~~. The maximum adjusted ~~performance-mileage~~ offer of all cleared resources will set the Regulation market ~~performance~~~~mileage~~-clearing price.

The owner of each Regulation resource that actively follows the Office of the Interconnection's Regulation signals and instructions, will be credited for Regulation ~~performance-mileage~~ by multiplying the assigned MW(s) by the Regulation market ~~performance~~~~mileage~~-clearing price, by the ratio between the requested mileage for the Regulation dispatch signal ~~assigned to the Regulation resource~~ and the ~~historic requested mileage for the~~ Regulation dispatch signal, ~~calculated by the Office of the Interconnection assigned to traditional resources~~, and by the Regulation resource's ~~accuracy-performance~~ score calculated in accordance with subsection (k) of this section.

(h) The Office of the Interconnection shall divide each Regulation resource's capability offer by the ~~unit-specific benefits factor described in subsection (j) of this section and divided by the~~ historic accuracy performance score for the resource for the purposes of committing resources and setting the market clearing prices.

The Office of the Interconnection shall calculate the Regulation market capability-clearing price for each Regulation Zone by subtracting the Regulation market ~~performance~~ emileage-clearing price described in subsection (g) from the total Regulation market clearing price described in subsection (c). This residual sets the Regulation market capability-clearing price for that market Real-time Settlement Interval.

The owner of each Regulation resource that actively follows the Office of the Interconnection's Regulation signals and instructions will be credited for Regulation capability based on the assigned MW and the capability Regulation market-clearing price multiplied by the Regulation resource's accuracy performance score calculated in accordance with subsection ~~(j)~~ (k) of this section.

(i) In accordance with the processes described in the PJM Manuals, the Office of the Interconnection shall: (i) calculate inter-temporal opportunity costs for each applicable resource; (ii) include such inter-temporal opportunity costs in each applicable resource's offer to sell frequency Regulation service; and (iii) account for such inter-temporal opportunity costs in the Regulation market-clearing price.

~~(j) The Office of the Interconnection shall calculate a unit-specific benefits factor for each of the dynamic Regulation signal and traditional Regulation signal in accordance with the PJM Manuals. Each resource shall be assigned a unit-specific benefits factor based on their order in the merit order stack for the applicable Regulation signal. The unit-specific benefits factor is the point on the benefits factor curve that aligns with the last megawatt, adjusted by historical performance, that resource will add to the dynamic resource stack. Resources following the dynamic Regulation signal which have a unit-specific benefits factor less than 0.1 will not be considered for the purposes of committing resources. The unit-specific benefits factor for the traditional Regulation signal shall be equal to one.~~

~~(k) The Office of the Interconnection shall calculate each Regulation resource's accuracy performance score. The accuracy performance score shall be the average of a delay score, correlation score, and energy score for each ten-second interval. For purposes of setting the interval to be used for the correlation score and delay scores, PJM will use the maximum of the correlation score plus the delay score for each interval.~~

~~The Office of the Interconnection shall calculate the correlation score using the following statistical correlation function (r) that measures the delay in response between the Regulation signal and the resource change in output:~~

$$\text{Correlation Score} = r_{\text{Signal, Response}(\delta, \delta+5 \text{ Min})}$$

~~$\delta = 0 \text{ to } 5 \text{ Min}$~~

~~where δ is delay.~~

~~The Office of the Interconnection shall calculate the delay score using the following equation:~~

$$\text{Delay Score} = \text{Abs}((\delta - 5 \text{ Minutes}) / (5 \text{ Minutes})).$$

~~The Office of the Interconnection shall calculate an energy score as a function of the difference in the energy provided versus the energy requested by the Regulation signal while scaling for the number of samples. The error measured shall be the difference of the resources response and the dispatch signal, adjusted by the assigned MW and signal dispatch of the Regulation resource.~~

~~The energy performance score is calculated using the absolute error (ϵ) as a function of the resource's Regulation capacity using the following equations:~~

$$\text{Energy Performance Score} = 1 - 1/n \sum \text{Abs}(\text{Error});$$

~~Error = Average of Abs (Abs (Response - Regulation Signal) / (0.5*HourlyInterval Average Regulation Signal + 0.5*AREG)); and~~

~~n = the number of samples in the hour and the energy interval
AREG = assigned regulation megawatt.~~

~~The Office of the Interconnection shall calculate an accuracy performance score for each Regulation resource that is the average of the delay score, correlation score, and energy score for each five-minute period the Regulation resource is assigned to provide Regulation using the following equation where the energy score, the delay score, and the correlation score are each weighted equally:~~

$$\text{Accuracy Score} = \text{max}((\text{Delay Score}) + (\text{Correlation Score}) + (\text{Energy Score})).$$

~~The historic accuracy performance score will be based on a 100 clock-hour rolling average of the Real-time Settlement Interval accuracy performance scores, with consideration of the qualification score, for resources without adequate historical data, as defined in the PJM Manuals.~~

~~Regulation resources that have a Real-time Settlement Interval performance score below 25% will be ineligible for Regulation credits for that Real-time Settlement Interval.~~

~~Regulation resources that have historical performance scores fall below 40% shall be disqualified from providing Regulation until they are able to re-qualify, as defined in the PJM Manuals.~~

~~(k)~~ During a Market Suspension where the suspension is less than or equal to ~~twenty-four (24)~~ consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Regulation, the resources providing Regulation at the direction of the Office of the Interconnection will be compensated based on a calculated Regulation market-clearing price. Regulation market-clearing prices for each Real-time Settlement Interval associated with such Market Suspension shall be the average of the Regulation market-clearing

prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

During a Market Suspension where the suspension is greater than ~~twenty-four (24)~~ consecutive hours, if the Office of the Interconnection is assigning Regulation, resources providing Regulation at the direction of the Office of the Interconnection will be compensated based on a calculated Regulation clearing price. The Regulation clearing price for each Real-time Settlement Interval will be determined by calculating a Regulation clearing cost for the online resources providing Regulation during the Market Suspension. The resource's Regulation clearing cost is determined by the summation of their adjusted Regulation offer and adjusted opportunity cost. The opportunity cost will be based on the resource's cost-based offer and will be determined as follows:

For online resources providing Regulation on a cost-based offer at the time of the Market Suspension, that cost-based offer will be used.

For online resources providing Regulation on a price-based offer at the time of the Market Suspension, the Office of the Interconnection shall use the cheapest available cost-based offer based on the dispatch cost formula as defined in Operating Agreement, Schedule 1, section 6.4.1(g) using the available cost-based offers in the Office of the Interconnection system at the time of the Market Suspension.

The highest cost resource, based on this Regulation clearing cost, will set the Regulation market-clearing price for each hour of the Market Suspension.

During a Market Suspension, if the Office of the Interconnection is not assigning Regulation resources, then the Regulation market-clearing price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period and no resource-specific opportunity cost will be calculated.

During a Market Suspension, the following Regulation components for all Real-time Settlement Intervals in the Market Suspension period will be determined as follows:

- (i) If the regulation accuracy-performance score cannot be calculated during a Market Suspension, the ~~100-hour rolling average accuracy-historic performance~~ score will be used for the Market Suspension period.
- (ii) If the regulation mileage ~~ratio~~ cannot be calculated during a Market Suspension, the mileage ~~ratio~~ will be set to one (1) for the Market Suspension period.
- ~~(iii) If the unit-specific benefits factor cannot be calculated during a Market Suspension, the unit-specific benefits factor would be based on the historical average unit-specific benefits factor over past hours that shared the same penetration of Regulation D resources that exist for the given Market Suspension hour.~~

3.2.2A Offer Price Caps.

3.2.2A.1 Applicability.

(a) ~~For Each hour~~ Regulation market clearing interval, the Office of the Interconnection shall conduct a Regulation three-pivotal supplier test as described in this section. Regulation offers from Market Sellers that fail the Regulation three-pivotal supplier test shall be capped in the ~~hour~~ interval in which they failed the test at their cost based offers as determined pursuant to Operating Agreement, Schedule 1, section 1.10.1A(e). A Regulation supplier fails the three-pivotal supplier test in any ~~hour~~ Regulation market clearing interval in which such Regulation supplier and the two largest other Regulation suppliers are jointly pivotal.

(b) For the purposes of conducting the three-pivotal supplier test pursuant to this section, the following applies:

(i) The Regulation three-pivotal supplier test will include in the definition of available supply all offers megawatts from resources capable of satisfying the Regulation ~~R~~Requirement of the PJM Region multiplied by the historic ~~accuracy~~ performance score of the resource ~~and multiplied by the unit specific benefits factor~~ for which the capability cost-based offer plus the performance-mileage cost-based offer plus any eligible opportunity costs is no greater than ~~150% percent~~ of the clearing price that would be calculated if all offers were limited to cost (plus eligible opportunity costs).

(ii) The Regulation three-pivotal supplier test will apply on a Regulation supplier basis (i.e. not a resource by resource basis) and only the Regulation suppliers that fail the three-pivotal supplier test will have their Regulation offers capped. A Regulation supplier for the purposes of this section includes corporate affiliates. Regulation from resources controlled by a Regulation supplier or its affiliates, whether by contract with unaffiliated third parties or otherwise, will be included as Regulation of that Regulation supplier. Regulation provided by resources owned by a Regulation supplier but controlled by an unaffiliated third party, whether by contract or otherwise, will be included as Regulation of that third party.

(iii) Each supplier shall be ranked from the largest to the smallest offered megawatt of eligible Regulation supply adjusted by the historic performance of each resource ~~and the unit specific benefits factor~~. Suppliers are then tested in order, starting with the three largest suppliers. For each iteration of the test, the two largest suppliers are combined with a third supplier, and the combined supply is subtracted from total effective supply. The resulting net amount of eligible supply is divided by the Regulation ~~R~~Requirement for the ~~hour~~ Regulation clearing interval to determine the residual supply index. Where the residual supply index for Regulation three pivotal suppliers is less than or equal to 1.0, then the three suppliers are jointly pivotal and the suppliers being tested fail the three pivotal supplier test. Iterations of the test continue until the combination of the two largest suppliers and a third supplier result in a residual supply index greater than 1.0, at which point the remaining suppliers pass the test. Any resource owner that fails the three-pivotal supplier test will be offer-capped.

3.2.3 Operating Reserves.

(a) A Market Seller's pool-scheduled resources capable of providing Operating Reserves shall be credited as specified below based on the applicable offer for the operation of such resource, provided that the resource was available for the entire time specified in the Offer Data for such resource. To the extent that sections 3.2.3A, 3.2.3A.001, and 3.2.3A.01 below do not meet the Synchronized Reserve Requirements, the Primary Reserve Requirements, and the 30-minute Reserve Requirements, the Office of the Interconnection shall schedule additional Operating Reserves pursuant to Section 1.7.17 and 1.10 of Schedule 1 of this Agreement. In addition the Office of the Interconnection shall schedule Operating Reserves pursuant to those sections to satisfy any unforeseen Operating Reserve requirements that are not reflected in the day-ahead market. PJMSettlement shall be the Counterparty to the purchases and sales of Operating Reserve in the PJM Interchange Energy Market.

(b) The following determination shall be made for each pool-scheduled resource that is scheduled in the Day-ahead Energy Market: the total offered price for Start-up Costs and No-load Costs and energy, determined on the basis of the resource's scheduled output, shall be compared to the total value of that resource's energy – as determined by the Day-ahead Energy Market and the Day-ahead Prices applicable to the relevant generation bus in the Day-ahead Energy Market. PJM shall also (i) determine whether any resources were scheduled in the Day-ahead Energy Market to provide Black Start service, Reactive Services or transfer interface control during the Operating Day because they are known or expected to be needed to maintain system reliability in a Zone during the Operating Day in order to minimize the total cost of Operating Reserves associated with the provision of such services and reflect the most accurate possible expectation of real-time operating conditions in the day-ahead model, which resources would not have otherwise been committed in the day-ahead security-constrained dispatch and (ii) report on the day following the Operating Day the megawatt quantities scheduled in the Day-ahead Energy Market for the above-enumerated purposes for the entire RTO.

Except as provided in section 3.2.3(n) below, if the total offered price for Start-up Costs (shutdown costs for Economic Load Response Participant resources) and No-load Costs and energy summed over all Day-ahead Settlement Intervals exceeds the total value summed over all Day-ahead Settlement Intervals, the difference shall be credited to the Market Seller as a day-ahead Operating Reserve credit.

However, for the Day-ahead Settlement Intervals in which the resource is scheduled to provide energy in the Operating Day and the resource actually provides energy in at least one Real-time Settlement Interval in an hour that corresponds to such scheduled Day-ahead Settlement Intervals, a resource's day-ahead Operating Reserve credit shall be reduced by the greater of zero or the difference of the resource's Day-ahead Operating Reserve Target and the Balancing Operating Reserve Target, as determined below.

A resource's Day-ahead Operating Reserve Target shall be determined in accordance with the following equation:

$$(A + B) - C$$

Where:

A = Start-up Costs

B = the sum of day-ahead No-load Costs and energy over the applicable Real-time Settlement Intervals that correspond with Day-ahead Settlement Intervals in which the resource is scheduled. The day-ahead No-load Costs and energy are divided by twelve to determine the cost for each Real-time Settlement Interval.

C = the sum of the day-ahead revenues calculated for each Real-time Settlement Interval that corresponds with a Day-ahead Settlement Interval in which the resource is scheduled, where the day-ahead revenue for each such Real-time Settlement Interval equals the product of the megawatt amount of energy scheduled in the Day-ahead Energy Market and the Day-ahead Price at the applicable pricing point for the resource divided by twelve.

A resource's Balancing Operating Reserve Target shall be determined in accordance with the following equation:

$$D - (E + F)$$

Where:

D = the sum of Start-up Costs and No-load Costs and the incremental cost of energy summed over all Real-time Settlement Intervals that correspond to the Day-ahead Settlement Intervals in which the resource was scheduled;

E = [(the megawatt amount of energy provided in the Real-time Energy Market minus the megawatt amount of energy scheduled in the Day-ahead Energy Market) multiplied by the Real-time Price at the applicable pricing point for the resource] plus the sum of the day-ahead revenues as determined in part C of the above formula for determining the Day-ahead Operating Reserve Target, summed over the applicable Real-time Settlement Intervals; and

F = the sum of all revenues earned for providing Secondary Reserves, Synchronized Reserves, Non-Synchronized Reserves, and Reactive Services over the applicable Real-time Settlement Intervals.

The Office of the Interconnection shall apply any balancing Operating Reserve credits allocated pursuant to this section 3.2.3(b) to real-time deviations or real-time load share plus exports, pursuant to Operating Agreement, Schedule 1, section 3.2.3(p), depending on whether the balancing Operating Reserve credits are related to resources scheduled during the reliability analysis for an Operating Day, or during the actual Operating Day.

(i) For resources scheduled by the Office of the Interconnection during the reliability analysis for an Operating Day, the associated balancing Operating Reserve credits shall be allocated based on the reason the resource was scheduled according to the following provisions:

(A) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to operate in real-time to augment the physical resources committed in the Day-ahead Energy Market to meet the forecasted real-time load plus the Operating Reserve requirement, the associated balancing Operating Reserve credits, identified as RA Credits for Deviations, shall be allocated to real-time deviations.

(B) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to maintain system reliability, the associated balancing Operating Reserve credits, identified as RA Credits for Reliability, shall be allocated according to ratio share of real time load plus export transactions.

(C) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource with a day-ahead schedule is required to deviate from that schedule to provide balancing Operating Reserves, the associated balancing Operating Reserve credits shall be segmented and separately allocated pursuant to subsections 3.2.3(b)(i)(A) or 3.2.3(b)(i)(B) hereof. Balancing Operating Reserve credits for such resources will be identified in the same manner as units committed during the reliability analysis pursuant to subsections 3.2.3(b)(i)(A) and 3.2.3(b)(i)(B) hereof.

(ii) For resources scheduled during an Operating Day, the associated balancing Operating Reserve credits shall be allocated according to the following provisions:

(A) If the Office of the Interconnection directs a resource to operate during an Operating Day to provide balancing Operating Reserves, the associated balancing Operating Reserve credits, identified as RT Credits for Reliability, shall be allocated according to ratio share of load plus exports. The foregoing notwithstanding, credits will be applied pursuant to this section only if the LMP at the resource's bus does not meet or exceed the applicable offer of the resource for at least four 5-minute intervals during one or more discrete clock hours during each period the resource operated and produced MWs during the relevant Operating Day. If a resource operated and produced MWs for less than four 5-minute intervals during one or more discrete clock hours during the relevant Operating Day, the credits for that resource during the hour it was operated less than four 5-minute intervals will be identified as being in the same category (RT Credits for Reliability or RT Credits for Deviations) as identified for the Operating Reserves for the other discrete clock hours.

(B) If the Office of the Interconnection directs a resource not covered by section 3.2.3(b)(ii)(A) hereof to operate in real-time during an Operating Day, the associated balancing Operating Reserve credits, identified as RT Credits for Deviations, shall be allocated according to real-time deviations from day-ahead schedules.

(iii) PJM shall post on its Web site the aggregate amount of MWs committed that meet the criteria referenced in subsections (b)(i) and (b)(ii) hereof.

(c) The sum of the foregoing credits calculated in accordance with section 3.2.3(b) plus any unallocated charges from section 3.2.3(h) and Operating Agreement, Schedule 1, section 5.1.7, and any shortfalls paid pursuant to the Market Settlement provision of the Day-ahead Economic Load Response Program, shall be the cost of Operating Reserves in the Day-ahead Energy Market.

(d) The cost of Operating Reserves in the Day-ahead Energy Market shall be allocated and charged to each Market Participant in proportion to the sum of its (i) scheduled load (net of Behind The Meter Generation expected to be operating, but not to be less than zero), accepted Decrement Bids in the Day-ahead Energy Market in megawatt-hours for that Operating Day and accepted Up-to Congestion Transactions in the Day-ahead Energy Market in megawatt-hours for the Operating Day at the sink of the transaction; and (ii) scheduled energy sales in the Day-ahead Energy Market from within the PJM Region to load outside such region in megawatt-hours for that Operating Day, but not including its bilateral transactions that are Dynamic Transfers to load outside such area pursuant to Operating Agreement, Schedule 1, section 1.12, except to the extent PJM scheduled resources to provide Black Start service, Reactive Services or transfer interface control. The cost of Operating Reserves in the Day-ahead Energy Market for resources scheduled to provide Black Start service for the Operating Day which resources would not have otherwise been committed in the day-ahead security constrained dispatch shall be allocated by ratio share of the monthly transmission use of each Network Customer or Transmission Customer serving Zone Load or Non-Zone Load, as determined in accordance with the formulas contained in Tariff, Schedule 6A. The cost of Operating Reserves in the Day-ahead Energy Market for resources scheduled to provide Reactive Services or transfer interface control because they are known or expected to be needed to maintain system reliability in a Zone during the Operating Day and would not have otherwise been committed in the day-ahead security constrained dispatch shall be allocated and charged to each Market Participant in proportion to the sum of its real-time deliveries of energy to load (net of operating Behind The Meter Generation) in such Zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such Zone.

(e) At the end of each Operating Day, the following determination shall be made for each synchronized pool-scheduled resource of each Market Seller that operates as requested by the Office of the Interconnection. For each calendar day, pool-scheduled resources in the Real-time Energy Market shall be made whole for each of the following Segments: 1) the greater of their day-ahead schedules and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Economic Load Response Participant

resources); and 2) any block of Real-time Settlement Intervals the resource operates at PJM's direction in excess of the greater of its day-ahead schedule and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Economic Load Response Participant resources). For each calendar day, and for each synchronized start of a generation resource or PJM-dispatched economic load reduction, there will be a maximum of two Segments for each resource. Segment 1 will be the greater of the day-ahead schedule and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Demand Resources) and Segment 2 will include the remainder of the contiguous Real-time Settlement Intervals when the resource is operating at the direction of the Office of the Interconnection, provided that a segment is limited to the Operating Day in which it commenced and cannot include any part of the following Operating Day.

A Generation Capacity Resource that operates outside of its unit-specific parameters will not receive Operating Reserve Credits nor be made whole for such operation when not dispatched by the Office of the Interconnection, unless the Market Seller of the Generation Capacity Resource can justify to the Office of the Interconnection that operation outside of such unit-specific parameters was the result of an actual constraint. Such Market Seller shall provide to the Market Monitoring Unit and the Office of the Interconnection its request to receive Operating Reserve Credits and/or to be made whole for such operation, along with documentation explaining in detail the reasons for operating its resource outside of its unit-specific parameters, within thirty calendar days following the issuance of billing statement for the Operating Day. The Market Seller shall also respond to additional requests for information from the Market Monitoring Unit and the Office of the Interconnection. The Market Monitoring Unit shall evaluate such request for compensation and provide its determination of whether there was an exercise of market power to the Office of the Interconnection by no later than twenty-five calendar days after receiving the Market Seller's request for compensation. The Office of the Interconnection shall make its determination whether the Market Seller justified that it is entitled to receive Operating Reserve Credits and/or be made whole for such operation of its resource for the day(s) in question, by no later than thirty calendar days after receiving the Market Seller's request for compensation.

Nuclear generation resources shall not be eligible for Operating Reserve payments unless: 1) the Office of the Interconnection directs such resources to reduce output, in which case, such units shall be compensated in accordance with Tariff, Attachment K-Appendix, section 3.2.3(f) and the parallel provision of Operating Agreement, Schedule 1, section 3.2.3(f); or 2) the resource submits a request for a risk premium to the Market Monitoring Unit under the procedures specified in Tariff, Attachment M – Appendix, section II.B. A nuclear generation resource (i) must submit a risk premium consistent with its agreement under such process, or, (ii) if it has not agreed with the Market Monitoring Unit on an appropriate risk premium, may submit its own determination of an appropriate risk premium to the Office of the Interconnection, subject to acceptance by the Office of the Interconnection, with or without prior approval from the Commission.

Credits received pursuant to this section shall be equal to the positive difference between a resource's Total Operating Reserve Offer, and the total value of the resource's energy in the Day-ahead Energy Market plus any credit or change for quantity deviations, at PJM dispatch

direction (excluding quantity deviations caused by an increase in the Market Seller's Real-time Offer), from the Day-ahead Energy Market during the Operating Day at the real-time LMP(s) applicable to the relevant generation bus in the Real-time Energy Market. The foregoing notwithstanding, credits for Segment 2 shall exclude start up (shutdown costs for Economic Load Response Participant resources) costs for generation resources.

Except as provided in section 3.2.3(m), if the total offered price exceeds the total value, the difference less any credit as determined pursuant to section 3.2.3(b), and less the absolute value of any negative Synchronized Reserve lost opportunity cost credit, as determined in section 3.2.3A(f)(iv) below, and less the absolute value of any negative Non-Synchronized Reserve lost opportunity cost credit determined in section 3.2.3.A.001(d)(iii) below, and less any amounts credited for providing Reactive Services as specified in section 3.2.3B, and the absolute value of any negative Secondary Reserve lost opportunity cost credit, as determined in section 3.2.3A.01(f)(iv) below, and plus the sum of the Market Revenue Neutrality Offsets for Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve, shall be credited to the Market Seller.

Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve credits applied against Operating Reserve credits pursuant to this section shall be netted against the Operating Reserve credits earned in the corresponding Real-time Settlement Interval(s) in which the Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve credits accrued, provided that for condensing combustion turbines, Synchronized Reserve credits will be netted against the total Operating Reserve credits accrued during each Real-time Settlement Interval the unit operates in condensing and generation mode.

(f) A Market Seller of a unit not defined in subsection (f-1), (f-2), or (f-4) hereof (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3(c) hereof), the output of which is reduced or suspended at the request of the Office of the Interconnection due to a transmission constraint or other reliability issue, and for which the real-time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall be credited for each Real-time Settlement Interval in an amount equal to the product of (A) the LOC Deviation times (B) the Locational Marginal Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A * B) - C$. If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.11.6, where the suspension is greater than twenty-four (24) consecutive hours, resources will not be compensated for lost opportunity costs.

(f-1) With the exception of Market Sellers of Flexible Resources that submit a Real-time Offer greater than their resource's Committed Offer in the Day-ahead Energy Market, a Market Seller of a Flexible Resource shall be compensated for lost opportunity cost, and shall be limited to the lesser of the unit's Economic Maximum or the unit's Generation Resource Maximum Output, if either of the following conditions occur:

- (i) if the unit output is reduced at the direction of the Office of the Interconnection and the real time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as directed by the PJM dispatcher), then the Market Seller shall be credited in a manner consistent with that described in section 3.2.3(f).
- (ii) If the unit is scheduled to produce energy in the Day-ahead Energy Market for a Day-ahead Settlement Interval, but the unit is not called on by the Office of the Interconnection and does not operate in the corresponding Real-time Settlement Interval(s), then the Market Seller shall be credited in an amount equal to the higher of:
 - 1) the product of (A) the amount of megawatts committed in the Day-ahead Energy Market for the generating unit, and (B) the Real-time Price at the generation bus for the generating unit, minus the sum of (C) the Total Lost Opportunity Cost Offer plus No-load Costs, plus (D) the Start-up Cost, divided by the Real-time Settlement Intervals committed for each set of contiguous hours for which the unit was scheduled in Day-ahead Energy Market. This equation is represented as $(A*B) - (C+D)$. The startup cost, (D), shall be excluded from this calculation if the unit operates in real time following the Office of the Interconnection's direction during any portion of the set of contiguous hours for which the unit was scheduled in Day-ahead Energy Market, or
 - 2) the Real-time Price at the unit's bus minus the Day-ahead Price at the unit's bus, multiplied by the number of megawatts committed in the Day-ahead Energy Market for the generating unit.

(f-2) A Market Seller of a hydroelectric resource that is pool-scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3(c) hereof), the output of which is altered at the request of the Office of the Interconnection from the schedule submitted by the owner, due to a transmission constraint or other reliability issue, shall be compensated for lost opportunity cost in the same manner as provided in sections 3.2.2(d) and 3.2.3A(f) and further detailed in the PJM Manuals.

(f-3) If a Market Seller believes that, due to specific pre-existing binding commitments to which it is a party, and that properly should be recognized for purposes of this section, the above calculations do not accurately compensate the Market Seller for opportunity cost associated with following PJM dispatch instructions and reducing or suspending a unit's output due to a transmission constraint or other reliability issue, then the Office of the Interconnection, the Market Monitoring Unit and the individual Market Seller will discuss a mutually acceptable, modified amount of opportunity cost compensation, taking into account the specific circumstances binding on the Market Seller. Following such discussion, if the Office of the

Interconnection accepts a modified amount of opportunity cost compensation, the Office of the Interconnection shall invoice the Market Seller accordingly. If the Market Monitoring Unit disagrees with the modified amount of opportunity cost compensation, as accepted by the Office of the Interconnection, it will exercise its powers to inform the Commission staff of its concerns.

(f-4) A Market Seller of a wind generating unit that is pool-scheduled or self-scheduled, has SCADA capability to transmit and receive instructions from the Office of the Interconnection, has provided data and established processes to follow PJM basepoints pursuant to the requirements for wind generating units as further detailed in this Agreement, the Tariff and the PJM Manuals, and which is operating as requested by the Office of the Interconnection, the output of which is reduced or suspended at the request of the Office of the Interconnection due to a transmission constraint or other reliability issue, and for which the , real-time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall be credited for each Real-time Settlement Interval in an amount equal to the product of (A) the LOC Deviation times (B) the Real-time Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A*B) - C$.

(f-5) (i) A Market Seller of a pool-scheduled resource or a dispatchable self-scheduled resource shall receive Dispatch Differential Lost Opportunity Cost credits as calculated under subsection (iv) below if the resource is dispatched to provide energy in the Real-time Energy Market, provided such resource is not committed to provide real-time ancillary services (Regulation, reserves, reactive service) or instructed to reduce or suspend output due to a transmission constraint or other reliability issue pursuant to Operating Agreement, Schedule 1, section 3.2.3(f-1) through Operating Agreement, Schedule 1, section (f-4).

(ii) PJM will calculate the revenue above cost for the pricing run for each Real-time Settlement Interval in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = the resource's expected output level based on its resource parameters at the Real-time Price at the applicable pricing point;

B = the Real-time Price at the applicable pricing point; and

C = the sum of the resource's Real-time Energy Market offer integrated under the Final Offer for the resource's expected output level based on its resource parameters at the Real-time Price at the applicable pricing point.

(iii) PJM will calculate the revenue above cost for the dispatch run for each Real-time Settlement Interval in accordance with the following equation:

(greater of A and B) – (lesser of C and D)

Where:

A = the product of the amount of megawatts of energy dispatched in the Real-time Energy Market dispatch run for the resource in that Real-time Settlement Interval and the Real-time Price at the applicable pricing point;

B = the product of the amount of megawatts of energy the resource actually provided in that Real-time Settlement Interval and the Real-time Price at the applicable pricing point;

C = the resource's Real-time Energy Market offer integrated under the Final Offer for the amount of megawatts dispatched in the Real-time Energy Market dispatch run;

D = the resource's Real-time Energy Market offer integrated under the Final Offer for the amount of megawatts the resource actually provided in that Real-time Settlement Interval.

(iv) The Dispatch Differential Lost Opportunity Cost credit shall equal the greater of (A) the difference between the revenue above cost based on the pricing run determined in subsection (f-5)(ii) and the revenue above cost based on the dispatch run determined in subsection (f-5)(iii) or (B) zero.

(v) For each hour in an Operating Day, the total cost of the Dispatch Differential Lost Opportunity Cost credits shall be allocated and charged to each Market Participant in proportion to the sum of its (i) deliveries of energy to load ((a) net of operating Behind The Meter Generation, but not to be less than zero; and (b) excluding Direct Charging Energy) in the PJM Region, served under Network Transmission Service, in megawatt-hours; and (ii) deliveries of energy sales from within the PJM Region to load outside such region in megawatt-hours but not including its bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Operating Agreement, Schedule 1, section 1.12, as compared to the sum of all such deliveries for all Market Participants.

(g) The sum of the foregoing credits in Operating Agreement, Schedule 1, section 3.2.3(f-1) through Operating Agreement, Schedule 1, section 3.2.3(f-4), plus any cancellation fees paid in accordance with Operating Agreement, Schedule 1, section 1.10.2(d), such cancellation fees to be applied to the Operating Day for which the unit was scheduled, plus any shortfalls paid pursuant to the Market Settlement provision of the real-time Economic Load Response Program, less any payments received from another Control Area for Operating Reserves shall be the cost of Operating Reserves for the Real-time Energy Market in each Operating Day.

(h) The cost of Operating Reserves for the Real-time Energy Market for each Operating Day, except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, shall be allocated and charged to each Market Participant based on their daily total of hourly deviations determined in accordance with the following equation:

$$\sum_h (A + B + C)$$

Where:

h = the hours in the applicable Operating Day;

A = For each Real-time Settlement Interval in an hour, the sum of the absolute value of the withdrawal deviations (in MW) between the quantities scheduled in the Day-ahead Energy Market and the Market Participant's energy withdrawals (net of operating Behind The Meter Generation) in the Real-time Energy Market, except as noted in subsection (h)(ii) below and in the PJM Manuals divided by the number of Real-time Settlement Intervals for that hour. The summation of each Real-time Settlement Interval's withdrawal deviation in an hour will be the Market Participant's total hourly withdrawal deviations. Market Participant bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Operating Agreement, Schedule 1, section 1.12 are not included in the determination of withdrawal deviations;

B = For each Real-time Settlement Interval in an hour, the sum of the absolute value of generation deviations (in MW and not including deviations in Behind The Meter Generation) as determined in subsection (o) divided by the number of Real-time Settlement Intervals for that hour;

C = For each Real-time Settlement Interval in an hour, the sum of the absolute value of the injection deviations (in MW) between the quantities scheduled in the Day-ahead Energy Market and the Market Participant's energy injections in the Real-time Energy Market divided by the number of Real-time Settlement Intervals for that hour. The summation of the injection deviations for each Real-time Settlement Interval in an hour will be the Market Participant's total hourly injection deviations. The determination of injection deviations does not include generation resources.

The Revenue Data for Settlements determined for each Real-time Settlement Interval in accordance with Operating Agreement, Schedule 1, section 3.1A shall be used in determining the real-time withdrawal deviations, generation deviations and injection deviations used to calculate Operating Reserve under this subsection (e).

The costs associated with scheduling of units for Black Start service or testing of Black Start Units shall be allocated by ratio share of the monthly transmission use of each Network Customer or Transmission Customer serving Zone Load or Non-Zone Load, as determined in accordance with the formulas contained in Tariff, Schedule 6A.

Notwithstanding section (h)(1) above, as more fully set forth in the PJM Manuals, load deviations from the Day-ahead Energy Market shall not be assessed Operating Reserves charges to the extent attributable to reductions in the load of Price Responsive Demand that is in response to an increase in Locational Marginal Price from the Day-ahead Energy Market to the Real-time Energy Market and that is in accordance with a properly submitted PRD Curve.

Deviations that occur within a single Zone shall be associated with the Eastern or Western Region, as defined in section 3.2.3(q) below, and shall be subject to the regional balancing Operating Reserve rate determined in accordance with Section 3.2.3(q). Deviations at a hub shall be associated with the Eastern or Western Region if all the buses that define the hub are located in the region. Deviations at an Interface Pricing Point shall be associated with whichever region, the Eastern or Western Region, with which the majority of the buses that define that Interface Pricing Point are most closely electrically associated. If deviations at interfaces and hubs are associated with the Eastern or Western region, they shall be subject to the regional balancing Operating Reserve rate. Demand and supply deviations shall be based on total activity in a Zone, including all aggregates and hubs defined by buses that are wholly contained within the same Zone.

The foregoing notwithstanding, netting deviations shall be allowed for each Real-time Settlement Interval in accordance with the following provisions:

(i) Generation resources with multiple units located at a single bus shall be able to offset deviations in accordance with the PJM Manuals to determine the net deviation MW at the relevant bus.

(ii) Demand deviations will be assessed by comparing all day-ahead demand transactions, which include the components referenced in section 3.2.3(d) regarding the cost of Operating Reserves in the Day-ahead Energy Market, at a single transmission zone, hub, or interface against the real-time demand transactions at that same transmission zone, hub, or interface; except that the positive values of demand deviations, as set forth in the PJM Manuals, will not be assessed Operating Reserve charges in the event of a Primary Reserve or Synchronized Reserve shortage in real-time or where PJM initiates the request for emergency load reductions in real-time in order to avoid a Primary Reserve or Synchronized Reserve shortage.

(iii) Supply deviations will be assessed by comparing all day-ahead transactions at a single transmission zone, hub, or interface against the real-time transactions at that same transmission zone, hub, or interface.

(iv) Bilateral transactions inside the PJM Region, as defined in Operating Agreement, Schedule 1, section 1.7.10, will not be included in the determination of Supply or Demand deviations.

(i) At the end of each Operating Day, Market Sellers shall be credited on the basis of their offered prices for synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, as well as the credits calculated as specified

in Section 3.2.3(b) for those generators committed solely for the purpose of providing synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, at the request of the Office of the Interconnection.

(j) The sum of the foregoing credits as specified in section 3.2.3(i) shall be the cost of Operating Reserves for synchronous condensing for the PJM Region for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, or in association with post-contingency operation for the Operating Day and shall be separately determined for the PJM Region.

(k) The cost of Operating Reserves for synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, or in association with post-contingency operation for each Operating Day shall be allocated and charged to each Market Participant in proportion to the sum of its (i) deliveries of energy to load (net of operating Behind The Meter Generation, but not to be less than zero) in the PJM Region, served under Network Transmission Service, in megawatt-hours during that Operating Day; and (ii) deliveries of energy sales from within the PJM Region to load outside such region in megawatt-hours during that Operating Day, but not including its bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Operating Agreement, Schedule 1, section 1.12, as compared to the sum of all such deliveries for all Market Participants.

(l) For any Operating Day in either, as applicable, the Day-ahead Energy Market or the Real-time Energy Market for which, for all or any part of such Operating Day, the Office of the Interconnection: (i) declares a Maximum Generation Emergency; (ii) issues an alert that a Maximum Generation Emergency may be declared (“Maximum Generation Emergency Alert”); or (iii) schedules units based on the anticipation of a Maximum Generation Emergency or a Maximum Generation Emergency Alert, the Operating Reserves credit otherwise provided by section 3.2.3.(b) or section 3.2.3(e) in connection with market-based offers shall be limited as provided in subsections (n) or (m), respectively. The Office of the Interconnection shall provide timely notice on its internet site of the commencement and termination of any of the actions described in subsection (i), (ii), or (iii) of this subsection (l) (collectively referred to as “MaxGen Conditions”). Following the posting of notice of the commencement of a MaxGen Condition, a Market Seller may elect to submit a cost-based offer in accordance with Operating Agreement, Schedule 2, in which case subsections (m) and (n) shall not apply to such offer; provided, however, that such offer must be submitted in accordance with the deadlines in Operating Agreement, Schedule 1, section 1.10 for the submission of offers in the Day-ahead Energy Market or Real-time Energy Market, as applicable. Submission of a cost-based offer under such conditions shall not be precluded by Operating Agreement, Schedule 1, section 1.9.7(b); provided, however, that the Market Seller must return to compliance with Operating Agreement, Schedule 1, section 1.9.7(b) when it submits its bid for the first Operating Day after termination of the MaxGen Condition.

(m) For the Real-time Energy Market, if the Effective Offer Price (as defined below) for a market-based offer is greater than \$1,000/MWh and greater than the Market Seller’s lowest available and applicable cost-based offer, the Market Seller shall not receive any credit for Operating Reserves. For purposes of this subsection (m), the Effective Offer Price shall be the

amount that, absent subsections (l) and (m), would have been credited for Operating Reserves for such Operating Day pursuant to section 3.2.3(e) plus the Real-time Energy Market revenues for the Real-time Settlement Intervals that the offer is economic divided by the megawatt hours of energy provided during the Real-time Settlement Intervals that the offer is economic. The Real-time Settlement Intervals that the offer is economic shall be: (i) the Real-time Settlement Intervals that the offer price for energy is less than or equal to the Real-time Price for the relevant generation bus, (ii) the Real-time Settlement Intervals in which the offer for energy is greater than Locational Marginal Price and the unit is operated at the direction of the Office of the Interconnection that are in addition to any Real-time Settlement Intervals required due to the minimum run time or other operating constraint of the unit, and (iii) for any unit with a minimum run time of one hour or less and with more than one start available per day, any hours the unit operated at the direction of the Office of the Interconnection.

(n) For the Day-ahead Energy Market, if notice of a MaxGen Condition is provided prior to 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled and the Effective Offer Price for a market-based offer is greater than \$1,000/MWh and greater than the Market Seller's lowest available and applicable cost-based offer, the Market Seller shall not receive any credit for Operating Reserves. If notice of a MaxGen Condition is provided after 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled and the Effective Offer Price is greater than \$1,000/MWh, the Market Seller shall receive credit for Operating Reserves determined in accordance with section 3.2.3(b), subject to the limit on total compensation stated below. If the Effective Offer Price is less than or equal to \$1,000/MWh, regardless of when notice of a MaxGen Condition is provided, the Market Seller shall receive credit for Operating Reserves determined in accordance with section 3.2.3(b), subject to the limit on total compensation stated below. For purposes of this subsection (n), the Effective Offer Price shall be the amount that, absent subsections (l) and (n), would have been credited for Operating Reserves for such Operating Day divided by the megawatt hours of energy offered during the Specified Hours, plus the offer for energy during such hours. The Specified Hours shall be the lesser of: (1) the minimum run hours stated by the Market Seller in its Offer Data; and (2) either (i) for steam-electric generating units and for combined-cycle units when such units are operating in combined-cycle mode, the six consecutive hours of highest Day-ahead Price during such Operating Day when such units are running or (ii) for combustion turbine units and for combined-cycle units when such units are operating in combustion turbine mode, the two consecutive hours of highest Day-ahead Price during such Operating Day when such units are running. Notwithstanding any other provision in this subsection, the total compensation to a Market Seller on any Operating Day that includes a MaxGen Condition shall not exceed \$1,000/MWh during the Specified Hours, where such total compensation in each such hour is defined as the amount that, absent subsections (l) and (n), would have been credited for Operating Reserves for such Operating Day pursuant to section 3.2.3(b) divided by the Specified Hours, plus the Day-ahead Price for such hour, and no Operating Reserves payments shall be made for any other hour of such Operating Day. If a unit operates in real time at the direction of the Office of the Interconnection consistently with its day-ahead clearing, then subsection (m) does not apply.

(o) Dispatchable pool-scheduled generation resources and dispatchable self-scheduled generation resources that follow dispatch shall not be assessed balancing Operating

Reserve deviations. Pool-scheduled generation resources and dispatchable self-scheduled generation resources that do not follow dispatch shall be assessed balancing Operating Reserve deviations in accordance with the calculations described below and in the PJM Manuals.

The Office of the Interconnection shall calculate a ramp-limited desired MW value for generation resources where the economic minimum and economic maximum are at least as far apart in real-time as they are in day-ahead according to the following parameters:

- (i) real-time economic minimum \leq 105% of day-ahead economic minimum or day-ahead economic minimum plus 5 MW, whichever is greater.
- (ii) real-time economic maximum \geq 95% day-ahead economic maximum or day-ahead economic maximum minus 5 MW, whichever is lower.

The ramp-limited desired MW value for a generation resource shall be equal to:

$$Ramp_Request_t = (Dispatch_target_{t-1} - AOutput_{t-1}) / (LAtime_{t-1})$$

$$RL_Desired_t = AOutput_{t-1} + (Ramp_Request_t * Case_Eff_time_{t-1})$$

where:

1. Dispatchtarget = Dispatch Signal for the previous approved Dispatch case
2. AOutput = Unit's achievable target MW at case solution time as defined in the PJM Manuals
3. LAtime = Dispatch look ahead time
4. Case_Eff_time = Time between signal changes
5. RL_Desired = Ramp-limited desired MW

To determine if a generation resource is following dispatch the Office of the Interconnection shall determine the unit's MW off dispatch and % off dispatch by using the lesser of the difference between the actual output and the dispatch signal or the actual output and ramp-limited desired MW value for each Real-time Settlement Interval. If the dispatch signal and the ramp-limited desired MW for the resource are unavailable, the Office of the Interconnection will determine the unit's MW off dispatch and % off dispatch by calculating the lesser of the difference between the actual output and the dispatch LMP Desired MW for each Real-time Settlement Interval.

A pool-scheduled or dispatchable self-scheduled resource is considered to be following dispatch if its actual output is between its ramp-limited desired MW value and dispatch signal, or if its % off dispatch is \leq 10, or its Real-time Settlement Interval MWh is within 5% of the Real-time Settlement Interval ramp-limited desired MW. A self-scheduled generator must also be

dispatched above economic minimum. The degree of deviations for resources that are not following dispatch shall be determined for each Real-time Settlement Interval in accordance with the following provisions:

- A dispatchable self-scheduled resource that is not dispatched above economic minimum shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – Day-Ahead MWh.
- A resource that is dispatchable day-ahead but is Fixed Gen in real-time shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – dispatch LMP Desired MW.
- Pool-scheduled generators that are not following dispatch shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – Ramp-Limited Desired MW.
- If a resource's real-time economic minimum is greater than its day-ahead economic minimum by 5% or 5 MW, whichever is greater, or its real-time economic maximum is less than its Day Ahead economic maximum by 5% or 5 MW, whichever is lower, and dispatch LMP Desired MWh for the Real-time Settlement Interval is either below the real time economic minimum or above the real time economic maximum, then balancing Operating Reserve deviations for the resource shall be assessed according to the following formula: Real time Settlement Interval MWh – dispatch LMP Desired MWh.
- If a resource is not following dispatch and its % Off Dispatch is $\leq 20\%$, balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – Ramp-Limited Desired MW. If deviation value is within 5% of Ramp-Limited Desired MW, balancing Operating Reserve deviations shall not be assessed.
- If a resource is not following dispatch and its % off Dispatch is $> 20\%$, balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – dispatch LMP Desired MWh.
- If a resource is not following dispatch, and the resource has tripped, for the Real-time Settlement Interval the resource tripped and the Real-time Settlement Intervals it remains offline throughout its day-ahead schedule balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – Day-Ahead MWh.
- For resources that are not dispatchable in both the Day-Ahead and Real-time Energy Markets balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh - Day-ahead MWh.

If a resource has a sum of the absolute value of generator deviations for an hour that is less than 5 MWh, then the resource shall not be assessed balancing Operating Reserve deviations for that hour.

(o-1) Dispatchable economic load reduction resources that follow dispatch shall not be assessed balancing Operating Reserve deviations. Economic Load Response Participant resources that do not follow dispatch shall be assessed balancing Operating Reserve deviations as described in this subsection and as further specified in the PJM Manuals.

The Desired MW quantity for such resources for each hour shall be the hourly integrated MW quantity to which the load reduction resource was dispatched for each hour (where the hourly integrated value is the average of the dispatched values as determined by the Office of the Interconnection for the resource for each hour).

If the actual reduction quantity for the load reduction resource for a given hour deviates by no more than 20% above or below the Desired MW quantity, then no balancing Operating Reserve deviation will accrue for that hour. If the actual reduction quantity for the load reduction resource for a given hour is outside the 20% bandwidth, the balancing Operating Reserve deviations will accrue for that hour in the amount of the absolute value of (Desired MW – actual reduction quantity). For those hours where the actual reduction quantity is within the 20% bandwidth specified above, the load reduction resource will be eligible to be made whole for the total value of its offer as defined in Operating Agreement, Schedule 1, section 3.3A. Hours for which the actual reduction quantity is outside the 20% bandwidth will not be eligible for the make-whole payment. If at least one hour is not eligible for make-whole payment based on the 20% criteria, then the resource will also not be made whole for its shutdown cost.

(p) The Office of the Interconnection shall allocate the charges assessed pursuant to Operating Agreement, Schedule 1, section 3.2.3(h) except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, to real-time deviations from day-ahead schedules or real-time load share plus exports depending on whether the underlying balancing Operating Reserve credits are related to resources scheduled during the reliability analysis for an Operating Day, or during the actual Operating Day. If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, section 1.11.6, the Office of the Interconnection shall allocate the charges to the ratio share of real-time load plus export transactions.

(i) For resources scheduled by the Office of the Interconnection during the reliability analysis for an Operating Day, the associated balancing Operating Reserve charges shall be allocated based on the reason the resource was scheduled according to the following provisions:

(A) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to operate in real-time to augment the physical resources committed in the Day-ahead Energy Market to meet the forecasted real-time load plus the Operating Reserve

requirement, the associated balancing Operating Reserve charges shall be allocated to real-time deviations from day-ahead schedules.

(B) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to maintain system reliability, the associated balancing Operating Reserve charges shall be allocated according to ratio share of real time load plus export transactions.

(C) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource with a day-ahead schedule is required to deviate from that schedule to provide balancing Operating Reserves, the associated balancing Operating Reserve charges shall be allocated pursuant to (A) or (B) above.

(ii) For resources scheduled during an Operating Day, the associated balancing Operating Reserve charges shall be allocated according to the following provisions:

(A) If the Office of the Interconnection directs a resource to operate during an Operating Day to provide balancing Operating Reserves, the associated balancing Operating Reserve charges shall be allocated according to ratio share of load plus exports. The foregoing notwithstanding, charges will be assessed pursuant to this section only if the LMP at the resource's bus does not meet or exceeds the applicable offer of the resource for at least four-5-minute intervals during one or more discrete clock hours during each period the resource operated and produced MWs during the relevant Operating Day. If a resource operated and produced MWs for less than four 5-minute intervals during one or more discrete clock hours during the relevant Operating Day, the charges for that resource during the hour it was operated less than four 5-minute intervals will be identified as being in the same category as identified for the Operating Reserves for the other discrete clock hours.

(B) If the Office of the Interconnection directs a resource not covered by Operating Agreement, Schedule 1, section 3.2.3(h)(ii)(A) to operate in real-time during an Operating Day, the associated balancing Operating Reserve charges shall be allocated according to real-time deviations from day-ahead schedules.

(q) The Office of the Interconnection shall determine regional balancing Operating Reserve rates for the Western and Eastern Regions of the PJM Region. For the purposes of this section, the Western Region shall be the AEP, APS, ComEd, Duquesne, Dayton, ATSI, DEOK, EKPC, OVEC transmission Zones, and the Eastern Region shall be the AEC, BGE, Dominion, PENELEC, PEPSCO, ME, PPL, JCPL, PECO, DPL, PSEG, RE transmission Zones. The regional balancing Operating Reserve rates shall be determined in accordance with the following provisions:

(i) The Office of the Interconnection shall calculate regional adder rates for the Eastern and Western Regions. Regional adder rates shall be equal to the total balancing Operating Reserve credits paid to generators for transmission constraints that occur on transmission system capacity equal to or less than 345kv. The regional adder rates shall be separated into reliability and deviation charges, which shall be allocated to real-time load or real-time deviations, respectively. Whether the underlying credits are designated as reliability or deviation charges shall be determined in accordance with section 3.2.3(p).

(ii) The Office of the Interconnection shall calculate RTO balancing Operating Reserve rates. RTO balancing Operating Reserve rates shall be equal to balancing Operating Reserve credits except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, in excess of the regional adder rates calculated pursuant to Operating Agreement, Schedule 1, section 3.2.3(q)(i) of Schedule 1 of this Agreement. The RTO balancing Operating Reserve rates shall be separated into reliability and deviation charges, which shall be allocated to real-time load or real-time deviations, respectively. Whether the underlying credits are allocated as reliability or deviation charges shall be determined in accordance with section 3.2.3(p).

(iii) Reliability and deviation regional balancing Operating Reserve rates shall be determined by summing the relevant RTO balancing Operating Reserve rates and regional adder rates.

(iv) If the Eastern and/or Western Regions do not have regional adder rates, the relevant regional balancing Operating Reserve rate shall be the reliability and/or deviation RTO balancing Operating Reserve rate.

(r) Market Sellers that incur incremental operating costs for a generation resource that are either greater than \$1,000/MWh as determined in accordance with the Market Seller's PJM-approved Fuel Cost Policy, Operating Agreement, Schedule 2 and PJM Manual 15, but are not verified at the time of dispatch of the resource under section 6.4.3 of this Schedule, or greater than \$2,000/MWh as determined in accordance with the Market Seller's PJM-approved Fuel Cost Policy, Operating Agreement, Schedule 2, and PJM Manual 15, will be eligible to receive credit for Operating Reserves upon review of the Market Monitoring Unit and the Office of the Interconnection, and approval of the Office of the Interconnection. Market Sellers must submit to the Office of the Interconnection and the Market Monitoring Unit all relevant documentation demonstrating the calculation of costs greater than \$2,000/MWh, and costs greater than \$1,000/MWh which were not verified at the time of dispatch of the resource under Operating Agreement, Schedule 1, section 6.4.3. The Office of the Interconnection must approve any Operating Reserve credits paid to a Market Seller under this subsection (r).

3.2.3A Synchronized Reserve.

(a) Each Market Participant that is a Load Serving Entity that is not part of an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have an obligation for hourly Synchronized Reserve equal to its pro rata share of Synchronized Reserve requirements for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone or Reserve Sub-zone for the hour ("Synchronized Reserve Obligation"), less any amount obtained from condensers associated with provision of Reactive Services as described in section 3.2.3B(i) and any amount obtained from condensers associated with post-contingency operations, as described in section 3.2.3C(b). Those entities that participate in an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have their reserve obligations determined based on the stipulations in such agreement. A Market Participant's hourly Synchronized Reserve Obligation shall be adjusted by any Synchronized Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Synchronized Reserve Obligation shall be charged the pro rata share of the sum of day-ahead and real-time credits for Synchronized Reserve as defined in sections 3.2.3A(b)(i) and (ii) below.

(b) A resource supplying Synchronized Reserve at the direction of the Office of the Interconnection shall be credited as follows:

i) Credits for Synchronized Reserve provided by generation and Economic Load Response Participant resources assigned to provide Synchronized Reserve by the Office of the Interconnection or self-scheduled in the Day-ahead Synchronized Reserve Market shall be equal to the product of the Day-ahead Synchronized Reserve Market Clearing Price multiplied by the megawatt amount of Synchronized Reserve such resource is assigned to provide..

ii) Credits for Synchronized Reserve provided by generation resources and Economic Load Response Participant resources assigned to provide Synchronized Reserve by the Office of the Interconnection or self-scheduled in the Real-time Synchronized Reserve Market shall be determined for each operating hour based on the sum of their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Synchronized Reserve from that resource assigned by the Office of the Interconnection or self-scheduled in the Real-time Synchronized Reserve Market. The megawatt value is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval where there is not a Synchronized Reserve event;

B = For each Real-time Settlement Interval, the megawatts of Synchronized Reserve from that resource assigned by the Office of the Interconnection or self-scheduled in the Day-ahead Synchronized Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Synchronized Reserve Market Clearing Price.

If a Synchronized Reserve Event is initiated by the Office of the Interconnection and the Economic Load Response Participant resource reduced its load in response to the event, the resource shall be eligible to receive a credit for the fixed costs associated with achieving the load reduction, as specified in the PJM Manuals.

iii) Pool-scheduled resources shall be credited a Synchronized Reserve lost opportunity cost credit, where positive, as described in subsection (f)(iv) below.

(c) [Reserved for future use]

(d) Synchronized Reserve Market Clearing Prices

(i) For the Day-ahead Synchronized Reserve Market, the Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Synchronized Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for Synchronized Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Synchronized Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Synchronized Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Synchronized Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute and (B) the price of serving the next increment of demand for Primary Reserve and 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute, provided that the Synchronized Reserve Market Clearing Price shall be less than or equal to the sum of no more than two of the Reserve Penalty Factors for the Synchronized Reserve Requirement, the Primary Reserve Requirement, and the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Synchronized Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Synchronized Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Synchronized Reserve market quantities and prices as determined pursuant to

subsection (d)(ii) hereof.

(ii) For the Real-time Synchronized Reserve Market, the Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for Synchronized Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Synchronized Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Synchronized Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Synchronized Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute and (B) the price of serving the next increment of demand for Primary Reserve and 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute, provided that the Synchronized Reserve Market Clearing Price shall be less than or equal to the sum of no more than two of the Reserve Penalty Factors for the Synchronized Reserve Requirement, the Primary Reserve Requirement, and the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Synchronized Reserves, then the Synchronized Reserve Market Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Synchronized Reserves, then the Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Synchronized Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Synchronized Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Synchronized Reserve Market Clearing Prices exist, then the Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of

the Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, and the Office of the Interconnection is assigning Synchronized Reserves, the Office of the Interconnection will set the Synchronized Reserve Market Clearing Price to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period. Resources will be compensated for lost opportunity cost per subsection (f) hereof using the energy price as determined in Operating Agreement, Schedule 1, section 2.5.2.iii. The opportunity cost shall be zero for all resources self-scheduled to provide Synchronized Reserve, synchronous condensers and Economic Load Response Participant resources.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action as described in the PJM Manuals or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Synchronized Reserve Market Clearing Price shall be the sum of the Reserve Penalty Factors for the Primary Reserve Requirement, and the Synchronized Reserve Requirement for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the Synchronized Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended Synchronized Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Synchronized Reserve Penalty Factors are warranted for subsequent Delivery Year(s).

(e) (i) For determining the Synchronized Reserve Market Clearing Price in each hour of the Day-ahead Synchronized Reserve Market, the estimated resource-specific opportunity cost for a generation resource or Economic Load Response Participant resource shall be the difference between the Locational Marginal Price at the generation or Economic Load Response Participant resource bus and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) or offer price to reduce energy from the Economic Load Response Participant resource in the PJM Interchange Energy Market when the Locational Marginal Price at the generation or Economic Load Participant resource bus is greater than the offer price for energy from the generation resource or the offer price to reduce energy from the Economic Load Response Participant resource.

However, the opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve and for synchronous condensers and for Economic Load Response Participant resources that do not receive a day-ahead commitment to provide energy in the same operating hour in which such resource is committed to provide Synchronized Reserve.

(ii) For determining the Synchronized Reserve Market Clearing Price for each Real-time Settlement Interval in the Real-time Synchronized Reserve Market, the estimated unit-specific opportunity cost for a generation resource that is not a hydroelectric resource shall be the difference between the Locational Marginal Price at the generation bus for the generation resource and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) in the PJM Interchange Energy Market when the Locational Marginal Price at the generation bus is greater than the offer price for energy from the generation resource.

For hydroelectric resources, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the expected real-time Locational Marginal Price at that generation bus. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions, as defined in the PJM Manuals, and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the expected real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average day-ahead Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

The opportunity costs shall be zero for all resources self-scheduled to provide Synchronized Reserve, synchronous condensers and Economic Load Response Participant resources.

(f) (i) In determining the credit under subsection (b) to a generation resource, except a generation resource that is operating as a synchronous condenser, selected to provide Synchronized Reserve in the Day-ahead Synchronized Reserve Market, or an Economic Load Response Participant resource that is selected to provide Synchronized Reserve in the Day-ahead Synchronized Reserve Market for the same operating hour in which such resource receives a day-ahead commitment to provide energy, the opportunity cost of a resource shall be determined for each operating hour that the Office of the Interconnection requires a resource to provide Synchronized Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Day-ahead Locational Marginal Price at the generation bus of the generation resource or the applicable pricing point for the Economic Load Response Participant resource;

B = The deviation of the resource's energy output or load reduction necessary to supply a Day-ahead Synchronized Reserve assignment from the resource's energy expected output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load; and

C = The Day-ahead Energy market offer integrated under the applicable energy offer curve for the resource's energy output or load reduction necessary to provide a Day-ahead Synchronized Reserve Market assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load.

For a generation resource that is operating as a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [energy use for providing synchronous condensing multiplied by A] plus [the applicable condense start-up cost divided by the number of hours the resource is assigned Synchronized Reserve].

(ii) In determining the credit under subsection (b) to a generation resource, except a generation resource that is operating as a synchronous condenser, selected to provide Synchronized Reserve in the Real-time Synchronized Reserve Market in excess of the resource's Day-ahead Synchronized Reserve Market assignment and that actively follows the Office of the Interconnection's signals and instructions, the unit-specific opportunity cost of that generation resource shall be determined for each Real-time Settlement Interval that the Office of the Interconnection requires that generation resource to provide Synchronized Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Real-time Locational Marginal Price at the generation bus of the generation resource;

B = The deviation of the generation resource's output necessary to supply Synchronized Reserve in real-time, reduced by the amount of Synchronized Reserve the resource failed to respond during a Synchronized Reserve Event during the Operating Day, in excess of its Day-ahead Synchronized Reserve Market assignment and follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy; and

C = The energy offer integrated under the applicable energy offer curve for the generation resource's output necessary to supply Synchronized Reserve in real-

time from the lesser of the generation resource's output necessary to provide a Day-ahead Synchronized Reserve Market assignment or follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [additional energy use in excess of day-ahead energy use for providing synchronous condensing in real-time multiplied by A] plus [any applicable condense start-up costs due to additional condense start-ups in real-time in excess of day-ahead condense start-ups allocated to each Real-time Settlement Interval as described in PJM Manuals].

For hydroelectric resources, the unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the real-time Locational Marginal Price at that generation bus multiplied by the additional megawatts assigned to supply Synchronized Reserve in real-time in excess of its Day-ahead Synchronized Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average real-time Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating multiplied by the additional megawatts assigned to supply the hourly Synchronized Reserve in real-time in excess of its Day-ahead Synchronized Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

(iii) For each Real-time Settlement Interval, a Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in the resource's real-time reserve MW from a day-ahead market assignment in more than one market for that Real-time Settlement Interval, the total Market Revenue Neutrality Offset is allocated to the Synchronized Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Synchronized Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Synchronized Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Synchronized Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Synchronized Reserve assignment decreases due to the resource being self-scheduled to provide energy or Regulation;

(B) A resource reduces its flexibility in real-time such that the resource no longer qualifies to provide Synchronized Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time;

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above; or

(F) A resource increases its Synchronized Reserve offer price in the Real-time Synchronized Reserve Market from its offer price in the Day-ahead Synchronized Reserve Market.

(iv) A Synchronized Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(A + B + C + D) - (E + F + G + H)$$

Where:

A = day-ahead Synchronized Reserve offer price times the Synchronized Reserve MW assignment;

B = real-time Synchronized Reserve offer price times the Synchronized Reserve MW assigned in real-time in excess of the Synchronized Reserve MW assigned day-ahead, where the Synchronized Reserve MW assigned is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval where there is not a Synchronized Reserve event;

C = day-ahead opportunity cost as determined in subsection (f)(i) above;

D = real-time opportunity cost as determined in subsection (f)(ii) above;

E = day-ahead clearing price credits as determined in subsection (b)(i) above;

F = real-time clearing price credits as determined in subsection (b)(ii) above less any applicable charges for failure to respond to a Synchronized Reserve Event as determined in subsection (j) below;

G = the applicable Market Revenue Neutrality Offset as determined in subsection (f)(iii) above; and

H = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A(f)(iii) above if not eligible for Market Revenue Neutrality Offset.

(v) The opportunity costs for an Economic Load Response Participant resource assigned Synchronized Reserve in real-time or any resource self-scheduled for Synchronized Reserves shall be zero.

(g) [Reserved for future use]

(h) For each operating hour, the sum of the Synchronized Reserve lost opportunity cost credits credited in accordance with subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Synchronized Reserve Obligation in proportion to its real-time purchases of Synchronized Reserve in megawatt-hours during that hour.

(i) [Reserved for future use]

(j) In the event a generation resource or Economic Load Response Participant Resource that either has been assigned by the Office of the Interconnection or self-scheduled to provide Synchronized Reserve in real-time fails to provide the assigned or self-scheduled amount of Synchronized Reserve in response to a Synchronized Reserve Event, the resource will be charged at the Real-time Synchronized Reserve Market Clearing Price for the real-time Synchronized Reserve assignment, in excess of amount that actually responded for all Real-time Settlement Intervals the resource was assigned or self-scheduled Synchronized Reserve real-time, which is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements for the resource on the Operating Day during which the event occurred. The determination of the amount of Synchronized Reserve credited to a resource shall be on an individual resource basis, not on an aggregate basis.

The resource shall refund payments received for Synchronized Reserve it failed to provide. For purposes of determining the amount of the payments to be refunded by a Market Participant, the Office of the Interconnection shall calculate the shortfall of Synchronized Reserve on an individual resource basis unless the Market Participant had multiple resources that were assigned or self-scheduled to provide Synchronized Reserve, in which case the shortfall will be determined on an aggregate basis. For performance determined on an aggregate basis, the response of any resource that provided more Synchronized Reserve than it was assigned or self-scheduled to provide will be used to offset the performance of other resources that provided less Synchronized Reserve than they were assigned or self-scheduled to provide during a Synchronized Reserve Event, as calculated in the PJM Manuals. The determination of a Market Participant's aggregate response shall not be taken into consideration in the determination of the amount of Synchronized Reserve credited to each individual resource.

The amount refunded shall be determined by multiplying the retroactive penalty megawatts by the Real-time Synchronized Reserve Market Clearing Price for all intervals the resource was assigned or self-scheduled to provide Synchronized Reserve for a period of time immediately preceding the Synchronized Reserve Event equal to the lesser of the average number of days between Synchronized Reserve Events, or the number of days since the resource last failed to provide the amount of Synchronized Reserve it was assigned or self-scheduled to provide in response to a Synchronized Reserve Event. The retroactive penalty megawatts for each interval shall be the lesser of the amount of the shortfall of Synchronized Reserve, measured in megawatts, and the real-time Synchronized Reserve assignment for each interval, which is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements for the resource. The average number of days between Synchronized Reserve Events for purposes of this calculation shall be determined by an annual review of the twenty-four month period ending October 31 of the calendar year in which the review is performed, and shall be rounded down to a whole day value. The Office of the Interconnection shall report the results of its annual review to stakeholders by no later than December 31, and the average number of days between Synchronized Reserve Events shall be effective as of the following January 1. The refunded charges shall be allocated as credits to Market Participants based on its pro rata share of the Synchronized Reserve Obligation megawatts in the hour(s) of the Synchronized Reserve Event for the Reserve Sub-zone or Reserve Zone, except that Market Participants that incur a refund obligation and also have an applicable Synchronized Reserve Obligation during the hour(s) of the Synchronized Reserve Event shall not be included in the allocation of such refund credits. If the event spans multiple hours, the refund credits will be prorated hourly based on the duration of the event within each clock hour.

(k) The magnitude of response to a Synchronized Reserve Event by a generation resource or an Economic Load Response Participant resource, except for Batch Load Economic Load Response Participant resources covered by section 3.2.3A(1), is the difference between the generation resource's output or the Economic Load Response Participant resource's consumption at the start of the event and its output or consumption 10 minutes after the start of the event. In order to allow for small fluctuations and possible telemetry delays, generation resource output or Economic Load Response Participant resource consumption at the start of the event is defined as the lowest telemetered generator resource output or greatest Economic Load Response Participant resource consumption between one minute prior to and one minute following the start of the event. Similarly, a generation resource's output or an Economic Load Response Participant resource's consumption 10 minutes after the event is defined as the greatest generator resource output or lowest Economic Load Response Participant resource consumption achieved between 9 and 11 minutes after the start of the event. The response actually credited to a generation resource will be reduced by the amount the megawatt output of the generation resource falls below the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter. The response actually credited to an Economic Load Response Participant resource will be reduced by the amount the megawatt consumption of the Economic Load Response Participant resource exceeds the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter.

(l) The magnitude of response by a Batch Load Economic Load Response Participant resource that is at the stage in its production cycle when its energy consumption is less than the level of megawatts in its offer at the start of a Synchronized Reserve Event shall be the difference between (i) the Batch Load Economic Load Response Participant resource's consumption at the end of the Synchronized Reserve Event and (ii) the Batch Load Economic Load Response Participant resource's consumption during the minute within the ten minutes after the end of the Synchronized Reserve Event in which the Batch Load Economic Load Response Participant resource's consumption was highest and for which its consumption in all subsequent minutes within the ten minutes was not less than fifty percent of the consumption in such minute; provided that, the magnitude of the response shall be zero if, when the Synchronized Reserve Event commences, the scheduled off-cycle stage of the production cycle is greater than ten minutes. .

3.2.3A.001 Non-Synchronized Reserve.

(a) Each Market Participant that is a Load Serving Entity that is not part of an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have an obligation for hourly Non-Synchronized Reserve equal to its pro rata share of Non-Synchronized Reserve assigned for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone and Reserve Sub-zone for the hour ("Non-Synchronized Reserve Obligation"). Those entities that participate in an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have their reserve obligations determined based on the stipulations in such agreement. A Market Participant's hourly Non-Synchronized Reserve Obligation shall be adjusted by any Non-Synchronized Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Non-Synchronized Reserve Obligation shall be charged the pro rata share of the sum day-ahead and real-time credits for Non-Synchronized Reserve as defined in sections 3.2.3A.001(b)(i) and (ii) below.

(b) Resources assigned to provide Non-Synchronized Reserve at the direction of the Office of the Interconnection shall be credited as follows:

(i) Credits for Non-Synchronized Reserve provided by generation resources assigned to provide Non-Synchronized Reserve by the Office of the Interconnection in the Day-ahead Non-Synchronized Reserve Market shall be equal to the product of the Day-ahead Non-Synchronized Market Clearing Price multiplied by the megawatt amount of Non-Synchronized Reserve such resource is assigned to provide.

(ii) Credits for Non-Synchronized Reserve provided by generation resources assigned to provide Non-Synchronized Reserve by the Office of the Interconnection in the Real-time Non-Synchronized Reserve Market shall be determined for each operating hour based on the sum on their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Non-Synchronized Reserve from that resource assigned by the Office of the Interconnection in the Real-time Non-Synchronized Reserve Market;

B = For each Real-time Settlement Interval, the megawatts of Non-Synchronized Reserve from that resource assigned by the Office of the Interconnection in the Day-ahead Non-Synchronized Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Non-Synchronized Reserve Market Clearing Price.

(iii) Pool-scheduled generation resources assigned to provide Non-Synchronized Reserve in the Day-ahead Non-Synchronized Reserve Market shall be credited a Non-Synchronized Reserve lost opportunity cost credit, where positive, as determined in accordance with subsection (d)(iii) below, to recover any net monetary loss to the Market Seller of such resource associated with the purchase of Non-Synchronized Reserve in the Real-time Non-Synchronized Reserve Market as a result of following the dispatch direction of the Office of the Interconnection.

(c) Non-Synchronized Reserve Market Clearing Prices

(i) For the Day-ahead Non-Synchronized Reserve Market, the Non-Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Non-Synchronized Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for Primary Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Non-Synchronized Reserve offer prices and the applicable Operating Reserve Demand Curve for Non-Synchronized Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Primary Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute and (B) the price of serving the next increment of demand for 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute, provided that the Non-Synchronized Reserve Market Clearing Price shall be less than or equal to the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Non-Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Non-Synchronized Reserve Market

Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Non-Synchronized Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Non-Synchronized Reserve market quantities and prices as determined pursuant to subsection (c)(ii) hereof.

(ii) For the Real-time Non-Synchronized Reserve Market, the Non-Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for Primary Reserve in a Reserve Zone or Reserve Sub-zone determined by the interaction between a supply curve formed using Non-Synchronized Reserve offer prices and the applicable Operating Reserve Demand Curve for Non-Synchronized Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Primary Reserve for any other Reserve Zone or Reserve Subzone to which the next increment of demand for Primary Reserve can contribute and (B) the price of serving the next increment of demand for 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute, provided that the Non-Synchronized Reserve Market Clearing Price shall be less than or equal to the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Non-Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Non-Synchronized Reserves, then the Non-Synchronized Reserve Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Non-Synchronized Reserves, then the Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Non-Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Non-Synchronized Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Non-Synchronized Reserve

Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Non-Synchronized Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Non-Synchronized Reserve Market Clearing Prices exist, then the Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Non-Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, the Non-Synchronized Reserve Market Clearing Price will be set to zero dollars per megawatt-hour regardless of whether the Office of the Interconnection is assigning Non-Synchronized Reserves.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action as described in the PJM Manuals or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Non-Synchronized Reserve Market Clearing Price shall be the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the Primary Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended Primary Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Primary Reserve Penalty Factors are warranted for subsequent Delivery Year(s).

(d) (i) For determining the Non-Synchronized Reserve clearing price for each hour in the Day-ahead Non-Synchronized Reserve Market and for each Real-time Settlement Interval in the Real-time Non-Synchronized Reserve Market, including during a declaration of a Market Suspension, the unit-specific opportunity cost for a generation resource that is not providing energy because they are providing Non-Synchronized Reserves will be zero.

(ii) For each Real-time Settlement Interval, a total Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in real-time reserve MW from a day-ahead market assignment in more than one market for that Real-time Settlement Interval, the total Market Revenue Neutrality Offset is allocated to the Non-Synchronized Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Non-Synchronized Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all

reserve markets, not to exceed the resource's opportunity cost owed in the Non-Synchronized Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Non-Synchronized Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Non-Synchronized Reserve assignment decreases due to the resource being self-scheduled to provide energy, Synchronized Reserve, or Regulation;

(B) A resource reduces flexibility in real-time such that the resource no longer qualifies to provide Non-Synchronized Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time; or

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above.

(iii) A Non-Synchronized Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(\text{zero}) - (A + B + C + D)$$

Where:

A = day-ahead clearing price credits as determined in subsection (b)(i) above;

B = real-time clearing price credits as determined in subsection (b)(ii) above;

C = the applicable Market Revenue Neutrality Offset as determined in subsection (d)(ii) above; and

D = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A.001(d)(ii) above if not eligible for Market Revenue Neutrality Offset.

(e) [Reserved for future use]

(f) For each operating hour, the sum of the Non-Synchronized Reserve lost opportunity cost credits credited in subsection (b)(iii) above shall be allocated and charged to

each Market Participant that does not meet its hourly Non-Synchronized Reserve Obligation in proportion to its real-time purchases of Non-Synchronized Reserve in megawatt-hours during that hour.

(g) The magnitude of response to a Non-Synchronized Reserve Event by a generation resource is the difference between the generation resource's output at the start of the event and its output 10 minutes after the start of the event. In order to allow for small fluctuations and possible telemetry delays, generation resource output at the start of the event is defined as the lowest telemetered generator resource output between one minute prior to and one minute following the start of the event. Similarly, a generation resource's output 10 minutes after the start of the event is defined as the greatest generator resource output achieved between 9 and 11 minutes after the start of the event. The response actually credited to a generation resource will be reduced by the amount the megawatt output of the generation resource falls below the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter.

(h) In the event a generation resource that has been assigned by the Office of the Interconnection to provide Non-Synchronized Reserve fails to provide the assigned amount of Non-Synchronized Reserve in response to a Non-Synchronized Reserve Event, the resource will be credited for Non-Synchronized Reserve capacity in the amount that actually responded for the contiguous Real-time Settlement Interval the resource was assigned Non-Synchronized Reserve during which the event occurred.

3.2.3A.01 Secondary Reserve.

(a) Each Market Participant that is a Load Serving Entity shall have an obligation for hourly Secondary Reserve equal to its pro rata share of Secondary Reserve assigned for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone and Reserve Sub-zone for the hour ("Secondary Reserve Obligation"). A Market Participant's hourly Secondary Reserve Obligation shall be adjusted by any Secondary Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Secondary Reserve Obligation shall be charged the pro rata share of the sum of day-ahead and real-time credits for Secondary Reserve as defined in sections 3.2.3A.01(b)(i) and (ii) below.

(b) Resources assigned to provide Secondary Reserve at the direction of the Office of the Interconnection shall be credited as follows:

(i) Credits for Secondary Reserve provided by generation resources and Economic Load Response Participant resources assigned to provide Secondary Reserve by the Office of the Interconnection in the Day-ahead Secondary Reserve Market shall be equal to the product of the Day-ahead Secondary Reserve Market Clearing Price multiplied by the megawatt amount of Secondary Reserve such resource is scheduled to provide.

(ii) Credits for Secondary Reserve provided by generation resources and Economic Load Response Participant resources scheduled to provide Secondary Reserve by the Office of the Interconnection in the Real-time Secondary Reserve Market shall be determined for each operating hour based on the sum of their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Secondary Reserve from that resource assigned by the Office of the Interconnection in the Real-time Secondary Reserve Market. The megawatt value is capped at the lesser of the Economic Maximum or Secondary Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval minus the Real-time Synchronized Reserve assignment;

B = For each Real-time Settlement Interval, the megawatts of Secondary Reserve from that resource scheduled by the Office of the Interconnection in the Day-ahead Secondary Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Secondary Reserve Market Clearing Price.

(iii) Pool-scheduled resources and Economic Load Response Participant resources shall be credited a Secondary Reserve lost opportunity cost credit, where positive, as described in subsection (f)(iv) below.

(c) [Reserved for future use]

(d) Secondary Reserve Market Clearing Prices

(i) For the Day-ahead Secondary Reserve Market, the Secondary Reserve Market Clearing Price shall be determined for each Reserve Zone and, as applicable, Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Secondary Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for 30-minute Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Secondary Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Secondary Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus the price of serving the next increment of demand for 30-minute Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute, but the Secondary Reserve Market Clearing Price shall

not exceed the Reserve Penalty Factor for the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Secondary Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Secondary Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Secondary Reserve market quantities and prices as determined pursuant to subsection (d)(ii) hereof.

(ii) For the Real-time Secondary Reserve Market, the Secondary Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for 30-minute Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Secondary Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Secondary Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus the price of serving the next increment of demand for 30-minute Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute but the Secondary Reserve Market Clearing Price shall not exceed the Reserve Penalty Factor for the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Secondary Reserves, then the Secondary Reserve Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Secondary Reserves, then the Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Secondary Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating

Days, and there are cleared Day-ahead Secondary Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Secondary Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Secondary Reserve Market Clearing Prices exist, then the Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Secondary Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, and the Office of the Interconnection is assigning Secondary Reserves, the Secondary Reserve Market Clearing Price will be set to zero dollars per megawatt-hour. Resources will be compensated for lost opportunity cost per subsection (f) hereof using the energy price as determined in Operating Agreement, Schedule 1, section 2.5.2.iii.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Secondary Reserve Market Clearing Price for a given Reserve Zone or Sub-zone shall be the Reserve Penalty Factor for the 30-minute Reserve Requirements for that Reserve Zone or Reserve Sub-zone

(iii) The Reserve Penalty Factor for the 30-minute Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended 30-minute Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Reserve Penalty Factor for 30-minute Reserve are warranted for subsequent Delivery Year(s).

(e) (i) For determining the Secondary Reserve Market Clearing Price for each hour in the Day-ahead Secondary Reserve Market, the estimated resource-specific opportunity cost for a generation resource or Economic Load Response Participant resources shall be the difference between the Locational Marginal Price at the generation or Economic Load Response Participant resource bus and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) or offer price to reduce energy from the Economic Load Response Participant resource in the PJM Interchange Energy Market when the Locational Marginal Price at the Economic Load Response Participant resource bus is greater than the offer price for energy from the generation resource or the offer price to reduce energy from the Economic Load Response Participant resource.

However, opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve, and for synchronous condensers and for Economic Load Response Participant resources that do not receive a day-ahead commitment to provide

energy in the same operating hour in which such resource is committed to provide Secondary Reserve.

(ii) For determining the Secondary Reserve Market Clearing Price for each Real-time Settlement Interval in the Real-time Secondary Reserve Market, the estimated unit-specific opportunity cost for a generation resource that is not a hydroelectric resource shall be the difference between the Locational Marginal Price at the generation bus for the generation resource and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) in the PJM Interchange Energy Market when the Locational Marginal Price at the generation bus is greater than the offer price for energy from the generation resource.

For hydroelectric resources, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the expected real-time Locational Marginal Price at that generation bus. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the expected real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average day-ahead Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

However, the opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve, and for synchronous condensers and Economic Load Response Participant resources.

(f) (i) In determining the credit under subsection (b) to a generation resource, except a generation resource that is a synchronous condenser, selected to provide Secondary Reserve in the Day-ahead Secondary Reserve Market or an Economic Load Response Participant resource that is selected to provide Secondary Reserve in the Day-ahead Secondary Reserve Market in the same operating hour in which such resource receives a day-ahead commitment to provide energy, the opportunity cost of a resource shall be determined for each operating hour that the Office of the Interconnection requires a resource to provide Secondary Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Day-ahead Locational Marginal Price at the generation bus of the generation resource or the applicable pricing point for the Economic Load Response Participant resource;

B= The deviation of the resource's energy output or load reduction necessary to supply a Day-ahead Secondary Reserve assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load less any Day-ahead Synchronized Reserve Market assignment; and

C = The Day-ahead Energy Market offer integrated under the applicable energy offer curve for the resource's energy output or load reduction necessary to provide a Day-ahead Secondary Reserve Market assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load less any Day-ahead Synchronized Reserve Market assignment.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [energy use for providing synchronous condensing multiplied by A] plus [the applicable condense start-up cost divided by the number of hours the resource is assigned Secondary Reserve].

(ii) In determining the credit under subsection (b) to a generation resource, except a generation that is a synchronous condenser, selected to provide Secondary Reserve in the Real-time Secondary Reserve Market in excess of the resource's Day-ahead Secondary Reserve Market assignment and that actively follows the Office of the Interconnection's signals and instructions, the unit-specific opportunity cost of that generation resource shall be determined for each Real-time Settlement Interval that the Office of the Interconnection requires that generation resource to provide Secondary Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Real-time Locational Marginal Price at the generation bus of the generation resource;

B= The deviation of the generation resource's output necessary to supply Secondary Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment and follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy less any Real-time Synchronized Reserve Market assignment; and

C = The energy offer integrated under the applicable energy offer curve for the generation resource's output necessary to supply Secondary Reserve in real-time from the lesser of the generation resource's output necessary to provide a Day-ahead Secondary Reserve Market assignment or follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy less any Real-time Synchronized Reserve Market assignment.

For hydroelectric resources, the unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the real-time Locational Marginal Price at that generation bus multiplied by the additional megawatts assigned to supply Synchronized Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average real-time Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating multiplied by the additional megawatts assigned to supply Secondary Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: additional energy use in excess of day-ahead energy use for providing synchronous condensing in real-time multiplied by A plus [any applicable condense start-up costs due to additional condense start-ups in real-time in excess of day-ahead condense start-ups allocated to each Real-time Settlement Interval as described in PJM Manuals]. If the generation resource is operating as a synchronous condenser and also has a Real-time Synchronized Reserve assignment, resource's unit-specific opportunity cost in the Secondary Reserve Market shall be zero,

(iii) For each Real-time Settlement Interval, a total Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in real-time reserve MW from a day-ahead market assignment in more than one market for that real-time settlement interval, the total Market Revenue Neutrality Offset is allocated to the Secondary Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Secondary Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Secondary Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Secondary Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Secondary Reserve assignment decreases due to the resource being self-scheduled to provide energy, Synchronized Reserve, or Regulation;

(B) A resource reduces flexibility in real-time such that the resource no longer qualifies to provide Secondary Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time;

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above; or

(F) A resource that fails to come online and reach Economic Minimum output within 30 minutes as described in section 3.2.3A.01(h)(i) below.

(iv) A Secondary Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(A + B) - (C + D + E + F)$$

Where:

A = day-ahead opportunity cost as determined in subsection (f)(i) above;

B = real-time opportunity cost as determined in subsection (f)(ii) above;

C = day-ahead clearing price credits as determined in subsection (b)(i) above;

D = real-time clearing price credits as determined subsection (b)(ii) above;

E = the applicable Market Revenue Neutrality Offset as determined in subsection (f)(iii) above; and

F = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A.01(f)(iii) above if not eligible for Market Revenue Neutrality Offset.

(v) The opportunity costs for Economic Load Response Participant resources and generation resources not synchronized to the grid shall be zero, except that Economic Load Response Participant resources may have a day-ahead opportunity cost, as determined in subsection (f)(i) above.

(g) For each operating hour, the sum of the Secondary Reserve lost opportunity cost credits credited in accordance with subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Secondary Reserve Obligation in proportion to its real-time purchases of Secondary Reserve in megawatt-hours during that hour.

(h) (i) In the event an offline generation resource has been assigned by the Office of the Interconnection to provide Secondary Reserve in real-time and is subsequently dispatched by the Office of the Interconnection to supply energy during that Operating Day and the resource qualifies as a Secondary Reserve resource at the time it is dispatched to provide energy, the Office of the Interconnection will assess the resource's performance as follows:

For each generation resource that fails to come online and reach Economic Minimum output within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval and for all prior intervals in which the resource was assigned to provide Secondary Reserve in the Real-time Secondary Reserve Market starting at the later of (A) the last interval the resource was online or (B) the beginning of that Operating Day and continuing up to the interval the resource failed to come online. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time not being paid for the assigned MW.

(ii) In the event an Economic Load Response Participant resource has been assigned by the Office of the Interconnection to provide Secondary Reserve in real-time and is subsequently dispatched to supply the Secondary Reserve assignment as a load reduction, the Office of the Interconnection will assess the resource's performance as follows:

For the purposes of this subsection, a resource's starting MW usage shall be the greatest telemetered consumption between one minute prior to and one minute following the issuance of a dispatch instruction from the Office of the Interconnection, and a resource's ending MW usage shall be the lowest consumption between 29 and 31 minutes after the issuance of a dispatch instruction from the Office of the Interconnection.

For each Economic Load Response Participant resource that fails to reduce load by at least the Economic Minimum, where the measured response is the difference between the resource's starting MW usage and the resource's ending MW usage as described above, within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval, and for all prior intervals in which the resource was assigned to provide Secondary Reserve in

the Real-time Secondary Reserve Market between such non-performance event starting at the later of (A) the last interval the resource reduced load at the instruction of the Office of the Interconnection or (B) the beginning of that Operating Day, and for all subsequent intervals through the earlier of (C) the next interval in which the resource is dispatched to reduce load or (D) the end of the Operating Day. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time, refunding all payments due for Secondary Reserve during such period.

(iii) For Batch Load Economic Load Response Participant Resources, a second method of verification will be used for instances where a Secondary Reserve assignment dispatched as an energy load reduction is initiated and the resource is operating at the minimum consumption level of its duty cycle. In this case, the magnitude of the response will be measured as the difference between (A) the minimum of the resource's consumption between the minute before and the minute after the end of the last settlement interval the resource reduced load at the instruction of the Office of the Interconnection and (B) the maximum consumption within a ten (10) minute period following the end of the last settlement interval the resource reduced load provided that all subsequent minutes following that minute are no less than 50% of the consumption in that minute.

For each Batch Load Economic Load Response Participant Resource that fails to reduce load by at least the Economic Minimum, where the measured response is the difference between the resource's starting MW usage and the resource's ending MW usage as described in section (ii) above or the difference between (A) and (B) as described in section (iii) above, within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval, and for all prior intervals in which the resource was assigned to provide Secondary Reserve in either the Day-ahead or Real-time Secondary Reserve Markets between such non-performance event starting at the later of (A) the last interval the resource reduced load at the instruction of the Office of the Interconnection or (B) the beginning of that Operating Day, and for all subsequent intervals through the earlier of (C) the next interval in which the resource is dispatched to reduce load or (D) the end of the Operating Day. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time, refunding all payments due for Secondary Reserve during such period.

3.2.3A.02 Operating Reserve Demand Curves

The Office of the Interconnection shall establish Operating Reserve Demand Curves for clearing 30-minute Reserve, Primary Reserve, and Synchronized Reserve, for, as applicable, each Reserve Zone or Reserve Sub-zone to procure sufficient reserves to meet, as applicable, (a) 30-minute Reserve Requirement and Extended 30-minute Reserve Requirement; (b) Primary Reserve Requirement and Extended Primary Reserve Requirement; and (c) Synchronized Reserve Requirement and Extended Synchronized Reserve Requirement. The Operating Reserve Demand Curves established for each reserve type shall be used to commit such reserves in both the day-ahead and real-time reserve markets. The Operating Reserve Demand Curves

shall be determined in accordance with the applicable Reserve Penalty Factors and PJM Manuals.

3.2.3B Reactive Services.

(a) A Market Seller providing Reactive Services at the direction of the Office of the Interconnection shall be credited as specified below for the operation of its resource. These provisions are intended to provide payments to generating units when the LMP dispatch algorithms would not result in the dispatch needed for the required reactive service. LMP will be used to compensate generators that are subject to redispatch for reactive transfer limits.

(b) At the end of each Operating Day, where the active energy output of a Market Seller's resource is reduced or suspended at the request of the Office of the Interconnection for the purpose of maintaining reactive reliability within the PJM Region, the Market Seller shall be credited according to sections 3.2.3B(c) & 3.2.3B(d).

(c) A Market Seller providing Reactive Services from either a steam-electric generating unit or combined cycle unit operating in combined cycle mode, where such unit is pool-scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3 (c) hereof), and where the real time LMP at the unit's bus is higher than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override) shall be compensated for lost opportunity cost by receiving a credit for each Real-time Settlement Interval in an amount equal to the product of (A) the deviation of the generating unit's output necessary to follow the Office of the Interconnection's signals and the generating unit's expected output level if it had been dispatched in economic merit order, times (B) the Real-time Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A*B) - C$.

(d) A Market Seller providing Reactive Services from either a combustion turbine unit or combined cycle unit operating in simple cycle mode that is pool scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3 (c) hereof), operated as requested by the Office of the Interconnection, shall be compensated for lost opportunity cost for each Real-time Settlement Interval, limited to the lesser of the unit's Economic Maximum or the unit's Generation Resource Maximum Output, if the unit output is reduced at the direction of the Office of the Interconnection and the real time LMP at the unit's bus is higher than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection as directed by the PJM dispatcher, then the Market Seller shall be credited in a manner consistent with that described above in section 3.2.3B(c) for a steam unit or a combined cycle unit operating in combined cycle mode.

(e) At the end of each Operating Day, where the active energy output of a Market Seller's unit is increased at the request of the Office of the Interconnection for the purpose of maintaining reactive reliability within the PJM Region and the offered price of the energy is

above the real-time LMP at the unit's bus, the Market Seller shall be credited according to section 3.2.3B(f).

(f) A Market Seller providing Reactive Services from either a steam-electric generating unit, combined cycle unit or combustion turbine unit, where such unit is pool scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3 (c) hereof), and where the real time LMP at the unit's bus is lower than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall receive a credit in an amount equal to $\{(AG - LMPDMW) \times (UB - URTLMP)\}$ where:

AG equals the actual output of the unit;

LMPDMW equals the level of output for the unit determined according to the point on the scheduled offer curve on which the unit was operating corresponding to the real time LMP at the unit's bus and adjusted for any Regulation or Tier 2 Synchronized Reserve assignments;

UB equals the unit offer for that unit for which output is increased, determined according to the lesser of the Final Offer or Committed Offer;

URTLMP equals the real time LMP at the unit's bus; and

where $UB - URTLMP$ shall not be negative.

(g) A Market Seller providing Reactive Services from a hydroelectric resource where such resource is pool scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3 (c) hereof), and where the output of such resource is altered from the schedule submitted by the Market Seller for the purpose of maintaining reactive reliability at the request of the Office of the Interconnection, shall be compensated for lost opportunity cost in the same manner as provided in sections 3.2.2(d) and 3.2.3A(f) and further detailed in the PJM Manuals.

(h) If a Market Seller believes that, due to specific pre-existing binding commitments to which it is a party, and that properly should be recognized for purposes of this section, the above calculations do not accurately compensate the Market Seller for lost opportunity cost associated with following the Office of the Interconnection's dispatch instructions to reduce or suspend a unit's output for the purpose of maintaining reactive reliability, then the Office of the Interconnection, the Market Monitoring Unit and the individual Market Seller will discuss a mutually acceptable, modified amount of such alternate lost opportunity cost compensation, taking into account the specific circumstances binding on the Market Seller. Following such discussion, if the Office of the Interconnection accepts a modified amount of alternate lost opportunity cost compensation, the Office of the Interconnection shall invoice the Market Participant accordingly. If the Market Monitoring Unit disagrees with the modified amount of

alternate lost opportunity cost compensation, as accepted by the Office of the Interconnection, it will exercise its powers to inform the Commission staff of its concerns.

(i) The amount of Synchronized Reserve provided by generating units maintaining reactive reliability shall be counted as Synchronized Reserve satisfying the overall PJM Synchronized Reserve requirements. Operators of these generating units shall be notified of such provision, and to the extent a generating unit's operator indicates that the generating unit is capable of providing Synchronized Reserve, shall be subject to the same requirements contained in section 3.2.3A regarding provision of Synchronized Reserve. At the end of each Operating Day, to the extent a condenser operated to provide Reactive Services also provided Synchronized Reserve, a Market Seller shall be credited for providing synchronous condensing for the purpose of maintaining reactive reliability at the request of the Office of the Interconnection, in an amount equal to the higher of (i) the Synchronized Reserve Market Clearing Price for each Real-time Settlement Interval a generating unit provided synchronous condensing multiplied by the amount of Synchronized reserve provided by the synchronous condenser or (ii) the sum of (A) the generating unit's cost to provide synchronous condensing, calculated in accordance with the PJM Manuals, (B) the product of MW energy usage for providing synchronous condensing multiplied by the real time LMP at the generating unit's bus, (C) the generating unit's startup-cost of providing synchronous condensing, and (D) the unit-specific lost opportunity cost of the generating resource supplying the increment of Synchronized Reserve as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals. To the extent a condenser operated to provide Reactive Services was not also providing Synchronized Reserve, the Market Seller shall be credited only for the generating unit's cost to condense, as described in (ii) above. The total Synchronized Reserve Obligations of all Load Serving Entities under section 3.2.3A(a) in the zone where these condensers are located shall be reduced by the amount counted as satisfying the PJM Synchronized Reserve requirements. The Synchronized Reserve Obligation of each Load Serving Entity in the zone under section 3.2.3A(a) shall be reduced to the same extent that the costs of such condensers counted as Synchronized Reserve are allocated to such Load Serving Entity pursuant to subsection (l) below.

(j) A Market Seller's pool scheduled steam-electric generating unit or combined cycle unit operating in combined cycle mode, that is not committed to operate in the Day-ahead Market, but that is directed by the Office of the Interconnection to operate solely for the purpose of maintaining reactive reliability, at the request of the Office of the Interconnection, shall be credited in the amount of the unit's offered price for start-up and no-load fees. The unit also shall receive, if applicable, compensation in accordance with Sections 3.2.3B(e)-(f).

(k) The sum of the foregoing credits as specified in Sections 3.2.3B(b)-(j) shall be the cost of Reactive Services for the purpose of maintaining reactive reliability for the Operating Day and shall be separately determined for each transmission zone in the PJM Region based on whether the resource was dispatched for the purpose of maintaining reactive reliability in such transmission zone.

(l) The cost of Reactive Services for the purpose of maintaining reactive reliability in a transmission zone in the PJM Region for each Operating Day shall be allocated and charged to

each Market Participant in proportion to its deliveries of energy to load (net of operating Behind The Meter Generation) in such transmission zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such transmission zone.

(m) Generating units receiving dispatch instructions from the Office of the Interconnection under the expectation of increased actual or reserve reactive shall inform the Office of the Interconnection dispatcher if the requested reactive capability is not achievable. Should the operator of a unit receiving such instructions realize at any time during which said instruction is effective that the unit is not, or likely would not be able to, provide the requested amount of reactive support, the operator shall as soon as practicable inform the Office of the Interconnection dispatcher of the unit's inability, or expected inability, to provide the required reactive support, so that the associated dispatch instruction may be cancelled. PJM Performance Compliance personnel will audit operations after-the-fact to determine whether a unit that has altered its active power output at the request of the Office of the Interconnection has provided the actual reactive support or the reactive reserve capability requested by the Office of the Interconnection. PJM shall utilize data including, but not limited to, historical reactive performance and stated reactive capability curves in order to make this determination, and may withhold such compensation as described above if reactive support as requested by the Office of the Interconnection was not or could not have been provided.

3.2.3C Synchronous Condensing for Post-Contingency Operation.

(a) Under normal circumstances, PJM operates generation out of merit order to control contingency overloads when the flow on the monitored element for loss of the contingent element ("contingency flow") exceeds the long-term emergency rating for that facility, typically a 4-hour or 2-hour rating. At times however, and under certain, specific system conditions, PJM does not operate generation out of merit order for certain contingency overloads until the contingency flow on the monitored element exceeds the 30-minute rating for that facility ("post-contingency operation"). In conjunction with such operation, when the contingency flow on such element exceeds the long-term emergency rating, PJM operates synchronous condensers in the areas affected by such constraints, to the extent they are available, to provide greater certainty that such resources will be capable of producing energy in sufficient time to reduce the flow on the monitored element below the normal rating should such contingency occur.

(b) The amount of Synchronized Reserve provided by synchronous condensers associated with post-contingency operation shall be counted as Synchronized Reserve satisfying the applicable Synchronized Reserve Requirements. Operators of these generation units shall be notified of such provision, and to the extent a generation unit's operator indicates that the generation unit is capable of providing Synchronized Reserve, shall be subject to the same requirements contained in section 3.2.3A regarding provision of Synchronized Reserve. At the end of each Operating Day, to the extent a condenser operated in conjunction with post-contingency operation also provided Synchronized Reserve, a Market Seller shall be credited for providing synchronous condensing in conjunction with post-contingency operation at the request of the Office of the Interconnection, in an amount equal to the higher of (i) the Real-time Synchronized Reserve Market Clearing Price for each applicable interval a generation resource

provided synchronous condensing multiplied by the amount of Synchronized Reserve provided by the synchronous condenser or (ii) the sum of (A) the generation resource's applicable interval cost to provide synchronous condensing, calculated in accordance with the PJM Manuals, (B) the applicable interval product of the megawatts of energy used to provide synchronous condensing multiplied by the real-time LMP at the generation bus of the generation resource, (C) the generation resource's start-up cost of providing synchronous condensing, and (D) the unit-specific lost opportunity cost of the generation resource supplying the increment of Synchronized Reserve as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals. To the extent a condenser operated in association with post-contingency constraint control was not also providing Synchronized Reserve, the Market Seller shall be credited only for the generation unit's cost to condense, as described in (ii) above. The total Synchronized Reserve Obligations of all Load Serving Entities under section 3.2.3A(a) in the zone where these condensers are located shall be reduced by the amount counted as satisfying the PJM Synchronized Reserve requirements. The Synchronized Reserve Obligation of each Load Serving Entity in the zone under section 3.2.3A(a) shall be reduced to the same extent that the costs of such condensers counted as Synchronized Reserve are allocated to such Load Serving Entity pursuant to subsection (d) below.

(c) The sum of the foregoing credits as specified in section 3.2.3C(b) shall be the cost of synchronous condensers associated with post-contingency operations for the Operating Day and shall be separately determined for each transmission zone in the PJM Region based on whether the resource was dispatched in association with post-contingency operation in such transmission zone.

(d) The cost of synchronous condensers associated with post-contingency operations in a transmission zone in the PJM Region for each Operating Day shall be allocated and charged to each Market Participant in proportion to its deliveries of energy to load (net of operating Behind The Meter Generation) in such transmission zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such transmission zone.

3.2.4 Transmission Congestion Charges.

Each Market Buyer shall be assessed Transmission Congestion Charges as specified in Operating Agreement, Schedule 1, section 5.

3.2.5 Transmission Loss Charges.

Each Market Buyer shall be assessed Transmission Loss Charges as specified in Operating Agreement, Schedule 1, section 5.

3.2.6 Emergency Energy.

(a) When the Office of the Interconnection has implemented Emergency procedures, resources offering Emergency energy are eligible to set real-time Locational Marginal Prices, capped at the energy offer cap plus the sum of the applicable Reserve Penalty Factors for the

Synchronized Reserve Requirement and Primary Reserve Requirement, provided that the Emergency energy is needed to meet demand in the PJM Region.

(b) Market Participants shall be allocated a proportionate share of the net cost of Emergency energy purchased by the Office of the Interconnection. Such allocated share during each applicable interval of such Emergency energy purchase shall be in proportion to the amount of each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Energy Market, whenever that deviation increases the Market Participant's spot market purchases or decreases its spot market sales. This deviation shall not include any reduction or suspension of output of pool scheduled resources requested by PJM to manage an Emergency within the PJM Region.

(c) Net revenues in excess of Real-time Prices attributable to sales of energy in connection with Emergencies to other Control Areas shall be credited to Market Participants during each applicable interval of such Emergency energy sale in proportion to the sum of (i) each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Energy Market, whenever that deviation increases the Market Participant's spot market purchases or decreases its spot market sales, and (ii) each Market Participant's energy sales from within the PJM Region to entities outside the PJM Region that have been curtailed by PJM.

(d) The net costs or net revenues associated with sales or purchases of energy in connection with a Minimum Generation Emergency in the PJM Region, or in another Control Area, shall be allocated during each applicable interval of such Emergency sale or purchase to each Market Participant in proportion to the amount of each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Market, whenever that deviation increases the Market Participant's spot market sales or decreases its spot market purchases.

3.2.7 Billing.

(a) PJMSettlement shall prepare a billing statement each billing cycle for each Market Participant in accordance with the charges and credits specified in Operating Agreement, Schedule 1, sections 3.2.1 through 3.2.6, and showing the net amount to be paid or received by the Market Participant. Billing statements shall provide sufficient detail, as specified in the PJM Manuals, to allow verification of the billing amounts and completion of the Market Participant's internal accounting.

(b) If deliveries to a Market Participant that has PJM Interchange meters in accordance with Operating Agreement, section 14 include amounts delivered for a Market Participant that does not have PJM Interchange meters separate from those of the metered Market Participant, PJMSettlement shall prepare a separate billing statement for the unmetered Market Participant based on the allocation of deliveries agreed upon between the Market Participant and the unmetered Market Participant specified by them to the Office of the Interconnection.

Attachment B

Revisions to the PJM Open Access Transmission Tariff and Operating Agreement

(Phase 1)

(Clean Format)

Definitions – R - S

Ramping Capability:

“Ramping Capability” shall mean the sustained rate of change of generator output, in megawatts per minute.

Real-time Congestion Price:

“Real-time Congestion Price” shall mean the Congestion Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Loss Price:

“Real-time Loss Price” shall mean the Loss Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Energy Market:

“Real-time Energy Market” shall mean the purchase or sale of energy and payment of Transmission Congestion Charges for quantity deviations from the Day-ahead Energy Market in the Operating Day.

Real-time Offer:

“Real-time Offer” shall mean a new offer or an update to a Market Seller’s existing cost-based or market-based offer for a clock hour, submitted for use after the close of the Day-ahead Energy Market.

Real-time Prices:

“Real-time Prices” shall mean the Locational Marginal Prices resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Settlement Interval:

“Real-time Settlement Interval” shall mean the interval used by settlements, which shall be every five minutes.

Real-time System Energy Price:

“Real-time System Energy Price” shall mean the System Energy Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Reasonable Efforts:

“Reasonable Efforts” shall mean, with respect to any action required to be made, attempted, or taken by an Interconnection Party or by a Construction Party under Tariff, Part IV or Part VI, an Interconnection Service Agreement, or a Construction Service Agreement, such efforts as are timely and consistent with Good Utility Practice and with efforts that such party would undertake for the protection of its own interests.

Receiving Party:

“Receiving Party” shall mean the entity receiving the capacity and energy transmitted by the Transmission Provider to Point(s) of Delivery.

Referral:

“Referral” shall mean a formal report of the Market Monitoring Unit to the Commission for investigation of behavior of a Market Participant, of behavior of PJM, or of a market design flaw, pursuant to Tariff, Attachment M, section IV.I.

Reference Resource:

“Reference Resource” shall mean a combustion turbine generating station, configured with a single General Electric Frame 7HA turbine with evaporative cooling, Selective Catalytic Reduction technology all CONE Areas, dual fuel capability, and a heat rate of 9.134 Mmbtu/MWh.

Regional Entity:

“Regional Entity” shall have the same meaning specified in the Operating Agreement.

Regional Network Integration Transmission Service:

“Regional Network Integration Transmission Service” shall mean firm transmission service taken by Network Customers that involves the delivery of energy and/or capacity from Network Resources physically interconnected to the Transmission Provider’s transmission system to Network Load physically interconnected to the Transmission Provider’s transmission system.

Regional Transmission Expansion Plan:

“Regional Transmission Expansion Plan” shall mean the plan prepared by the Office of the Interconnection pursuant to Operating Agreement, Schedule 6 for the enhancement and expansion of the Transmission System in order to meet the demands for firm transmission service in the PJM Region.

Regional Transmission Group (RTG):

“Regional Transmission Group” or “RTG” shall mean a voluntary organization of transmission owners, transmission users and other entities approved by the Commission to efficiently

coordinate transmission planning (and expansion), operation and use on a regional (and interregional) basis.

Regulation:

“Regulation” shall mean the capability of a specific generation resource or Demand Resource with appropriate telecommunications, control and response capability to separately increase and decrease its output or adjust load in response to a regulating control signal, in accordance with the specifications in the PJM Manuals.

Regulation Requirement:

“Regulation Requirement” shall mean the required megawatts of performance-adjusted Regulation capability to be maintained in a Regulation Zone. The Regulation Requirement is defined as a set megawatt value by commitment interval and can increase to account for additional operational uncertainty, in accordance with the PJM Manuals.

Regulation Zone:

“Regulation Zone” shall mean any of those one or more geographic areas, each consisting of a combination of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, regulation service.

Relevant Electric Retail Regulatory Authority:

“Relevant Electric Retail Regulatory Authority” shall mean an entity that has jurisdiction over and establishes prices and policies for competition for providers of retail electric service to end-customers, such as the city council for a municipal utility, the governing board of a cooperative utility, the state public utility commission or any other such entity.

Reliability Assurance Agreement or PJM Reliability Assurance Agreement:

“Reliability Assurance Agreement” or “PJM Reliability Assurance Agreement” shall mean that certain Reliability Assurance Agreement Among Load Serving Entities in the PJM Region, on file with FERC as PJM Interconnection L.L.C. Rate Schedule FERC No. 44, and as amended from time to time thereafter.

Reliability Pricing Model Auction:

“Reliability Pricing Model Auction” or “RPM Auction” shall mean the Base Residual Auction or any Incremental Auction, or, for the 2016/2017 and 2017/2018 Delivery Years, any Capacity Performance Transition Incremental Auction.

Required Transmission Enhancements:

“Regional Transmission Enhancements” shall mean enhancements and expansions of the Transmission System that (1) a Regional Transmission Expansion Plan developed pursuant to Operating Agreement, Schedule 6 or (2) any joint planning or coordination agreement between PJM and another region or transmission planning authority set forth in Tariff, Schedule 12-Appendix B (“Appendix B Agreement”) designates one or more of the Transmission Owner(s) to construct and own or finance. Required Transmission Enhancements shall also include enhancements and expansions of facilities in another region or planning authority that meet the definition of transmission facilities pursuant to FERC’s Uniform System of Accounts or have been classified as transmission facilities in a ruling by FERC addressing such facilities constructed pursuant to an Appendix B Agreement cost responsibility for which has been assigned at least in part to PJM pursuant to such Appendix B Agreement.

Reserved Capacity:

“Reserved Capacity” shall mean the maximum amount of capacity and energy that the Transmission Provider agrees to transmit for the Transmission Customer over the Transmission Provider’s Transmission System between the Point(s) of Receipt and the Point(s) of Delivery under Tariff, Part II. Reserved Capacity shall be expressed in terms of whole megawatts on a sixty (60) minute interval (commencing on the clock hour) basis.

Reserve Penalty Factor:

“Reserve Penalty Factor” shall mean the cost, in \$/MWh, associated with being unable to meet a specific reserve requirement in a Reserve Zone or Reserve Sub-zone. A Reserve Penalty Factor will be defined for each reserve requirement in a Reserve Zone or Reserve Sub-zone.

Reserve Sub-zone:

“Reserve Sub-zone” shall mean any of those geographic areas wholly contained within a Reserve Zone, consisting of a combination of a portion of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, reserve service.

Reserve Zone:

“Reserve Zone” shall mean any of those geographic areas consisting of a combination of one or more Control Zone(s), as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, reserve service.

Residual Auction Revenue Rights:

“Residual Auction Revenue Rights” shall mean incremental stage 1 Auction Revenue Rights created within a Planning Period by an increase in transmission system capability, including the return to service of existing transmission capability, that was not modeled pursuant to Operating Agreement, Schedule 1, section 7.5 and the parallel provisions of Tariff, Attachment K-Appendix, section 7.5 in compliance with Operating Agreement, Schedule 1, section 7.4.2 (h)

and the parallel provisions of Tariff, Attachment K-Appendix, section 7.4.2(h), and, if modeled, would have increased the amount of stage 1 Auction Revenue Rights allocated pursuant to Operating Agreement, Schedule 1, section 7.4.2 and the parallel provisions of Tariff, Attachment K-Appendix, section 7.4.2; provided that, the foregoing notwithstanding, Residual Auction Revenue Rights shall exclude: 1) Incremental Auction Revenue Rights allocated pursuant to Tariff, Part VI; and 2) Auction Revenue Rights allocated to entities that are assigned cost responsibility pursuant to Operating Agreement, Schedule 6 for transmission upgrades that create such rights.

Residual Metered Load:

“Residual Metered Load” shall mean all load remaining in an electric distribution company’s fully metered franchise area(s) or service territory(ies) after all nodally priced load of entities serving load in such area(s) or territory(ies) has been carved out.

Resource Substitution Charge:

“Resource Substitution Charge” shall mean a charge assessed on Capacity Market Buyers in an Incremental Auction to recover the cost of replacement Capacity Resources.

Revenue Data for Settlements:

“Revenue Data for Settlements” shall mean energy quantities used in accounting and billing as determined pursuant to Tariff, Attachment K-Appendix and the corresponding provisions of Operating Agreement, Schedule 1.

RPM Seller Credit:

“RPM Seller Credit” shall mean an additional form of Unsecured Credit defined in Tariff, Attachment Q, section IV.

Scheduled Incremental Auctions:

“Scheduled Incremental Auctions” shall refer to the First, Second, or Third Incremental Auction.

Schedule of Work:

“Schedule of Work” shall mean that schedule attached to the Interconnection Construction Service Agreement setting forth the timing of work to be performed by the Constructing Entity pursuant to the Interconnection Construction Service Agreement, based upon the Facilities Study and subject to modification, as required, in accordance with Transmission Provider’s scope change process for interconnection projects set forth in the PJM Manuals.

Scope of Work:

“Scope of Work” shall mean that scope of the work attached as a schedule to the Interconnection Construction Service Agreement and to be performed by the Constructing Entity(ies) pursuant to the Interconnection Construction Service Agreement, provided that such Scope of Work may be modified, as required, in accordance with Transmission Provider’s scope change process for interconnection projects set forth in the PJM Manuals.

Seasonal Capacity Performance Resource:

“Seasonal Capacity Performance Resource” shall have the same meaning specified in Tariff, Attachment DD, section 5.5A.

Secondary Reserve:

“Secondary Reserve” shall mean the reserve capability of generation resources that can be converted fully into energy or Economic Load Response Participant resources whose demand can be reduced within 30 minutes (less the capability of such resources to provide Primary Reserve), from the request of the Office of the Interconnection, regardless of whether the equipment providing the reserve is electrically synchronized to the Transmission System or not.

Secondary Systems:

“Secondary Systems” shall mean control or power circuits that operate below 600 volts, AC or DC, including, but not limited to, any hardware, control or protective devices, cables, conductors, electric raceways, secondary equipment panels, transducers, batteries, chargers, and voltage and current transformers.

Second Incremental Auction:

“Second Incremental Auction” shall mean an Incremental Auction conducted ten months before the Delivery Year to which it relates.

Security:

“Security” shall mean the security provided by the New Service Customer pursuant to Tariff, section 212.4 or Tariff, Part VI, section 213.4 to secure the New Service Customer’s responsibility for Costs under the Interconnection Service Agreement or Upgrade Construction Service Agreement and Tariff, Part VI, section 217.

Segment:

“Segment” shall have the same meaning as described in Operating Agreement, Schedule 1, section 3.2.3(e).

Self-Supply:

“Self-Supply” shall mean Capacity Resources secured by a Load-Serving Entity, by ownership or contract, outside a Reliability Pricing Model Auction, and used to meet obligations under this

Attachment or the Reliability Assurance Agreement through submission in a Base Residual Auction or an Incremental Auction of a Sell Offer indicating such Market Seller's intent that such Capacity Resource be Self-Supply. Self-Supply may be either committed regardless of clearing price or submitted as a Sell Offer with a price bid. A Load Serving Entity's Sell Offer with a price bid for an owned or contracted Capacity Resource shall not be deemed "Self-Supply," unless it is designated as Self-Supply and used by the LSE to meet obligations under this Attachment or the Reliability Assurance Agreement.

Self-Supply Entity:

"Self-Supply Entity" shall mean the following types of Load Serving Entity that operate under long-standing business models: single customer entity, public power entity, or vertically integrated utility, where "vertically integrated utility" means a utility that owns generation, includes such generation in its regulated rates, and earns a regulated return on its investment in such generation or receives any cost recovery for such generation through bilateral contracts; "single customer entity" means a Load Serving Entity that serves at retail only customers that are under common control with such Load Serving Entity, where such control means holding 51% or more of the voting securities or voting interests of the Load Serving Entity and all its retail customers; and "public power entity" means cooperative and municipal utilities, including public power supply entities comprised of either or both of the same and rural electric cooperatives, and joint action agencies.

Self-Supply Seller:

"Self-Supply Seller" shall mean, for purposes of evaluating Buyer-Side Market Power, the following types of Load Serving Entities that operate under long-standing business models: vertically integrated utility or public power entity, where "vertically integrated utility" means a utility that owns generation, includes such generation in its state-regulated rates, and earns a state-regulated return on its investment in such generation; and "public power entity" means electric cooperatives that are either rate regulated by the state or have their long-term resource plan approved or otherwise reviewed and accepted by a Relevant Electric Retail Regulatory Authority and municipal utilities or joint action agencies that are subject to direct regulation by a Relevant Electric Retail Regulatory Authority.

Sell Offer:

"Sell Offer" shall mean an offer to sell Capacity Resources in a Base Residual Auction, Incremental Auction, or Reliability Backstop Auction.

Service Agreement:

"Service Agreement" shall mean the initial agreement and any amendments or supplements thereto entered into by the Transmission Customer and the Transmission Provider for service under the Tariff.

Service Commencement Date:

“Service Commencement Date” shall mean the date the Transmission Provider begins to provide service pursuant to the terms of an executed Service Agreement, or the date the Transmission Provider begins to provide service in accordance with Tariff, Part II, section 15.3 or Tariff, Part III, section 29.1.

Short-Term Firm Point-To-Point Transmission Service:

“Short-Term Firm Point-To-Point Transmission Service” shall mean Firm Point-To-Point Transmission Service under Tariff, Part II with a term of less than one year.

Short-term Project:

“Short-term Project” shall have the same meaning provided in the Operating Agreement.

Short-Term Resource Procurement Target:

“Short-Term Resource Procurement Target” shall mean, for Delivery Years through May 31, 2018, as to the PJM Region, for purposes of the Base Residual Auction, 2.5% of the PJM Region Reliability Requirement determined for such Base Residual Auction, for purposes of the First Incremental Auction, 2% of the of the PJM Region Reliability Requirement as calculated at the time of the Base Residual Auction; and, for purposes of the Second Incremental Auction, 1.5% of the of the PJM Region Reliability Requirement as calculated at the time of the Base Residual Auction; and, as to any Zone, an allocation of the PJM Region Short-Term Resource Procurement Target based on the Preliminary Zonal Forecast Peak Load, reduced by the amount of load served under the FRR Alternative. For any LDA, the LDA Short-Term Resource Procurement Target shall be the sum of the Short-Term Resource Procurement Targets of all Zones in the LDA.

Short-Term Resource Procurement Target Applicable Share:

“Short-Term Resource Procurement Target Applicable Share” shall mean, for Delivery Years through May 31, 2018: (i) for the PJM Region, as to the First and Second Incremental Auctions, 0.2 times the Short-Term Resource Procurement Target used in the Base Residual Auction and, as to the Third Incremental Auction for the PJM Region, 0.6 times such target; and (ii) for an LDA, as to the First and Second Incremental Auctions, 0.2 times the Short-Term Resource Procurement Target used in the Base Residual Auction for such LDA and, as to the Third Incremental Auction, 0.6 times such target.

Site:

“Site” shall mean all of the real property, including but not limited to any leased real property and easements, on which the Customer Facility is situated and/or on which the Customer Interconnection Facilities are to be located.

Small Commercial Customer:

“Small Commercial Customer,” as used in RAA, Schedule 6 and Tariff, Attachment DD-1, shall mean a commercial retail electric end-use customer of an electric distribution company that participates in a mass market demand response program under the jurisdiction of a RERRA and satisfies the definition of a “small commercial customer” under the terms of the applicable RERRA’s program, provided that the customer has an annual peak demand no greater than 100kW.

Small Generation Resource:

“Small Generation Resource” shall mean an Interconnection Customer’s device of 20 MW or less for the production and/or storage for later injection of electricity identified in an Interconnection Request, but shall not include the Interconnection Customer’s Interconnection Facilities. This term shall include Energy Storage Resources and/or other devices for storage for later injection of energy.

Small Inverter Facility:

“Small Inverter Facility” shall mean an Energy Resource that is a certified small inverter-based facility no larger than 10 kW.

Small Inverter ISA:

“Small Inverter ISA” shall mean an agreement among Transmission Provider, Interconnection Customer, and Interconnected Transmission Owner regarding interconnection of a Small Inverter Facility under Tariff, Part IV, section 112B.

Special Member:

“Special Member” shall mean an entity that satisfies the requirements of Operating Agreement, Schedule 1, section 1.5A.02, and the parallel provisions of Tariff, Attachment K-Appendix, section 1.5A.02, or the special membership provisions established under the Emergency Load Response and Pre-Emergency Load Response Programs.

Spot Market Backup:

“Spot Market Backup” shall mean the purchase of energy from, or the delivery of energy to, the PJM Interchange Energy Market in quantities sufficient to complete the delivery or receipt obligations of a bilateral contract that has been curtailed or interrupted for any reason.

Spot Market Energy:

“Spot Market Energy” shall mean energy bought or sold by Market Participants through the PJM Interchange Energy Market at System Energy Prices determined as specified in Operating Agreement, Schedule 1, section 2, and the parallel provisions of Tariff, Attachment K-Appendix, section 2.

Start Additional Labor Costs:

“Start Additional Labor Costs” shall mean additional labor costs for startup required above normal station manning levels.

Start Fuel:

For units without a soak process, “Start Fuel” shall consist of fuel consumed from first fire of the start process to first breaker closing, plus any fuel expended from last breaker opening to shutdown.

For units with a soak process, “Start Fuel” is fuel consumed from first fire of the start process (initial reactor criticality for nuclear units) to dispatchable output (including auxiliary boiler fuel), plus any fuel expended from last breaker opening to shutdown, excluding normal plant heating/auxiliary equipment fuel requirements. Start Fuel included for each temperature state from breaker closure to dispatchable output shall not exceed the unit specific soak time period reviewed and approved as part of the unit-specific parameter process detailed in Tariff, Attachment K-Appendix, section 6.6(c) or the defaults below:

- Cold Soak Time = $0.73 * \text{unit specific Minimum Run Time (in hours)}$
- Intermediate Soak Time = $0.61 * \text{unit specific Minimum Run Time (in hours)}$
- Hot Soak Time = $0.43 * \text{unit specific Minimum Run Time (in hours)}$

Start-Up Costs:

“Start-Up Costs” shall consist primarily of the cost of fuel, as determined by the unit’s start heat input (adjusted by the performance factor) times the fuel cost. It also includes operating costs, Maintenance Adders, emissions allowances/adders, and station service cost. Start-Up Costs can vary with the unit offline time being categorized in three unit temperature conditions: hot, intermediate and cold.

For units with a steam turbine and a soak process (nuclear, steam, and combined cycle), “Start Fuel” is fuel consumed from first fire of start process (initial reactor criticality for nuclear units): Start-Up Costs shall mean the net unit costs from PJM’s notification to the level at which the unit can follow PJM’s dispatch, and from last breaker open to shutdown.

For units without a steam turbine and no soak process (engines, combustion turbines, Intermittent Resources, and Energy Storage Resources): Start-Up Costs shall mean the unit costs from PJM’s notification to first breaker close and from last breaker open to shutdown.

State:

“State” shall mean the District of Columbia and any State or Commonwealth of the United States.

State Commission:

“State Commission” shall mean any state regulatory agency having jurisdiction over retail electricity sales in any State in the PJM Region.

State Estimator:

“State Estimator” shall mean the computer model of power flows specified in Operating Agreement, Schedule 1, section 2.3 and the parallel provisions of Tariff, Attachment K-Appendix, section 2.3.

State Subsidy:

“State Subsidy” shall mean a direct or indirect payment, concession, rebate, subsidy, non-bypassable consumer charge, or other financial benefit that is as a result of any action, mandated process, or sponsored process of a state government, a political subdivision or agency of a state, or an electric cooperative formed pursuant to state law, and that

(1) is derived from or connected to the procurement of (a) electricity or electric generation capacity sold at wholesale in interstate commerce, or (b) an attribute of the generation process for electricity or electric generation capacity sold at wholesale in interstate commerce; or

(2) will support the construction, development, or operation of a new or existing Capacity Resource; or

(3) could have the effect of allowing the unit to clear in any PJM capacity auction.

Notwithstanding the foregoing, State Subsidy shall not include (a) payments, concessions, rebates, subsidies, or incentives designed to incent, or participation in a program, contract or other arrangement that utilizes criteria designed to incent or promote, general industrial development in an area or designed to incent siting facilities in that county or locality rather than another county or locality; (b) state action that imposes a tax or assesses a charge utilizing the parameters of a regional program on a given set of resources notwithstanding the tax or cost having indirect benefits on resources not subject to the tax or cost (e.g., Regional Greenhouse Gas Initiative); (c) any indirect benefits to a Capacity Resource as a result of any transmission project approved as part of the Regional Transmission Expansion Plan; (d) any contract, legally enforceable obligation, or rate pursuant to the Public Utility Regulatory Policies Act or any other state-administered federal regulatory program (e.g., the Cross-State Air Pollution Rule); (e) any revenues from the sale or allocation, either direct or indirect, to an Entity Providing Supply Services to Default Retail Service Provider where such entity’s obligations was awarded through a state default procurement auction that was subject to independent oversight by a consultant or manager who certifies that the auction was conducted through a non-discriminatory and competitive bidding process, subject to the below condition, and provided further that nothing herein would exempt a Capacity Resource that would otherwise be subject to the minimum offer price rule pursuant to this Tariff; (f) any revenues for providing capacity as part of an FRR Capacity Plan or through bilateral transactions with FRR Entities; or (g) any voluntary and arm’s length bilateral transaction (including but not limited to those reported pursuant to Tariff, Attachment DD, section 4.6), such as a power purchase agreement or other similar contract where the buyer is a Self-Supply Entity and the transaction is (1) a short term transaction (one-year or less) or (2) a long-term transaction that is the result of a competitive process that was not

fuel-specific and is not used for the purpose of supporting uneconomic construction, development, or operation of the subject Capacity Resource, provided however that if the Self-Supply Entity is responsible for offering the Capacity Resource into an RPM Auction, the specified amount of installed capacity purchased by such Self-Supply Entity shall be considered to receive a State Subsidy in the same manner, under the same conditions, and to the same extent as any other Capacity Resource of a Self-Supply Entity. For purposes of subsection (e) of this definition, a state default procurement auction that has been certified to be a result of a non-discriminatory and competitive bidding process shall:

- (i) have no conditions based on the ownership (except supplier diversity requirements or limits), location (except to meet PJM deliverability requirements), affiliation, fuel type, technology, or emissions of any resources or supply (except state-mandated renewable portfolio standards for which Capacity Resources are separately subject to the minimum offer price rule or eligible for an exemption);
- (ii) result in contracts between an Entity Providing Supply Services to Default Retail Service Provider and the electric distribution company for a retail default generation supply product and none of those contracts require that the retail obligation be sourced from any specific Capacity Resource or resource type as set forth in subsection (i) above; and
- (iii) establish market-based compensation for a retail default generation supply product that retail customers can avoid paying for by obtaining supply from a competitive retail supplier of their choice.

State of Charge:

“State of Charge” shall mean the quantity of physical energy stored in an Energy Storage Resource Model Participant or in a storage component of a Hybrid Resource in proportion to its maximum State of Charge capability. State of Charge is quantified as defined in the PJM Manuals.

State of Charge Management:

“State of Charge Management” shall mean the control of State of Charge of an Energy Storage Resource Market Participant or a storage component of a Hybrid Resource using minimum and maximum discharge (and, as applicable, charge) limits, changes in operating mode (as applicable), discharging (and, as applicable, charging) offer curves, and self-scheduling of non-dispatchable sales (and, as applicable, purchases) of energy in the PJM markets. State of Charge Management shall not interfere with the obligation of a Market Seller of an Energy Storage Resource Model Participant or of a Hybrid Resource to follow PJM dispatch, consistent with all other resources.

Station Power:

“Station Power” shall mean energy used for operating the electric equipment on the site of a generation facility located in the PJM Region or for the heating, lighting, air-conditioning and office equipment needs of buildings on the site of such a generation facility that are used in the

operation, maintenance, or repair of the facility. Station Power does not include any energy (i) used to power synchronous condensers; (ii) used for pumping at a pumped storage facility; (iii) used in association with restoration or black start service; or (iv) that is Direct Charging Energy.

Sub-Annual Resource Constraint:

“Sub-Annual Resource Constraint” shall mean, for the 2017/2018 Delivery Year and for FRR Capacity Plans the 2017/2018 and 2018/2019 Delivery Years, for the PJM Region or for each LDA for which the Office of the Interconnection is required under Tariff, Attachment DD, section 5.10(a) to establish a separate VRR Curve for a Delivery Year, a limit on the total amount of Unforced Capacity that can be committed as Limited Demand Resources and Extended Summer Demand Resources for the 2017/2018 Delivery Year in the PJM Region or in such LDA, calculated as the Sub-Annual Resource Reliability Target for the PJM Region or for such LDA, respectively, minus the Short-Term Resource Procurement Target for the PJM Region or for such LDA, respectively.

Sub-Annual Resource Price Decrement:

“Sub-Annual Resource Price Decrement” shall mean, for the 2017/2018 Delivery Year, a difference between the clearing price for Extended Summer Demand Resources and the clearing price for Annual Resources, representing the cost to procure additional Annual Resources out of merit order when the Sub-Annual Resource Constraint is binding.

Sub-Annual Resource Reliability Target:

“Sub-Annual Reliability Target” for the PJM Region or an LDA, shall mean the maximum amount of the combination of Extended Summer Demand Resources and Limited Demand Resources in Unforced Capacity determined by PJM to be consistent with the maintenance of reliability, stated in Unforced Capacity, that shall be used to calculate the Minimum Annual Resource Requirement for Delivery Years through May 31, 2017 and the Sub-Annual Resource Constraint for the 2017/2018 and 2018/2019 Delivery Years. As more fully set forth in the PJM Manuals, PJM calculates the Sub-Annual Resource Reliability Target, by first determining a reference annual loss of load expectation (“LOLE”) assuming no Demand Resources. The calculation for the unconstrained portion of the PJM Region uses a daily distribution of loads under a range of weather scenarios (based on the most recent load forecast and iteratively shifting the load distributions to result in the Installed Reserve Margin established for the Delivery Year in question) and a weekly capacity distribution (based on the cumulative capacity availability distributions developed for the Installed Reserve Margin study for the Delivery Year in question). The calculation for each relevant LDA uses a daily distribution of loads under a range of weather scenarios (based on the most recent load forecast for the Delivery Year in question) and a weekly capacity distribution (based on the cumulative capacity availability distributions developed for the Capacity Emergency Transfer Objective study for the Delivery Year in question). For the relevant LDA calculation, the weekly capacity distributions are adjusted to reflect the Capacity Emergency Transfer Limit for the Delivery Year in question.

For both the PJM Region and LDA analyses, PJM then models the commitment of varying amounts of DR (displacing otherwise committed generation) as interruptible from May 1 through October 31 and unavailable from November 1 through April 30 and calculates the LOLE at each DR level. The Extended Summer DR Reliability Target is the DR amount, stated as a percentage of the unrestricted peak load, that produces no more than a ten percent increase in the LOLE, compared to the reference value. The Sub-Annual Resource Reliability Target shall be expressed as a percentage of the forecasted peak load of the PJM Region or such LDA and is converted to Unforced Capacity by multiplying [the reliability target percentage] times [the Forecast Pool Requirement] times [the DR Factor] times [the forecasted peak load of the PJM Region or such LDA, reduced by the amount of load served under the FRR Alternative].

Sub-meter:

“Sub-meter” shall mean a metering point for electricity consumption that does not include all electricity consumption for the end-use customer as defined by the electric distribution company account number. PJM shall only accept sub-meter load data from end-use customers for measurement and verification of Regulation service as set forth in the Economic Load Response rules and PJM Manuals.

Summer-Period Capacity Performance Resource:

“Summer-Period Capacity Performance Resource” shall have the same meaning specified in Tariff, Attachment DD, section 5.5A.

Surplus Interconnection Customer:

“Surplus Interconnection Customer” shall mean either an Interconnection Customer whose Generating Facility is already interconnected to the PJM Transmission System or one of its affiliates, or an unaffiliated entity that submits a Surplus Interconnection Request to utilize Surplus Interconnection Service within the Transmission System in the PJM Region. A Surplus Interconnection Customer is not a New Service Customer.

Surplus Interconnection Request:

“Surplus Interconnection Request” shall mean a request submitted by a Surplus Interconnection Customer, pursuant to Tariff, Attachment RR, to utilize Surplus Interconnection Service within the Transmission System in the PJM Region. A Surplus Interconnection Request is not a New Service Request.

Surplus Interconnection Service:

“Surplus Interconnection Service” shall mean any unneeded portion of Interconnection Service established in an Interconnection Service Agreement, such that if Surplus Interconnection Service is utilized, the total amount of Interconnection Service at the Point of Interconnection would remain the same.

Switching and Tagging Rules:

“Switching and Tagging Rules” shall mean the switching and tagging procedures of Interconnected Transmission Owners and Interconnection Customer as they may be amended from time to time.

Synchronized Reserve:

“Synchronized Reserve” shall mean the reserve capability of generation resources that can be converted fully into energy or Economic Load Response Participant resources whose demand can be reduced within ten minutes from the request of the Office of the Interconnection dispatcher, and is provided by equipment that is electrically synchronized to the Transmission System.

Synchronized Reserve Event:

“Synchronized Reserve Event” shall mean a request from the Office of the Interconnection to generation resources and/or Economic Load Response Participant resources able, assigned or self-scheduled to provide Synchronized Reserve in one or more specified Reserve Zones or Reserve Sub-zones, within ten minutes, to increase the energy output or reduce load by the amount of assigned or self-scheduled Synchronized Reserve capability.

Synchronized Reserve Requirement:

“Synchronized Reserve Requirement” shall mean the megawatts required to be maintained in a Reserve Zone or Reserve Sub-zone as Synchronized Reserve, absent any increase to account for additional reserves scheduled to address operational uncertainty. The Synchronized Reserve Requirement is calculated in accordance with the PJM Manuals. This requirement can only be satisfied by Synchronized Reserve resources.

System Condition:

“System Condition” shall mean a specified condition on the Transmission Provider’s system or on a neighboring system, such as a constrained transmission element or flowgate, that may trigger Curtailment of Long-Term Firm Point-to-Point Transmission Service using the curtailment priority pursuant to Tariff, Part II, section 13.6. Such conditions must be identified in the Transmission Customer’s Service Agreement.

System Energy Price:

“System Energy Price” shall mean the energy component of the Locational Marginal Price, which is the price at which the Market Seller has offered to supply an additional increment of energy from a resource, calculated as specified in Operating Agreement, Schedule 1, section 2 and the parallel provisions of Tariff, Attachment K-Appendix, section 2.

System Impact Study:

“System Impact Study” shall mean an assessment by the Transmission Provider of (i) the adequacy of the Transmission System to accommodate a Completed Application, an Interconnection Request or an Upgrade Request, (ii) whether any additional costs may be incurred in order to provide such transmission service or to accommodate an Interconnection Request, and (iii) with respect to an Interconnection Request, an estimated date that an Interconnection Customer’s Customer Facility can be interconnected with the Transmission System and an estimate of the Interconnection Customer’s cost responsibility for the interconnection; and (iv) with respect to an Upgrade Request, the estimated cost of the requested system upgrades or expansion, or of the cost of the system upgrades or expansion, necessary to provide the requested incremental rights.

System Protection Facilities:

“System Protection Facilities” shall refer to the equipment required to protect (i) the Transmission System, other delivery systems and/or other generating systems connected to the Transmission System from faults or other electrical disturbance occurring at or on the Customer Facility, and (ii) the Customer Facility from faults or other electrical system disturbance occurring on the Transmission System or on other delivery systems and/or other generating systems to which the Transmission System is directly or indirectly connected. System Protection Facilities shall include such protective and regulating devices as are identified in the Applicable Technical Requirements and Standards or that are required by Applicable Laws and Regulations or other Applicable Standards, or as are otherwise necessary to protect personnel and equipment and to minimize deleterious effects to the Transmission System arising from the Customer Facility.

SCHEDULE 3

Regulation and Frequency Response Service

Regulation and Frequency Response Service is necessary to provide for the continuous balancing of resources with load and for maintaining scheduled Interconnection frequency at 60 cycles per second (60 Hz). Regulation and Frequency Response Service is accomplished by committing resources whose output is raised or lowered (predominantly through the use of automatic generating control equipment) and by other non-generation resources capable of providing this service as necessary to follow the moment-by-moment changes in load. The obligation to maintain this balance between resources and load lies with the Transmission Provider. The Transmission Provider must offer this service when the transmission service is used to serve load within its Control Area. The Transmission Customer must either purchase this service from the Transmission Provider or make alternative comparable arrangements to satisfy its Regulation and Frequency Response Service obligation. The Transmission Provider will take into account the speed and accuracy of Regulation resources in its determination of Regulation and Frequency Response reserve requirements, including as it reviews whether a self-supplying Transmission Customer has made alternative comparable arrangements. Upon request by the self-supplying Transmission Customer, the Transmission Provider will share with the Transmission Customer its reasoning and any related data used to make the determination of whether the Transmission Customer has made alternative comparable arrangements. The amount of and charges for Regulation and Frequency Response Service are set forth below. The Transmission Provider shall administer the purchases of Regulation Service in the PJM Interchange Energy Market. PJMSettlement shall be the Counterparty to the purchases by customers of Regulation Service in the PJM Interchange Energy Market; provided however, that PJMSettlement shall not be the contracting party to bilateral transactions between market participants or with respect to a self-schedule or self-supply of resources by a customer to satisfy its Regulation obligation.

For Regulation not satisfied by individual Transmission Owners on behalf of their Native Load Customers, Network Customers or other Transmission Customers serving load in the PJM Region, the Transmission Provider will order the lowest cost alternative for Regulation in service as needed to meet the Regulation Requirements of each Regulation Zone (as may be set forth in the PJM Manuals and as specified below:

- a. Regulation shall be supplied to meet the Regulation objective of a Regulation Zone from resources located within the metered electrical boundaries of such Regulation Zone. Resources offering Regulation shall comply with applicable standards and requirements for Regulation capability and dispatch specified in the PJM Manuals.
- b. The Office of the Interconnection shall obtain and maintain an amount of Regulation for each Regulation Zone equal to the Regulation objective for such Regulation Zone, as specified in the PJM Manuals.
- c. The Regulation range of a resource shall be at least twice the amount of Regulation assigned.

d. A resource capable of automatic energy dispatch that is also providing Regulation shall have its energy dispatch range reduced from the Regulation range by at least twice the amount of the Regulation provided with consideration of the Regulation limits of the resource, as specified in the PJM Manuals.

e. Qualified Regulation resources must satisfy the measurement and verification tests described in the PJM Manuals.

f. A Transmission Owner, Network Customer or other Transmission Customer may satisfy its Regulation obligation from its own resources capable of performing Regulation service, by contractual arrangements with others able to provide Regulation service on a comparable basis, or by purchases from the PJM Regulation market.

g. The Office of the Interconnection shall obtain Regulation service from the least-cost alternatives available from either pool-scheduled or self-scheduled resources as needed to meet Regulation Zone requirements not otherwise satisfied by a Transmission Owner, Network Customer or other Transmission Customer, in accordance with Tariff, Attachment K-Appendix, section 1.11.4(b).

h. The Office of the Interconnection shall dispatch resources for Regulation by sending Regulation signals and instructions to resources from which Regulation service has been committed, in accordance with the PJM Manuals. Those resources shall comply with Regulation dispatch signals and instructions transmitted by the Office of the Interconnection and, in the event of conflict, Regulation dispatch signals and instructions shall take precedence over energy dispatch signals and instructions. Those providing Regulation shall exert all reasonable efforts to operate, or ensure the operation of, their resources supplying load in the PJM Region as close to desired output levels as practical, consistent with Good Utility Practice.

i. Each Transmission Owner (on behalf of its Native Load Customers), Network Customer or other Transmission Customer serving load within a Regulation Zone shall have an hourly Regulation objective equal to its pro rata share of the Regulation Requirement of such Regulation Zone for such hour, based on the entity's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Regulation Zone for such hour.

j. An entity supplying Regulation at the direction of the Office of the Interconnection in excess of its hourly Regulation obligation shall be credited for each increment of such Regulation at the price specified in Tariff, Attachment K-Appendix, section 3.2.2 and Tariff, Attachment K-Appendix, section 3.3.2 and the parallel provisions of Operating Agreement, Schedule 1, section 3.2.2 and Operating Agreement, Schedule 1, section 3.3.2. A Transmission Owner, Network Customer or other Transmission Customer that does not meet its hourly Regulation obligation shall be charged for Regulation dispatched by the Office of the Interconnection to meet such obligation at the price specified in Tariff, Attachment K-Appendix, section 3.2.2 and Tariff, Attachment K-Appendix, section 3.3.2 and the parallel provisions of Operating Agreement, Schedule 1, section 3.2.2 and Operating Agreement, Schedule 1, section 3.3.2.

1.10 Scheduling.

1.10.1 General.

(a) The Office of the Interconnection shall administer scheduling processes to implement a Day-ahead Energy Market and a Real-time Energy Market. PJMSettlement shall be the Counterparty to the purchases and sales of energy that clear the Day-ahead Energy Market and the Real-time Energy Market; provided that PJMSettlement shall not be a contracting party to bilateral transactions between Market Participants or with respect to a Generating Market Buyer's self-schedule or self-supply of its generation resources up to that Generating Market Buyer's Equivalent Load.

(b) The Day-ahead Energy Market shall enable Market Participants to purchase and sell energy through the PJM Interchange Energy Market at Day-ahead Prices and enable Transmission Customers to reserve transmission service with Transmission Congestion Charges and Transmission Loss Charges based on locational differences in Day-ahead Prices. Up-to Congestion Transactions submitted in the Day-ahead Energy Market shall not require transmission service and Transmission Customers shall not reserve transmission service for such Up-to Congestion Transactions. Market Participants whose purchases and sales, and Transmission Customers whose transmission uses are scheduled in the Day-ahead Energy Market, shall be obligated to purchase or sell energy, or pay Transmission Congestion Charges and Transmission Loss Charges, at the applicable Day-ahead Prices for the amounts scheduled.

(c) (i) In the Real-time Energy Market, Market Participants that deviate from the amounts of energy purchases or sales scheduled in the Day-ahead Energy Market shall be obligated to purchase or sell energy for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.

(ii) In the Real-time Energy Market, Transmission Customers that deviate from the transmission uses, scheduled in the Day-ahead Energy Market shall be obligated to pay Transmission Congestion Charges and Transmission Loss Charges for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.

(iii) Market Participants that deviate in real-time from the amounts of Secondary Reserve, Non-Synchronized Reserve, or Synchronized Reserve sales, scheduled day-ahead shall be obligated to purchase Secondary Reserve, Non-Synchronized Reserve, or Synchronized Reserve for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.

(d) The following scheduling procedures and principles shall govern the commitment of resources to the Day-ahead Energy Market and the Real-time Energy Market over a period extending from one week to one hour prior to the real-time dispatch. Scheduling encompasses the day-ahead and hourly scheduling process, through which the Office of the Interconnection determines the Day-ahead Energy Market and determines, based on changing forecasts of

conditions and actions by Market Participants and system constraints, a plan to serve the hourly energy and reserve requirements of the Internal Market Buyers and the purchase requests of the External Market Buyers in the least costly manner, subject to maintaining the reliability of the PJM Region. Scheduling does not encompass Coordinated External Transactions, which are subject to the procedures of Tariff, Attachment K-Appendix, section 1.13. Scheduling shall be conducted as specified in section 1.10.1A below, subject to the following condition. If the Office of the Interconnection's forecast for the next seven days projects a likelihood of Emergency conditions, the Office of the Interconnection may commit, for all or part of such seven day period, to the use of generation resources with notification or start-up times greater than one day as necessary in order to alleviate or mitigate such Emergency, in accordance with the Market Sellers' offers for such units for such periods and the specifications in the PJM Manuals. Such resources committed by the Office of the Interconnection to alleviate or mitigate an Emergency will not receive Operating Reserve Credits nor otherwise be made whole for its hours of operation for the duration of any portion of such commitment that exceeds the maximum start-up and notification times for such resources during Hot Weather Alerts and Cold Weather Alerts, consistent with Tariff, Attachment K-Appendix, section 3.2.3 and Tariff, Attachment K-Appendix, section 6.6.

1.10.1A Day-ahead and Real-time Energy Market Scheduling.

The following actions shall occur not later than 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled, or such other deadline as may be specified by the Office of the Interconnection in order to comply with the practical requirements and the economic and efficiency objectives of the scheduling process specified in this Schedule.

(a) Each Market Participant may submit to the Office of the Interconnection specifications of the amount and location of its customer loads and/or energy purchases to be included in the Day-ahead Energy Market for each hour of the next Operating Day, such specifications to comply with the requirements set forth in the PJM Manuals. Each Market Buyer shall inform the Office of the Interconnection of the prices, if any, at which it desires not to include its load in the Day-ahead Energy Market rather than pay the Day-ahead Price. PRD Providers that have committed Price Responsive Demand in accordance with the Reliability Assurance Agreement shall submit to the Office of the Interconnection, in accordance with procedures specified in the PJM Manuals, any desired updates to their previously submitted PRD Curves, provided that such updates are consistent with their Price Responsive Demand commitments, and provided further that PRD Providers that are not Load Serving Entities for the Price Responsive Demand at issue may only submit PRD Curves for the Real-time Energy Market. Price Responsive Demand that has been committed in accordance with the Reliability Assurance Agreement shall be presumed available for the next Operating Day in accordance with the most recently submitted PRD Curve unless the PRD Curve is updated to indicate otherwise. PRD Providers may also submit PRD Curves for any Price Responsive Demand that is not committed in accordance with the Reliability Assurance Agreement; provided that PRD Providers that are not Load Serving Entities for the Price Responsive Demand at issue may only submit PRD Curves for the Real-time Energy Market. All PRD Curves shall be on a PRD Substation basis, and shall specify the maximum time period required to implement load reductions.

(b) Each Generating Market Buyer shall submit to the Office of the Interconnection: (i) hourly schedules for resource increments, including hydropower units, self-scheduled by the Market Buyer to meet its Equivalent Load; and (ii) the Dispatch Rate at which each such self-scheduled resource will disconnect or reduce output, or confirmation of the Market Buyer's intent not to reduce output.

(c) All Market Participants shall submit to the Office of the Interconnection schedules for any energy exports, energy imports, and wheel through transactions involving use of generation or Transmission Facilities as specified below, and shall inform the Office of the Interconnection if the transaction is to be scheduled in the Day-ahead Energy Market. Any Market Participant that elects to schedule an export, import or wheel through transaction in the Day-ahead Energy Market may specify the price (such price not to exceed \$2,000/MWh), if any, at which the export, import or wheel through transaction will be wholly or partially curtailed. The foregoing price specification shall apply to the applicable interface pricing point. Any Market Participant that elects not to schedule its export, import or wheel through transaction in the Day-ahead Energy Market shall inform the Office of the Interconnection if the parties to the transaction are not willing to incur Transmission Congestion and Loss Charges in the Real-time Energy Market in order to complete any such scheduled transaction. Such transactions in the Real-time Energy Market, other than Coordinated Transaction Schedules and emergency energy sales and purchases, may specify a price up to \$2,000/MWh. Scheduling of such transactions shall be conducted in accordance with the specifications in the PJM Manuals and the following requirements:

i) Market Participants shall submit schedules for all energy purchases for delivery within the PJM Region, whether from resources inside or outside the PJM Region;

ii) Market Participants shall submit schedules for exports for delivery outside the PJM Region from resources within the PJM Region that are not Dynamic Transfers to such entities pursuant to Tariff, Attachment K-Appendix, section 1.12; and

iii) In addition to the foregoing schedules for exports, imports and wheel through transactions, Market Participants shall submit confirmations of each scheduled transaction from each other party to the transaction in addition to the party submitting the schedule, or the adjacent Control Area.

(c-1) A Market Participant may elect to submit in the Day-ahead Energy Market a form of Virtual Transaction that combines an offer to sell energy at a source, with a bid to buy the same megawatt quantity of energy at a sink where such transaction specifies the maximum difference between the Locational Marginal Prices at the source and sink. The Office of Interconnection will schedule these transactions only to the extent this difference in Locational Marginal Prices is within the maximum amount specified by the Market Participant. A Virtual Transaction of this type is referred to as an "Up-to Congestion Transaction." Such Up-to Congestion Transactions may be wholly or partially scheduled depending on the price difference between the source and sink locations in the Day-ahead Energy Market. The maximum

difference between the source and sink prices that a participant may specify shall be limited to +/- \$50/MWh. The foregoing price specification shall apply to the price difference between the specified source and sink in the day-ahead scheduling process only. An accepted Up-to Congestion Transaction results in scheduled injection at a specified source and scheduled withdrawal of the same megawatt quantity at a specified sink in the Day-ahead Energy Market.

(c-2) A Market Participant may elect to submit an Increment Offer and/or Decrement Bid form of Virtual Transaction in the Day-ahead Energy Market and shall specify the price for such transaction which shall be limited to \$2,000/megawatt-hour.

(c-3) Up-to Congestion Transactions may only be submitted at hubs, Residual Metered Load and interfaces not described in Tariff, Attachment K-Appendix, section 2.6A(b). Increment Offers and Decrement Bids may be only submitted at hubs, nodes at which physical generation or load is settled, Residual Metered Load and interfaces not described in Tariff, Attachment K-Appendix, section 2.6A(b).

(d) Market Sellers in the Day-ahead Energy Market shall submit offers for the supply of energy, demand reductions, or other services for the following Operating Day for each clock hour for which the Market Seller desires or is required to make its resource available to the Office of the Interconnection. Offers for the supply of energy may be cost-based, market-based, or both, and may vary hourly. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, Operating Agreement, Schedule 2, and the PJM Manuals, as applicable. Market Sellers owning or controlling the output of a Generation Capacity Resource that is committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1, and that has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage shall submit offers for the available capacity of such Generation Capacity Resource, including any portion that is self-scheduled by the Generating Market Buyer. Such offers shall be based on the ICAP equivalent of the Market Seller's cleared UCAP capacity commitment, provided, however, where the underlying resource is a Capacity Storage Resource or an Intermittent Resource, the Market Seller shall satisfy the must offer requirement by either self-scheduling or offering the unit as a dispatchable resource, in accordance with the PJM Manuals, where the hourly day-ahead self-scheduled values for such Capacity Storage Resources and Intermittent Resources may vary hour to hour from the capacity commitment. Any offer not designated as a Maximum Emergency offer shall be considered available for scheduling and dispatch under both Emergency and non-Emergency conditions. Offers may only be designated as Maximum Emergency offers to the extent that the Generation Capacity Resource falls into at least one of the following categories:

i) Environmental limits. If the resource has a limit on its run hours imposed by a federal, state, or other governmental agency that will significantly limit its availability, on either a temporary or long-term basis. This includes a resource that is limited to operating only during declared PJM capacity emergencies by a governmental authority.

ii) Fuel limits. If physical events beyond the control of the resource owner result in the temporary interruption of fuel supply and there is limited on-site fuel storage. A fuel supplier's exercise of a contractual right to interrupt supply or delivery under an interruptible service agreement shall not qualify as an event beyond the control of the resource owner.

iii) Temporary emergency conditions at the unit. If temporary emergency physical conditions at the resource significantly limit its availability.

iv) Temporary megawatt additions. If a resource can provide additional megawatts on a temporary basis by oil topping, boiler over-pressure, or similar techniques, and such megawatts are not ordinarily otherwise available.

The submission of offers for resource increments that are not committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1 shall be optional, but any such offers must contain the information specified in the Office of the Interconnection's Offer Data specification, Operating Agreement, Schedule 1, sections 1.10.1A(d) and 1.10.9B, Operating Agreement, Schedule 2, and the PJM Manuals, as applicable. Energy offered from generation resources that are not committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1 shall not be supplied from resources that are included in or otherwise committed to supply the Operating Reserves of a Control Area outside the PJM Region.

The foregoing offers:

i) Shall specify the Generation Capacity Resource or Economic Load Response Participant resource and energy or demand reduction amount, respectively, for each clock hour in the offer period;

ii) Shall specify the amounts and prices for each clock hour during the entire Operating Day for each resource component offered by the Market Seller to the Office of the Interconnection;

iii) May specify for generation resources offer parameters for each clock hour during the entire Operating Day, as applicable and in accordance with section 1.10.9B below, including: (1) Minimum Run Time; (2) maximum run time; (3) Start-up Costs; (4) No-load Costs; (5) Incremental Energy Offer; (6) notification time; (7) availability; (8) ramp rate; (9) Economic Minimum; (10) Economic Maximum; (11) emergency minimum MW; (12) emergency maximum MW; (13) Synchronized Reserve maximum MW; (14) Secondary Reserve maximum MW; and (15) condense to generation time constraints, and may specify offer parameters for Economic Load Response Participant resources for each clock hour during the entire Operating Day, as applicable and in accordance with section 1.10.9B below, including: (1) minimum down time; (2) shutdown costs; (3) Incremental Energy Offer; (4) notification time; (5) Economic Minimum; and (6) Economic Maximum;

iv) Shall set forth any special conditions upon which the Market Seller proposes to supply a resource increment, including any curtailment rate specified in a bilateral contract for the output of the resource, or any cancellation fees;

v) May include a schedule of offers for prices and operating data contingent on acceptance by the deadline specified in this Schedule, with additional schedules applicable if accepted after the foregoing deadline;

vi) Shall constitute an offer to submit the resource increment to the Office of the Interconnection for scheduling and dispatch in accordance with the terms of the offer for the clock hour, which offer shall remain open through the Operating Day, for which the offer is submitted, unless the Market Seller a) submits a Real-time Offer for the applicable clock hour, or b) updates the availability of its offer for that hour, as further described in the PJM Manuals;

vii) Shall be final as to the price or prices at which the Market Seller proposes to supply energy or other services to the PJM Interchange Energy Market, such price or prices being guaranteed by the Market Seller for the period extending through the end of the following Operating Day, unless modified after the close of the Day-ahead Energy Market as permitted pursuant to sections 1.10.9A or 1.10.9B below;

viii) Shall not exceed an energy offer price of \$1,000/megawatt-hour for all generation resources, except (1) when a Market Seller's cost-based offer is above \$1,000/megawatt-hour and less than or equal to \$2,000/megawatt-hour, then its market-based offer must be less than or equal to the cost-based offer; and (2) when a Market Seller's cost-based offer is greater than \$2,000/megawatt-hour, then its market-based offer must be less than or equal to \$2,000/megawatt-hour;

ix) Shall not exceed a demand reduction offer price of \$1,000/megawatt-hour, except when an Economic Load Response Participant submits a cost-based offer that includes an incremental cost component that is above \$1,000/megawatt-hour, then its market-based offer must be less than or equal to the cost-based offer but in no event greater than \$2,000/megawatt-hour;

x) Shall not exceed an offer price as follows for Emergency Load Response and Pre-Emergency Load Response participants with:

a) a 30 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provision of RAA, Schedule 6, \$1,000/megawatt-hour, plus the applicable Reserve Penalty Factor for the Primary Reserve Requirement, minus \$1.00;

b) an approved 60 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provision of RAA, Schedule 6, \$1,000/megawatt hour, plus [the applicable Reserve Penalty Factor for the Primary Reserve Requirement divided by 2]; and

c) an approved 120 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provisions of RAA, Schedule 6, \$1,100/megawatt-hour; and

xi) Shall not exceed an energy offer price of \$0.00/MWh for pumped storage hydropower units scheduled by the Office of the Interconnection pursuant to the hydro optimization tool in the Day-ahead Energy Market.

(e) A Market Seller that wishes to make a resource available to sell Regulation service shall submit an offer for Regulation for each 30 minute Regulation clearing interval for which the Market Seller desires to make its resource available to the Office of the Interconnection to provide Regulation that shall specify the megawatts of Regulation being offered, which must equal or exceed 0.1 megawatts, in the Regulation Zone for which such Regulation is offered, the price of the capability offer in dollars per MW, the price of the mileage offer in Dollars per change in MW, and such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer and the resource's opportunity costs. Such offers may vary for each 30 minute Regulation clearing interval, and may be updated each 30 minute Regulation clearing interval, up to 35 minutes before the applicable 30 minute Regulation clearing interval during the Operating Day. The total of the mileage offer multiplied by the historical average mileage used in the market clearing plus the capability offer shall not exceed \$100/megawatt-hour. In addition to any market-based offer for Regulation, the Market Seller also shall submit a cost-based offer. A cost-based offer must be in the form specified in the PJM Manuals and consist of the following components as well as any other components specified in the PJM Manuals:

i. The costs (in \$/MW) of the fuel cost increase due to the steady-state heat rate increase resulting from operating the unit at lower megawatt output incurred from the provision of Regulation shall apply to the capability offer;

ii. The cost increase (in $\$/\Delta\text{MW}$) in costs associated with movement of the regulation resource incurred from the provision of Regulation shall apply to the mileage offer; and

a. Only Regulation-only resources may include all variable operation and maintenance expenses in the mileage offer, as defined in the PJM Manuals.

iii. An adder of up to \$12.00 per megawatt of Regulation provided applied to the capability offer.

Qualified Regulation capability must satisfy the measurement and verification tests specified in the PJM Manuals.

(f) Each Market Seller owning or controlling the output of a Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative shall submit a forecast of the availability of each such

Generation Capacity Resource for the next seven days. A Market Seller (i) may submit a non-binding forecast of the price at which it expects to offer a generation resource increment to the Office of the Interconnection over the next seven days, and (ii) shall submit a binding offer for energy, along with Start-up Costs and No-load Costs, if any, for the next seven days or part thereof, for any generation resource with minimum notification or start-up requirement greater than 24 hours. Such resources committed by the Office of the Interconnection will not receive Operating Reserve Credits nor otherwise be made whole for its hours of operation for the duration of any portion of such commitment that exceeds the maximum start-up and notification times for such resources during Hot Weather Alerts and Cold Weather Alerts, consistent with Tariff, Attachment K-Appendix, section 3.2.3 and Tariff, Attachment K-Appendix, section 6.6.

(g) Each component of an offer by a Market Seller of a Generation Capacity Resource that is constant for the entire Operating Day and does not vary hour to hour shall remain in effect for subsequent Operating Days until superseded or canceled.

(h) The Office of the Interconnection shall post the total hourly loads scheduled in the Day-ahead Energy Market, as well as, its estimate of the combined hourly load of the Market Buyers for the next four days, and peak load forecasts for an additional three days.

(i) Except for Economic Load Response Participants, all Market Participants may submit Virtual Transactions that apply to the Day-ahead Energy Market only. Such Virtual Transactions must comply with the requirements set forth in the PJM Manuals and must specify amount, location and price, if any, at which the Market Participant desires to purchase or sell energy in the Day-ahead Energy Market. The Office of the Interconnection may require that a market participant shall not submit in excess of a defined number of bid/offer segments in the Day-ahead Energy Market, as specified in the PJM Manuals, when the Office of the Interconnection determines that such limit is required to avoid or mitigate significant system performance problems related to bid/offer volume. Notice of the need to impose such limit shall be provided prior to 10:00 a.m. EPT on the day that the Day-ahead Energy Market will clear. For purposes of this provision, a bid/offer segment is each pairing of price and megawatt quantity submitted as part of an Increment Offer or Decrement Bid. For purposes of applying this provision to an Up-to Congestion Transaction, a bid/offer segment shall refer to the pairing of a source and sink designation, as well as price and megawatt quantity, that comprise each Up-to Congestion Transaction.

(j) (i) Offers to Supply Synchronized and Non-Synchronized Reserves By Generation Resources in the Day-ahead and Real-time Reserve Markets

(1) Market Sellers owning or controlling the output of a Generation Capacity Resource that was committed in an FRR Capacity Plan, self-supplied, offered and cleared in a Base Residual Auction or Incremental Auction, or designated as replacement capacity, as specified in Tariff, Attachment DD, is capable of providing Synchronized Reserve or Non-Synchronized Reserve as specified in section 1.7.19A(a), in section 1.7.19A.01(a) and in the PJM Manuals, and has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage, shall submit offers

or otherwise make their 10-minute reserve capability available to supply Synchronized Reserve or, as applicable, Non-Synchronized Reserve, including any portion that is self-scheduled by the Generating Market Buyer, in an amount equal to the available 10-minute reserve capability of such Generation Capacity Resource. Market Sellers of Generation Capacity Resources subject to this must-offer requirement that do not make the reserve capability of such resources available when such resource is able to operate with a dispatchable range (e.g. through offering a fixed output) will be in violation of this provision.

(2) Market Sellers of all other generation resources that (A) are capable of providing Synchronized Reserve or Non-Synchronized Reserve, as specified in section 1.7.19A(a), in section 1.7.19A.01(a) and in the PJM Manuals, (B) are located within the metered boundaries of the PJM Region, and (C) have submitted offers for the supply of energy into the Day-ahead Energy Market and/or Real-time Energy Market shall be deemed to have made their reserve capability available to provide Synchronized Reserve or Non-Synchronized Reserve in the Day-ahead Energy Market and/or Real-time Energy Market for each clock hour for which the Market Seller submits an available offer to supply energy; provided, however that hydroelectric generation resources and Energy Storage Resources are not automatically deemed available to provide reserves based on the submission of an available energy offer but may submit offers to supply Synchronized Reserve and Non-Synchronized Reserve, as applicable.

(3) Offers for the supply of Synchronized Reserve by all generation resources must be cost-based. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A, section 1.10.9B below, and the PJM Manuals, as applicable. For offers to supply Synchronized Reserve, the offer price shall not exceed the expected value of the penalty for failing to provide Synchronized Reserve, where such expected value shall be recalculated annually, in accordance with the PJM Manuals, and posted on PJM's website. The expected value of the penalty is calculated as the product of: (A) the average penalty, expressed in \$/MWh, multiplied by (B) the average rate of non-performance during Synchronized Reserve events multiplied by (C) the probability a Synchronized Reserve event that will qualify for non-performance assessments will occur.

The expected value of the penalty shall be determined by an annual review of the twelve-month period ending October 31 of the calendar year in which the review is performed. The Office of the Interconnection shall post the results of its annual review by no later than December 15, and the revised offer price cap shall be effective as of the following January 1; provided, however, that at the time of implementation of this rule the expected value of the penalty shall be \$0.02/MWh,

and for the period from the second month after implementation through the second December 31 following such date of implementation, the expected value of the penalty shall be recalculated on a monthly basis using data from the implementation date of this rule through the 15th day of the current month, and the revised value shall be effective the 1st day of the following month.

(4) All Non-Synchronized Reserve offers shall be for \$0.00/MWh. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this subsection (d) of this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(ii) Determination of Available Synchronized Reserve Capability of Generation Resources

(1) For each offer to supply reserves by a synchronized resource, the Office of the Interconnection shall determine the MW of available Synchronized Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market, in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Hydroelectric generation resources and Energy Storage Resources may submit offers for their available Synchronized Reserve capability as part of their offer into the Synchronized Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(j)(i) above must submit a Synchronized Reserve offer which specifies the MW of available Synchronized Reserve capability in order to remain compliant with such requirements.

(2) An on-line generation resource's available Synchronized Reserve capability, except for generation resources capable of synchronous condensing, shall be determined in accordance with the PJM Manuals and based on the resource's current performance and initial energy output and the following offer parameters submitted as part of the resource's energy offer: (A) ramp rate; (B) Economic Minimum; and (C) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Synchronized Reserves above the Synchronized Reserve maximum MW.

For generation resources capable of synchronous condensing, the resource's available Synchronized Reserve capability shall be based on the following offer parameters submitted as part of the resource's energy offer: (D) ramp rate; (E) condense to generation time constraints; (F) Economic Minimum; and (G) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Synchronized Reserves above the Synchronized Reserve maximum MW.

(3) Any Market Seller that believes its generating unit has operating modes, limits, or conditions where the unit would not be capable of providing Synchronized Reserves in real time, can submit to the Office of the Interconnection with a copy to the Market Monitoring Unit a request for an exception from being assigned Synchronized Reserves in the Real-time Synchronized Reserve Market during time periods in which the generating unit is in those operating modes, limits, or conditions. As part of the request, the Market Seller shall supply, for each generating unit, technical information about the operational modes, limits, or conditions to support the requested exception, as further detailed in the PJM Manuals. The Office of the Interconnection shall consult with the Market Monitoring Unit, and consider any input received from the Market Monitoring Unit, in its determination of a request for such an exception. Within 60 days of the submission of the request, the Office of the Interconnection shall notify the Market Seller in writing, with a copy to the Market Monitoring Unit, whether the request is approved or denied. The effective date of any approved request will be provided in the written notification. If a Market Seller has an approved exception, the Market Seller must communicate to the Office of the Interconnection when the unit cannot provide reserves, and the Office of the Interconnection will provide a mechanism for Market Sellers with an approved exception to provide such communication to the Office of the Interconnection in real time, as further detailed in the PJM Manuals. An approved exception will remain applicable to the unit until such time as the Office of the Interconnection determines that a change is needed or the Market Seller notifies the Office of the Interconnection, with a copy to the Market Monitoring Unit, that a change is needed based on changed operational capabilities of the unit. Market Sellers must notify the Office of the Interconnection, with a copy to the Market Monitoring Unit, within 30 days of any changed operational capabilities that necessitate a change in an approved exception.

(iii) Determination of Available Non-Synchronized Reserve Capability of Generation Resources

(1) For each offer to supply reserves by an off-line generation resource, the Office of the Interconnection shall determine the MW of available

Non-Synchronized Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Such hydroelectric generation resources or Energy Storage Resources may submit offers for their available Non-Synchronized Reserve capability as part of their offer into the Non-Synchronized Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(j)(i) above must submit a Non-Synchronized Reserve offer which specifies the MW of available Non-Synchronized Reserve capability in order to remain compliant with such requirements.

(2) An off-line generation resource's available Non-Synchronized Reserve capability shall be determined in accordance with the PJM Manuals and based on the following offer parameters submitted as part of the resource's energy offer: (A) startup time; (B) notification time; (C) ramp rate; (D) Economic Minimum; and (E) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Non-Synchronized Reserves above its Synchronized Reserve maximum MW.

(iv) Offers to Supply Synchronized Reserves by Economic Load Response Participant Resources in the Day-ahead and Real-time Reserve Markets

(1) Economic Load Response Participants that submit offers to reduce demand into the Day-ahead Energy Market and Real-time Energy Market and wish to make their resources available to supply Synchronized Reserve may submit offers to supply Synchronized Reserve from such resources, where such offers shall specify the megawatts of Synchronized Reserve being offered, which must equal or exceed 0.1 megawatts and such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer. Such offers may vary hourly, and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day.

(2) All offers to supply Synchronized Reserve offers from Economic Load Response Participant resources shall not exceed the expected value of the penalty for failing to provide Synchronized Reserve, as determined in accordance with section 1.10.1A(j)(i)(3) above. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(k) An Economic Load Response Participant that wishes to participate in the Day-ahead Energy Market by reducing demand shall submit an offer to reduce demand to the Office of the Interconnection for each clock hour for which the Economic Load Response Participant desires to make its resource available to the Office of the Interconnection to reduce demand. The offer must equal or exceed 0.1 megawatts, may vary hourly, and shall specify: (i) the amount of the offered curtailment in minimum increments of .1 megawatts; (ii) the Day-ahead Locational Marginal Price above which the end-use customer will reduce load, subject to section 1.10.1A(d)(ix); and (iii) at the Economic Load Response Participant's option, shutdown costs associated with reducing load, including direct labor and equipment costs, opportunity costs, and/or a minimum of number of contiguous hours for which the load reduction must be committed. Such offers may be updated each hour, up to 65 minutes before the applicable clock hour during the Operating Day. Economic Load Response Participants submitting offers to reduce demand in the Day-ahead Energy Market may establish an incremental offer curve, provided that such offer curve shall be limited to ten price pairs (in MWs) per hour.

(l) Market Sellers owning or controlling the output of an Economic Load Response Participant resource that was committed in an FRR Capacity Plan, or that was self-supplied or that offered and cleared in a Base Residual Auction or Incremental Auction, may submit demand reduction bids for the available load reduction capability of the Economic Load Response Participant resource. The submission of demand reduction bids for Economic Load Response Participant resource increments that were not committed in an FRR Capacity Plan, or that have not cleared in a Base Residual Auction or Incremental Auction, shall be optional, but any such bids must contain the information required to be included in such bids, as specified in the PJM Economic Load Response Program. An Economic Load Response Participant resource that was committed in an FRR Capacity Plan, or that was self-supplied or offered and cleared in a Base Residual Auction or Incremental Auction, may submit a demand reduction bid in the Day-ahead Energy Market as specified in the Economic Load Response Program; provided, however, that in the event of an Emergency PJM shall require Economic Load Response Participant resources to reduce load, notwithstanding that the Zonal LMP at the time such Emergency is declared is below the price identified in the demand reduction bid.

(m) (i) Offers to Supply Secondary Reserve By Generation Resources

(1) Market Sellers owning or controlling the output of a Generation Capacity Resource that was committed in an FRR Capacity Plan, self-supplied, offered and cleared in a Base Residual Auction or Incremental Auction, or designated as replacement capacity, as specified in Tariff, Attachment DD, that is available for energy, is capable of providing Secondary Reserve, as specified in section 1.7.19A.02(a) and in the PJM Manuals, and has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage shall submit offers to supply Secondary Reserve, or otherwise make their Secondary Reserve capability available. Such offers shall be for an amount equal to the resource's available energy output achievable within thirty minutes (less its energy output achievable within ten minutes) from a request of the Office of the Interconnection. Market Sellers of Generation Capacity Resources subject to this must-offer requirement that do not make the

reserve capability of such resources available when such resource is able to operate with a dispatchable range (e.g. through offering a fixed output) will be in violation of this provision.

(2) Market Sellers of all other generation resources located within the metered boundaries of the PJM Region that submit offers for the supply of energy into the Day-ahead Energy Market and/or Real-time Energy Market and are capable of providing Secondary Reserve, as specified in the PJM Manuals, shall be deemed to have made their reserve capability available to provide Secondary Reserve in the Day-ahead Energy Market and/or Real-time Energy Market for each clock hour for which the Market Seller submits an available offer to supply energy; provided, however that hydroelectric generation resources and Energy Storage Resources are not automatically deemed available to provide reserves based on the submission of an available energy offer but may submit offers to supply Secondary Reserve, as applicable.

(3) Offers for the supply of Secondary Reserve shall be for \$0.00/MWh. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this subsection (d) above, section 1.10.9B below, and the PJM Manuals, as applicable.

(ii) Determination of Available Secondary Reserve Capability of Generation Resources

(1) For each offer to supply Secondary Reserve by a generation resource, the Office of the Interconnection shall determine the MW of available Secondary Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Hydroelectric generation resources or Energy Storage Resources may submit their available Secondary Reserve capability as part of their offer into the Secondary Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(m)(i) above must submit a Secondary Reserve offer which specifies the MW of available Secondary Reserve capability in order to remain compliant with such requirements.

(2) (A) An on-line generation resource's available Secondary Reserve capability, except for generation resources capable of synchronous condensing, shall be based on the resource's current performance and initial energy output, the resource's available

Synchronized Reserve capability; and the following offer parameters submitted as part of the energy offer: (i) ramp rate; (ii) Economic Minimum; and (iii) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(B) For generation resources capable of synchronous condensing, the resource's available Secondary Reserve capability shall be based on the following offer parameters submitted as part of the energy offer: (i) ramp rate; (ii) condense to generation time constraints; (iii) Economic Minimum; and (iv) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(C) An off-line generation resource's available Secondary Reserve capability, shall be based on the resource's available Secondary Reserve capability and the following offer parameters submitted as part of the resource's energy offer: (i) startup time; (ii) notification time; (iii) ramp rate; (iv) Economic Minimum; and (v) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(3) Any Market Seller that believes its generating unit has operating modes, limits, or conditions where the unit would not be capable of providing Secondary Reserves in real time, can submit to the Office of the Interconnection with a copy to the Market Monitoring Unit a request for an exception from being assigned Secondary Reserves in the Real-time Secondary Reserve Market during time periods in which the generating unit is in those operating modes, limits, or conditions. As part of the request, the Market Seller shall supply, for each generating unit, technical information about the operational modes, limits, or conditions to support the requested exception, as further detailed in the PJM Manuals. The

Office of the Interconnection shall consult with the Market Monitoring Unit, and consider any input received from the Market Monitoring Unit, in its determination of a request for such an exception. Within 60 days of the submission of the request, the Office of the Interconnection shall notify the Market Seller in writing, with a copy to the Market Monitoring Unit, whether the request is approved or denied. The effective date of any approved request will be provided in the written notification. If a Market Seller has an approved exception, the Market Seller must communicate to the Office of the Interconnection when the unit cannot provide reserves, and the Office of the Interconnection will provide a mechanism for Market Sellers with an approved exception to provide such communication to the Office of the Interconnection in real time, as further detailed in the PJM Manuals. An approved exception will remain applicable to the unit until such time as the Office of the Interconnection determines that a change is needed or the Market Seller notifies the Office of the Interconnection, with a copy to the Market Monitoring Unit, that a change is needed based on changed operational capabilities of the unit. Market Sellers must notify the Office of the Interconnection, with a copy to the Market Monitoring Unit, within 30 days of any changed operational capabilities that necessitate a change in an approved exception.

(iii) Offers to Supply Secondary Reserves by Economic Load Response Participant resources

(1) Each Economic Load Response Participant that submits offers to reduce demand into the Day-ahead Energy Market and Real-time Energy Market and wishes to make their resources available to supply Secondary Reserve shall submit offers to supply Secondary Reserve from such resources, where such offers shall specify the megawatts of Secondary Reserve being offered, which must equal or exceed 0.1 megawatts and include such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer. Such offers may vary hourly, and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day.

(2) All Secondary Reserve offers by Economic Load Response Participant resources shall be for \$0.00/MWh. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(n) A Market Participant may submit a Day-Ahead Pseudo-Tie Transaction for a Market Participant's generator within the PJM balancing authority area that is a Pseudo-Tie into the MISO balancing authority area. Day-Ahead Pseudo-Tie Transactions combine an offer to sell energy at a source with a bid to buy the same megawatt quantity of energy at a sink where such transaction specifies the maximum difference between the Locational Marginal Prices at the source and sink.

Each Day-Ahead Pseudo-Tie Transaction shall: (1) source at a Market Participant's generator within the PJM balancing authority area that Pseudo-Ties into MISO; and (2) sink at the PJM-MISO interface. A Market Participant must reserve transmission service in accordance with the PJM Tariff for each Day-Ahead Pseudo-Tie Transaction. Megawatt quantities for Day-Ahead Pseudo-Tie Transactions shall be greater than zero and less than or equal to the transmission service reserved for the Day-Ahead Pseudo-Tie Transaction. An accepted Day-Ahead Pseudo-Tie Transaction results in scheduled injection at a specified source and scheduled withdrawal of the same megawatt quantity at a specified sink in the Day-Ahead Energy Market.

1.10.1B Demand Bid Scheduling and Screening

(a) The Office of the Interconnection shall apply Demand Bid Screening to all Demand Bids submitted in the Day-ahead Energy Market for each Load Serving Entity, separately by Zone. Using Demand Bid Screening, the Office of the Interconnection will automatically reject a Load Serving Entity's Demand Bids in any future Operating Day for which the Load Serving Entity submits bids if the total megawatt volume of such bids would exceed the Load Serving Entity's Demand Bid Limit for any hour in such Operating Day, unless the Office of the Interconnection permits an exception pursuant to subsection (d) below.

(b) On a daily basis, PJM will update and post each Load Serving Entity's Demand Bid Limit in each applicable Zone. Such Demand Bid Limit will apply to all Demand Bids submitted by that Load Serving Entity for each future Operating Day for which it submits bids. The Demand Bid Limit is calculated using the following equation:

Demand Bid Limit = greater of (Zonal Peak Demand Reference Point * 1.3), or (Zonal Peak Demand Reference Point + 10MW)

Where:

1. Zonal Peak Demand Reference Point = for each Zone: the product of (a) LSE Recent Load Share, multiplied by (b) Peak Daily Load Forecast.
2. LSE Recent Load Share is the Load Serving Entity's highest share of Network Load in each Zone for any hour over the most recently available seven Operating Days for which PJM has data.
3. Peak Daily Load Forecast is PJM's highest available peak load forecast for each applicable Zone that is calculated on a daily basis.

(c) A Load Serving Entity whose Demand Bids are rejected as a result of Demand Bid Screening may change its Demand Bids to reduce its total megawatt volume to a level that does not exceed its Demand Bid Limit, and may resubmit them subject to the applicable rules related to bid submission outlined in Tariff, Operating Agreement and PJM Manuals.

(d) PJM may allow a Load Serving Entity to submit bids in excess of its Demand Bid Limit when circumstances exist that will cause, or are reasonably expected to cause, a Load Serving Entity's actual load to exceed its Demand Bid Limit on a given Operating Day. Examples of such circumstances include, but are not limited to, changes in load commitments due to state sponsored auctions, mergers and acquisitions between PJM Members, and sales and

divestitures between PJM Members. A Load Serving Entity may submit a written exception request to the Office of Interconnection for a higher Demand Bid Limit for an affected Operating Day. Such request must include a detailed explanation of the circumstances at issue and supporting documentation that justify the Load Serving Entity's expectation that its actual load will exceed its Demand Bid Limit.

1.10.2 Pool-scheduled Resources.

Pool-scheduled resources are those resources for which Market Participants submitted offers to sell energy in the Day-ahead Energy Market and offers to reduce demand in the Day-ahead Energy Market, which the Office of the Interconnection scheduled in the Day-ahead Energy Market as well as generators committed by the Office of the Interconnection subsequent to the Day-ahead Energy Market. Such resources shall be committed to provide energy in the real-time dispatch unless the schedules for such units are revised pursuant to section 1.10.9 below or Tariff, Attachment K-Appendix, section 1.11. Pool-scheduled resources shall be governed by the following principles and procedures.

(a) Pool-scheduled resources shall be selected by the Office of the Interconnection on the basis of the prices offered for energy and demand reductions and related services, whether the resource is expected to be needed to maintain system reliability during the Operating Day, Start-up Costs, No-load Costs and cancellation fees, and the specified operating characteristics, offered by Market Sellers to the Office of the Interconnection by the offer deadline specified in section 1.10.1A above. Hydropower units can only be pool-scheduled if they are pumped storage units and scheduled by the Office of the Interconnection pursuant to the hydro optimization tool in the Day-ahead Energy Market.

(b) A resource that is scheduled by a Market Participant to support a bilateral sale, or that is self-scheduled by a Generating Market Buyer, shall not be selected by the Office of the Interconnection as a pool-scheduled resource except in an Emergency.

(c) Market Sellers offering energy from hydropower or other facilities with fuel or environmental limitations may submit data to the Office of the Interconnection that is sufficient to enable the Office of the Interconnection to determine the available operating hours of such facilities.

(d) The Market Seller of a resource selected as a pool-scheduled resource shall receive payments or credits for energy, demand reductions or related services, or for Start-up Costs and No-load Costs, from the Office of the Interconnection on behalf of the Market Buyers in accordance with Tariff, Attachment K-Appendix, section 3. Alternatively, the Market Seller shall receive, in lieu of Start-up Costs and No-load Costs, its actual costs incurred, if any, up to a cap of the resource's Start-up Costs, if the Office of the Interconnection cancels its selection of the resource as a pool-scheduled resource and so notifies the Market Seller before the resource is synchronized.

(e) Market Participants shall make available their pool-scheduled resources to the Office of the Interconnection for coordinated operation to supply the Operating Reserves needs of the applicable Control Zone.

(f) Economic Load Response Participants offering to reduce demand shall specify: (i) the amount of the offered curtailment, which must equal or exceed 0.1 megawatts, in minimum increments of 0.1 megawatts; (ii) the real-time Locational Marginal Price above which the end-use customer will reduce load; and (iii) at the Economic Load Response Participant's option, shut-down costs associated with reducing load, including direct labor and equipment costs, opportunity costs, and/or a minimum number of contiguous hours for which the load reduction must be committed. Economic Load Response Participants submitting offers to reduce demand in the Day-ahead Energy Market and/or the Real-time Energy Market may establish an incremental offer curve, provided that such offer curve shall be limited to ten price pairs (in MWs). Economic Load Response Participants offering to reduce demand shall also indicate the hours that the demand reduction is not available.

1.10.3 Self-scheduled Resources.

Self-scheduled resources shall be governed by the following principles and procedures.

(a) Each Generating Market Buyer shall use all reasonable efforts, consistent with Good Utility Practice, not to self-schedule resources in excess of its Equivalent Load.

(b) The offered prices of resources that are self-scheduled and not dispatchable by the Office of the Interconnection shall not be considered by the Office of the Interconnection in determining Locational Marginal Prices.

(c) Market Participants shall make available their self-scheduled resources to the Office of the Interconnection for coordinated operation to supply the Operating Reserves needs of the applicable Control Zone, by submitting an offer as to such resources.

(d) A Market Participant self-scheduling a resource in the Day-ahead Energy Market that does not deliver the energy in the Real-time Energy Market, shall replace the energy not delivered with energy from the Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(e) A Market Participant self-scheduling a resource to supply Synchronized Reserve in the Day-ahead Synchronized Reserve Market that does not deliver the scheduled megawatt quantity in the applicable real-time reserve market, shall replace the Synchronized Reserve not delivered and shall pay for such Synchronized Reserve at the applicable Real-time Synchronized Reserve Market Clearing Price. Market Participants shall not self-schedule a resource to provide Secondary Reserve or Non-Synchronized Reserve.

(f) For energy, hydropower units, excluding pumped storage units, may only be self-scheduled.

(g) A resource that has been self-scheduled shall not receive payments or credits for Start-up Costs or No-load Costs.

1.10.4 Capacity Resources.

(a) A Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative that is selected as a pool-scheduled resource shall be made available for scheduling and dispatch at the direction of the Office of the Interconnection. Such a Generation Capacity Resource that does not deliver energy as scheduled shall be deemed to have experienced a Generator Forced Outage to the extent of such energy not delivered. A Market Participant offering such Generation Capacity Resource in the Day-ahead Energy Market shall replace the energy not delivered with energy from the Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(b) Energy from a Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative that has not been scheduled in the Day-ahead Energy Market may be sold on a bilateral basis by the Market Seller, may be self-scheduled, or may be offered for dispatch during the Operating Day in accordance with the procedures specified in this Schedule. Such a Generation Capacity Resource that has not been scheduled in the Day-ahead Energy Market and that has been sold on a bilateral basis must be made available upon request to the Office of the Interconnection for scheduling and dispatch during the Operating Day if the Office of the Interconnection declares a Maximum Generation Emergency. Any such resource so scheduled and dispatched shall receive the applicable Real-time Price for energy delivered.

1.10.5 External Resources.

(a) External Resources may submit offers to the PJM Interchange Energy Market, in accordance with the day-ahead and real-time scheduling processes specified above. An External Resource selected as a pool-scheduled resource shall be made available for scheduling and dispatch at the direction of the Office of the Interconnection, and except as specified below shall be compensated on the same basis as other pool-scheduled resources. External Resources that are not capable of Dynamic Transfer shall, if selected by the Office of the Interconnection on the basis of the Market Seller's Offer Data, be block loaded on an hourly scheduled basis. Market Sellers shall offer External Resources to the PJM Interchange Energy Market on either a resource-specific or an aggregated resource basis. A Market Participant whose pool-scheduled resource does not deliver the energy scheduled in the Day-ahead Energy Market shall replace such energy not delivered as scheduled in the Day-ahead Energy Market with energy from the PJM Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(b) Offers for External Resources from an aggregation of two or more generating units shall so indicate, and shall specify, in accordance with the Offer Data requirements specified by the Office of the Interconnection: (i) energy prices; (ii) hours of energy availability; (iii) a minimum dispatch level; (iv) a maximum dispatch level; and (v) unless such information has previously been made available to the Office of the Interconnection, sufficient information, as specified in the PJM Manuals, to enable the Office of the Interconnection to model the flow

into the PJM Region of any energy from the External Resources scheduled in accordance with the Offer Data.

(c) Offers for External Resources on a resource-specific basis shall specify the resource being offered, along with the information specified in the Offer Data as applicable.

1.10.6 External Market Buyers.

(a) Deliveries to an External Market Buyer not subject to Dynamic Transfer by the Office of the Interconnection shall be delivered on a block loaded basis to the bus or buses at the electrical boundaries of the PJM Region, or in such area with respect to an External Market Buyer's load within such area not served by Network Service, at which the energy is delivered to or for the External Market Buyer. External Market Buyers shall be charged (which charge may be positive or negative) at either the Day-ahead Prices or Real-time Prices, whichever is applicable, for energy at the foregoing bus or buses.

(b) An External Market Buyer's hourly schedules for energy purchased from the PJM Interchange Energy Market shall conform to the ramping and other applicable requirements of the interconnection agreement between the PJM Region and the Control Area to which, whether as an intermediate or final point of delivery, the purchased energy will initially be delivered.

(c) The Office of the Interconnection shall curtail deliveries to an External Market Buyer if necessary to maintain appropriate reserve levels for a Control Zone as defined in the PJM Manuals, or to avoid shedding load in such Control Zone.

1.10.7 Bilateral Transactions.

Bilateral transactions as to which the parties have notified the Office of the Interconnection by the deadline specified in section 1.10.1A above that they elect not to be included in the Day-ahead Energy Market and that they are not willing to incur Transmission Congestion Charges in the Real-time Energy Market shall be curtailed by the Office of the Interconnection as necessary to reduce or alleviate transmission congestion. Bilateral transactions that were not included in the Day-ahead Energy Market and that are willing to incur congestion charges and bilateral transactions that were accepted in the Day-ahead Energy Market shall continue to be implemented during periods of congestion, except as may be necessary to respond to Emergencies.

1.10.8 Office of the Interconnection Responsibilities.

(a) The Office of the Interconnection shall use its best efforts to determine (i) the least-cost means of satisfying the projected hourly requirements for energy, Operating Reserves, and other ancillary services of the Market Buyers, including the reliability requirements of the PJM Region, of the Day-ahead Energy Market, and (ii) the least-cost means of satisfying the Operating Reserve and other ancillary service requirements for any portion of the load forecast of the Office of the Interconnection for the Operating Day in excess of that scheduled in the Day-ahead Energy Market. In making these determinations, the Office of the Interconnection shall

take into account: (i) the Office of the Interconnection's forecasts of PJM Interchange Energy Market and PJM Region energy requirements, giving due consideration to the energy requirement forecasts and purchase requests submitted by Market Buyers and PRD Curves properly submitted by PRD Providers; (ii) the offers submitted by Market Sellers; (iii) the availability of limited energy resources; (iv) the capacity, location, and other relevant characteristics of self-scheduled resources; (v) the objectives of each Control Zone for Operating Reserves, as specified in the PJM Manuals; (vi) the requirements of each Regulation Zone for Regulation and other ancillary services, as specified in the PJM Manuals; (vii) the benefits of avoiding or minimizing transmission constraint control operations, as specified in the PJM Manuals; and (viii) such other factors as the Office of the Interconnection reasonably concludes are relevant to the foregoing determination, including, without limitation, transmission constraints on external coordinated flowgates to the extent provided by Tariff, Attachment K-Appendix, section 1.7.6. The Office of the Interconnection shall develop a Day-ahead Energy Market based on the foregoing determination, and shall determine the Day-ahead Prices resulting from such schedule. The Office of the Interconnection shall report the planned schedule for a hydropower resource to the operator of that resource as necessary for plant safety and security, and legal limitations on pond elevations.

(b) By 1:30 p.m., or as soon as practicable thereafter, of the day before each Operating Day, or such other deadline as may be specified by the Office of the Interconnection in the PJM Manuals, the Office of the Interconnection shall: (i) post the aggregate Day-ahead Energy Market results; (ii) post the Day-ahead Prices; and (iii) inform the Market Sellers, Market Buyers, and Economic Load Response Participants of their scheduled injections, withdrawals, and demand reductions respectively. The foregoing notwithstanding, the deadlines set forth in this subsection shall not apply if the Office of the Interconnection is unable to obtain Market Participant bid/offer data due to extraordinary circumstances. For purposes of this subsection, extraordinary circumstances shall mean a technical malfunction that limits, prohibits or otherwise interferes with the ability of the Office of the Interconnection to obtain Market Participant bid/offer data prior to 11:59 p.m. on the day before the affected Operating Day. Extraordinary circumstances do not include a Market Participant's inability to submit bid/offer data to the Office of the Interconnection. If the Office of the Interconnection is unable to clear the Day-ahead Energy Market prior to 11:59 p.m. on the day before the affected Operating Day as a result of such extraordinary circumstances, the Office of the Interconnection shall notify Members as soon as practicable.

(c) Following posting of the information specified in section 1.10.8(b), and absent extraordinary circumstances preventing the clearing of the Day-ahead Energy Market, the Office of the Interconnection shall revise its schedule of generation resources to reflect updated projections of load, conditions affecting electric system operations in the PJM Region, the availability of and constraints on limited energy and other resources, transmission constraints, and other relevant factors.

(d) Market Buyers shall pay PJMSettlement and Market Sellers shall be paid by PJMSettlement for the quantities of energy scheduled in the Day-ahead Energy Market at the Day-ahead Prices when the Day-ahead Price is positive. Market Buyers shall be paid by PJMSettlement and Market Sellers shall pay PJMSettlement for the quantities of energy

scheduled in the Day-ahead Energy Market at the Day-ahead Prices when the Day-ahead Price is negative. Economic Load Response Participants shall be paid for scheduled demand reductions pursuant to Tariff, Attachment K-Appendix, section 3.3A. Notwithstanding the foregoing, if the Office of the Interconnection is unable to clear the Day-ahead Energy Market prior to 11:59 p.m. on the day before the affected Operating Day due to extraordinary circumstances as described in subsection (b) above, it will be declared a Market Suspension, and Day-ahead Prices shall be determined pursuant to Operating Agreement, Schedule 1, section 2.6.1. If the Office of the Interconnection declares a Market Suspension, it shall notify Market Participants of the Market Suspension as soon as practicable.

(e) If the Office of the Interconnection discovers a *potential* error in prices and/or cleared quantities in the Day-ahead Energy Market or Day-ahead Ancillary Services Markets, or the Real-time Energy Market or Real-time Ancillary Services Markets after it has posted the results for these markets on its Web site, the Office of the Interconnection shall notify Market Participants as soon as possible after it is found, but in no event later than 12:00 p.m. of the second Business Day following the Operating Day for the Real-time Energy Market and Real-time Ancillary Services Markets, and no later than 5:00 p.m. of the second Business Day following the initial publication of the results for the Day-ahead Energy Market and Day-ahead Ancillary Services Markets. After this initial notification, if the Office of the Interconnection determines it is necessary to post modified results, it shall provide notification of its intent to do so, *along with a description detailing the cause and scope of the error*, by no later than 5:00 p.m. of the fifth Business Day following the Operating Day for the Real-time Energy Market and Real-time Ancillary Services Markets, and no later than 5:00 p.m. of the fifth Business Day following the initial publication of the results in the Day-ahead Energy Market and Day-ahead Ancillary Services Markets. *The provided description will not contain information that is market sensitive or confidential.* Thereafter, the Office of the Interconnection must post on its Web site the corrected results by no later than 5:00 p.m. of the tenth calendar day following the Operating Day for the Day-ahead Energy Market, Real-time Energy Market, and Day-ahead Ancillary Services Markets, and Real-time Ancillary Service Markets. Should any of the above deadlines pass without the associated action on the part of the Office of the Interconnection, the originally posted results will be considered final. Notwithstanding the foregoing, the deadlines set forth above shall not apply if the referenced market results are under publicly noticed review by the FERC.

(f) Consistent with Operating Agreement, section 18.17.1, and notwithstanding anything to the contrary in the Operating Agreement or in the PJM Tariff, to allow the tracking of Market Participants' non-aggregated bids and offers over time as required by FERC Order No. 719, the Office of the Interconnection shall post on its Web site the non-aggregated bid data and Offer Data submitted by Market Participants (for participation in the PJM Interchange Energy Market) approximately four months after the bid or offer was submitted to the Office of the Interconnection.

1.10.9 Hourly Scheduling.

(a) Following the initial posting by the Office of the Interconnection of the Locational Marginal Prices resulting from the Day-ahead Energy Market, and subject to the right

of the Office of the Interconnection to schedule and dispatch pool-scheduled resources and to direct that schedules be changed in an Emergency, and absent extraordinary circumstances preventing the clearing of the Day-ahead Energy Market, a generation rebidding period shall exist. Typically the rebidding period shall be from the time the Office of the Interconnection posts the results of the Day-ahead Energy Market until 2:15 p.m. on the day before each Operating Day. However, should the clearing of the Day-ahead Energy Market be significantly delayed, the Office of the Interconnection may establish a revised rebidding period. During the rebidding period, Market Participants may submit revisions to generation Offer Data for the next Operating Day. Adjustments to the Day-ahead Energy Market shall be settled at the applicable Real-time Prices, and shall not affect the obligation to pay or receive payment for the quantities of energy scheduled in the Day-ahead Energy Market at the applicable Day-ahead Prices.

(b) A Market Participant may adjust the schedule of a resource under its dispatch control on an hour-to-hour basis beginning at 6:30 p.m. of the day before each Operating Day, provided that the Office of the Interconnection is notified not later than 65 minutes prior to the hour in which the adjustment is to take effect, as follows and as specified in section 1.10.9A below:

i) A Generating Market Buyer may self-schedule any of its resource increments, including hydropower resources, not previously designated as self-scheduled and not selected as a pool-scheduled resource in the Day-ahead Energy Market;

ii) A Market Participant may request the scheduling of a non-firm bilateral transaction; or

iii) A Market Participant may request the scheduling of deliveries or receipts of Spot Market Energy; or

iv) A Generating Market Buyer may remove from service a resource increment, including a hydropower resource, that it had previously designated as self-scheduled, provided that the Office of the Interconnection shall have the option to schedule energy from any such resource increment that is a Capacity Resource at the price offered in the scheduling process, with no obligation to pay any Start-Up Costs.

(c) An External Market Buyer may refuse delivery of some or all of the energy it requested to purchase in the Day-ahead Energy Market by notifying the Office of the Interconnection of the adjustment in deliveries not later than 65 minutes prior to the hour in which the adjustment is to take effect, but any such adjustment shall not affect the obligation of the External Market Buyer to pay for energy scheduled on its behalf in the Day-ahead Energy Market at the applicable Day-ahead Prices.

(d) The Office of the Interconnection shall provide External Market Buyers and External Market Sellers and parties to bilateral transactions with any revisions to their schedules resulting from the rebidding period by 6:30 p.m. on the day before each Operating Day. The Office of the Interconnection may also commit additional resources after such time as system conditions require. For each hour in the Operating Day, as soon as practicable after the deadlines

specified in the foregoing subsection of this section 1.10, the Office of the Interconnection shall provide External Market Buyers and External Market Sellers and parties to bilateral transactions with any revisions to their schedules for the hour.

1.10.9A Updating Offers in Real-time

(a) Each Market Seller may submit Real-time Offers for a resource up to 65 minutes before the applicable clock hour, and such Real-time Offers shall supersede any previous offer for that resource for the clock hour, as further described in the PJM Manuals and subject to the following conditions:

(i) A market-based Real-time Offer shall not exceed the applicable energy offer caps specified in this Schedule. Once a Market Seller's resource is committed for an applicable clock hour, the Market Seller may not increase its Incremental Energy Offer and may only submit a market-based Real-time Offer that is higher than its market-based offer that was in effect at the time of commitment to reflect increases in the resource's cost-based Start-up Costs and cost-based No-load Costs. The Market Seller may elect not to have its market-based offer considered for dispatch and to have only its lowest cost-based offer considered for the remainder of the Operating Day.

(ii) Cost-based Real-time Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection's Offer Data specification, Operating Agreement, Schedule 1, sections 1.10.1A(d) and 1.10.9B, Operating Agreement, Schedule 2 and the PJM Manuals, as applicable. If a Market Seller submits a market-based Real-time Offer for a particular clock hour in accordance with subsection (c) below, or if updates to a cost-based offer are required by the Market Seller's approved Fuel Cost Policy, the Market Seller shall update its previously submitted cost-based Real-time Offer.

(iii) If a Market Seller's available cost-based offer is not compliant with Operating Agreement, Schedule 2 and the PJM Manuals at the time a Market Seller submits a market-based Real-time Offer for an applicable clock hour during the Operating Day, the Market Seller must submit an updated cost-based Real-time Offer consisting of an Incremental Energy Offer, Start-up Cost and No-load Cost for that clock hour that is compliant with Operating Agreement, Schedule 2 and the PJM Manuals.

(b) Each Market Seller may submit Real-time Offers for a resource during and through the end of the applicable clock hour to update only the following offer parameters, as further described in the PJM Manuals: (1) Economic Minimum; (2) Economic Maximum; (3) emergency minimum MW; (4) emergency maximum MW; (5) unit availability status; (6) fixed output indicator; (7) Synchronized Reserve maximum MW; and (8) Secondary Reserve maximum MW. Such Real-time Offers shall supersede any previous offer for that resource for the clock hour.

1.10.9B Offer Parameter Flexibility

(a) Market Sellers may, in accordance with sections 1.10.1A and 1.10.9A above, this section 1.10.9B, and the PJM Manuals, update offer parameters at any time up to 65 minutes before the applicable clock hour, including prior to the close of the Day-ahead Energy Market and prior to the close of the rebidding period specified in section 1.10.9, except that Market Sellers may not update their offers for the supply of energy, Secondary Reserve, Synchronized Reserve, Non-Synchronized Reserve, or demand reduction: (1) during the period after the close the Day-ahead Energy Market and prior to the posting of the Day-ahead Energy Market results pursuant to section 1.10.8(b); or (2) during the period after close of the rebidding period and prior to PJM announcing the results of the rebidding period pursuant to section 1.10.9(d).

(b) For generation resource offers, Market Sellers may vary for each clock hour during the entire Operating Day the following offer parameters: (1) cost-based Start-up Costs; (2) cost-based No-load Costs; (3) Incremental Energy Offer; (4) Economic Minimum and Economic Maximum; (5) emergency minimum MW and emergency maximum MW; (6) ramp rate; (7) Synchronized Reserve maximum MW; (8) Secondary Reserve maximum MW; and (9) for Real-time Offers only, (i) notification time and (ii) for uncommitted hours only, Minimum Run Time.

(c) For Economic Load Response Participant resource offers, Market Sellers may vary for each clock hour during the entire Operating Day the following offer parameters: (1) shutdown costs, (2) Incremental Energy Offer; (3) Economic Minimum; (4) Economic Maximum; and (5) for Real-time Offers only, (i) notification time and (ii) for uncommitted hours only, minimum down time.

(d) After the announcement of the results of the rebidding period pursuant to section 1.10.9(d), a Market Seller may submit a Real-time Offer where offer parameters may differ from the offer originally submitted in the Day-ahead Energy Market, except that a Market Seller may not submit a Real-time Offer that changes, of the offer parameters listed in section 1.10.1A(d), the MW amounts specified in the Incremental Energy Offer, MW amounts specified in the ramp rate, maximum run time, and availability; provided, however, Market Sellers of dual-fueled resources may submit Real-time Offers for such resources that change the availability of a submitted cost-based offer.

3.2 Market Settlements.

If a dollar-per-MW-hour value is applied in a calculation under this section 3.2 where the interval of the value produced in that calculation is less than an hour, then for purposes of that calculation the dollar-per-MW hour value is divided by the number of Real-time Settlement Intervals in the hour.

3.2.1 Spot Market Energy.

(a) The Office of the Interconnection shall calculate System Energy Prices in the form of Day-ahead System Energy Prices and Real-time System Energy Prices for the PJM Region, in accordance with Tariff, Attachment K-Appendix, section 2.

(b) Each Market Participant shall be charged for all of its Market Participant Energy Withdrawals scheduled in the Day-ahead Energy Market at the Day-ahead System Energy Price to be served in the PJM Interchange Energy Market.

(c) Each Market Participant shall be paid for all of its Market Participant Energy Injections scheduled in the Day-ahead Energy Market at the Day-ahead System Energy Price to be delivered to the PJM Interchange Energy Market.

(d) For each Day-ahead Settlement Interval during an Operating Day, the Office of the Interconnection shall calculate Spot Market Energy charges for each Market Participant as the difference between the sum of its Market Participant Energy Withdrawals scheduled times the Day-ahead System Energy Price and the sum of its Market Participant Energy Injections scheduled times the Day-ahead System Energy Price.

(e) For each Real-time Settlement Interval during an Operating Day, the Office of the Interconnection shall calculate Spot Market Energy charges for each Market Participant as the difference between the sum of its real-time Market Participant Energy Withdrawals less its scheduled Market Participant Energy Withdrawals times the Real-time System Energy Price and the sum of its real-time Market Participant Energy Injections less scheduled Market Participant Energy Injections times the Real-time System Energy Price. The Revenue Data for Settlements determined for each Real-time Settlement Interval in accordance with Tariff, Attachment K-Appendix, section 3.1A shall be used in determining the real-time Market Participant Energy Withdrawals and Market Participant Energy Injections used to calculate Spot Market Energy charges under this subsection (e).

(f) For pool External Resources, the Office of the Interconnection shall model, based on an appropriate flow analysis, the megawatts of real-time energy injections to be delivered from each such resource to the corresponding Interface Pricing Point between adjacent Control Areas and the PJM Region.

3.2.2 Regulation.

(a) Each Market Participant that is a Load Serving Entity in a Regulation Zone shall have an hourly Regulation objective equal to its pro rata share of the Regulation Requirement of such Regulation Zone for the hour, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Regulation Zone for the hour ("Regulation Obligation"). A Market Participant with an hourly Regulation Obligation shall be charged the pro rata share of the sum of the Regulation market mileage clearing price credits and Regulation market capability clearing price credits for the Real-time Settlement Intervals in an hour.

Regulation Charge = Hourly Regulation Obligation Share * (sum of the Real-time Settlement Interval Regulation credits in an hour)

(b) Each Market Participant supplying Regulation in a Regulation Zone at the direction of the Office of the Interconnection shall be credited for each of its resources such that the calculated credit for each increment of Regulation provided by each resource shall be the higher of: (i) the Regulation market-clearing price; or (ii) the sum of the applicable Regulation offers for a resource determined pursuant to section 3.2.2A.1 below, the resource-specific shoulder opportunity costs described in subsection (e) of this section, the resource-specific inter-temporal opportunity costs discussed in subsection (d), and the resource-specific opportunity costs discussed in subsection (e) of this section.

(c) The Office of the Interconnection shall commit resources to provide Regulation every 30 minutes, for the clock intervals of the first 30 minutes of an hour and the second 30 minutes of an hour, up to the Regulation Requirement of such Regulation Zone. The Office of the Interconnection shall select resources in merit order, taking into account the resource's mileage Regulation offer, capability Regulation offer, and estimated resource-specific opportunity cost, all converted into their performance adjusted values as further detailed in the PJM Manuals. The total Regulation market-clearing price in each Regulation Zone shall be determined in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval. The total Regulation market-clearing price shall include: (i) the mileage Regulation market-clearing price in a Regulation Zone that shall be calculated in accordance with subsection (g) of this section; (ii) the capability Regulation market-clearing price that shall be calculated in accordance with subsection (h) of this section; and (iii) a Regulation resource's unit-specific opportunity costs during the 5-minute period, determined as described in subsection (d) below. A resource's Regulation offer by any Market Seller that fails the three-pivotal supplier test set forth in section 3.2.2A.1 below shall not exceed the cost of providing Regulation from such resource, plus twelve dollars, as determined pursuant to the formula in Tariff, Attachment K-Appendix, section 1.10.1A(e).

(d) In determining the Regulation 5-minute clearing price for each Regulation Zone, the resource-specific opportunity costs (in dollars) of a resource offering to sell Regulation in each regulating interval, except for hydroelectric resources, shall be equal to the area bounded by (i) Locational Marginal Price at the generation bus for the regulating resource, (ii) the resource's Final Offer, (iii) the resource's tracking ramp-rate limited expected output level if it had been

dispatched for energy in economic merit order, as further described in the PJM Manuals, and (iv) the resource's regulation set point on the energy schedule curve on which the resource is running in the PJM Interchange Energy Market. The area is divided by the resource performance score and further divided by the resource's regulation assigned megawatt to convert to dollars per megawatt.

For hydroelectric resources offering to sell Regulation in a regulating interval, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the full value of the Locational Marginal Price at that generation bus for each megawatt of Regulation capability.

The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead megawatt commitment greater than zero shall be equal to the product of (i) the deviation of the set point of the hydroelectric resource that is expected to be required in order to provide Regulation from the hydroelectric resource's expected output level if it had been dispatched in economic merit order times (ii) the difference between the expected Locational Marginal Price at the generation bus for the hydroelectric resource and the average of the Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. Estimated opportunity costs shall be zero for hydroelectric resources for which the average Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period, excluding those Real-time Settlement Intervals during which all available units at the hydroelectric resource were operating is higher than the actual Locational Marginal Price at the generator bus for the Real-time Settlement Interval.

The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead megawatt commitment greater than zero shall be equal to the product of (i) the deviation of the set point of the hydroelectric resource that is expected to be required in order to provide Regulation from the hydroelectric resource's expected output level if it had been dispatched in economic merit order times (ii) the difference between the average of the Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating and the expected Locational Marginal Price at the generation bus for the hydroelectric resource. Estimated opportunity costs shall be zero for hydroelectric resources for which the actual Locational Marginal Price at the generator bus for the Real-time Settlement Interval is higher than the average Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period, excluding those Real-time Settlement Intervals during which all available units at the hydroelectric resource were operating.

For the purpose of committing resources and setting Regulation market clearing prices, the Office of the Interconnection shall utilize day-ahead Locational Marginal Prices to calculate the average of the Locational Marginal Price values used in the calculation for opportunity costs for hydroelectric resources. For the purposes of settlements, the Office of the Interconnection shall

utilize the real-time Locational Marginal Prices to calculate the average of the Locational Marginal Price used in the calculation for opportunity costs for hydroelectric resources.

Opportunity costs for Economic Load Response Participant resources and regulation-only resources to provide Regulation are zero for the purpose of committing resources, setting Regulation clearing prices, and settlements.

(e) In determining the credit under subsection (b) to a Market Participant selected to provide Regulation in a Regulation Zone and that actively follows the Office of the Interconnection's Regulation signals and instructions, the unit-specific opportunity cost of a generation resource shall be determined for (1) each Real-time Settlement Interval that the Office of the Interconnection requires a generation resource to provide Regulation, and (2) the two Real-time Settlement Intervals preceding the regulation commitment and the two Real-time Settlement Intervals following the regulation commitment in accordance with the PJM Manuals and below.

The unit-specific opportunity cost in dollars, incurred during the Real-time Settlement Interval, in which the Regulation obligation is fulfilled, shall be equal to the area bounded by (i) the Locational Marginal Price at the generation bus for the regulating resource, (ii) the resource's Final Offer, (iii) the generation resource's tracking ramp-rate limited expected output level if it had been dispatched in economic merit order, as further described in the PJM Manuals, and (iv) the generation resource's regulation set point, and adjusted for the performance score of the resource. Opportunity costs for Economic Load Response Participant or regulation only resources to provide Regulation are zero.

The unit-specific opportunity costs associated with uneconomic operation during each of the preceding two Real-time Settlement Intervals of the regulation commitment shall be equal to the product of (i) the deviation between the set point of the generation resource that is expected to be required in the initial regulating Real-time Settlement Interval in order to provide Regulation and the resource's tracking expected ramp rate limited output in each of the preceding two Real-time Settlement Intervals of the regulation commitment times (ii) the absolute value of the difference between the Locational Marginal Price at the generation bus for the generation resource in each of the preceding two Real-time Settlement Intervals of the regulation commitment and the energy offer, using the Final Offer, at the megawatt level of the Regulation set point for the resource in the initial regulating Real-time Settlement Interval, in the PJM Interchange Energy Market, all as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals.

The unit-specific opportunity costs associated with uneconomic operation during each of the following two Real-time Settlement Intervals of the regulation commitment shall be equal to the product of (i) the deviation between the set point of the generation resource that is expected to be required in the final regulating Real-time Settlement Interval in order to provide Regulation and the resource's tracking expected ramp-rate limited output in each of the following two Real-time Settlement Intervals of the regulation commitment times, and (ii) the absolute value of the difference between the Locational Marginal Price at the generation bus for the generation resource in each of the following two Real-time Settlement Intervals of the regulation

commitment and the energy offer, using the Final Offer, at the megawatt level of the Regulation set point for the resource in final regulating hour, in the PJM Interchange Energy Market all as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals.

(f) Any amounts credited for Regulation in an hour in excess of the Regulation market-clearing price in that hour shall be allocated and charged to each Market Participant in a Regulation Zone that does not meet its hourly Regulation obligation in proportion to its purchases of Regulation in such Regulation Zone in megawatt-hours during that hour.

(g) To determine the Regulation market mileage-clearing price, the Office of the Interconnection shall adjust the submitted mileage offer for each resource in accordance with the historical performance score of that resource, and the amount of historically dispatched Regulation (mileage) calculated by the Office of the Interconnection. The maximum adjusted mileage offer of all cleared resources will set the Regulation market mileage-clearing price.

The owner of each Regulation resource that actively follows the Office of the Interconnection's Regulation signals and instructions, will be credited for Regulation mileage by multiplying the assigned MW(s) by the Regulation market mileage-clearing price, by the ratio between the requested mileage for the Regulation dispatch signal and the historic requested mileage for the Regulation dispatch signal, calculated by the Office of the Interconnection, and by the Regulation resource's performance score calculated in accordance with subsection (j) of this section.

(h) The Office of the Interconnection shall divide each Regulation resource's capability offer by the historic performance score for the resource for the purposes of committing resources and setting the market clearing prices.

The Office of the Interconnection shall calculate the Regulation market capability-clearing price for each Regulation Zone by subtracting the Regulation market mileage-clearing price described in subsection (g) from the total Regulation market clearing price described in subsection (c). This residual sets the Regulation market capability-clearing price for that market Real-time Settlement Interval.

The owner of each Regulation resource that actively follows the Office of the Interconnection's Regulation signals and instructions will be credited for Regulation capability based on the assigned MW and the capability Regulation market-clearing price multiplied by the Regulation resource's performance score calculated in accordance with subsection (j) of this section.

(i) In accordance with the processes described in the PJM Manuals, the Office of the Interconnection shall: (i) calculate inter-temporal opportunity costs for each applicable resource; (ii) include such inter-temporal opportunity costs in each applicable resource's offer to sell frequency Regulation service; and (iii) account for such inter-temporal opportunity costs in the Regulation market-clearing price.

(j) The Office of the Interconnection shall calculate each Regulation resource's performance score. The performance score shall be a function of the difference in the energy provided versus the energy requested by the Regulation signal while scaling for the number of samples. The error measured shall be the difference of the resources response and the dispatch signal, adjusted by the assigned MW and signal dispatch of the Regulation resource. The performance score is calculated using the following equations:

$$\text{Performance Score} = 1 - 1/n \sum \text{Abs (Error)};$$

Error = Average of Abs (Abs (Response - Regulation Signal) / (0.5*Interval Average Regulation Signal + 0.5*AREG)); and

n = the number of samples in the interval

AREG = assigned regulation megawatt.

The Office of the Interconnection shall calculate a performance score for each Regulation resource for each five-minute period the Regulation resource is assigned to provide Regulation.

The historic performance score will be based on a 100 clock-hour rolling average of the Real-time Settlement Interval performance scores, with consideration of the qualification score, for resources without adequate historical data, as defined in the PJM Manuals.

Regulation resources that have a Real-time Settlement Interval performance score below 25% will be ineligible for Regulation credits for that Real-time Settlement Interval.

Regulation resources that have historical performance scores fall below 40% shall be disqualified from providing Regulation until they are able to re-qualify, as defined in the PJM Manuals.

(k) During a Market Suspension where the suspension is less than or equal to 24 consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Regulation, the resources providing Regulation at the direction of the Office of the Interconnection will be compensated based on a calculated Regulation market-clearing price. Regulation market-clearing prices for each Real-time Settlement Interval associated with such Market Suspension shall be the average of the Regulation market-clearing prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

During a Market Suspension where the suspension is greater than 24 consecutive hours, if the Office of the Interconnection is assigning Regulation, resources providing Regulation at the direction of the Office of the Interconnection will be compensated based on a calculated Regulation clearing price. The Regulation clearing price for each Real-time Settlement Interval will be determined by calculating a Regulation clearing cost for the online resources providing Regulation during the Market Suspension. The resource's Regulation clearing cost is determined by the summation of their adjusted Regulation offer and adjusted opportunity cost. The opportunity cost will be based on the resource's cost-based offer and will be determined as follows:

For online resources providing Regulation on a cost-based offer at the time of the Market Suspension, that cost-based offer will be used.

For online resources providing Regulation on a price-based offer at the time of the Market Suspension, the Office of the Interconnection shall use the cheapest available cost-based offer based on the dispatch cost formula as defined in Operating Agreement, Schedule 1, section 6.4.1(g) using the available cost-based offers in the Office of the Interconnection system at the time of the Market Suspension.

The highest cost resource, based on this Regulation clearing cost, will set the Regulation market-clearing price for each hour of the Market Suspension.

During a Market Suspension, if the Office of the Interconnection is not assigning Regulation resources, then the Regulation market-clearing price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period and no resource-specific opportunity cost will be calculated.

During a Market Suspension, the following Regulation components for all Real-time Settlement Intervals in the Market Suspension period will be determined as follows:

- (i) If the regulation performance score cannot be calculated during a Market Suspension, the historic performance score will be used for the Market Suspension period.
- (ii) If the regulation mileage cannot be calculated during a Market Suspension, the mileage will be set to one (1) for the Market Suspension period.

3.2.2A Offer Price Caps.

3.2.2A.1 Applicability.

(a) For each Regulation market clearing interval, the Office of the Interconnection shall conduct a Regulation three-pivotal supplier test as described in this section. Regulation offers from Market Sellers that fail the Regulation three-pivotal supplier test shall be capped in the interval in which they failed the test at their cost based offers as determined pursuant to Tariff, Attachment K-Appendix, section 1.10.1A(e). A Regulation supplier fails the three-pivotal supplier test in any Regulation market clearing interval in which such Regulation supplier and the two largest other Regulation suppliers are jointly pivotal.

(b) For the purposes of conducting the three-pivotal supplier test pursuant to this section, the following applies:

- (i) The Regulation three-pivotal supplier test will include in the definition of available supply all offer megawatts from resources capable of satisfying the Regulation Requirement of the PJM Region multiplied by the historic performance score of the

resource for which the capability cost-based offer plus the mileage cost-based offer plus any eligible opportunity costs is no greater than 150% of the clearing price that would be calculated if all offers were limited to cost (plus eligible opportunity costs).

(ii) The Regulation three-pivotal supplier test will apply on a Regulation supplier basis (i.e. not a resource by resource basis) and only the Regulation suppliers that fail the three-pivotal supplier test will have their Regulation offers capped. A Regulation supplier for the purposes of this section includes corporate affiliates. Regulation from resources controlled by a Regulation supplier or its affiliates, whether by contract with unaffiliated third parties or otherwise, will be included as Regulation of that Regulation supplier. Regulation provided by resources owned by a Regulation supplier but controlled by an unaffiliated third party, whether by contract or otherwise, will be included as Regulation of that third party.

(iii) Each supplier shall be ranked from the largest to the smallest offered megawatt of eligible Regulation supply adjusted by the historic performance of each resource. Suppliers are then tested in order, starting with the three largest suppliers. For each iteration of the test, the two largest suppliers are combined with a third supplier, and the combined supply is subtracted from total effective supply. The resulting net amount of eligible supply is divided by the Regulation Requirement for the Regulation clearing interval to determine the residual supply index. Where the residual supply index for Regulation three pivotal suppliers is less than or equal to 1.0, then the three suppliers are jointly pivotal and the suppliers being tested fail the three pivotal supplier test. Iterations of the test continue until the combination of the two largest suppliers and a third supplier result in a residual supply index greater than 1.0, at which point the remaining suppliers pass the test. Any resource owner that fails the three-pivotal supplier test will be offer-capped.

3.2.3 Operating Reserves.

(a) A Market Seller's pool-scheduled resources capable of providing Operating Reserves shall be credited as specified below based on the applicable offer for the operation of such resource, provided that the resource was available for the entire time specified in the Offer Data for such resource. To the extent that sections 3.2.3A, 3.2.3A.001, and 3.2.3A.01 below do not meet the Synchronized Reserve Requirements, the Primary Reserve Requirements, and the 30-minute Reserve Requirements, the Office of the Interconnection shall schedule additional Operating Reserves pursuant to Section 1.7.17 and 1.10 of Schedule 1 of this Agreement. In addition the Office of the Interconnection shall schedule Operating Reserves pursuant to those sections to satisfy any unforeseen Operating Reserve requirements that are not reflected in the day-ahead market. PJMSettlement shall be the Counterparty to the purchases and sales of Operating Reserve in the PJM Interchange Energy Market.

(b) The following determination shall be made for each pool-scheduled resource that is scheduled in the Day-ahead Energy Market: the total offered price for Start-up Costs and No-load Costs and energy, determined on the basis of the resource's scheduled output, shall be compared to the total value of that resource's energy – as determined by the Day-ahead Energy

Market and the Day-ahead Prices applicable to the relevant generation bus in the Day-ahead Energy Market. PJM shall also (i) determine whether any resources were scheduled in the Day-ahead Energy Market to provide Black Start service, Reactive Services or transfer interface control during the Operating Day because they are known or expected to be needed to maintain system reliability in a Zone during the Operating Day in order to minimize the total cost of Operating Reserves associated with the provision of such services and reflect the most accurate possible expectation of real-time operating conditions in the day-ahead model, which resources would not have otherwise been committed in the day-ahead security-constrained dispatch and (ii) report on the day following the Operating Day the megawatt quantities scheduled in the Day-ahead Energy Market for the above-enumerated purposes for the entire RTO.

Except as provided in section 3.2.3(n) below, if the total offered price for Start-up Costs (shutdown costs for Economic Load Response Participant resources) and No-load Costs and energy summed over all Day-ahead Settlement Intervals exceeds the total value summed over all Day-ahead Settlement Intervals, the difference shall be credited to the Market Seller as a day-ahead Operating Reserve credit.

However, for the Day-ahead Settlement Intervals in which the resource is scheduled to provide energy in the Operating Day and the resource actually provides energy in at least one Real-time Settlement Interval in an hour that corresponds to such scheduled Day-ahead Settlement Intervals, a resource's day-ahead Operating Reserve credit shall be reduced by the greater of zero or the difference of the resource's Day-ahead Operating Reserve Target and the Balancing Operating Reserve Target, as determined below.

A resource's Day-ahead Operating Reserve Target shall be determined in accordance with the following equation:

$$(A + B) - C$$

Where:

A = Start-up Costs

B = the sum of day-ahead No-load Costs and energy over the applicable Real-time Settlement Intervals that correspond with Day-ahead Settlement Intervals in which the resource is scheduled. The day-ahead No-load Costs and energy are divided by twelve to determine the cost for each Real-time Settlement Interval.

C = the sum of the day-ahead revenues calculated for each Real-time Settlement Interval that corresponds with a Day-ahead Settlement Interval in which the resource is scheduled, where the day-ahead revenue for each such Real-time Settlement Interval equals the product of the megawatt amount of energy scheduled in the Day-ahead Energy Market and the Day-ahead Price at the applicable pricing point for the resource divided by twelve.

A resource's Balancing Operating Reserve Target shall be determined in accordance with the following equation:

$$D - (E + F)$$

Where:

D = the sum of Start-up Costs and No-load Costs and the incremental cost of energy summed over all Real-time Settlement Intervals that correspond to the Day-ahead Settlement Intervals in which the resource was scheduled;

E = [(the megawatt amount of energy provided in the Real-time Energy Market minus the megawatt amount of energy scheduled in the Day-ahead Energy Market) multiplied by the Real-time Price at the applicable pricing point for the resource] plus the sum of the day-ahead revenues as determined in part C of the above formula for determining the Day-ahead Operating Reserve Target, summed over the applicable Real-time Settlement Intervals; and

F = the sum of all revenues earned for providing Secondary Reserves, Synchronized Reserves, Non-Synchronized Reserves, and Reactive Services over the applicable Real-time Settlement Intervals.

The Office of the Interconnection shall apply any balancing Operating Reserve credits allocated pursuant to this section 3.2.3(b) to real-time deviations or real-time load share plus exports, pursuant to Tariff, Attachment K-Appendix, section 3.2.3(p), depending on whether the balancing Operating Reserve credits are related to resources scheduled during the reliability analysis for an Operating Day, or during the actual Operating Day.

(i) For resources scheduled by the Office of the Interconnection during the reliability analysis for an Operating Day, the associated balancing Operating Reserve credits shall be allocated based on the reason the resource was scheduled according to the following provisions:

(A) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to operate in real-time to augment the physical resources committed in the Day-ahead Energy Market to meet the forecasted real-time load plus the Operating Reserve requirement, the associated balancing Operating Reserve credits, identified as RA Credits for Deviations, shall be allocated to real-time deviations.

(B) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to maintain system reliability, the associated balancing Operating Reserve credits, identified as RA Credits for Reliability, shall be allocated according to ratio share of real time load plus export transactions.

(C) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource with a day-ahead schedule is required to deviate from that schedule to provide balancing Operating Reserves, the associated balancing Operating Reserve credits shall be segmented and separately allocated pursuant to subsections 3.2.3(b)(i)(A) or 3.2.3(b)(i)(B) hereof. Balancing Operating Reserve credits for such resources will be identified in the same manner as units committed during the reliability analysis pursuant to subsections 3.2.3(b)(i)(A) and 3.2.3(b)(i)(B) hereof.

(ii) For resources scheduled during an Operating Day, the associated balancing Operating Reserve credits shall be allocated according to the following provisions:

(A) If the Office of the Interconnection directs a resource to operate during an Operating Day to provide balancing Operating Reserves, the associated balancing Operating Reserve credits, identified as RT Credits for Reliability, shall be allocated according to ratio share of load plus exports. The foregoing notwithstanding, credits will be applied pursuant to this section only if the LMP at the resource's bus does not meet or exceed the applicable offer of the resource for at least four 5-minute intervals during one or more discrete clock hours during each period the resource operated and produced MWs during the relevant Operating Day. If a resource operated and produced MWs for less than four 5-minute intervals during one or more discrete clock hours during the relevant Operating Day, the credits for that resource during the hour it was operated less than four 5-minute intervals will be identified as being in the same category (RT Credits for Reliability or RT Credits for Deviations) as identified for the Operating Reserves for the other discrete clock hours.

(B) If the Office of the Interconnection directs a resource not covered by section 3.2.3(b)(ii)(A) hereof to operate in real-time during an Operating Day, the associated balancing Operating Reserve credits, identified as RT Credits for Deviations, shall be allocated according to real-time deviations from day-ahead schedules.

(iii) PJM shall post on its Web site the aggregate amount of MWs committed that meet the criteria referenced in subsections (b)(i) and (b)(ii) hereof.

(c) The sum of the foregoing credits calculated in accordance with section 3.2.3(b) plus any unallocated charges from section 3.2.3(h) and Tariff, Attachment K-Appendix, section 5.1.7, and any shortfalls paid pursuant to the Market Settlement provision of the Day-ahead Economic Load Response Program, shall be the cost of Operating Reserves in the Day-ahead Energy Market.

(d) The cost of Operating Reserves in the Day-ahead Energy Market shall be allocated and charged to each Market Participant in proportion to the sum of its (i) scheduled load (net of Behind The Meter Generation expected to be operating, but not to be less than zero),

accepted Decrement Bids in the Day-ahead Energy Market in megawatt-hours for that Operating Day and accepted Up-to Congestion Transactions in the Day-ahead Energy Market in megawatt-hours for the Operating Day at the sink of the transaction; and (ii) scheduled energy sales in the Day-ahead Energy Market from within the PJM Region to load outside such region in megawatt-hours for that Operating Day, but not including its bilateral transactions that are Dynamic Transfers to load outside such area pursuant to Tariff, Attachment K-Appendix, section 1.12, except to the extent PJM scheduled resources to provide Black Start service, Reactive Services or transfer interface control. The cost of Operating Reserves in the Day-ahead Energy Market for resources scheduled to provide Black Start service for the Operating Day which resources would not have otherwise been committed in the day-ahead security constrained dispatch shall be allocated by ratio share of the monthly transmission use of each Network Customer or Transmission Customer serving Zone Load or Non-Zone Load, as determined in accordance with the formulas contained in Tariff, Schedule 6A. The cost of Operating Reserves in the Day-ahead Energy Market for resources scheduled to provide Reactive Services or transfer interface control because they are known or expected to be needed to maintain system reliability in a Zone during the Operating Day and would not have otherwise been committed in the day-ahead security constrained dispatch shall be allocated and charged to each Market Participant in proportion to the sum of its real-time deliveries of energy to load (net of operating Behind The Meter Generation) in such Zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such Zone.

(e) At the end of each Operating Day, the following determination shall be made for each synchronized pool-scheduled resource of each Market Seller that operates as requested by the Office of the Interconnection. For each calendar day, pool-scheduled resources in the Real-time Energy Market shall be made whole for each of the following Segments: 1) the greater of their day-ahead schedules and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Economic Load Response Participant resources); and 2) any block of Real-time Settlement Intervals the resource operates at PJM's direction in excess of the greater of its day-ahead schedule and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Economic Load Response Participant resources). For each calendar day, and for each synchronized start of a generation resource or PJM-dispatched economic load reduction, there will be a maximum of two Segments for each resource. Segment 1 will be the greater of the day-ahead schedule and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Demand Resources) and Segment 2 will include the remainder of the contiguous Real-time Settlement Intervals when the resource is operating at the direction of the Office of the Interconnection, provided that a segment is limited to the Operating Day in which it commenced and cannot include any part of the following Operating Day.

A Generation Capacity Resource that operates outside of its unit-specific parameters will not receive Operating Reserve Credits nor be made whole for such operation when not dispatched by the Office of the Interconnection, unless the Market Seller of the Generation Capacity Resource can justify to the Office of the Interconnection that operation outside of such unit-specific parameters was the result of an actual constraint. Such Market Seller shall provide to the Market Monitoring Unit and the Office of the Interconnection its request to receive Operating Reserve

Credits and/or to be made whole for such operation, along with documentation explaining in detail the reasons for operating its resource outside of its unit-specific parameters, within thirty calendar days following the issuance of billing statement for the Operating Day. The Market Seller shall also respond to additional requests for information from the Market Monitoring Unit and the Office of the Interconnection. The Market Monitoring Unit shall evaluate such request for compensation and provide its determination of whether there was an exercise of market power to the Office of the Interconnection by no later than twenty-five calendar days after receiving the Market Seller's request for compensation. The Office of the Interconnection shall make its determination whether the Market Seller justified that it is entitled to receive Operating Reserve Credits and/or be made whole for such operation of its resource for the day(s) in question, by no later than thirty calendar days after receiving the Market Seller's request for compensation.

Nuclear generation resources shall not be eligible for Operating Reserve payments unless: 1) the Office of the Interconnection directs such resources to reduce output, in which case, such units shall be compensated in accordance with Tariff, Attachment K-Appendix, section 3.2.3(f) and the parallel provision of Operating Agreement, Schedule 1, section 3.2.3(f); or 2) the resource submits a request for a risk premium to the Market Monitoring Unit under the procedures specified in Tariff, Attachment M – Appendix, section II.B. A nuclear generation resource (i) must submit a risk premium consistent with its agreement under such process, or, (ii) if it has not agreed with the Market Monitoring Unit on an appropriate risk premium, may submit its own determination of an appropriate risk premium to the Office of the Interconnection, subject to acceptance by the Office of the Interconnection, with or without prior approval from the Commission.

Credits received pursuant to this section shall be equal to the positive difference between a resource's Total Operating Reserve Offer, and the total value of the resource's energy in the Day-ahead Energy Market plus any credit or change for quantity deviations, at PJM dispatch direction (excluding quantity deviations caused by an increase in the Market Seller's Real-time Offer), from the Day-ahead Energy Market during the Operating Day at the real-time LMP(s) applicable to the relevant generation bus in the Real-time Energy Market. The foregoing notwithstanding, credits for Segment 2 shall exclude start up (shutdown costs for Economic Load Response Participant resources) costs for generation resources.

Except as provided in section 3.2.3(m), if the total offered price exceeds the total value, the difference less any credit as determined pursuant to section 3.2.3(b), and less the absolute value of any negative Synchronized Reserve lost opportunity cost credit, as determined in section 3.2.3A(f)(iv) below, and less the absolute value of any negative Non-Synchronized Reserve lost opportunity cost credit determined in section 3.2.3.A.001(d)(iii) below, and less any amounts credited for providing Reactive Services as specified in section 3.2.3B, and the absolute value of any negative Secondary Reserve lost opportunity cost credit, as determined in section 3.2.3A.01(f)(iv) below, and plus the sum of the Market Revenue Neutrality Offsets for Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve, shall be credited to the Market Seller.

Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve credits applied against Operating Reserve credits pursuant to this section shall be netted against the Operating Reserve credits earned in the corresponding Real-time Settlement Interval(s) in which the Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve credits accrued, provided that for condensing combustion turbines, Synchronized Reserve credits will be netted against the total Operating Reserve credits accrued during each Real-time Settlement Interval the unit operates in condensing and generation mode.

(f) A Market Seller of a unit not defined in subsection (f-1), (f-2), or (f-4) hereof (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3(c) hereof), the output of which is reduced or suspended at the request of the Office of the Interconnection due to a transmission constraint or other reliability issue, and for which the real-time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall be credited for each Real-time Settlement Interval in an amount equal to the product of (A) the LOC Deviation times (B) the Locational Marginal Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A * B) - C$. If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.11.6, where the suspension is greater than twenty-four (24) consecutive hours, resources will not be compensated for lost opportunity costs.

(f-1) With the exception of Market Sellers of Flexible Resources that submit a Real-time Offer greater than their resource's Committed Offer in the Day-ahead Energy Market, a Market Seller of a Flexible Resource shall be compensated for lost opportunity cost, and shall be limited to the lesser of the unit's Economic Maximum or the unit's Generation Resource Maximum Output, if either of the following conditions occur:

- (i) if the unit output is reduced at the direction of the Office of the Interconnection and the real time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as directed by the PJM dispatcher), then the Market Seller shall be credited in a manner consistent with that described in section 3.2.3(f).
- (ii) If the unit is scheduled to produce energy in the Day-ahead Energy Market for a Day-ahead Settlement Interval, but the unit is not called on by the Office of the Interconnection and does not operate in the corresponding Real-time Settlement Interval(s), then the Market Seller shall be credited in an amount equal to the higher of:
 - 1) the product of (A) the amount of megawatts committed in the Day-ahead Energy Market for the generating unit, and (B) the Real-time Price at the generation bus for the generating unit, minus the sum of (C) the Total Lost Opportunity Cost Offer plus No-load Costs, plus (D) the Start-up Cost, divided by the

Real-time Settlement Intervals committed for each set of contiguous hours for which the unit was scheduled in Day-ahead Energy Market. This equation is represented as $(A*B) - (C+D)$. The startup cost, (D), shall be excluded from this calculation if the unit operates in real time following the Office of the Interconnection's direction during any portion of the set of contiguous hours for which the unit was scheduled in Day-ahead Energy Market, or

- 2) the Real-time Price at the unit's bus minus the Day-ahead Price at the unit's bus, multiplied by the number of megawatts committed in the Day-ahead Energy Market for the generating unit.

(f-2) A Market Seller of a hydroelectric resource that is pool-scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3(c) hereof), the output of which is altered at the request of the Office of the Interconnection from the schedule submitted by the owner, due to a transmission constraint or other reliability issue, shall be compensated for lost opportunity cost in the same manner as provided in sections 3.2.2(d) and 3.2.3A(f) and further detailed in the PJM Manuals.

(f-3) If a Market Seller believes that, due to specific pre-existing binding commitments to which it is a party, and that properly should be recognized for purposes of this section, the above calculations do not accurately compensate the Market Seller for opportunity cost associated with following PJM dispatch instructions and reducing or suspending a unit's output due to a transmission constraint or other reliability issue, then the Office of the Interconnection, the Market Monitoring Unit and the individual Market Seller will discuss a mutually acceptable, modified amount of opportunity cost compensation, taking into account the specific circumstances binding on the Market Seller. Following such discussion, if the Office of the Interconnection accepts a modified amount of opportunity cost compensation, the Office of the Interconnection shall invoice the Market Seller accordingly. If the Market Monitoring Unit disagrees with the modified amount of opportunity cost compensation, as accepted by the Office of the Interconnection, it will exercise its powers to inform the Commission staff of its concerns.

(f-4) A Market Seller of a wind generating unit that is pool-scheduled or self-scheduled, has SCADA capability to transmit and receive instructions from the Office of the Interconnection, has provided data and established processes to follow PJM basepoints pursuant to the requirements for wind generating units as further detailed in this Agreement, the Tariff and the PJM Manuals, and which is operating as requested by the Office of the Interconnection, the output of which is reduced or suspended at the request of the Office of the Interconnection due to a transmission constraint or other reliability issue, and for which the , real-time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall be credited for each Real-time Settlement Interval in an amount equal to the product of (A) the LOC Deviation times (B) the Real-time Price at the generation bus for the generating unit,

minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A*B) - C$.

(f-5) (i) A Market Seller of a pool-scheduled resource or a dispatchable self-scheduled resource shall receive Dispatch Differential Lost Opportunity Cost credits as calculated under subsection (iv) below if the resource is dispatched to provide energy in the Real-time Energy Market, provided such resource is not committed to provide real-time ancillary services (Regulation, reserves, reactive service) or instructed to reduce or suspend output due to a transmission constraint or other reliability issue pursuant to Tariff, Attachment K-Appendix, section 3.2.3(f-1) through Tariff, Attachment K-Appendix, section (f-4).

(ii) PJM will calculate the revenue above cost for the pricing run for each Real-time Settlement Interval in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = the resource's expected output level based on its resource parameters at the Real-time Price at the applicable pricing point;

B = the Real-time Price at the applicable pricing point; and

C = the sum of the resource's Real-time Energy Market offer integrated under the Final Offer for the resource's expected output level based on its resource parameters at the Real-time Price at the applicable pricing point.

(iii) PJM will calculate the revenue above cost for the dispatch run for each Real-time Settlement Interval in accordance with the following equation:

$$(\text{greater of A and B}) - (\text{lesser of C and D})$$

Where:

A = the product of the amount of megawatts of energy dispatched in the Real-time Energy Market dispatch run for the resource in that Real-time Settlement Interval and the Real-time Price at the applicable pricing point;

B = the product of the amount of megawatts of energy the resource actually provided in that Real-time Settlement Interval and the Real-time Price at the applicable pricing point;

C = the resource's Real-time Energy Market offer integrated under the Final Offer for the amount of megawatts dispatched in the Real-time Energy Market dispatch run;

D = the resource's Real-time Energy Market offer integrated under the Final Offer for the amount of megawatts the resource actually provided in that Real-time Settlement Interval.

(iv) The Dispatch Differential Lost Opportunity Cost credit shall equal the greater of (A) the difference between the revenue above cost based on the pricing run determined in subsection (f-5)(ii) and the revenue above cost based on the dispatch run determined in subsection (f-5)(iii) or (B) zero.

(v) For each hour in an Operating Day, the total cost of the Dispatch Differential Lost Opportunity Cost credits shall be allocated and charged to each Market Participant in proportion to the sum of its (i) deliveries of energy to load ((a) net of operating Behind The Meter Generation, but not to be less than zero; and (b) excluding Direct Charging Energy) in the PJM Region, served under Network Transmission Service, in megawatt-hours; and (ii) deliveries of energy sales from within the PJM Region to load outside such region in megawatt-hours but not including its bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Tariff, Attachment K-Appendix, section 1.12, as compared to the sum of all such deliveries for all Market Participants.

(g) The sum of the foregoing credits in Tariff, Attachment K-Appendix, section 3.2.3(f-1) through Tariff, Attachment K-Appendix, section 3.2.3(f-4), plus any cancellation fees paid in accordance with Tariff, Attachment K-Appendix, section 1.10.2(d), such cancellation fees to be applied to the Operating Day for which the unit was scheduled, plus any shortfalls paid pursuant to the Market Settlement provision of the real-time Economic Load Response Program, less any payments received from another Control Area for Operating Reserves shall be the cost of Operating Reserves for the Real-time Energy Market in each Operating Day.

(h) The cost of Operating Reserves for the Real-time Energy Market for each Operating Day, except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, shall be allocated and charged to each Market Participant based on their daily total of hourly deviations determined in accordance with the following equation:

$$\sum_h (A + B + C)$$

Where:

h = the hours in the applicable Operating Day;

A = For each Real-time Settlement Interval in an hour, the sum of the absolute value of the withdrawal deviations (in MW) between the quantities scheduled in the Day-ahead Energy Market and the Market Participant's energy withdrawals (net of operating Behind The Meter Generation) in the Real-time Energy Market, except as noted in subsection (h)(ii) below and in the PJM Manuals divided by the number of Real-time Settlement Intervals for that hour. The summation of each Real-time Settlement Interval's withdrawal deviation in an hour will be the Market Participant's total hourly withdrawal

deviations. Market Participant bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Tariff, Attachment K-Appendix, section 1.12 are not included in the determination of withdrawal deviations;

B = For each Real-time Settlement Interval in an hour, the sum of the absolute value of generation deviations (in MW and not including deviations in Behind The Meter Generation) as determined in subsection (o) divided by the number of Real-time Settlement Intervals for that hour;

C = For each Real-time Settlement Interval in an hour, the sum of the absolute value of the injection deviations (in MW) between the quantities scheduled in the Day-ahead Energy Market and the Market Participant's energy injections in the Real-time Energy Market divided by the number of Real-time Settlement Intervals for that hour. The summation of the injection deviations for each Real-time Settlement Interval in an hour will be the Market Participant's total hourly injection deviations. The determination of injection deviations does not include generation resources.

The Revenue Data for Settlements determined for each Real-time Settlement Interval in accordance with Tariff, Attachment K-Appendix, section 3.1A shall be used in determining the real-time withdrawal deviations, generation deviations and injection deviations used to calculate Operating Reserve under this subsection (e).

The costs associated with scheduling of units for Black Start service or testing of Black Start Units shall be allocated by ratio share of the monthly transmission use of each Network Customer or Transmission Customer serving Zone Load or Non-Zone Load, as determined in accordance with the formulas contained in Tariff, Schedule 6A.

Notwithstanding section (h)(1) above, as more fully set forth in the PJM Manuals, load deviations from the Day-ahead Energy Market shall not be assessed Operating Reserves charges to the extent attributable to reductions in the load of Price Responsive Demand that is in response to an increase in Locational Marginal Price from the Day-ahead Energy Market to the Real-time Energy Market and that is in accordance with a properly submitted PRD Curve.

Deviations that occur within a single Zone shall be associated with the Eastern or Western Region, as defined in section 3.2.3(q) below, and shall be subject to the regional balancing Operating Reserve rate determined in accordance with Section 3.2.3(q). Deviations at a hub shall be associated with the Eastern or Western Region if all the buses that define the hub are located in the region. Deviations at an Interface Pricing Point shall be associated with whichever region, the Eastern or Western Region, with which the majority of the buses that define that Interface Pricing Point are most closely electrically associated. If deviations at interfaces and hubs are associated with the Eastern or Western region, they shall be subject to the regional balancing Operating Reserve rate. Demand and supply deviations shall be based on total activity in a Zone, including all aggregates and hubs defined by buses that are wholly contained within the same Zone.

The foregoing notwithstanding, netting deviations shall be allowed for each Real-time Settlement Interval in accordance with the following provisions:

(i) Generation resources with multiple units located at a single bus shall be able to offset deviations in accordance with the PJM Manuals to determine the net deviation MW at the relevant bus.

(ii) Demand deviations will be assessed by comparing all day-ahead demand transactions, which include the components referenced in section 3.2.3(d) regarding the cost of Operating Reserves in the Day-ahead Energy Market, at a single transmission zone, hub, or interface against the real-time demand transactions at that same transmission zone, hub, or interface; except that the positive values of demand deviations, as set forth in the PJM Manuals, will not be assessed Operating Reserve charges in the event of a Primary Reserve or Synchronized Reserve shortage in real-time or where PJM initiates the request for emergency load reductions in real-time in order to avoid a Primary Reserve or Synchronized Reserve shortage.

(iii) Supply deviations will be assessed by comparing all day-ahead transactions at a single transmission zone, hub, or interface against the real-time transactions at that same transmission zone, hub, or interface.

(iv) Bilateral transactions inside the PJM Region, as defined in Operating Agreement, Schedule 1, section 1.7.10, will not be included in the determination of Supply or Demand deviations.

(i) At the end of each Operating Day, Market Sellers shall be credited on the basis of their offered prices for synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, as well as the credits calculated as specified in Section 3.2.3(b) for those generators committed solely for the purpose of providing synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, at the request of the Office of the Interconnection.

(j) The sum of the foregoing credits as specified in section 3.2.3(i) shall be the cost of Operating Reserves for synchronous condensing for the PJM Region for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, or in association with post-contingency operation for the Operating Day and shall be separately determined for the PJM Region.

(k) The cost of Operating Reserves for synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, or in association with post-contingency operation for each Operating Day shall be allocated and charged to each Market Participant in proportion to the sum of its (i) deliveries of energy to load (net of operating Behind The Meter Generation, but not to be less than zero) in the PJM Region, served under Network Transmission Service, in megawatt-hours during that Operating Day; and (ii) deliveries of energy sales from within the PJM Region to load outside such region in megawatt-hours during that Operating Day, but not including its bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Tariff, Attachment K-Appendix, section 1.12, as compared to the sum of all such deliveries for all Market Participants.

(l) For any Operating Day in either, as applicable, the Day-ahead Energy Market or the Real-time Energy Market for which, for all or any part of such Operating Day, the Office of the Interconnection: (i) declares a Maximum Generation Emergency; (ii) issues an alert that a Maximum Generation Emergency may be declared (“Maximum Generation Emergency Alert”); or (iii) schedules units based on the anticipation of a Maximum Generation Emergency or a Maximum Generation Emergency Alert, the Operating Reserves credit otherwise provided by section 3.2.3.(b) or section 3.2.3(e) in connection with market-based offers shall be limited as provided in subsections (n) or (m), respectively. The Office of the Interconnection shall provide timely notice on its internet site of the commencement and termination of any of the actions described in subsection (i), (ii), or (iii) of this subsection (l) (collectively referred to as “MaxGen Conditions”). Following the posting of notice of the commencement of a MaxGen Condition, a Market Seller may elect to submit a cost-based offer in accordance with Operating Agreement, Schedule 2, in which case subsections (m) and (n) shall not apply to such offer; provided, however, that such offer must be submitted in accordance with the deadlines in Tariff, Attachment K-Appendix, section 1.10 for the submission of offers in the Day-ahead Energy Market or Real-time Energy Market, as applicable. Submission of a cost-based offer under such conditions shall not be precluded by Tariff, Attachment K-Appendix, section 1.9.7(b); provided, however, that the Market Seller must return to compliance with Tariff, Attachment K-Appendix, section 1.9.7(b) when it submits its bid for the first Operating Day after termination of the MaxGen Condition.

(m) For the Real-time Energy Market, if the Effective Offer Price (as defined below) for a market-based offer is greater than \$1,000/MWh and greater than the Market Seller’s lowest available and applicable cost-based offer, the Market Seller shall not receive any credit for Operating Reserves. For purposes of this subsection (m), the Effective Offer Price shall be the amount that, absent subsections (l) and (m), would have been credited for Operating Reserves for such Operating Day pursuant to section 3.2.3(e) plus the Real-time Energy Market revenues for the Real-time Settlement Intervals that the offer is economic divided by the megawatt hours of energy provided during the Real-time Settlement Intervals that the offer is economic. The Real-time Settlement Intervals that the offer is economic shall be: (i) the Real-time Settlement Intervals that the offer price for energy is less than or equal to the Real-time Price for the relevant generation bus, (ii) the Real-time Settlement Intervals in which the offer for energy is greater than Locational Marginal Price and the unit is operated at the direction of the Office of the Interconnection that are in addition to any Real-time Settlement Intervals required due to the minimum run time or other operating constraint of the unit, and (iii) for any unit with a minimum run time of one hour or less and with more than one start available per day, any hours the unit operated at the direction of the Office of the Interconnection.

(n) For the Day-ahead Energy Market, if notice of a MaxGen Condition is provided prior to 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled and the Effective Offer Price for a market-based offer is greater than \$1,000/MWh and greater than the Market Seller’s lowest available and applicable cost-based offer, the Market Seller shall not receive any credit for Operating Reserves. If notice of a MaxGen Condition is provided after 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled and the Effective Offer Price is greater than \$1,000/MWh, the Market Seller shall

receive credit for Operating Reserves determined in accordance with section 3.2.3(b), subject to the limit on total compensation stated below. If the Effective Offer Price is less than or equal to \$1,000/MWh, regardless of when notice of a MaxGen Condition is provided, the Market Seller shall receive credit for Operating Reserves determined in accordance with section 3.2.3(b), subject to the limit on total compensation stated below. For purposes of this subsection (n), the Effective Offer Price shall be the amount that, absent subsections (l) and (n), would have been credited for Operating Reserves for such Operating Day divided by the megawatt hours of energy offered during the Specified Hours, plus the offer for energy during such hours. The Specified Hours shall be the lesser of: (1) the minimum run hours stated by the Market Seller in its Offer Data; and (2) either (i) for steam-electric generating units and for combined-cycle units when such units are operating in combined-cycle mode, the six consecutive hours of highest Day-ahead Price during such Operating Day when such units are running or (ii) for combustion turbine units and for combined-cycle units when such units are operating in combustion turbine mode, the two consecutive hours of highest Day-ahead Price during such Operating Day when such units are running. Notwithstanding any other provision in this subsection, the total compensation to a Market Seller on any Operating Day that includes a MaxGen Condition shall not exceed \$1,000/MWh during the Specified Hours, where such total compensation in each such hour is defined as the amount that, absent subsections (l) and (n), would have been credited for Operating Reserves for such Operating Day pursuant to section 3.2.3(b) divided by the Specified Hours, plus the Day-ahead Price for such hour, and no Operating Reserves payments shall be made for any other hour of such Operating Day. If a unit operates in real time at the direction of the Office of the Interconnection consistently with its day-ahead clearing, then subsection (m) does not apply.

(o) Dispatchable pool-scheduled generation resources and dispatchable self-scheduled generation resources that follow dispatch shall not be assessed balancing Operating Reserve deviations. Pool-scheduled generation resources and dispatchable self-scheduled generation resources that do not follow dispatch shall be assessed balancing Operating Reserve deviations in accordance with the calculations described below and in the PJM Manuals.

The Office of the Interconnection shall calculate a ramp-limited desired MW value for generation resources where the economic minimum and economic maximum are at least as far apart in real-time as they are in day-ahead according to the following parameters:

(i) real-time economic minimum \leq 105% of day-ahead economic minimum or day-ahead economic minimum plus 5 MW, whichever is greater.

(ii) real-time economic maximum \geq 95% day-ahead economic maximum or day-ahead economic maximum minus 5 MW, whichever is lower.

The ramp-limited desired MW value for a generation resource shall be equal to:

$$Ramp_Request_t = (Dispatch_target_{t-1} - AOutput_{t-1}) / (LAtime_{t-1})$$

$$RL_Desired_t = AOutput_{t-1} + (Ramp_Request_t * Case_Eff_time_{t-1})$$

where:

1. Dispatchtarget = Dispatch Signal for the previous approved Dispatch case
2. AOutput = Unit's achievable target MW at case solution time as defined in the PJM Manuals
3. LAtime = Dispatch look ahead time
4. Case_Eff_time = Time between signal changes
5. RL_Desired = Ramp-limited desired MW

To determine if a generation resource is following dispatch the Office of the Interconnection shall determine the unit's MW off dispatch and % off dispatch by using the lesser of the difference between the actual output and the dispatch signal or the actual output and ramp-limited desired MW value for each Real-time Settlement Interval. If the dispatch signal and the ramp-limited desired MW for the resource are unavailable, the Office of the Interconnection will determine the unit's MW off dispatch and % off dispatch by calculating the lesser of the difference between the actual output and the dispatch LMP Desired MW for each Real-time Settlement Interval.

A pool-scheduled or dispatchable self-scheduled resource is considered to be following dispatch if its actual output is between its ramp-limited desired MW value and dispatch signal, or if its % off dispatch is ≤ 10 , or its Real-time Settlement Interval MWh is within 5% of the Real-time Settlement Interval ramp-limited desired MW. A self-scheduled generator must also be dispatched above economic minimum. The degree of deviations for resources that are not following dispatch shall be determined for each Real-time Settlement Interval in accordance with the following provisions:

- A dispatchable self-scheduled resource that is not dispatched above economic minimum shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – Day-Ahead MWh.
- A resource that is dispatchable day-ahead but is Fixed Gen in real-time shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – dispatch LMP Desired MW.
- Pool-scheduled generators that are not following dispatch shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – Ramp-Limited Desired MW.

- If a resource's real-time economic minimum is greater than its day-ahead economic minimum by 5% or 5 MW, whichever is greater, or its real-time economic maximum is less than its Day Ahead economic maximum by 5% or 5 MW, whichever is lower, and dispatch LMP Desired MWh for the Real-time Settlement Interval is either below the real time economic minimum or above the real time economic maximum, then balancing Operating Reserve deviations for the resource shall be assessed according to the following formula: Real time Settlement Interval MWh – dispatch LMP Desired MWh.
- If a resource is not following dispatch and its % Off Dispatch is $\leq 20\%$, balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – Ramp-Limited Desired MW. If deviation value is within 5% of Ramp-Limited Desired MW, balancing Operating Reserve deviations shall not be assessed.
- If a resource is not following dispatch and its % off Dispatch is $> 20\%$, balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – dispatch LMP Desired MWh.
- If a resource is not following dispatch, and the resource has tripped, for the Real-time Settlement Interval the resource tripped and the Real-time Settlement Intervals it remains offline throughout its day-ahead schedule balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – Day-Ahead MWh.
- For resources that are not dispatchable in both the Day-Ahead and Real-time Energy Markets balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh - Day-ahead MWh.

If a resource has a sum of the absolute value of generator deviations for an hour that is less than 5 MWh, then the resource shall not be assessed balancing Operating Reserve deviations for that hour.

(o-1) Dispatchable economic load reduction resources that follow dispatch shall not be assessed balancing Operating Reserve deviations. Economic Load Response Participant resources that do not follow dispatch shall be assessed balancing Operating Reserve deviations as described in this subsection and as further specified in the PJM Manuals.

The Desired MW quantity for such resources for each hour shall be the hourly integrated MW quantity to which the load reduction resource was dispatched for each hour (where the hourly integrated value is the average of the dispatched values as determined by the Office of the Interconnection for the resource for each hour).

If the actual reduction quantity for the load reduction resource for a given hour deviates by no more than 20% above or below the Desired MW quantity, then no balancing Operating Reserve deviation will accrue for that hour. If the actual reduction quantity for the load reduction

resource for a given hour is outside the 20% bandwidth, the balancing Operating Reserve deviations will accrue for that hour in the amount of the absolute value of (Desired MW – actual reduction quantity). For those hours where the actual reduction quantity is within the 20% bandwidth specified above, the load reduction resource will be eligible to be made whole for the total value of its offer as defined in Tariff, Attachment K-Appendix, section 3.3A. Hours for which the actual reduction quantity is outside the 20% bandwidth will not be eligible for the make-whole payment. If at least one hour is not eligible for make-whole payment based on the 20% criteria, then the resource will also not be made whole for its shutdown cost.

(p) The Office of the Interconnection shall allocate the charges assessed pursuant to Tariff, Attachment K-Appendix, section 3.2.3(h) except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, to real-time deviations from day-ahead schedules or real-time load share plus exports depending on whether the underlying balancing Operating Reserve credits are related to resources scheduled during the reliability analysis for an Operating Day, or during the actual Operating Day. If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, section 1.11.6, the Office of the Interconnection shall allocate the charges to the ratio share of real-time load plus export transactions.

(i) For resources scheduled by the Office of the Interconnection during the reliability analysis for an Operating Day, the associated balancing Operating Reserve charges shall be allocated based on the reason the resource was scheduled according to the following provisions:

(A) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to operate in real-time to augment the physical resources committed in the Day-ahead Energy Market to meet the forecasted real-time load plus the Operating Reserve requirement, the associated balancing Operating Reserve charges shall be allocated to real-time deviations from day-ahead schedules.

(B) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to maintain system reliability, the associated balancing Operating Reserve charges shall be allocated according to ratio share of real time load plus export transactions.

(C) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource with a day-ahead schedule is required to deviate from that schedule to provide balancing Operating Reserves, the associated balancing Operating Reserve charges shall be allocated pursuant to (A) or (B) above.

(ii) For resources scheduled during an Operating Day, the associated balancing Operating Reserve charges shall be allocated according to the following provisions:

(A) If the Office of the Interconnection directs a resource to operate during an Operating Day to provide balancing Operating Reserves, the associated balancing Operating Reserve charges shall be allocated according to ratio share of load plus exports. The foregoing notwithstanding, charges will be assessed pursuant to this section only if the LMP at the resource's bus does not meet or exceeds the applicable offer of the resource for at least four 5-minute intervals during one or more discrete clock hours during each period the resource operated and produced MWs during the relevant Operating Day. If a resource operated and produced MWs for less than four 5-minute intervals during one or more discrete clock hours during the relevant Operating Day, the charges for that resource during the hour it was operated less than four 5-minute intervals will be identified as being in the same category as identified for the Operating Reserves for the other discrete clock hours.

(B) If the Office of the Interconnection directs a resource not covered by Tariff, Attachment K-Appendix, section 3.2.3(h)(ii)(A) to operate in real-time during an Operating Day, the associated balancing Operating Reserve charges shall be allocated according to real-time deviations from day-ahead schedules.

(q) The Office of the Interconnection shall determine regional balancing Operating Reserve rates for the Western and Eastern Regions of the PJM Region. For the purposes of this section, the Western Region shall be the AEP, APS, ComEd, Duquesne, Dayton, ATSI, DEOK, EKPC, OVEC transmission Zones, and the Eastern Region shall be the AEC, BGE, Dominion, PENELEC, PEPCO, ME, PPL, JCPL, PECO, DPL, PSEG, RE transmission Zones. The regional balancing Operating Reserve rates shall be determined in accordance with the following provisions:

(i) The Office of the Interconnection shall calculate regional adder rates for the Eastern and Western Regions. Regional adder rates shall be equal to the total balancing Operating Reserve credits paid to generators for transmission constraints that occur on transmission system capacity equal to or less than 345kv. The regional adder rates shall be separated into reliability and deviation charges, which shall be allocated to real-time load or real-time deviations, respectively. Whether the underlying credits are designated as reliability or deviation charges shall be determined in accordance with section 3.2.3(p).

(ii) The Office of the Interconnection shall calculate RTO balancing Operating Reserve rates. RTO balancing Operating Reserve rates shall be equal to balancing Operating Reserve credits except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, in excess of the regional adder rates calculated pursuant to Tariff, Attachment K-Appendix, section 3.2.3(q)(i) of Schedule 1 of this Agreement. The RTO balancing Operating Reserve rates shall be separated into reliability and deviation charges, which shall be allocated to real-time load or real-time deviations, respectively. Whether the

underlying credits are allocated as reliability or deviation charges shall be determined in accordance with section 3.2.3(p).

(iii) Reliability and deviation regional balancing Operating Reserve rates shall be determined by summing the relevant RTO balancing Operating Reserve rates and regional adder rates.

(iv) If the Eastern and/or Western Regions do not have regional adder rates, the relevant regional balancing Operating Reserve rate shall be the reliability and/or deviation RTO balancing Operating Reserve rate.

(r) Market Sellers that incur incremental operating costs for a generation resource that are either greater than \$1,000/MWh as determined in accordance with the Market Seller's PJM-approved Fuel Cost Policy, Operating Agreement, Schedule 2 and PJM Manual 15, but are not verified at the time of dispatch of the resource under section 6.4.3 of this Schedule, or greater than \$2,000/MWh as determined in accordance with the Market Seller's PJM-approved Fuel Cost Policy, Operating Agreement, Schedule 2, and PJM Manual 15, will be eligible to receive credit for Operating Reserves upon review of the Market Monitoring Unit and the Office of the Interconnection, and approval of the Office of the Interconnection. Market Sellers must submit to the Office of the Interconnection and the Market Monitoring Unit all relevant documentation demonstrating the calculation of costs greater than \$2,000/MWh, and costs greater than \$1,000/MWh which were not verified at the time of dispatch of the resource under Tariff, Attachment K-Appendix, section 6.4.3. The Office of the Interconnection must approve any Operating Reserve credits paid to a Market Seller under this subsection (r).

3.2.3A Synchronized Reserve.

(a) Each Market Participant that is a Load Serving Entity that is not part of an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have an obligation for hourly Synchronized Reserve equal to its pro rata share of Synchronized Reserve requirements for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone or Reserve Sub-zone for the hour ("Synchronized Reserve Obligation"), less any amount obtained from condensers associated with provision of Reactive Services as described in section 3.2.3B(i) and any amount obtained from condensers associated with post-contingency operations, as described in section 3.2.3C(b). Those entities that participate in an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have their reserve obligations determined based on the stipulations in such agreement. A Market Participant's hourly Synchronized Reserve Obligation shall be adjusted by any Synchronized Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Synchronized Reserve Obligation shall be charged the pro rata share of the sum of day-ahead and real-time credits for Synchronized Reserve as defined in sections 3.2.3A(b)(i) and (ii) below.

(b) A resource supplying Synchronized Reserve at the direction of the Office of the Interconnection shall be credited as follows:

i) Credits for Synchronized Reserve provided by generation and Economic Load Response Participant resources assigned to provide Synchronized Reserve by the Office of the Interconnection or self-scheduled in the Day-ahead Synchronized Reserve Market shall be equal to the product of the Day-ahead Synchronized Reserve Market Clearing Price multiplied by the megawatt amount of Synchronized Reserve such resource is assigned to provide..

ii) Credits for Synchronized Reserve provided by generation resources and Economic Load Response Participant resources assigned to provide Synchronized Reserve by the Office of the Interconnection or self-scheduled in the Real-time Synchronized Reserve Market shall be determined for each operating hour based on the sum of their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Synchronized Reserve from that resource assigned by the Office of the Interconnection or self-scheduled in the Real-time Synchronized Reserve Market. The megawatt value is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval where there is not a Synchronized Reserve event;

B = For each Real-time Settlement Interval, the megawatts of Synchronized Reserve from that resource assigned by the Office of the Interconnection or self-scheduled in the Day-ahead Synchronized Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Synchronized Reserve Market Clearing Price.

If a Synchronized Reserve Event is initiated by the Office of the Interconnection and the Economic Load Response Participant resource reduced its load in response to the event, the resource shall be eligible to receive a credit for the fixed costs associated with achieving the load reduction, as specified in the PJM Manuals.

iii) Pool-scheduled resources shall be credited a Synchronized Reserve lost opportunity cost credit, where positive, as described in subsection (f)(iv) below.

(c) [Reserved for future use]

(d) Synchronized Reserve Market Clearing Prices

(i) For the Day-ahead Synchronized Reserve Market, the Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Synchronized Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for Synchronized Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Synchronized Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Synchronized Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Synchronized Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute and (B) the price of serving the next increment of demand for Primary Reserve and 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute, provided that the Synchronized Reserve Market Clearing Price shall be less than or equal to the sum of no more than two of the Reserve Penalty Factors for the Synchronized Reserve Requirement, the Primary Reserve Requirement, and the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Synchronized Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Synchronized Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Synchronized Reserve market quantities and prices as determined pursuant to subsection (d)(ii) hereof.

(ii) For the Real-time Synchronized Reserve Market, the Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for Synchronized Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Synchronized Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Synchronized Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Synchronized Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute and (B) the price of serving the next increment of demand for Primary Reserve and 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute, provided that the Synchronized Reserve Market Clearing Price shall be less than or equal to the sum of no more than two of the Reserve Penalty Factors for the

Synchronized Reserve Requirement, the Primary Reserve Requirement, and the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Synchronized Reserves, then the Synchronized Reserve Market Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Synchronized Reserves, then the Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Synchronized Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Synchronized Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Synchronized Reserve Market Clearing Prices exist, then the Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, and the Office of the Interconnection is assigning Synchronized Reserves, the Office of the Interconnection will set the Synchronized Reserve Market Clearing Price to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period. Resources will be compensated for lost opportunity cost per subsection (f) hereof using the energy price as determined in Operating Agreement, Schedule 1, section 2.5.2.iii. The opportunity cost shall be zero for all resources self-scheduled to provide Synchronized Reserve, synchronous condensers and Economic Load Response Participant resources.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action as described in the PJM Manuals or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Synchronized Reserve Market Clearing Price shall be the sum of the Reserve Penalty Factors for the Primary

Reserve Requirement, and the Synchronized Reserve Requirement for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the Synchronized Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended Synchronized Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Synchronized Reserve Penalty Factors are warranted for subsequent Delivery Year(s).

(e) (i) For determining the Synchronized Reserve Market Clearing Price in each hour of the Day-ahead Synchronized Reserve Market, the estimated resource-specific opportunity cost for a generation resource or Economic Load Response Participant resource shall be the difference between the Locational Marginal Price at the generation or Economic Load Response Participant resource bus and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) or offer price to reduce energy from the Economic Load Response Participant resource in the PJM Interchange Energy Market when the Locational Marginal Price at the generation or Economic Load Participant resource bus is greater than the offer price for energy from the generation resource or the offer price to reduce energy from the Economic Load Response Participant resource.

However, the opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve and for synchronous condensers and for Economic Load Response Participant resources that do not receive a day-ahead commitment to provide energy in the same operating hour in which such resource is committed to provide Synchronized Reserve.

(ii) For determining the Synchronized Reserve Market Clearing Price for each Real-time Settlement Interval in the Real-time Synchronized Reserve Market, the estimated unit-specific opportunity cost for a generation resource that is not a hydroelectric resource shall be the difference between the Locational Marginal Price at the generation bus for the generation resource and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) in the PJM Interchange Energy Market when the Locational Marginal Price at the generation bus is greater than the offer price for energy from the generation resource.

For hydroelectric resources, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the expected real-time Locational Marginal Price at that generation bus. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions, as

defined in the PJM Manuals, and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the expected real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average day-ahead Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

The opportunity costs shall be zero for all resources self-scheduled to provide Synchronized Reserve, synchronous condensers and Economic Load Response Participant resources.

(f) (i) In determining the credit under subsection (b) to a generation resource, except a generation resource that is operating as a synchronous condenser, selected to provide Synchronized Reserve in the Day-ahead Synchronized Reserve Market, or an Economic Load Response Participant resource that is selected to provide Synchronized Reserve in the Day-ahead Synchronized Reserve Market for the same operating hour in which such resource receives a day-ahead commitment to provide energy, the opportunity cost of a resource shall be determined for each operating hour that the Office of the Interconnection requires a resource to provide Synchronized Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Day-ahead Locational Marginal Price at the generation bus of the generation resource or the applicable pricing point for the Economic Load Response Participant resource;

B = The deviation of the resource's energy output or load reduction necessary to supply a Day-ahead Synchronized Reserve assignment from the resource's energy expected output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load; and

C = The Day-ahead Energy market offer integrated under the applicable energy offer curve for the resource's energy output or load reduction necessary to provide a Day-ahead Synchronized Reserve Market assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load.

For a generation resource that is operating as a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [energy use for providing synchronous condensing multiplied by A] plus [the applicable condense start-up cost divided by the number of hours the resource is assigned Synchronized Reserve].

(ii) In determining the credit under subsection (b) to a generation resource, except a generation resource that is operating as a synchronous condenser, selected to provide Synchronized Reserve in the Real-time Synchronized Reserve Market in excess of the resource's Day-ahead Synchronized Reserve Market assignment and that actively follows the Office of the Interconnection's signals and instructions, the unit-specific opportunity cost of that generation resource shall be determined for each Real-time Settlement Interval that the Office of the Interconnection requires that generation resource to provide Synchronized Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Real-time Locational Marginal Price at the generation bus of the generation resource;

B = The deviation of the generation resource's output necessary to supply Synchronized Reserve in real-time, reduced by the amount of Synchronized Reserve the resource failed to respond during a Synchronized Reserve Event during the Operating Day, in excess of its Day-ahead Synchronized Reserve Market assignment and follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy; and

C = The energy offer integrated under the applicable energy offer curve for the generation resource's output necessary to supply Synchronized Reserve in real-time from the lesser of the generation resource's output necessary to provide a Day-ahead Synchronized Reserve Market assignment or follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [additional energy use in excess of day-ahead energy use for providing synchronous condensing in real-time multiplied by A] plus [any applicable condense start-up costs due to additional condense start-ups in real-time in excess of day-ahead condense start-ups allocated to each Real-time Settlement Interval as described in PJM Manuals].

For hydroelectric resources, the unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the real-time Locational Marginal Price at that generation bus multiplied by the additional megawatts assigned to supply Synchronized Reserve in real-time in excess of its Day-ahead Synchronized Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average real-time Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating multiplied by the additional megawatts assigned to supply the hourly Synchronized Reserve in real-time in excess of its Day-ahead Synchronized Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

(iii) For each Real-time Settlement Interval, a Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in the resource's real-time reserve MW from a day-ahead market assignment in more than one market for that Real-time Settlement Interval, the total Market Revenue Neutrality Offset is allocated to the Synchronized Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Synchronized Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Synchronized Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Synchronized Reserve in a Real-time Settlement Interval for any of the following conditions:

- (A) A resource's real-time Synchronized Reserve assignment decreases due to the resource being self-scheduled to provide energy or Regulation;
- (B) A resource reduces its flexibility in real-time such that the resource no longer qualifies to provide Synchronized Reserve in real-time;
- (C) A resource's Final Offer is less than its Committed Offer;
- (D) A resource trips offline or otherwise becomes unavailable in real-time;
- (E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above; or
- (F) A resource increases its Synchronized Reserve offer price in the Real-time Synchronized Reserve Market from its offer price in the Day-ahead Synchronized Reserve Market.

(iv) A Synchronized Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(A + B + C + D) - (E + F + G + H)$$

Where:

A = day-ahead Synchronized Reserve offer price times the Synchronized Reserve MW assignment;

B = real-time Synchronized Reserve offer price times the Synchronized Reserve MW assigned in real-time in excess of the Synchronized Reserve MW assigned day-ahead, where the Synchronized Reserve MW assigned is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval where there is not a Synchronized Reserve event;

C = day-ahead opportunity cost as determined in subsection (f)(i) above;

D = real-time opportunity cost as determined in subsection (f)(ii) above;

E = day-ahead clearing price credits as determined in subsection (b)(i) above;

F = real-time clearing price credits as determined in subsection (b)(ii) above less any applicable charges for failure to respond to a Synchronized Reserve Event as determined in subsection (j) below;

G = the applicable Market Revenue Neutrality Offset as determined in subsection (f)(iii) above; and

H = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A(f)(iii) above if not eligible for Market Revenue Neutrality Offset.

(v) The opportunity costs for an Economic Load Response Participant resource assigned Synchronized Reserve in real-time or any resource self-scheduled for Synchronized Reserves shall be zero.

(g) [Reserved for future use]

(h) For each operating hour, the sum of the Synchronized Reserve lost opportunity cost credits credited in accordance with subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Synchronized Reserve Obligation in proportion to its real-time purchases of Synchronized Reserve in megawatt-hours during that hour.

(i) [Reserved for future use]

(j) In the event a generation resource or Economic Load Response Participant Resource that either has been assigned by the Office of the Interconnection or self-scheduled to provide Synchronized Reserve in real-time fails to provide the assigned or self-scheduled amount of Synchronized Reserve in response to a Synchronized Reserve Event, the resource will be charged at the Real-time Synchronized Reserve Market Clearing Price for the real-time Synchronized Reserve assignment, in excess of amount that actually responded for all Real-time Settlement Intervals the resource was assigned or self-scheduled Synchronized Reserve real-time, which is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements for the resource on the Operating Day during which the event occurred. The determination of the amount of Synchronized Reserve credited to a resource shall be on an individual resource basis, not on an aggregate basis.

The resource shall refund payments received for Synchronized Reserve it failed to provide. For purposes of determining the amount of the payments to be refunded by a Market Participant, the Office of the Interconnection shall calculate the shortfall of Synchronized Reserve on an individual resource basis unless the Market Participant had multiple resources that were assigned or self-scheduled to provide Synchronized Reserve, in which case the shortfall will be determined on an aggregate basis. For performance determined on an aggregate basis, the response of any resource that provided more Synchronized Reserve than it was assigned or self-scheduled to provide will be used to offset the performance of other resources that provided less Synchronized Reserve than they were assigned or self-scheduled to provide during a Synchronized Reserve Event, as calculated in the PJM Manuals. The determination of a Market Participant's aggregate response shall not be taken into consideration in the determination of the amount of Synchronized Reserve credited to each individual resource.

The amount refunded shall be determined by multiplying the retroactive penalty megawatts by the Real-time Synchronized Reserve Market Clearing Price for all intervals the resource was assigned or self-scheduled to provide Synchronized Reserve for a period of time immediately preceding the Synchronized Reserve Event equal to the lesser of the average number of days between Synchronized Reserve Events, or the number of days since the resource last failed to provide the amount of Synchronized Reserve it was assigned or self-scheduled to provide in response to a Synchronized Reserve Event. The retroactive penalty megawatts for each interval shall be the lesser of the amount of the shortfall of Synchronized Reserve, measured in megawatts, and the real-time Synchronized Reserve assignment for each interval, which is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements for the resource. The average number of days between Synchronized Reserve Events for purposes of this calculation shall be determined by an annual review of the twenty-four month period ending October 31 of the calendar year in which the review is performed, and shall be rounded down to a whole day value. The Office of the Interconnection shall report the results of its annual review to stakeholders by no later than December 31, and the average number of days between Synchronized Reserve Events shall be effective as of the following January 1. The refunded charges shall be allocated as credits to Market Participants based on its pro rata share of the Synchronized Reserve Obligation

megawatts in the hour(s) of the Synchronized Reserve Event for the Reserve Sub-zone or Reserve Zone, except that Market Participants that incur a refund obligation and also have an applicable Synchronized Reserve Obligation during the hour(s) of the Synchronized Reserve Event shall not be included in the allocation of such refund credits. If the event spans multiple hours, the refund credits will be prorated hourly based on the duration of the event within each clock hour.

(k) The magnitude of response to a Synchronized Reserve Event by a generation resource or an Economic Load Response Participant resource, except for Batch Load Economic Load Response Participant resources covered by section 3.2.3A(l), is the difference between the generation resource's output or the Economic Load Response Participant resource's consumption at the start of the event and its output or consumption 10 minutes after the start of the event. In order to allow for small fluctuations and possible telemetry delays, generation resource output or Economic Load Response Participant resource consumption at the start of the event is defined as the lowest telemetered generator resource output or greatest Economic Load Response Participant resource consumption between one minute prior to and one minute following the start of the event. Similarly, a generation resource's output or an Economic Load Response Participant resource's consumption 10 minutes after the event is defined as the greatest generator resource output or lowest Economic Load Response Participant resource consumption achieved between 9 and 11 minutes after the start of the event. The response actually credited to a generation resource will be reduced by the amount the megawatt output of the generation resource falls below the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter. The response actually credited to an Economic Load Response Participant resource will be reduced by the amount the megawatt consumption of the Economic Load Response Participant resource exceeds the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter.

(l) The magnitude of response by a Batch Load Economic Load Response Participant resource that is at the stage in its production cycle when its energy consumption is less than the level of megawatts in its offer at the start of a Synchronized Reserve Event shall be the difference between (i) the Batch Load Economic Load Response Participant resource's consumption at the end of the Synchronized Reserve Event and (ii) the Batch Load Economic Load Response Participant resource's consumption during the minute within the ten minutes after the end of the Synchronized Reserve Event in which the Batch Load Economic Load Response Participant resource's consumption was highest and for which its consumption in all subsequent minutes within the ten minutes was not less than fifty percent of the consumption in such minute; provided that, the magnitude of the response shall be zero if, when the Synchronized Reserve Event commences, the scheduled off-cycle stage of the production cycle is greater than ten minutes. .

3.2.3A.001 Non-Synchronized Reserve.

(a) Each Market Participant that is a Load Serving Entity that is not part of an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have an obligation for hourly Non-Synchronized Reserve equal to its pro rata share of Non-

Synchronized Reserve assigned for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone and Reserve Sub-zone for the hour ("Non-Synchronized Reserve Obligation"). Those entities that participate in an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have their reserve obligations determined based on the stipulations in such agreement. A Market Participant's hourly Non-Synchronized Reserve Obligation shall be adjusted by any Non-Synchronized Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Non-Synchronized Reserve Obligation shall be charged the pro rata share of the sum day-ahead and real-time credits for Non-Synchronized Reserve as defined in sections 3.2.3A.001(b)(i) and (ii) below.

(b) Resources assigned to provide Non-Synchronized Reserve at the direction of the Office of the Interconnection shall be credited as follows:

(i) Credits for Non-Synchronized Reserve provided by generation resources assigned to provide Non-Synchronized Reserve by the Office of the Interconnection in the Day-ahead Non-Synchronized Reserve Market shall be equal to the product of the Day-ahead Non-Synchronized Market Clearing Price multiplied by the megawatt amount of Non-Synchronized Reserve such resource is assigned to provide.

(ii) Credits for Non-Synchronized Reserve provided by generation resources assigned to provide Non-Synchronized Reserve by the Office of the Interconnection in the Real-time Non-Synchronized Reserve Market shall be determined for each operating hour based on the sum on their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Non-Synchronized Reserve from that resource assigned by the Office of the Interconnection in the Real-time Non-Synchronized Reserve Market;

B = For each Real-time Settlement Interval, the megawatts of Non-Synchronized Reserve from that resource assigned by the Office of the Interconnection in the Day-ahead Non-Synchronized Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Non-Synchronized Reserve Market Clearing Price.

(iii) Pool-scheduled generation resources assigned to provide Non-Synchronized Reserve in the Day-ahead Non-Synchronized Reserve Market shall be credited a Non-Synchronized Reserve lost opportunity cost credit, where positive, as

determined in accordance with subsection (d)(iii) below, to recover any net monetary loss to the Market Seller of such resource associated with the purchase of Non-Synchronized Reserve in the Real-time Non-Synchronized Reserve Market as a result of following the dispatch direction of the Office of the Interconnection.

(c) Non-Synchronized Reserve Market Clearing Prices

(i) For the Day-ahead Non-Synchronized Reserve Market, the Non-Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Non-Synchronized Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for Primary Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Non-Synchronized Reserve offer prices and the applicable Operating Reserve Demand Curve for Non-Synchronized Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Primary Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute and (B) the price of serving the next increment of demand for 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute, provided that the Non-Synchronized Reserve Market Clearing Price shall be less than or equal to the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Non-Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Non-Synchronized Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Non-Synchronized Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Non-Synchronized Reserve market quantities and prices as determined pursuant to subsection (c)(ii) hereof.

(ii) For the Real-time Non-Synchronized Reserve Market, the Non-Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for Primary Reserve in a Reserve Zone or Reserve Sub-zone determined by the interaction between a supply curve formed using Non-Synchronized Reserve offer prices and the applicable Operating Reserve Demand Curve for Non-Synchronized Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Primary Reserve for any other Reserve

Zone or Reserve Subzone to which the next increment of demand for Primary Reserve can contribute and (B) the price of serving the next increment of demand for 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute, provided that the Non-Synchronized Reserve Market Clearing Price shall be less than or equal to the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Non-Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Non-Synchronized Reserves, then the Non-Synchronized Reserve Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Non-Synchronized Reserves, then the Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Non-Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Non-Synchronized Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Non-Synchronized Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Non-Synchronized Reserve Market Clearing Prices exist, then the Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Non-Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, the Non-Synchronized Reserve Market Clearing Price will be set to zero dollars per megawatt-hour regardless of whether the Office of the Interconnection is assigning Non-Synchronized Reserves.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action as described in the PJM Manuals or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Non-Synchronized Reserve Market Clearing Price shall be the product of 1.5 multiplied by the

Reserve Penalty Factor for the Primary Reserve Requirement for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the Primary Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended Primary Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Primary Reserve Penalty Factors are warranted for subsequent Delivery Year(s).

(d) (i) For determining the Non-Synchronized Reserve clearing price for each hour in the Day-ahead Non-Synchronized Reserve Market and for each Real-time Settlement Interval in the Real-time Non-Synchronized Reserve Market, including during a declaration of a Market Suspension, the unit-specific opportunity cost for a generation resource that is not providing energy because they are providing Non-Synchronized Reserves will be zero.

(ii) For each Real-time Settlement Interval, a total Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in real-time reserve MW from a day-ahead market assignment in more than one market for that Real-time Settlement Interval, the total Market Revenue Neutrality Offset is allocated to the Non-Synchronized Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Non-Synchronized Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Non-Synchronized Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Non-Synchronized Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Non-Synchronized Reserve assignment decreases due to the resource being self-scheduled to provide energy, Synchronized Reserve, or Regulation;

(B) A resource reduces flexibility in real-time such that the resource no longer qualifies to provide Non-Synchronized Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time; or

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above.

(iii) A Non-Synchronized Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(\text{zero}) - (A + B + C + D)$$

Where:

A = day-ahead clearing price credits as determined in subsection (b)(i) above;

B = real-time clearing price credits as determined in subsection (b)(ii) above;

C = the applicable Market Revenue Neutrality Offset as determined in subsection (d)(ii) above; and

D = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A.001(d)(ii) above if not eligible for Market Revenue Neutrality Offset.

(e) [Reserved for future use]

(f) For each operating hour, the sum of the Non-Synchronized Reserve lost opportunity cost credits credited in subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Non-Synchronized Reserve Obligation in proportion to its real-time purchases of Non-Synchronized Reserve in megawatt-hours during that hour.

(g) The magnitude of response to a Non-Synchronized Reserve Event by a generation resource is the difference between the generation resource's output at the start of the event and its output 10 minutes after the start of the event. In order to allow for small fluctuations and possible telemetry delays, generation resource output at the start of the event is defined as the lowest telemetered generator resource output between one minute prior to and one minute following the start of the event. Similarly, a generation resource's output 10 minutes after the start of the event is defined as the greatest generator resource output achieved between 9 and 11 minutes after the start of the event. The response actually credited to a generation resource will be reduced by the amount the megawatt output of the generation resource falls below the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter.

(h) In the event a generation resource that has been assigned by the Office of the Interconnection to provide Non-Synchronized Reserve fails to provide the assigned amount of Non-Synchronized Reserve in response to a Non-Synchronized Reserve Event, the resource will be credited for Non-Synchronized Reserve capacity in the amount that actually responded for the contiguous Real-time Settlement Interval the resource was assigned Non-Synchronized Reserve during which the event occurred.

3.2.3A.01 Secondary Reserve.

(a) Each Market Participant that is a Load Serving Entity shall have an obligation for hourly Secondary Reserve equal to its pro rata share of Secondary Reserve assigned for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone and Reserve Sub-zone for the hour ("Secondary Reserve Obligation"). A Market Participant's hourly Secondary Reserve Obligation shall be adjusted by any Secondary Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Secondary Reserve Obligation shall be charged the pro rata share of the sum of day-ahead and real-time credits for Secondary Reserve as defined in sections 3.2.3A.01(b)(i) and (ii) below.

(b) Resources assigned to provide Secondary Reserve at the direction of the Office of the Interconnection shall be credited as follows:

(i) Credits for Secondary Reserve provided by generation resources and Economic Load Response Participant resources assigned to provide Secondary Reserve by the Office of the Interconnection in the Day-ahead Secondary Reserve Market shall be equal to the product of the Day-ahead Secondary Reserve Market Clearing Price multiplied by the megawatt amount of Secondary Reserve such resource is scheduled to provide.

(ii) Credits for Secondary Reserve provided by generation resources and Economic Load Response Participant resources scheduled to provide Secondary Reserve by the Office of the Interconnection in the Real-time Secondary Reserve Market shall be determined for each operating hour based on the sum of their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Secondary Reserve from that resource assigned by the Office of the Interconnection in the Real-time Secondary Reserve Market. The megawatt value is capped at the lesser of the Economic Maximum or Secondary Reserve maximum MW minus the Revenue

Data for Settlements of the resource for each Real-time Settlement Interval minus the Real-time Synchronized Reserve assignment;

B = For each Real-time Settlement Interval, the megawatts of Secondary Reserve from that resource scheduled by the Office of the Interconnection in the Day-ahead Secondary Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Secondary Reserve Market Clearing Price.

(iii) Pool-scheduled resources and Economic Load Response Participant resources shall be credited a Secondary Reserve lost opportunity cost credit, where positive, as described in subsection (f)(iv) below.

(c) [Reserved for future use]

(d) Secondary Reserve Market Clearing Prices

(i) For the Day-ahead Secondary Reserve Market, the Secondary Reserve Market Clearing Price shall be determined for each Reserve Zone and, as applicable, Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Secondary Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for 30-minute Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Secondary Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Secondary Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus the price of serving the next increment of demand for 30-minute Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute, but the Secondary Reserve Market Clearing Price shall not exceed the Reserve Penalty Factor for the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Secondary Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Secondary Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Secondary Reserve market quantities and prices as determined pursuant to subsection (d)(ii) hereof.

(ii) For the Real-time Secondary Reserve Market, the Secondary Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each Real-time Settlement Interval of the

Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for 30-minute Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Secondary Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Secondary Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus the price of serving the next increment of demand for 30-minute Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute but the Secondary Reserve Market Clearing Price shall not exceed the Reserve Penalty Factor for the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Secondary Reserves, then the Secondary Reserve Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Secondary Reserves, then the Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Secondary Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Secondary Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Secondary Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Secondary Reserve Market Clearing Prices exist, then the Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Secondary Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, and the Office of the Interconnection is assigning Secondary Reserves, the Secondary Reserve Market Clearing Price will be set to zero dollars per megawatt-hour. Resources will be compensated for lost opportunity cost per subsection (f) hereof using the energy price as determined in Operating Agreement, Schedule 1, section 2.5.2.iii.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action or a Manual Load Dump Action as

described in the PJM Manuals, the Real-time Secondary Reserve Market Clearing Price for a given Reserve Zone or Sub-zone shall be the Reserve Penalty Factor for the 30-minute Reserve Requirements for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the 30-minute Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended 30-minute Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Reserve Penalty Factor for 30-minute Reserve are warranted for subsequent Delivery Year(s).

(e) (i) For determining the Secondary Reserve Market Clearing Price for each hour in the Day-ahead Secondary Reserve Market, the estimated resource-specific opportunity cost for a generation resource or Economic Load Response Participant resources shall be the difference between the Locational Marginal Price at the generation or Economic Load Response Participant resource bus and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) or offer price to reduce energy from the Economic Load Response Participant resource in the PJM Interchange Energy Market when the Locational Marginal Price at the Economic Load Response Participant resource bus is greater than the offer price for energy from the generation resource or the offer price to reduce energy from the Economic Load Response Participant resource.

However, opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve, and for synchronous condensers and for Economic Load Response Participant resources that do not receive a day-ahead commitment to provide energy in the same operating hour in which such resource is committed to provide Secondary Reserve.

(ii) For determining the Secondary Reserve Market Clearing Price for each Real-time Settlement Interval in the Real-time Secondary Reserve Market, the estimated unit-specific opportunity cost for a generation resource that is not a hydroelectric resource shall be the difference between the Locational Marginal Price at the generation bus for the generation resource and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) in the PJM Interchange Energy Market when the Locational Marginal Price at the generation bus is greater than the offer price for energy from the generation resource.

For hydroelectric resources, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the expected real-time Locational Marginal Price at that generation bus. The estimated unit-

specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the expected real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average day-ahead Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

However, the opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve, and for synchronous condensers and Economic Load Response Participant resources.

(f) (i) In determining the credit under subsection (b) to a generation resource, except a generation resource that is a synchronous condenser, selected to provide Secondary Reserve in the Day-ahead Secondary Reserve Market or an Economic Load Response Participant resource that is selected to provide Secondary Reserve in the Day-ahead Secondary Reserve Market in the same operating hour in which such resource receives a day-ahead commitment to provide energy, the opportunity cost of a resource shall be determined for each operating hour that the Office of the Interconnection requires a resource to provide Secondary Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Day-ahead Locational Marginal Price at the generation bus of the generation resource or the applicable pricing point for the Economic Load Response Participant resource;

B= The deviation of the resource's energy output or load reduction necessary to supply a Day-ahead Secondary Reserve assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load less any Day-ahead Synchronized Reserve Market assignment; and

C = The Day-ahead Energy Market offer integrated under the applicable energy offer curve for the resource's energy output or load reduction necessary to provide a Day-ahead Secondary Reserve Market assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load less any Day-ahead Synchronized Reserve Market assignment.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [energy use for providing synchronous condensing multiplied by A] plus [the applicable condense start-up cost divided by the number of hours the resource is assigned Secondary Reserve].

(ii) In determining the credit under subsection (b) to a generation resource, except a generation that is a synchronous condenser, selected to provide Secondary Reserve in the Real-time Secondary Reserve Market in excess of the resource's Day-ahead Secondary Reserve Market assignment and that actively follows the Office of the Interconnection's signals and instructions, the unit-specific opportunity cost of that generation resource shall be determined for each Real-time Settlement Interval that the Office of the Interconnection requires that generation resource to provide Secondary Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Real-time Locational Marginal Price at the generation bus of the generation resource;

B= The deviation of the generation resource's output necessary to supply Secondary Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment and follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy less any Real-time Synchronized Reserve Market assignment; and

C = The energy offer integrated under the applicable energy offer curve for the generation resource's output necessary to supply Secondary Reserve in real-time from the lesser of the generation resource's output necessary to provide a Day-ahead Secondary Reserve Market assignment or follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy less any Real-time Synchronized Reserve Market assignment.

For hydroelectric resources, the unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the real-time Locational Marginal Price at that generation bus multiplied by the additional megawatts assigned to supply Synchronized Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the

average real-time Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating multiplied by the additional megawatts assigned to supply Secondary Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: additional energy use in excess of day-ahead energy use for providing synchronous condensing in real-time multiplied by A plus [any applicable condense start-up costs due to additional condense start-ups in real-time in excess of day-ahead condense start-ups allocated to each Real-time Settlement Interval as described in PJM Manuals]. If the generation resource is operating as a synchronous condenser and also has a Real-time Synchronized Reserve assignment, resource's unit-specific opportunity cost in the Secondary Reserve Market shall be zero,

(iii) For each Real-time Settlement Interval, a total Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in real-time reserve MW from a day-ahead market assignment in more than one market for that real-time settlement interval, the total Market Revenue Neutrality Offset is allocated to the Secondary Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Secondary Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Secondary Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Secondary Reserve in a Real-time Settlement Interval for any of the following conditions:

- (A) A resource's real-time Secondary Reserve assignment decreases due to the resource being self-scheduled to provide energy, Synchronized Reserve, or Regulation;
- (B) A resource reduces flexibility in real-time such that the resource no longer qualifies to provide Secondary Reserve in real-time;
- (C) A resource's Final Offer is less than its Committed Offer;
- (D) A resource trips offline or otherwise becomes unavailable in real-time;
- (E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above; or

(F) A resource that fails to come online and reach Economic Minimum output within 30 minutes as described in section 3.2.3A.01(h)(i) below.

(iv) A Secondary Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(A + B) - (C + D + E + F)$$

Where:

A = day-ahead opportunity cost as determined in subsection (f)(i) above;

B = real-time opportunity cost as determined in subsection (f)(ii) above;

C = day-ahead clearing price credits as determined in subsection (b)(i) above;

D = real-time clearing price credits as determined subsection (b)(ii) above;

E = the applicable Market Revenue Neutrality Offset as determined in subsection (f)(iii) above; and

F = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A.01(f)(iii) above if not eligible for Market Revenue Neutrality Offset.

(v) The opportunity costs for Economic Load Response Participant resources and generation resources not synchronized to the grid shall be zero, except that Economic Load Response Participant resources may have a day-ahead opportunity cost, as determined in subsection (f)(i) above.

(g) For each operating hour, the sum of the Secondary Reserve lost opportunity cost credits credited in accordance with subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Secondary Reserve Obligation in proportion to its real-time purchases of Secondary Reserve in megawatt-hours during that hour.

(h) (i) In the event an offline generation resource has been assigned by the Office of the Interconnection to provide Secondary Reserve in real-time and is subsequently dispatched by the Office of the Interconnection to supply energy during that Operating Day and the resource qualifies as a Secondary Reserve resource at the time it is dispatched to provide energy, the Office of the Interconnection will assess the resource's performance as follows:

For each generation resource that fails to come online and reach Economic Minimum output within 30 minutes as instructed by the Office of the Interconnection, the

resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval and for all prior intervals in which the resource was assigned to provide Secondary Reserve in the Real-time Secondary Reserve Market starting at the later of (A) the last interval the resource was online or (B) the beginning of that Operating Day and continuing up to the interval the resource failed to come online. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time not being paid for the assigned MW.

(ii) In the event an Economic Load Response Participant resource has been assigned by the Office of the Interconnection to provide Secondary Reserve in real-time and is subsequently dispatched to supply the Secondary Reserve assignment as a load reduction, the Office of the Interconnection will assess the resource's performance as follows:

For the purposes of this subsection, a resource's starting MW usage shall be the greatest telemetered consumption between one minute prior to and one minute following the issuance of a dispatch instruction from the Office of the Interconnection, and a resource's ending MW usage shall be the lowest consumption between 29 and 31 minutes after the issuance of a dispatch instruction from the Office of the Interconnection.

For each Economic Load Response Participant resource that fails to reduce load by at least the Economic Minimum, where the measured response is the difference between the resource's starting MW usage and the resource's ending MW usage as described above, within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval, and for all prior intervals in which the resource was assigned to provide Secondary Reserve in the Real-time Secondary Reserve Market between such non-performance event starting at the later of (A) the last interval the resource reduced load at the instruction of the Office of the Interconnection or (B) the beginning of that Operating Day, and for all subsequent intervals through the earlier of (C) the next interval in which the resource is dispatched to reduce load or (D) the end of the Operating Day. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time, refunding all payments due for Secondary Reserve during such period.

(iii) For Batch Load Economic Load Response Participant Resources, a second method of verification will be used for instances where a Secondary Reserve assignment dispatched as an energy load reduction is initiated and the resource is operating at the minimum consumption level of its duty cycle. In this case, the magnitude of the response will be measured as the difference between (A) the minimum of the resource's consumption between the minute before and the minute after the end of the last settlement interval the resource reduced load at the instruction of the Office of the Interconnection and (B) the maximum consumption within a ten (10) minute period following the end of the last settlement interval the resource reduced load provided that

all subsequent minutes following that minute are no less than 50% of the consumption in that minute.

For each Batch Load Economic Load Response Participant Resource that fails to reduce load by at least the Economic Minimum, where the measured response is the difference between the resource's starting MW usage and the resource's ending MW usage as described in section (ii) above or the difference between (A) and (B) as described in section (iii) above, within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval, and for all prior intervals in which the resource was assigned to provide Secondary Reserve in either the Day-ahead or Real-time Secondary Reserve Markets between such non-performance event starting at the later of (A) the last interval the resource reduced load at the instruction of the Office of the Interconnection or (B) the beginning of that Operating Day, and for all subsequent intervals through the earlier of (C) the next interval in which the resource is dispatched to reduce load or (D) the end of the Operating Day. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time, refunding all payments due for Secondary Reserve during such period.

3.2.3A.02 Operating Reserve Demand Curves

The Office of the Interconnection shall establish Operating Reserve Demand Curves for clearing 30-minute Reserve, Primary Reserve, and Synchronized Reserve, for, as applicable, each Reserve Zone or Reserve Sub-zone to procure sufficient reserves to meet, as applicable, (a) 30-minute Reserve Requirement and Extended 30-minute Reserve Requirement; (b) Primary Reserve Requirement and Extended Primary Reserve Requirement; and (c) Synchronized Reserve Requirement and Extended Synchronized Reserve Requirement. The Operating Reserve Demand Curves established for each reserve type shall be used to commit such reserves in both the day-ahead and real-time reserve markets. The Operating Reserve Demand Curves shall be determined in accordance with the applicable Reserve Penalty Factors and PJM Manuals.

3.2.3B Reactive Services.

(a) A Market Seller providing Reactive Services at the direction of the Office of the Interconnection shall be credited as specified below for the operation of its resource. These provisions are intended to provide payments to generating units when the LMP dispatch algorithms would not result in the dispatch needed for the required reactive service. LMP will be used to compensate generators that are subject to redispatch for reactive transfer limits.

(b) At the end of each Operating Day, where the active energy output of a Market Seller's resource is reduced or suspended at the request of the Office of the Interconnection for the purpose of maintaining reactive reliability within the PJM Region, the Market Seller shall be credited according to sections 3.2.3B(c) & 3.2.3B(d).

(c) A Market Seller providing Reactive Services from either a steam-electric generating unit or combined cycle unit operating in combined cycle mode, where such unit is pool-scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3 (c) hereof), and where the real time LMP at the unit's bus is higher than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override) shall be compensated for lost opportunity cost by receiving a credit for each Real-time Settlement Interval in an amount equal to the product of (A) the deviation of the generating unit's output necessary to follow the Office of the Interconnection's signals and the generating unit's expected output level if it had been dispatched in economic merit order, times (B) the Real-time Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A*B) - C$.

(d) A Market Seller providing Reactive Services from either a combustion turbine unit or combined cycle unit operating in simple cycle mode that is pool scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3 (c) hereof), operated as requested by the Office of the Interconnection, shall be compensated for lost opportunity cost for each Real-time Settlement Interval, limited to the lesser of the unit's Economic Maximum or the unit's Generation Resource Maximum Output, if the unit output is reduced at the direction of the Office of the Interconnection and the real time LMP at the unit's bus is higher than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection as directed by the PJM dispatcher, then the Market Seller shall be credited in a manner consistent with that described above in section 3.2.3B(c) for a steam unit or a combined cycle unit operating in combined cycle mode.

(e) At the end of each Operating Day, where the active energy output of a Market Seller's unit is increased at the request of the Office of the Interconnection for the purpose of maintaining reactive reliability within the PJM Region and the offered price of the energy is above the real-time LMP at the unit's bus, the Market Seller shall be credited according to section 3.2.3B(f).

(f) A Market Seller providing Reactive Services from either a steam-electric generating unit, combined cycle unit or combustion turbine unit, where such unit is pool scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3 (c) hereof), and where the real time LMP at the unit's bus is lower than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall receive a credit in an amount equal to $\{(AG - LMPDMW) \times (UB - URTLMP)\}$ where:

AG equals the actual output of the unit;

LMPDMW equals the level of output for the unit determined according to the point on the scheduled offer curve on which the unit was operating corresponding

to the real time LMP at the unit's bus and adjusted for any Regulation or Tier 2 Synchronized Reserve assignments;

UB equals the unit offer for that unit for which output is increased, determined according to the lesser of the Final Offer or Committed Offer;

URTLMP equals the real time LMP at the unit's bus; and

where $UB - URTLMP$ shall not be negative.

(g) A Market Seller providing Reactive Services from a hydroelectric resource where such resource is pool scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3 (c) hereof), and where the output of such resource is altered from the schedule submitted by the Market Seller for the purpose of maintaining reactive reliability at the request of the Office of the Interconnection, shall be compensated for lost opportunity cost in the same manner as provided in sections 3.2.2(d) and 3.2.3A(f) and further detailed in the PJM Manuals.

(h) If a Market Seller believes that, due to specific pre-existing binding commitments to which it is a party, and that properly should be recognized for purposes of this section, the above calculations do not accurately compensate the Market Seller for lost opportunity cost associated with following the Office of the Interconnection's dispatch instructions to reduce or suspend a unit's output for the purpose of maintaining reactive reliability, then the Office of the Interconnection, the Market Monitoring Unit and the individual Market Seller will discuss a mutually acceptable, modified amount of such alternate lost opportunity cost compensation, taking into account the specific circumstances binding on the Market Seller. Following such discussion, if the Office of the Interconnection accepts a modified amount of alternate lost opportunity cost compensation, the Office of the Interconnection shall invoice the Market Participant accordingly. If the Market Monitoring Unit disagrees with the modified amount of alternate lost opportunity cost compensation, as accepted by the Office of the Interconnection, it will exercise its powers to inform the Commission staff of its concerns.

(i) The amount of Synchronized Reserve provided by generating units maintaining reactive reliability shall be counted as Synchronized Reserve satisfying the overall PJM Synchronized Reserve requirements. Operators of these generating units shall be notified of such provision, and to the extent a generating unit's operator indicates that the generating unit is capable of providing Synchronized Reserve, shall be subject to the same requirements contained in section 3.2.3A regarding provision of Synchronized Reserve. At the end of each Operating Day, to the extent a condenser operated to provide Reactive Services also provided Synchronized Reserve, a Market Seller shall be credited for providing synchronous condensing for the purpose of maintaining reactive reliability at the request of the Office of the Interconnection, in an amount equal to the higher of (i) the Synchronized Reserve Market Clearing Price for each Real-time Settlement Interval a generating unit provided synchronous condensing multiplied by the amount of Synchronized reserve provided by the synchronous condenser or (ii) the sum of (A) the generating unit's cost to provide synchronous condensing, calculated in accordance with the PJM Manuals, (B) the product of MW energy usage for providing synchronous condensing

multiplied by the real time LMP at the generating unit's bus, (C) the generating unit's startup-cost of providing synchronous condensing, and (D) the unit-specific lost opportunity cost of the generating resource supplying the increment of Synchronized Reserve as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals. To the extent a condenser operated to provide Reactive Services was not also providing Synchronized Reserve, the Market Seller shall be credited only for the generating unit's cost to condense, as described in (ii) above. The total Synchronized Reserve Obligations of all Load Serving Entities under section 3.2.3A(a) in the zone where these condensers are located shall be reduced by the amount counted as satisfying the PJM Synchronized Reserve requirements. The Synchronized Reserve Obligation of each Load Serving Entity in the zone under section 3.2.3A(a) shall be reduced to the same extent that the costs of such condensers counted as Synchronized Reserve are allocated to such Load Serving Entity pursuant to subsection (l) below.

(j) A Market Seller's pool scheduled steam-electric generating unit or combined cycle unit operating in combined cycle mode, that is not committed to operate in the Day-ahead Market, but that is directed by the Office of the Interconnection to operate solely for the purpose of maintaining reactive reliability, at the request of the Office of the Interconnection, shall be credited in the amount of the unit's offered price for start-up and no-load fees. The unit also shall receive, if applicable, compensation in accordance with Sections 3.2.3B(e)-(f).

(k) The sum of the foregoing credits as specified in Sections 3.2.3B(b)-(j) shall be the cost of Reactive Services for the purpose of maintaining reactive reliability for the Operating Day and shall be separately determined for each transmission zone in the PJM Region based on whether the resource was dispatched for the purpose of maintaining reactive reliability in such transmission zone.

(l) The cost of Reactive Services for the purpose of maintaining reactive reliability in a transmission zone in the PJM Region for each Operating Day shall be allocated and charged to each Market Participant in proportion to its deliveries of energy to load (net of operating Behind The Meter Generation) in such transmission zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such transmission zone.

(m) Generating units receiving dispatch instructions from the Office of the Interconnection under the expectation of increased actual or reserve reactive shall inform the Office of the Interconnection dispatcher if the requested reactive capability is not achievable. Should the operator of a unit receiving such instructions realize at any time during which said instruction is effective that the unit is not, or likely would not be able to, provide the requested amount of reactive support, the operator shall as soon as practicable inform the Office of the Interconnection dispatcher of the unit's inability, or expected inability, to provide the required reactive support, so that the associated dispatch instruction may be cancelled. PJM Performance Compliance personnel will audit operations after-the-fact to determine whether a unit that has altered its active power output at the request of the Office of the Interconnection has provided the actual reactive support or the reactive reserve capability requested by the Office of the Interconnection. PJM shall utilize data including, but not limited to, historical reactive

performance and stated reactive capability curves in order to make this determination, and may withhold such compensation as described above if reactive support as requested by the Office of the Interconnection was not or could not have been provided.

3.2.3C Synchronous Condensing for Post-Contingency Operation.

(a) Under normal circumstances, PJM operates generation out of merit order to control contingency overloads when the flow on the monitored element for loss of the contingent element (“contingency flow”) exceeds the long-term emergency rating for that facility, typically a 4-hour or 2-hour rating. At times however, and under certain, specific system conditions, PJM does not operate generation out of merit order for certain contingency overloads until the contingency flow on the monitored element exceeds the 30-minute rating for that facility (“post-contingency operation”). In conjunction with such operation, when the contingency flow on such element exceeds the long-term emergency rating, PJM operates synchronous condensers in the areas affected by such constraints, to the extent they are available, to provide greater certainty that such resources will be capable of producing energy in sufficient time to reduce the flow on the monitored element below the normal rating should such contingency occur.

(b) The amount of Synchronized Reserve provided by synchronous condensers associated with post-contingency operation shall be counted as Synchronized Reserve satisfying the applicable Synchronized Reserve Requirements. Operators of these generation units shall be notified of such provision, and to the extent a generation unit’s operator indicates that the generation unit is capable of providing Synchronized Reserve, shall be subject to the same requirements contained in section 3.2.3A regarding provision of Synchronized Reserve. At the end of each Operating Day, to the extent a condenser operated in conjunction with post-contingency operation also provided Synchronized Reserve, a Market Seller shall be credited for providing synchronous condensing in conjunction with post-contingency operation at the request of the Office of the Interconnection, in an amount equal to the higher of (i) the Real-time Synchronized Reserve Market Clearing Price for each applicable interval a generation resource provided synchronous condensing multiplied by the amount of Synchronized Reserve provided by the synchronous condenser or (ii) the sum of (A) the generation resource’s applicable interval cost to provide synchronous condensing, calculated in accordance with the PJM Manuals, (B) the applicable interval product of the megawatts of energy used to provide synchronous condensing multiplied by the real-time LMP at the generation bus of the generation resource, (C) the generation resource’s start-up cost of providing synchronous condensing, and (D) the unit-specific lost opportunity cost of the generation resource supplying the increment of Synchronized Reserve as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals. To the extent a condenser operated in association with post-contingency constraint control was not also providing Synchronized Reserve, the Market Seller shall be credited only for the generation unit’s cost to condense, as described in (ii) above. The total Synchronized Reserve Obligations of all Load Serving Entities under section 3.2.3A(a) in the zone where these condensers are located shall be reduced by the amount counted as satisfying the PJM Synchronized Reserve requirements. The Synchronized Reserve Obligation of each Load Serving Entity in the zone under section 3.2.3A(a) shall be reduced to the same extent that the costs of such condensers counted as Synchronized Reserve are allocated to such Load Serving Entity pursuant to subsection (d) below.

(c) The sum of the foregoing credits as specified in section 3.2.3C(b) shall be the cost of synchronous condensers associated with post-contingency operations for the Operating Day and shall be separately determined for each transmission zone in the PJM Region based on whether the resource was dispatched in association with post-contingency operation in such transmission zone.

(d) The cost of synchronous condensers associated with post-contingency operations in a transmission zone in the PJM Region for each Operating Day shall be allocated and charged to each Market Participant in proportion to its deliveries of energy to load (net of operating Behind The Meter Generation) in such transmission zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such transmission zone.

3.2.4 Transmission Congestion Charges.

Each Market Buyer shall be assessed Transmission Congestion Charges as specified in Tariff, Attachment K-Appendix, section 5.

3.2.5 Transmission Loss Charges.

Each Market Buyer shall be assessed Transmission Loss Charges as specified in Tariff, Attachment K-Appendix, section 5.

3.2.6 Emergency Energy.

(a) When the Office of the Interconnection has implemented Emergency procedures, resources offering Emergency energy are eligible to set real-time Locational Marginal Prices, capped at the energy offer cap plus sum of the applicable Reserve Penalty Factors for the Synchronized Reserved Requirement and Primary Reserve Requirement, provided that the Emergency energy is needed to meet demand in the PJM Region.

(b) Market Participants shall be allocated a proportionate share of the net cost of Emergency energy purchased by the Office of the Interconnection. Such allocated share during each applicable interval of such Emergency energy purchase shall be in proportion to the amount of each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Energy Market, whenever that deviation increases the Market Participant's spot market purchases or decreases its spot market sales. This deviation shall not include any reduction or suspension of output of pool scheduled resources requested by PJM to manage an Emergency within the PJM Region.

(c) Net revenues in excess of Real-time Prices attributable to sales of energy in connection with Emergencies to other Control Areas shall be credited to Market Participants during each applicable interval of such Emergency energy sale in proportion to the sum of (i) each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Energy Market, whenever that deviation increases the Market Participant's spot market

purchases or decreases its spot market sales, and (ii) each Market Participant's energy sales from within the PJM Region to entities outside the PJM Region that have been curtailed by PJM.

(d) The net costs or net revenues associated with sales or purchases of energy in connection with a Minimum Generation Emergency in the PJM Region, or in another Control Area, shall be allocated during each applicable interval of such Emergency sale or purchase to each Market Participant in proportion to the amount of each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Market, whenever that deviation increases the Market Participant's spot market sales or decreases its spot market purchases.

3.2.7 Billing.

(a) PJMSettlement shall prepare a billing statement each billing cycle for each Market Participant in accordance with the charges and credits specified in Tariff, Attachment K-Appendix, sections 3.2.1 through 3.2.6, and showing the net amount to be paid or received by the Market Participant. Billing statements shall provide sufficient detail, as specified in the PJM Manuals, to allow verification of the billing amounts and completion of the Market Participant's internal accounting.

(b) If deliveries to a Market Participant that has PJM Interchange meters in accordance with Operating Agreement, section 14 include amounts delivered for a Market Participant that does not have PJM Interchange meters separate from those of the metered Market Participant, PJMSettlement shall prepare a separate billing statement for the unmetered Market Participant based on the allocation of deliveries agreed upon between the Market Participant and the unmetered Market Participant specified by them to the Office of the Interconnection.

Definitions Q - R

Ramping Capability:

“Ramping Capability” shall mean the sustained rate of change of generator output, in megawatts per minute.

Real-time Congestion Price:

“Real-time Congestion Price” shall mean the Congestion Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Loss Price:

“Real-time Loss Price” shall mean the Loss Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Offer:

“Real-time Offer” shall mean a new offer or an update to a Market Seller’s existing cost-based or market-based offer for a clock hour, submitted for use after the close of the Day-ahead Energy Market.

Real-time Prices:

“Real-time Prices” shall mean the Locational Marginal Prices resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Energy Market:

“Real-time Energy Market” shall mean the purchase or sale of energy and payment of Transmission Congestion Charges for quantity deviations from the Day-ahead Energy Market in the Operating Day.

Real-time Settlement Interval:

“Real-time Settlement Interval” shall mean the interval used by settlements, which shall be every five minutes.

Real-time State of Charge:

“Real-time State of Charge” shall mean the current State of Charge of an Energy Storage Resource Model Participant, measured in units of megawatt-hours.

Real-time System Energy Price:

“Real-time System Energy Price” shall mean the System Energy Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Regional Entity:

“Regional Entity” shall mean an organization that NERC has delegated the authority to propose and enforce reliability standards pursuant to the Federal Power Act.

Regional RTEP Project:

“Regional RTEP Project” shall mean a transmission expansion or enhancement rated at 230 kV or above which is required for compliance with the following PJM criteria: system reliability, operational performance or economic criteria, pursuant to a determination by the Office of the Interconnection.

Registered Entity:

“Registered Entity” shall mean the entity registered under the NERC Functional Model and NERC Rules of Procedures for the purpose of compliance with NERC Reliability Standards and responsible for carrying out the tasks within a NERC function without regard to whether a task or tasks are performed by another entity pursuant to the terms of the PJM Governing Agreements.

Regulation:

“Regulation” shall mean the capability of a specific generation resource or Demand Resource with appropriate telecommunications, control and response capability to separately increase and decrease its output or adjust load in response to a regulating control signal, in accordance with the specifications in the PJM Manuals.

Regulation Requirement:

“Regulation Requirement” shall mean the required megawatts of performance-adjusted Regulation capability to be maintained in a Regulation Zone. The Regulation Requirement is defined as a set megawatt value by commitment interval and can increase to account for additional operational uncertainty, in accordance with the PJM Manuals.

Regulation Zone:

“Regulation Zone” shall mean any of those one or more geographic areas, each consisting of a combination of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, regulation service.

Related Parties:

“Related Parties” shall mean, solely for purposes of the governance provisions of the Operating Agreement: (i) any generation and transmission cooperative and one of its distribution cooperative members; and (ii) any joint municipal agency and one of its members. For purposes of the Operating Agreement, representatives of state or federal government agencies shall not be deemed Related Parties with respect to each other, and a public body's regulatory authority, if any, over a Member shall not be deemed to make it a Related Party with respect to that Member.

Relevant Electric Retail Regulatory Authority:

“Relevant Electric Retail Regulatory Authority” shall mean an entity that has jurisdiction over and establishes prices and policies for competition for providers of retail electric service to end-customers, such as the city council for a municipal utility, the governing board of a cooperative utility, the state public utility commission or any other such entity.

Reliability Assurance Agreement or PJM Reliability Assurance Agreement:

“Reliability Assurance Agreement” or “PJM Reliability Assurance Agreement” shall mean that certain Reliability Assurance Agreement Among Load-Serving Entities in the PJM Region, on file with FERC as PJM Interconnection, L.L.C. Rate Schedule FERC. No. 44, and as amended from time to time thereafter.

Reliability Coordinator:

“Reliability Coordinator” shall have the same meaning set forth in the NERC Glossary of Terms used in NERC Reliability Standards.

Reserve Penalty Factor:

“Reserve Penalty Factor” shall mean the cost, in \$/MWh, associated with being unable to meet a specific reserve requirement in a Reserve Zone or Reserve Sub-zone. A Reserve Penalty Factor will be defined for each reserve requirement in a Reserve Zone or Reserve Sub-zone.

Reserve Sub-zone:

“Reserve Sub-zone” shall mean any of those geographic areas wholly contained within a Reserve Zone, consisting of a combination of a portion of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, reserve service.

Reserve Zone:

“Reserve Zone” shall mean any of those geographic areas consisting of a combination of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, reserve service.

Residual Auction Revenue Rights:

“Residual Auction Revenue Rights” shall mean incremental stage 1 Auction Revenue Rights created within a Planning Period by an increase in transmission system capability, including the return to service of existing transmission capability, that was not modeled pursuant to Operating Agreement, Schedule 1, section 7.5, and the parallel provisions of Tariff, Attachment K-Appendix, section 7.5 in compliance with Operating Agreement, Schedule 1, section 7.4.2(h), and the parallel provisions of Tariff, Attachment K-Appendix, section 7.4.2(h), and, if modeled, would have increased the amount of stage 1 Auction Revenue Rights allocated pursuant to Operating Agreement, Schedule 1, section 7.4.2, and the parallel provisions of Attachment K-Appendix, section 7.4.2; provided that, the foregoing notwithstanding, Residual Auction Revenue Rights shall exclude: 1) Incremental Auction Revenue Rights allocated pursuant to Tariff, Part VI; and 2) Auction Revenue Rights allocated to entities that are assigned cost responsibility pursuant to Operating Agreement, Schedule 6 for transmission upgrades that create such rights.

Residual Metered Load:

“Residual Metered Load” shall mean all load remaining in an electric distribution company’s fully metered franchise area(s) or service territory(ies) after all nodally priced load of entities serving load in such area(s) or territory(ies) has been carved out.

Revenue Data for Settlements:

“Revenue Data for Settlements” shall mean energy quantities used in accounting and billing as determined pursuant to Tariff, Attachment K-Appendix and the corresponding provisions of Operating Agreement, Schedule 1.

1.10 Scheduling.

1.10.1 General.

(a) The Office of the Interconnection shall administer scheduling processes to implement a Day-ahead Energy Market and a Real-time Energy Market. PJMSettlement shall be the Counterparty to the purchases and sales of energy that clear the Day-ahead Energy Market and the Real-time Energy Market; provided that PJMSettlement shall not be a contracting party to bilateral transactions between Market Participants or with respect to a Generating Market Buyer's self-schedule or self-supply of its generation resources up to that Generating Market Buyer's Equivalent Load.

(b) The Day-ahead Energy Market shall enable Market Participants to purchase and sell energy through the PJM Interchange Energy Market at Day-ahead Prices and enable Transmission Customers to reserve transmission service with Transmission Congestion Charges and Transmission Loss Charges based on locational differences in Day-ahead Prices. Up-to Congestion Transactions submitted in the Day-ahead Energy Market shall not require transmission service and Transmission Customers shall not reserve transmission service for such Up-to Congestion Transactions. Market Participants whose purchases and sales, and Transmission Customers whose transmission uses are scheduled in the Day-ahead Energy Market, shall be obligated to purchase or sell energy, or pay Transmission Congestion Charges and Transmission Loss Charges, at the applicable Day-ahead Prices for the amounts scheduled.

(c) (i) In the Real-time Energy Market, Market Participants that deviate from the amounts of energy purchases or sales scheduled in the Day-ahead Energy Market shall be obligated to purchase or sell energy for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.

(ii) In the Real-time Energy Market, Transmission Customers that deviate from the transmission uses, scheduled in the Day-ahead Energy Market shall be obligated to pay Transmission Congestion Charges and Transmission Loss Charges for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.

(iii) Market Participants that deviate in real-time from the amounts of Secondary Reserve, Non-Synchronized Reserve, or Synchronized Reserve sales, scheduled day-ahead shall be obligated to purchase Secondary Reserve, Non-Synchronized Reserve, or Synchronized Reserve for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.

(d) The following scheduling procedures and principles shall govern the commitment of resources to the Day-ahead Energy Market and the Real-time Energy Market over a period extending from one week to one hour prior to the real-time dispatch. Scheduling encompasses the day-ahead and hourly scheduling process, through which the Office of the Interconnection determines the Day-ahead Energy Market and determines, based on changing forecasts of conditions and actions by Market Participants and system constraints, a plan to serve the hourly

energy and reserve requirements of the Internal Market Buyers and the purchase requests of the External Market Buyers in the least costly manner, subject to maintaining the reliability of the PJM Region. Scheduling does not encompass Coordinated External Transactions, which are subject to the procedures of Operating Agreement, Schedule 1, section 1.13. Scheduling shall be conducted as specified in section 1.10.1A below, subject to the following condition. If the Office of the Interconnection's forecast for the next seven days projects a likelihood of Emergency conditions, the Office of the Interconnection may commit, for all or part of such seven day period, to the use of generation resources with notification or start-up times greater than one day as necessary in order to alleviate or mitigate such Emergency, in accordance with the Market Sellers' offers for such units for such periods and the specifications in the PJM Manuals. Such resources committed by the Office of the Interconnection to alleviate or mitigate an Emergency will not receive Operating Reserve Credits nor otherwise be made whole for its hours of operation for the duration of any portion of such commitment that exceeds the maximum start-up and notification times for such resources during Hot Weather Alerts and Cold Weather Alerts, consistent with Operating Agreement, Schedule 1, section 3.2.3 and Operating Agreement, Schedule 1, section 6.6.

1.10.1A Day-ahead and Real-time Energy Market Scheduling.

The following actions shall occur not later than 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled, or such other deadline as may be specified by the Office of the Interconnection in order to comply with the practical requirements and the economic and efficiency objectives of the scheduling process specified in this Schedule.

(a) Each Market Participant may submit to the Office of the Interconnection specifications of the amount and location of its customer loads and/or energy purchases to be included in the Day-ahead Energy Market for each hour of the next Operating Day, such specifications to comply with the requirements set forth in the PJM Manuals. Each Market Buyer shall inform the Office of the Interconnection of the prices, if any, at which it desires not to include its load in the Day-ahead Energy Market rather than pay the Day-ahead Price. PRD Providers that have committed Price Responsive Demand in accordance with the Reliability Assurance Agreement shall submit to the Office of the Interconnection, in accordance with procedures specified in the PJM Manuals, any desired updates to their previously submitted PRD Curves, provided that such updates are consistent with their Price Responsive Demand commitments, and provided further that PRD Providers that are not Load Serving Entities for the Price Responsive Demand at issue may only submit PRD Curves for the Real-time Energy Market. Price Responsive Demand that has been committed in accordance with the Reliability Assurance Agreement shall be presumed available for the next Operating Day in accordance with the most recently submitted PRD Curve unless the PRD Curve is updated to indicate otherwise. PRD Providers may also submit PRD Curves for any Price Responsive Demand that is not committed in accordance with the Reliability Assurance Agreement; provided that PRD Providers that are not Load Serving Entities for the Price Responsive Demand at issue may only submit PRD Curves for the Real-time Energy Market. All PRD Curves shall be on a PRD Substation basis, and shall specify the maximum time period required to implement load reductions.

(b) Each Generating Market Buyer shall submit to the Office of the Interconnection:
(i) hourly schedules for resource increments, including hydropower units, self-scheduled by the Market Buyer to meet its Equivalent Load; and (ii) the Dispatch Rate at which each such self-scheduled resource will disconnect or reduce output, or confirmation of the Market Buyer's intent not to reduce output.

(c) All Market Participants shall submit to the Office of the Interconnection schedules for any energy exports, energy imports, and wheel through transactions involving use of generation or Transmission Facilities as specified below, and shall inform the Office of the Interconnection if the transaction is to be scheduled in the Day-ahead Energy Market. Any Market Participant that elects to schedule an export, import or wheel through transaction in the Day-ahead Energy Market may specify the price (such price not to exceed \$2,000/MWh), if any, at which the export, import or wheel through transaction will be wholly or partially curtailed. The foregoing price specification shall apply to the applicable interface pricing point. Any Market Participant that elects not to schedule its export, import or wheel through transaction in the Day-ahead Energy Market shall inform the Office of the Interconnection if the parties to the transaction are not willing to incur Transmission Congestion and Loss Charges in the Real-time Energy Market in order to complete any such scheduled transaction. Such transactions in the Real-time Energy Market, other than Coordinated Transaction Schedules and emergency energy sales and purchases, may specify a price up to \$2,000/MWh. Scheduling of such transactions shall be conducted in accordance with the specifications in the PJM Manuals and the following requirements:

- i) Market Participants shall submit schedules for all energy purchases for delivery within the PJM Region, whether from resources inside or outside the PJM Region;
- ii) Market Participants shall submit schedules for exports for delivery outside the PJM Region from resources within the PJM Region that are not Dynamic Transfers to such entities pursuant to Operating Agreement, Schedule 1, section 1.12; and
- iii) In addition to the foregoing schedules for exports, imports and wheel through transactions, Market Participants shall submit confirmations of each scheduled transaction from each other party to the transaction in addition to the party submitting the schedule, or the adjacent Control Area.

(c-1) A Market Participant may elect to submit in the Day-ahead Energy Market a form of Virtual Transaction that combines an offer to sell energy at a source, with a bid to buy the same megawatt quantity of energy at a sink where such transaction specifies the maximum difference between the Locational Marginal Prices at the source and sink. The Office of Interconnection will schedule these transactions only to the extent this difference in Locational Marginal Prices is within the maximum amount specified by the Market Participant. A Virtual Transaction of this type is referred to as an "Up-to Congestion Transaction." Such Up-to Congestion Transactions may be wholly or partially scheduled depending on the price difference between the source and sink locations in the Day-ahead Energy Market. The maximum difference between the source

and sink prices that a participant may specify shall be limited to +/- \$50/MWh. The foregoing price specification shall apply to the price difference between the specified source and sink in the day-ahead scheduling process only. An accepted Up-to Congestion Transaction results in scheduled injection at a specified source and scheduled withdrawal of the same megawatt quantity at a specified sink in the Day-ahead Energy Market.

(c-2) A Market Participant may elect to submit an Increment Offer and/or Decrement Bid form of Virtual Transaction in the Day-ahead Energy Market and shall specify the price for such transaction which shall be limited to \$2,000/megawatt-hour.

(c-3) Up-to Congestion Transactions may only be submitted at hubs, Residual Metered Load and interfaces not described in Tariff, Attachment K-Appendix, section 2.6A(b). Increment Offers and Decrement Bids may be only submitted at hubs, nodes at which physical generation or load is settled, Residual Metered Load and interfaces not described in Tariff, Attachment K-Appendix, section 2.6A(b).

(d) Market Sellers in the Day-ahead Energy Market shall submit offers for the supply of energy, demand reductions, or other services for the following Operating Day for each clock hour for which the Market Seller desires or is required to make its resource available to the Office of the Interconnection. Offers for the supply of energy may be cost-based, market-based, or both, and may vary hourly. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, Operating Agreement, Schedule 2, and the PJM Manuals, as applicable. Market Sellers owning or controlling the output of a Generation Capacity Resource that is committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1, and that has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage shall submit offers for the available capacity of such Generation Capacity Resource, including any portion that is self-scheduled by the Generating Market Buyer. Such offers shall be based on the ICAP equivalent of the Market Seller's cleared UCAP capacity commitment, provided, however, where the underlying resource is a Capacity Storage Resource or an Intermittent Resource, the Market Seller shall satisfy the must offer requirement by either self-scheduling or offering the unit as a dispatchable resource, in accordance with the PJM Manuals, where the hourly day-ahead self-scheduled values for such Capacity Storage Resources and Intermittent Resources may vary hour to hour from the capacity commitment. Any offer not designated as a Maximum Emergency offer shall be considered available for scheduling and dispatch under both Emergency and non-Emergency conditions. Offers may only be designated as Maximum Emergency offers to the extent that the Generation Capacity Resource falls into at least one of the following categories:

- i) Environmental limits. If the resource has a limit on its run hours imposed by a federal, state, or other governmental agency that will significantly limit its availability, on either a temporary or long-term basis. This includes a resource that is limited to operating only during declared PJM capacity emergencies by a governmental authority.

- ii) Fuel limits. If physical events beyond the control of the resource owner result in the temporary interruption of fuel supply and there is limited on-site fuel storage. A fuel supplier's exercise of a contractual right to interrupt supply or delivery under an interruptible service agreement shall not qualify as an event beyond the control of the resource owner.
- iii) Temporary emergency conditions at the unit. If temporary emergency physical conditions at the resource significantly limit its availability.
- iv) Temporary megawatt additions. If a resource can provide additional megawatts on a temporary basis by oil topping, boiler over-pressure, or similar techniques, and such megawatts are not ordinarily otherwise available.

The submission of offers for resource increments that are not committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1 shall be optional, but any such offers must contain the information specified in the Office of the Interconnection's Offer Data specification, Operating Agreement, Schedule 1, sections 1.10.1A(d) and 1.10.9B, Operating Agreement, Schedule 2, and the PJM Manuals, as applicable. Energy offered from generation resources that are not committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1 shall not be supplied from resources that are included in or otherwise committed to supply the Operating Reserves of a Control Area outside the PJM Region.

The foregoing offers:

- i) Shall specify the Generation Capacity Resource or Economic Load Response Participant resource and energy or demand reduction amount, respectively, for each clock hour in the offer period;
- ii) Shall specify the amounts and prices for each clock hour during the entire Operating Day for each resource component offered by the Market Seller to the Office of the Interconnection;
- iii) May specify for generation resources offer parameters for each clock hour during the entire Operating Day, as applicable and in accordance with section 1.10.9B below, including: (1) Minimum Run Time; (2) maximum run time; (3) Start-up Costs; (4) No-load Costs; (5) Incremental Energy Offer; (6) notification time; (7) availability; (8) ramp rate; (9) Economic Minimum; (10) Economic Maximum; (11) emergency minimum MW; (12) emergency maximum MW; (13) Synchronized Reserve maximum MW; (14) Secondary Reserve maximum MW; and (15) condense to generation time constraints, and may specify offer parameters for Economic Load Response Participant resources for each clock hour during the entire Operating Day, as applicable and in accordance with section 1.10.9B below, including: (1) minimum down time; (2) shutdown costs;

(3) Incremental Energy Offer; (4) notification time; (5) Economic Minimum; and (6) Economic Maximum;

- iv) Shall set forth any special conditions upon which the Market Seller proposes to supply a resource increment, including any curtailment rate specified in a bilateral contract for the output of the resource, or any cancellation fees;
- v) May include a schedule of offers for prices and operating data contingent on acceptance by the deadline specified in this Schedule, with additional schedules applicable if accepted after the foregoing deadline;
- vi) Shall constitute an offer to submit the resource increment to the Office of the Interconnection for scheduling and dispatch in accordance with the terms of the offer for the clock hour, which offer shall remain open through the Operating Day, for which the offer is submitted, unless the Market Seller a) submits a Real-time Offer for the applicable clock hour, or b) updates the availability of its offer for that hour, as further described in the PJM Manuals;
- vii) Shall be final as to the price or prices at which the Market Seller proposes to supply energy or other services to the PJM Interchange Energy Market, such price or prices being guaranteed by the Market Seller for the period extending through the end of the following Operating Day, unless modified after the close of the Day-ahead Energy Market as permitted pursuant to sections 1.10.9A or 1.10.9B below;
- viii) Shall not exceed an energy offer price of \$1,000/megawatt-hour for all generation resources, except (1) when a Market Seller's cost-based offer is above \$1,000/megawatt-hour and less than or equal to \$2,000/megawatt-hour, then its market-based offer must be less than or equal to the cost-based offer; and (2) when a Market Seller's cost-based offer is greater than \$2,000/megawatt-hour, then its market-based offer must be less than or equal to \$2,000/megawatt-hour;
- ix) Shall not exceed a demand reduction offer price of \$1,000/megawatt-hour, except when an Economic Load Response Participant submits a cost-based offer that includes an incremental cost component that is above \$1,000/megawatt-hour, then its market-based offer must be less than or equal to the cost-based offer but in no event greater than \$2,000/megawatt-hour;
- x) Shall not exceed an offer price as follows for Emergency Load Response and Pre-Emergency Load Response participants with:
 - a) a 30 minute lead time, pursuant to Tariff, Attachment DD-1,

section A.2 and the parallel provision of RAA, Schedule 6, \$1,000/megawatt-hour, plus the applicable Reserve Penalty Factor for the Primary Reserve Requirement, minus \$1.00;

b) an approved 60 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provision of RAA, Schedule 6, \$1,000/megawatt-hour, plus [the applicable Reserve Penalty Factor for the Primary Reserve Requirement divided by 2]; and

c) an approved 120 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provisions of RAA, Schedule 6, \$1,100/megawatt-hour; and

xi) Shall not exceed an energy offer price of \$0.00/MWh for pumped storage hydropower units scheduled by the Office of the Interconnection pursuant to the hydro optimization tool in the Day-ahead Energy Market.

(e) A Market Seller that wishes to make a resource available to sell Regulation service shall submit an offer for Regulation for each 30 minute Regulation clearing interval for which the Market Seller desires to make its resource available to the Office of the Interconnection to provide Regulation that shall specify the megawatts of Regulation being offered, which must equal or exceed 0.1 megawatts, in the Regulation Zone for which such Regulation is offered, the price of the capability offer in dollars per MW, the price of the mileage offer in Dollars per change in MW, and such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer and the resource's opportunity costs. Such offers may vary for each 30 minute Regulation clearing interval, and may be updated each 30 minute Regulation clearing interval, up to 35 minutes before the applicable 30 minute Regulation clearing interval during the Operating Day. The total of the mileage offer multiplied by the historical average mileage used in the market clearing plus the capability offer shall not exceed \$100/megawatt-hour. In addition to any market-based offer for Regulation, the Market Seller also shall submit a cost-based offer. A cost-based offer must be in the form specified in the PJM Manuals and consist of the following components as well as any other components specified in the PJM Manuals:

i. The costs (in \$/MW) of the fuel cost increase due to the steady-state heat rate increase resulting from operating the unit at lower megawatt output incurred from the provision of Regulation shall apply to the capability offer;

ii. The cost increase (in $\$/\Delta\text{MW}$) in costs associated with movement of the regulation resource incurred from the provision of Regulation shall apply to the mileage offer; and

a. Only Regulation-only resources may include all variable operation and maintenance expenses in the mileage offer, as defined in the PJM Manuals.

- iii. An adder of up to \$12.00 per megawatt of Regulation provided applied to the capability offer.

Qualified Regulation capability must satisfy the measurement and verification tests specified in the PJM Manuals.

(f) Each Market Seller owning or controlling the output of a Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative shall submit a forecast of the availability of each such Generation Capacity Resource for the next seven days. A Market Seller (i) may submit a non-binding forecast of the price at which it expects to offer a generation resource increment to the Office of the Interconnection over the next seven days, and (ii) shall submit a binding offer for energy, along with Start-up Costs and No-load Costs, if any, for the next seven days or part thereof, for any generation resource with minimum notification or start-up requirement greater than 24 hours. Such resources committed by the Office of the Interconnection will not receive Operating Reserve Credits nor otherwise be made whole for its hours of operation for the duration of any portion of such commitment that exceeds the maximum start-up and notification times for such resources during Hot Weather Alerts and Cold Weather Alerts, consistent with Operating Agreement, Schedule 1, section 3.2.3 and Operating Agreement, Schedule 1, section 6.6.

(g) Each component of an offer by a Market Seller of a Generation Capacity Resource that is constant for the entire Operating Day and does not vary hour to hour shall remain in effect for subsequent Operating Days until superseded or canceled.

(h) The Office of the Interconnection shall post the total hourly loads scheduled in the Day-ahead Energy Market, as well as, its estimate of the combined hourly load of the Market Buyers for the next four days, and peak load forecasts for an additional three days.

(i) Except for Economic Load Response Participants, all Market Participants may submit Virtual Transactions that apply to the Day-ahead Energy Market only. Such Virtual Transactions must comply with the requirements set forth in the PJM Manuals and must specify amount, location and price, if any, at which the Market Participant desires to purchase or sell energy in the Day-ahead Energy Market. The Office of the Interconnection may require that a market participant shall not submit in excess of a defined number of bid/offer segments in the Day-ahead Energy Market, as specified in the PJM Manuals, when the Office of the Interconnection determines that such limit is required to avoid or mitigate significant system performance problems related to bid/offer volume. Notice of the need to impose such limit shall be provided prior to 10:00 a.m. EPT on the day that the Day-ahead Energy Market will clear. For purposes of this provision, a bid/offer segment is each pairing of price and megawatt quantity submitted as part of an Increment Offer or Decrement Bid. For purposes of applying this provision to an Up-to Congestion Transaction, a bid/offer segment shall refer to the pairing of a source and sink designation, as well as price and megawatt quantity, that comprise each Up-to Congestion Transaction.

(j) (i) Offers to Supply Synchronized and Non-Synchronized Reserves By Generation Resources in the Day-ahead and Real-time Reserve Markets

(1) Market Sellers owning or controlling the output of a Generation Capacity Resource that was committed in an FRR Capacity Plan, self-supplied, offered and cleared in a Base Residual Auction or Incremental Auction, or designated as replacement capacity, as specified in Tariff, Attachment DD, is capable of providing Synchronized Reserve or Non-Synchronized Reserve as specified in section 1.7.19A(a), in section 1.7.19A.01(a) and in the PJM Manuals, and has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage, shall submit offers or otherwise make their 10-minute reserve capability available to supply Synchronized Reserve or, as applicable, Non-Synchronized Reserve, including any portion that is self-scheduled by the Generating Market Buyer, in an amount equal to the available 10-minute reserve capability of such Generation Capacity Resource. Market Sellers of Generation Capacity Resources subject to this must-offer requirement that do not make the reserve capability of such resources available when such resource is able to operate with a dispatchable range (e.g. through offering a fixed output) will be in violation of this provision.

(2) Market Sellers of all other generation resources that (A) are capable of providing Synchronized Reserve or Non-Synchronized Reserve, as specified in section 1.7.19A(a), in section 1.7.19A.01(a) and in the PJM Manuals, (B) are located within the metered boundaries of the PJM Region, and (C) have submitted offers for the supply of energy into the Day-ahead Energy Market and/or Real-time Energy Market shall be deemed to have made their reserve capability available to provide Synchronized Reserve or Non-Synchronized Reserve in the Day-ahead Energy Market and/or Real-time Energy Market for each clock hour for which the Market Seller submits an available offer to supply energy; provided, however that hydroelectric generation resources and Energy Storage Resources are not automatically deemed available to provide reserves based on the submission of an available energy offer but may submit offers to supply Synchronized Reserve and Non-Synchronized Reserve, as applicable.

(3) Offers for the supply of Synchronized Reserve by all generation resources must be cost-based. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A, section 1.10.9B below, and the PJM Manuals, as applicable. For offers to supply Synchronized Reserve, the offer price shall not exceed the expected value of the penalty for failing to provide Synchronized Reserve, where such expected value shall be recalculated annually, in accordance with the PJM Manuals, and posted on PJM's website. The expected value of the penalty is calculated as the product of: (A) the

average penalty, expressed in \$/MWh, multiplied by (B) the average rate of non-performance during Synchronized Reserve events multiplied by (C) the probability a Synchronized Reserve event that will qualify for non-performance assessments will occur.

The expected value of the penalty shall be determined by an annual review of the twelve-month period ending October 31 of the calendar year in which the review is performed. The Office of the Interconnection shall post the results of its annual review by no later than December 15, and the revised offer price cap shall be effective as of the following January 1; provided, however, that at the time of implementation of this rule the expected value of the penalty shall be \$0.02/MWh, and for the period from the second month after implementation through the second December 31 following such date of implementation, the expected value of the penalty shall be recalculated on a monthly basis using data from the implementation date of this rule through the 15th day of the current month, and the revised value shall be effective the 1st day of the following month.

(4) All Non-Synchronized Reserve offers shall be for \$0.00/MWh. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this subsection (d) of this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(ii) Determination of Available Synchronized Reserve Capability of Generation Resources

(1) For each offer to supply reserves by a synchronized resource, the Office of the Interconnection shall determine the MW of available Synchronized Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market, in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Hydroelectric generation resources and Energy Storage Resources may submit offers for their available Synchronized Reserve capability as part of their offer into the Synchronized Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(j)(i) above must submit a Synchronized Reserve offer which specifies the MW of available Synchronized Reserve capability in order to remain compliant with such requirements.

(2) An on-line generation resource's available Synchronized Reserve capability, except for generation resources capable of synchronous condensing, shall be determined in accordance with the PJM Manuals and based on the

resource's current performance and initial energy output and the following offer parameters submitted as part of the resource's energy offer: (A) ramp rate; (B) Economic Minimum; and (C) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Synchronized Reserves above the Synchronized Reserve maximum MW.

For generation resources capable of synchronous condensing, the resource's available Synchronized Reserve capability shall be based on the following offer parameters submitted as part of the resource's energy offer: (D) ramp rate; (E) condense to generation time constraints; (F) Economic Minimum; and (G) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Synchronized Reserves above the Synchronized Reserve maximum MW.

(3) Any Market Seller that believes its generating unit has operating modes, limits, or conditions where the unit would not be capable of providing Synchronized Reserves in real time, can submit to the Office of the Interconnection with a copy to the Market Monitoring Unit a request for an exception from being assigned Synchronized Reserves in the Real-time Synchronized Reserve Market during time periods in which the generating unit is in those operating modes, limits, or conditions. As part of the request, the Market Seller shall supply, for each generating unit, technical information about the operational modes, limits, or conditions to support the requested exception, as further detailed in the PJM Manuals. The Office of the Interconnection shall consult with the Market Monitoring Unit, and consider any input received from the Market Monitoring Unit, in its determination of a request for such an exception. Within 60 days of the submission of the request, the Office of the Interconnection shall notify the Market Seller in writing, with a copy to the Market Monitoring Unit, whether the request is approved or denied. The effective date of any approved request will be provided in the written notification. If a Market Seller has an approved exception, the Market Seller must communicate to the Office of the Interconnection when the unit cannot provide reserves, and the Office of the Interconnection will provide a mechanism for Market Sellers with an approved exception to provide such communication to the Office of the Interconnection in real time, as further detailed in the PJM Manuals. An approved exception will remain applicable to the unit until such time as the Office of the Interconnection determines that a change is needed or the Market Seller notifies the Office of the Interconnection, with a copy to the Market Monitoring

Unit, that a change is needed based on changed operational capabilities of the unit. Market Sellers must notify the Office of the Interconnection, with a copy to the Market Monitoring Unit, within 30 days of any changed operational capabilities that necessitate a change in an approved exception.

(iii) Determination of Available Non-Synchronized Reserve Capability of Generation Resources

(1) For each offer to supply reserves by an off-line generation resource, the Office of the Interconnection shall determine the MW of available Non-Synchronized Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Such hydroelectric generation resources or Energy Storage Resources may submit offers for their available Non-Synchronized Reserve capability as part of their offer into the Non-Synchronized Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(j)(i) above must submit a Non-Synchronized Reserve offer which specifies the MW of available Non-Synchronized Reserve capability in order to remain compliant with such requirements.

(2) An off-line generation resource's available Non-Synchronized Reserve capability shall be determined in accordance with the PJM Manuals and based on the following offer parameters submitted as part of the resource's energy offer: (A) startup time; (B) notification time; (C) ramp rate; (D) Economic Minimum; and (E) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Non-Synchronized Reserves above its Synchronized Reserve maximum MW.

(iv) Offers to Supply Synchronized Reserves by Economic Load Response Participant Resources in the Day-ahead and Real-time Reserve Markets

(1) Economic Load Response Participants that submit offers to reduce demand into the Day-ahead Energy Market and Real-time Energy Market and wish to make their resources available to supply Synchronized Reserve may submit offers to supply Synchronized Reserve from such resources, where such offers shall specify the megawatts of Synchronized Reserve being offered, which must equal or exceed 0.1 megawatts and such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer. Such

offers may vary hourly, and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day.

(2) All offers to supply Synchronized Reserve offers from Economic Load Response Participant resources shall not exceed the expected value of the penalty for failing to provide Synchronized Reserve, as determined in accordance with section 1.10.1A(j)(i)(3) above. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(k) An Economic Load Response Participant that wishes to participate in the Day-ahead Energy Market by reducing demand shall submit an offer to reduce demand to the Office of the Interconnection for each clock hour for which the Economic Load Response Participant desires to make its resource available to the Office of the Interconnection to reduce demand. The offer must equal or exceed 0.1 megawatts, may vary hourly, and shall specify: (i) the amount of the offered curtailment in minimum increments of .1 megawatts; (ii) the Day-ahead Locational Marginal Price above which the end-use customer will reduce load, subject to section 1.10.1A(d)(ix); and (iii) at the Economic Load Response Participant's option, shutdown costs associated with reducing load, including direct labor and equipment costs, opportunity costs, and/or a minimum of number of contiguous hours for which the load reduction must be committed. Such offers may be updated each hour, up to 65 minutes before the applicable clock hour during the Operating Day. Economic Load Response Participants submitting offers to reduce demand in the Day-ahead Energy Market may establish an incremental offer curve, provided that such offer curve shall be limited to ten price pairs (in MWs) per hour.

(l) Market Sellers owning or controlling the output of an Economic Load Response Participant resource that was committed in an FRR Capacity Plan, or that was self-supplied or that offered and cleared in a Base Residual Auction or Incremental Auction, may submit demand reduction bids for the available load reduction capability of the Economic Load Response Participant resource. The submission of demand reduction bids for Economic Load Response Participant resource increments that were not committed in an FRR Capacity Plan, or that have not cleared in a Base Residual Auction or Incremental Auction, shall be optional, but any such bids must contain the information required to be included in such bids, as specified in the PJM Economic Load Response Program. An Economic Load Response Participant resource that was committed in an FRR Capacity Plan, or that was self-supplied or offered and cleared in a Base Residual Auction or Incremental Auction, may submit a demand reduction bid in the Day-ahead Energy Market as specified in the Economic Load Response Program; provided, however, that in the event of an Emergency PJM shall require Economic Load Response Participant resources to reduce load, notwithstanding that the Zonal LMP at the time such Emergency is declared is below the price identified in the demand reduction bid.

(m) (i) Offers to Supply Secondary Reserve By Generation Resources

(1) Market Sellers owning or controlling the output of a Generation Capacity Resource that was committed in an FRR Capacity Plan, self-supplied, offered and cleared in a Base Residual Auction or Incremental Auction, or designated as replacement capacity, as specified in Tariff, Attachment DD, that is available for energy, is capable of providing Secondary Reserve, as specified in section 1.7.19A.02(a) and in the PJM Manuals, and has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage shall submit offers to supply Secondary Reserve, or otherwise make their Secondary Reserve capability available. Such offers shall be for an amount equal to the resource's available energy output achievable within thirty minutes (less its energy output achievable within ten minutes) from a request of the Office of the Interconnection. Market Sellers of Generation Capacity Resources subject to this must-offer requirement that do not make the reserve capability of such resources available when such resource is able to operate with a dispatchable range (e.g. through offering a fixed output) will be in violation of this provision.

(2) Market Sellers of all other generation resources located within the metered boundaries of the PJM Region that submit offers for the supply of energy into the Day-ahead Energy Market and/or Real-time Energy Market and are capable of providing Secondary Reserve, as specified in the PJM Manuals, shall be deemed to have made their reserve capability available to provide Secondary Reserve in the Day-ahead Energy Market and/or Real-time Energy Market for each clock hour for which the Market Seller submits an available offer to supply energy; provided, however that hydroelectric generation resources and Energy Storage Resources are not automatically deemed available to provide reserves based on the submission of an available energy offer but may submit offers to supply Secondary Reserve, as applicable.

(3) Offers for the supply of Secondary Reserve shall be for \$0.00/MWh. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this subsection (d) above, section 1.10.9B below, and the PJM Manuals, as applicable.

(ii) Determination of Available Secondary Reserve Capability of Generation Resources

(1) For each offer to supply Secondary Reserve by a generation resource, the Office of the Interconnection shall determine the MW of available Secondary Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation

resources or Energy Storage Resources. Hydroelectric generation resources or Energy Storage Resources may submit their available Secondary Reserve capability as part of their offer into the Secondary Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(m)(i) above must submit a Secondary Reserve offer which specifies the MW of available Secondary Reserve capability in order to remain compliant with such requirements.

(2) (A) An on-line generation resource's available Secondary Reserve capability, except for generation resources capable of synchronous condensing, shall be based on the resource's current performance and initial energy output, the resource's available Synchronized Reserve capability; and the following offer parameters submitted as part of the energy offer: (i) ramp rate; (ii) Economic Minimum; and (iii) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(B) For generation resources capable of synchronous condensing, the resource's available Secondary Reserve capability shall be based on the following offer parameters submitted as part of the energy offer: (i) ramp rate; (ii) condense to generation time constraints; (iii) Economic Minimum; and (iv) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(C) An off-line generation resource's available Secondary Reserve capability, shall be based on the resource's available Secondary Reserve capability and the following offer parameters submitted as part of the resource's energy offer: (i) startup time; (ii) notification time; (iii) ramp rate; (iv) Economic Minimum; and (v) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating

configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(3) Any Market Seller that believes its generating unit has operating modes, limits, or conditions where the unit would not be capable of providing Secondary Reserves in real time, can submit to the Office of the Interconnection with a copy to the Market Monitoring Unit a request for an exception from being assigned Secondary Reserves in the Real-time Secondary Reserve Market during time periods in which the generating unit is in those operating modes, limits, or conditions. As part of the request, the Market Seller shall supply, for each generating unit, technical information about the operational modes, limits, or conditions to support the requested exception, as further detailed in the PJM Manuals. The Office of the Interconnection shall consult with the Market Monitoring Unit, and consider any input received from the Market Monitoring Unit, in its determination of a request for such an exception. Within 60 days of the submission of the request, the Office of the Interconnection shall notify the Market Seller in writing, with a copy to the Market Monitoring Unit, whether the request is approved or denied. The effective date of any approved request will be provided in the written notification. If a Market Seller has an approved exception, the Market Seller must communicate to the Office of the Interconnection when the unit cannot provide reserves, and the Office of the Interconnection will provide a mechanism for Market Sellers with an approved exception to provide such communication to the Office of the Interconnection in real time, as further detailed in the PJM Manuals. An approved exception will remain applicable to the unit until such time as the Office of the Interconnection determines that a change is needed or the Market Seller notifies the Office of the Interconnection, with a copy to the Market Monitoring Unit, that a change is needed based on changed operational capabilities of the unit. Market Sellers must notify the Office of the Interconnection, with a copy to the Market Monitoring Unit, within 30 days of any changed operational capabilities that necessitate a change in an approved exception.

(iii) Offers to Supply Secondary Reserves by Economic Load Response Participant resources

(1) Each Economic Load Response Participant that submits offers to reduce demand into the Day-ahead Energy Market and Real-time Energy Market and wishes to make their resources available to supply Secondary Reserve shall submit offers to supply Secondary Reserve from such resources, where such offers shall specify the megawatts of Secondary Reserve being offered, which must equal or exceed 0.1 megawatts and include such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer. Such offers may vary hourly, and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day.

(2) All Secondary Reserve offers by Economic Load Response Participant resources shall be for \$0.00/MWh. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(n) A Market Participant may submit a Day-Ahead Pseudo-Tie Transaction for a Market Participant's generator within the PJM balancing authority area that is a Pseudo-Tie into the MISO balancing authority area. Day-Ahead Pseudo-Tie Transactions combine an offer to sell energy at a source with a bid to buy the same megawatt quantity of energy at a sink where such transaction specifies the maximum difference between the Locational Marginal Prices at the source and sink.

Each Day-Ahead Pseudo-Tie Transaction shall: (1) source at a Market Participant's generator within the PJM balancing authority area that Pseudo-Ties into MISO; and (2) sink at the PJM-MISO interface. A Market Participant must reserve transmission service in accordance with the PJM Tariff for each Day-Ahead Pseudo-Tie Transaction. Megawatt quantities for Day-Ahead Pseudo-Tie Transactions shall be greater than zero and less than or equal to the transmission service reserved for the Day-Ahead Pseudo-Tie Transaction. An accepted Day-Ahead Pseudo-Tie Transaction results in scheduled injection at a specified source and scheduled withdrawal of the same megawatt quantity at a specified sink in the Day-Ahead Energy Market.

1.10.1B Demand Bid Scheduling and Screening

(a) The Office of the Interconnection shall apply Demand Bid Screening to all Demand Bids submitted in the Day-ahead Energy Market for each Load Serving Entity, separately by Zone. Using Demand Bid Screening, the Office of the Interconnection will automatically reject a Load Serving Entity's Demand Bids in any future Operating Day for which the Load Serving Entity submits bids if the total megawatt volume of such bids would exceed the Load Serving Entity's Demand Bid Limit for any hour in such Operating Day, unless the Office of the Interconnection permits an exception pursuant to subsection (d) below.

(b) On a daily basis, PJM will update and post each Load Serving Entity's Demand Bid Limit in each applicable Zone. Such Demand Bid Limit will apply to all Demand Bids submitted by that Load Serving Entity for each future Operating Day for which it submits bids. The Demand Bid Limit is calculated using the following equation:

Demand Bid Limit = greater of (Zonal Peak Demand Reference Point * 1.3), or (Zonal Peak Demand Reference Point + 10MW)

Where:

1. Zonal Peak Demand Reference Point = for each Zone: the product of (a) LSE Recent Load Share, multiplied by (b) Peak Daily Load Forecast.

2. LSE Recent Load Share is the Load Serving Entity's highest share of Network Load in each Zone for any hour over the most recently available seven Operating Days for which PJM has data.
3. Peak Daily Load Forecast is PJM's highest available peak load forecast for each applicable Zone that is calculated on a daily basis.

(c) A Load Serving Entity whose Demand Bids are rejected as a result of Demand Bid Screening may change its Demand Bids to reduce its total megawatt volume to a level that does not exceed its Demand Bid Limit, and may resubmit them subject to the applicable rules related to bid submission outlined in Tariff, Operating Agreement and PJM Manuals.

(d) PJM may allow a Load Serving Entity to submit bids in excess of its Demand Bid Limit when circumstances exist that will cause, or are reasonably expected to cause, a Load Serving Entity's actual load to exceed its Demand Bid Limit on a given Operating Day. Examples of such circumstances include, but are not limited to, changes in load commitments due to state sponsored auctions, mergers and acquisitions between PJM Members, and sales and divestitures between PJM Members. A Load Serving Entity may submit a written exception request to the Office of Interconnection for a higher Demand Bid Limit for an affected Operating Day. Such request must include a detailed explanation of the circumstances at issue and supporting documentation that justify the Load Serving Entity's expectation that its actual load will exceed its Demand Bid Limit.

1.10.2 Pool-scheduled Resources.

Pool-scheduled resources are those resources for which Market Participants submitted offers to sell energy in the Day-ahead Energy Market and offers to reduce demand in the Day-ahead Energy Market, which the Office of the Interconnection scheduled in the Day-ahead Energy Market as well as generators committed by the Office of the Interconnection subsequent to the Day-ahead Energy Market. Such resources shall be committed to provide energy in the real-time dispatch unless the schedules for such units are revised pursuant to section 1.10.9 below or Operating Agreement, Schedule 1, section 1.11. Pool-scheduled resources shall be governed by the following principles and procedures.

(a) Pool-scheduled resources shall be selected by the Office of the Interconnection on the basis of the prices offered for energy and demand reductions and related services, whether the resource is expected to be needed to maintain system reliability during the Operating Day, Start-up Costs, No-load Costs, and cancellation fees, and the specified operating characteristics, offered by Market Sellers to the Office of the Interconnection by the offer deadline specified in section 1.10.1A above. Hydropower units can only be pool-scheduled if they are pumped storage units and scheduled by the Office of the Interconnection pursuant to the hydro optimization tool in the Day-ahead Energy Market.

(b) A resource that is scheduled by a Market Participant to support a bilateral sale, or that is self-scheduled by a Generating Market Buyer, shall not be selected by the Office of the Interconnection as a pool-scheduled resource except in an Emergency.

(c) Market Sellers offering energy from hydropower or other facilities with fuel or environmental limitations may submit data to the Office of the Interconnection that is sufficient to enable the Office of the Interconnection to determine the available operating hours of such facilities.

(d) The Market Seller of a resource selected as a pool-scheduled resource shall receive payments or credits for energy, demand reductions or related services, or for Start-up Costs and No-load Costs, from the Office of the Interconnection on behalf of the Market Buyers in accordance with Operating Agreement, Schedule 1, section 3. Alternatively, the Market Seller shall receive, in lieu of Start-up Costs and No-load Costs, its actual costs incurred, if any, up to a cap of the resource's Start-up Costs, if the Office of the Interconnection cancels its selection of the resource as a pool-scheduled resource and so notifies the Market Seller before the resource is synchronized.

(e) Market Participants shall make available their pool-scheduled resources to the Office of the Interconnection for coordinated operation to supply the Operating Reserves needs of the applicable Control Zone.

(f) Economic Load Response Participants offering to reduce demand shall specify: (i) the amount of the offered curtailment, which must equal or exceed 0.1 megawatts, in minimum increments of 0.1 megawatts; (ii) the real-time Locational Marginal Price above which the end-use customer will reduce load; and (iii) at the Economic Load Response Participant's option, shut-down costs associated with reducing load, including direct labor and equipment costs, opportunity costs, and/or a minimum number of contiguous hours for which the load reduction must be committed. Economic Load Response Participants submitting offers to reduce demand in the Day-ahead Energy Market and/or the Real-time Energy Market may establish an incremental offer curve, provided that such offer curve shall be limited to ten price pairs (in MWs). Economic Load Response Participants offering to reduce demand shall also indicate the hours that the demand reduction is not available.

1.10.3 Self-scheduled Resources.

Self-scheduled resources shall be governed by the following principles and procedures.

(a) Each Generating Market Buyer shall use all reasonable efforts, consistent with Good Utility Practice, not to self-schedule resources in excess of its Equivalent Load.

(b) The offered prices of resources that are self-scheduled and not dispatchable by the Office of the Interconnection shall not be considered by the Office of the Interconnection in determining Locational Marginal Prices.

(c) Market Participants shall make available their self-scheduled resources to the Office of the Interconnection for coordinated operation to supply the Operating Reserves needs of the applicable Control Zone, by submitting an offer as to such resources.

(d) A Market Participant self-scheduling a resource in the Day-ahead Energy Market that does not deliver the energy in the Real-time Energy Market, shall replace the energy not delivered with energy from the Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(e) A Market Participant self-scheduling a resource to supply Synchronized Reserve in the Day-ahead Synchronized Reserve Market that does not deliver the scheduled megawatt quantity in the applicable real-time reserve market, shall replace the Synchronized Reserve not delivered and shall pay for such Synchronized Reserve at the applicable Real-time Synchronized Reserve Market Clearing Price. Market Participants shall not self-schedule a resource to provide Secondary Reserve or Non-Synchronized Reserve.

(f) For energy, hydropower units, excluding pumped storage units, may only be self-scheduled.

(g) A resource that has been self-scheduled shall not receive payments or credits for Start-up Costs or No-load Costs.

1.10.4 Capacity Resources.

(a) A Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative that is selected as a pool-scheduled resource shall be made available for scheduling and dispatch at the direction of the Office of the Interconnection. Such a Generation Capacity Resource that does not deliver energy as scheduled shall be deemed to have experienced a Generator Forced Outage to the extent of such energy not delivered. A Market Participant offering such Generation Capacity Resource in the Day-ahead Energy Market shall replace the energy not delivered with energy from the Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(b) Energy from a Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative that has not been scheduled in the Day-ahead Energy Market may be sold on a bilateral basis by the Market Seller, may be self-scheduled, or may be offered for dispatch during the Operating Day in accordance with the procedures specified in this Schedule. Such a Generation Capacity Resource that has not been scheduled in the Day-ahead Energy Market and that has been sold on a bilateral basis must be made available upon request to the Office of the Interconnection for scheduling and dispatch during the Operating Day if the Office of the Interconnection declares a Maximum Generation Emergency. Any such resource so scheduled and dispatched shall receive the applicable Real-time Price for energy delivered.

1.10.5 External Resources.

(a) External Resources may submit offers to the PJM Interchange Energy Market, in accordance with the day-ahead and real-time scheduling processes specified above. An External Resource selected as a pool-scheduled resource shall be made available for scheduling and

dispatch at the direction of the Office of the Interconnection, and except as specified below shall be compensated on the same basis as other pool-scheduled resources. External Resources that are not capable of Dynamic Transfer shall, if selected by the Office of the Interconnection on the basis of the Market Seller's Offer Data, be block loaded on an hourly scheduled basis. Market Sellers shall offer External Resources to the PJM Interchange Energy Market on either a resource-specific or an aggregated resource basis. A Market Participant whose pool-scheduled resource does not deliver the energy scheduled in the Day-ahead Energy Market shall replace such energy not delivered as scheduled in the Day-ahead Energy Market with energy from the PJM Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(b) Offers for External Resources from an aggregation of two or more generating units shall so indicate, and shall specify, in accordance with the Offer Data requirements specified by the Office of the Interconnection: (i) energy prices; (ii) hours of energy availability; (iii) a minimum dispatch level; (iv) a maximum dispatch level; and (v) unless such information has previously been made available to the Office of the Interconnection, sufficient information, as specified in the PJM Manuals, to enable the Office of the Interconnection to model the flow into the PJM Region of any energy from the External Resources scheduled in accordance with the Offer Data.

(c) Offers for External Resources on a resource-specific basis shall specify the resource being offered, along with the information specified in the Offer Data as applicable.

1.10.6 External Market Buyers.

(a) Deliveries to an External Market Buyer not subject to Dynamic Transfer by the Office of the Interconnection shall be delivered on a block loaded basis to the bus or buses at the electrical boundaries of the PJM Region, or in such area with respect to an External Market Buyer's load within such area not served by Network Service, at which the energy is delivered to or for the External Market Buyer. External Market Buyers shall be charged (which charge may be positive or negative) at either the Day-ahead Prices or Real-time Prices, whichever is applicable, for energy at the foregoing bus or buses.

(b) An External Market Buyer's hourly schedules for energy purchased from the PJM Interchange Energy Market shall conform to the ramping and other applicable requirements of the interconnection agreement between the PJM Region and the Control Area to which, whether as an intermediate or final point of delivery, the purchased energy will initially be delivered.

(c) The Office of the Interconnection shall curtail deliveries to an External Market Buyer if necessary to maintain appropriate reserve levels for a Control Zone as defined in the PJM Manuals, or to avoid shedding load in such Control Zone.

1.10.7 Bilateral Transactions.

Bilateral transactions as to which the parties have notified the Office of the Interconnection by the deadline specified in section 1.10.1A above that they elect not to be included in the Day-ahead Energy Market and that they are not willing to incur Transmission Congestion Charges in the Real-time Energy Market shall be curtailed by the Office of the Interconnection as necessary

to reduce or alleviate transmission congestion. Bilateral transactions that were not included in the Day-ahead Energy Market and that are willing to incur congestion charges and bilateral transactions that were accepted in the Day-ahead Energy Market shall continue to be implemented during periods of congestion, except as may be necessary to respond to Emergencies.

1.10.8 Office of the Interconnection Responsibilities.

(a) The Office of the Interconnection shall use its best efforts to determine (i) the least-cost means of satisfying the projected hourly requirements for energy, Operating Reserves, and other ancillary services of the Market Buyers, including the reliability requirements of the PJM Region, of the Day-ahead Energy Market, and (ii) the least-cost means of satisfying the Operating Reserve and other ancillary service requirements for any portion of the load forecast of the Office of the Interconnection for the Operating Day in excess of that scheduled in the Day-ahead Energy Market. In making these determinations, the Office of the Interconnection shall take into account: (i) the Office of the Interconnection's forecasts of PJM Interchange Energy Market and PJM Region energy requirements, giving due consideration to the energy requirement forecasts and purchase requests submitted by Market Buyers and PRD Curves properly submitted by PRD Providers; (ii) the offers submitted by Market Sellers; (iii) the availability of limited energy resources; (iv) the capacity, location, and other relevant characteristics of self-scheduled resources; (v) the objectives of each Control Zone for Operating Reserves, as specified in the PJM Manuals; (vi) the requirements of each Regulation Zone for Regulation and other ancillary services, as specified in the PJM Manuals; (vii) the benefits of avoiding or minimizing transmission constraint control operations, as specified in the PJM Manuals; and (viii) such other factors as the Office of the Interconnection reasonably concludes are relevant to the foregoing determination, including, without limitation, transmission constraints on external coordinated flowgates to the extent provided by Operating Agreement, Schedule 1, section 1.7.6. The Office of the Interconnection shall develop a Day-ahead Energy Market based on the foregoing determination, and shall determine the Day-ahead Prices resulting from such schedule. The Office of the Interconnection shall report the planned schedule for a hydropower resource to the operator of that resource as necessary for plant safety and security, and legal limitations on pond elevations.

(b) By 1:30 p.m., or as soon as practicable thereafter, of the day before each Operating Day, or such other deadline as may be specified by the Office of the Interconnection in the PJM Manuals, the Office of the Interconnection shall: (i) post the aggregate Day-ahead Energy Market results; (ii) post the Day-ahead Prices; and (iii) inform the Market Sellers, Market Buyers, and Economic Load Response Participants of their scheduled injections, withdrawals, and demand reductions respectively. The foregoing notwithstanding, the deadlines set forth in this subsection shall not apply if the Office of the Interconnection is unable to obtain Market Participant bid/offer data due to extraordinary circumstances. For purposes of this subsection, extraordinary circumstances shall mean a technical malfunction that limits, prohibits or otherwise interferes with the ability of the Office of the Interconnection to obtain Market Participant bid/offer data prior to 11:59 p.m. on the day before the affected Operating Day. Extraordinary circumstances do not include a Market Participant's inability to submit bid/offer data to the Office of the Interconnection. If the Office of the Interconnection is unable to clear

the Day-ahead Energy Market prior to 11:59 p.m. on the day before the affected Operating Day as a result of such extraordinary circumstances, the Office of the Interconnection shall notify Members as soon as practicable.

(c) Following posting of the information specified in section 1.10.8(b), and absent extraordinary circumstances preventing the clearing of the Day-ahead Energy Market, the Office of the Interconnection shall revise its schedule of generation resources to reflect updated projections of load, conditions affecting electric system operations in the PJM Region, the availability of and constraints on limited energy and other resources, transmission constraints, and other relevant factors.

(d) Market Buyers shall pay PJMSettlement and Market Sellers shall be paid by PJMSettlement for the quantities of energy scheduled in the Day-ahead Energy Market at the Day-ahead Prices when the Day-ahead Price is positive. Market Buyers shall be paid by PJMSettlement and Market Sellers shall pay PJMSettlement for the quantities of energy scheduled in the Day-ahead Energy Market at the Day-ahead Prices when the Day-ahead Price is negative. Economic Load Response Participants shall be paid for scheduled demand reductions pursuant to Operating Agreement, Schedule 1, section 3.3A. Notwithstanding the foregoing, if the Office of the Interconnection is unable to clear the Day-ahead Energy Market prior to 11:59 p.m. on the day before the affected Operating Day due to extraordinary circumstances as described in subsection (b) above, it will be declared a Market Suspension, and Day-ahead Prices shall be determined pursuant to Operating Agreement, Schedule 1, section 2.6.1. If the Office of the Interconnection declares a Market Suspension, it shall notify Market Participants of the Market Suspension as soon as practicable.

(e) If the Office of the Interconnection discovers a *potential* error in prices and/or cleared quantities in the Day-ahead Energy Market or Day-ahead Ancillary Services Markets, or the Real-time Energy Market or Real-time Ancillary Services Markets after it has posted the results for these markets on its Web site, the Office of the Interconnection shall notify Market Participants as soon as possible after it is found, but in no event later than 12:00 p.m. of the second Business Day following the Operating Day for the Real-time Energy Market and Real-time Ancillary Services Markets, and no later than 5:00 p.m. of the second Business Day following the initial publication of the results for the Day-ahead Energy Market and Day-ahead Ancillary Services Markets. After this initial notification, if the Office of the Interconnection determines it is necessary to post modified results, it shall provide notification of its intent to do so, *along with a description detailing the cause and scope of the error*, by no later than 5:00 p.m. of the fifth Business Day following the Operating Day for the Real-time Energy Market and Real-time Ancillary Services Markets, and no later than 5:00 p.m. of the fifth Business Day following the initial publication of the results in the Day-ahead Energy Market and Day-ahead Ancillary Services Markets. *The provided description will not contain information that is market sensitive or confidential.* Thereafter, the Office of the Interconnection must post on its Web site the corrected results by no later than 5:00 p.m. of the tenth calendar day following the Operating Day for the Day-ahead Energy Market, Real-time Energy Market, and Day-ahead Ancillary Services Markets, and Real-time Ancillary Service Markets. Should any of the above deadlines pass without the associated action on the part of the Office of the Interconnection, the originally posted results will be considered final. Notwithstanding the foregoing, the deadlines set forth

above shall not apply if the referenced market results are under publicly noticed review by the FERC.

(f) Consistent with Operating Agreement, section 18.17.1, and notwithstanding anything to the contrary in the Operating Agreement or in the PJM Tariff, to allow the tracking of Market Participants' non-aggregated bids and offers over time as required by FERC Order No. 719, the Office of the Interconnection shall post on its Web site the non-aggregated bid data and Offer Data submitted by Market Participants (for participation in the PJM Interchange Energy Market) approximately four months after the bid or offer was submitted to the Office of the Interconnection.

1.10.9 Hourly Scheduling.

(a) Following the initial posting by the Office of the Interconnection of the Locational Marginal Prices resulting from the Day-ahead Energy Market, and subject to the right of the Office of the Interconnection to schedule and dispatch pool-scheduled resources and to direct that schedules be changed in an Emergency, and absent extraordinary circumstances preventing the clearing of the Day-ahead Energy Market, a generation rebidding period shall exist. Typically the rebidding period shall be from the time the Office of the Interconnection posts the results of the Day-ahead Energy Market until 2:15 p.m. on the day before each Operating Day. However, should the clearing of the Day-ahead Energy Market be significantly delayed, the Office of the Interconnection may establish a revised rebidding period. During the rebidding period, Market Participants may submit revisions to generation Offer Data for the next Operating Day. Adjustments to the Day-ahead Energy Market shall be settled at the applicable Real-time Prices, and shall not affect the obligation to pay or receive payment for the quantities of energy scheduled in the Day-ahead Energy Market at the applicable Day-ahead Prices.

(b) A Market Participant may adjust the schedule of a resource under its dispatch control on an hour-to-hour basis beginning at 6:30 p.m. of the day before each Operating Day, provided that the Office of the Interconnection is notified not later than 65 minutes prior to the hour in which the adjustment is to take effect, as follows and as specified in section 1.10.9A below:

- i) A Generating Market Buyer may self-schedule any of its resource increments, including hydropower resources, not previously designated as self-scheduled and not selected as a pool-scheduled resource in the Day-ahead Energy Market;
- ii) A Market Participant may request the scheduling of a non-firm bilateral transaction; or
- iii) A Market Participant may request the scheduling of deliveries or receipts of Spot Market Energy; or
- iv) A Generating Market Buyer may remove from service a resource increment, including a hydropower resource, that it had previously designated as self-scheduled, provided that the Office of the

Interconnection shall have the option to schedule energy from any such resource increment that is a Capacity Resource at the price offered in the scheduling process, with no obligation to pay any Start-Up Costs.

(c) An External Market Buyer may refuse delivery of some or all of the energy it requested to purchase in the Day-ahead Energy Market by notifying the Office of the Interconnection of the adjustment in deliveries not later than 65 minutes prior to the hour in which the adjustment is to take effect, but any such adjustment shall not affect the obligation of the External Market Buyer to pay for energy scheduled on its behalf in the Day-ahead Energy Market at the applicable Day-ahead Prices.

(d) The Office of the Interconnection shall provide External Market Buyers and External Market Sellers and parties to bilateral transactions with any revisions to their schedules resulting from the rebidding period by 6:30 p.m. on the day before each Operating Day. The Office of the Interconnection may also commit additional resources after such time as system conditions require. For each hour in the Operating Day, as soon as practicable after the deadlines specified in the foregoing subsection of this section 1.10, the Office of the Interconnection shall provide External Market Buyers and External Market Sellers and parties to bilateral transactions with any revisions to their schedules for the hour.

1.10.9A Updating Offers in Real-time

(a) Each Market Seller may submit Real-time Offers for a resource up to 65 minutes before the applicable clock hour, and such Real-time Offers shall supersede any previous offer for that resource for the clock hour, as further described in the PJM Manuals and subject to the following conditions:

(i) A market-based Real-time Offer shall not exceed the applicable energy offer caps specified in this Schedule. Once a Market Seller's resource is committed for an applicable clock hour, the Market Seller may not increase its Incremental Energy Offer and may only submit a market-based Real-time Offer that is higher than its market-based offer that was in effect at the time of commitment to reflect increases in the resource's cost-based Start-up Costs and cost-based No-load Costs. The Market Seller may elect not to have its market-based offer considered for dispatch and to have only its lowest cost-based offer considered for the remainder of the Operating Day.

(ii) Cost-based Real-time Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection's Offer Data specification, Operating Agreement, Schedule 1, sections 1.10.1A(d) and 1.10.9B, Operating Agreement, Schedule 2 and the PJM Manuals, as applicable. If a Market Seller submits a market-based Real-time Offer for a particular clock hour in accordance with subsection (c) below, or if updates to a cost-based offer are required by the Market Seller's approved Fuel Cost Policy, the Market Seller shall update its previously submitted cost-based Real-time Offer.

(iii) If a Market Seller's available cost-based offer is not compliant with Operating Agreement, Schedule 2 and the PJM Manuals at the time a Market Seller submits a market-based Real-time Offer for an applicable clock hour during the Operating Day, the Market Seller must submit an updated cost-based Real-time Offer consisting of an Incremental Energy Offer, Start-up Cost, and No-load Cost for that clock hour that is compliant with Operating Agreement, Schedule 2 and the PJM Manuals.

(b) Each Market Seller may submit Real-time Offers for a resource during and through the end of the applicable clock hour to update only the following offer parameters, as further described in the PJM Manuals: (1) Economic Minimum; (2) Economic Maximum; (3) emergency minimum MW; (4) emergency maximum MW; (5) unit availability status; (6) fixed output indicator; (7) Synchronized Reserve maximum MW; and (8) Secondary Reserve maximum MW. Such Real-time Offers shall supersede any previous offer for that resource for the clock hour.

1.10.9B Offer Parameter Flexibility

(a) Market Sellers may, in accordance with sections 1.10.1A and 1.10.9A above, this section 1.10.9B, and the PJM Manuals, update offer parameters at any time up to 65 minutes before the applicable clock hour, including prior to the close of the Day-ahead Energy Market and prior to the close of the rebidding period specified in section 1.10.9, except that Market Sellers may not update their offers for the supply of energy, Secondary Reserve, Synchronized Reserve, Non-Synchronized Reserve, or demand reduction: (1) during the period after the close the Day-ahead Energy Market and prior to the posting of the Day-ahead Energy Market results pursuant to section 1.10.8(b); or (2) during the period after close of the rebidding period and prior to PJM announcing the results of the rebidding period pursuant to section 1.10.9(d).

(b) For generation resource offers, Market Sellers may vary for each clock hour during the entire Operating Day the following offer parameters: (1) cost-based Start-up Costs; (2) cost-based No-load Costs; (3) Incremental Energy Offer; (4) Economic Minimum and Economic Maximum; (5) emergency minimum MW and emergency maximum MW; (6) ramp rate; (7) Synchronized Reserve maximum MW; (8) Secondary Reserve maximum MW; and (9) for Real-time Offers only, (i) notification time and (ii) for uncommitted hours only, Minimum Run Time.

(c) For Economic Load Response Participant resource offers, Market Sellers may vary for each clock hour during the entire Operating Day the following offer parameters: (1) shutdown costs, (2) Incremental Energy Offer; (3) Economic Minimum; (4) Economic Maximum; and (5) for Real-time Offers only, (i) notification time and (ii) for uncommitted hours only, minimum down time.

(d) After the announcement of the results of the rebidding period pursuant to section 1.10.9(d), a Market Seller may submit a Real-time Offer where offer parameters may differ from the offer originally submitted in the Day-ahead Energy Market, except that a Market Seller may not submit a Real-time Offer that changes, of the offer parameters listed in section 1.10.1A(d), the MW amounts specified in the Incremental Energy Offer, MW amounts specified in the ramp

rate, maximum run time, and availability; provided, however, Market Sellers of dual-fueled resources may submit Real-time Offers for such resources that change the availability of a submitted cost-based offer.

3.2 Market Settlements.

If a dollar-per-MW-hour value is applied in a calculation under this section 3.2 where the interval of the value produced in that calculation is less than an hour, then for purposes of that calculation the dollar-per-MW hour value is divided by the number of Real-time Settlement Intervals in the hour.

3.2.1 Spot Market Energy.

(a) The Office of the Interconnection shall calculate System Energy Prices in the form of Day-ahead System Energy Prices and Real-time System Energy Prices for the PJM Region, in accordance with Operating Agreement, Schedule 1, section 2.

(b) Each Market Participant shall be charged for all of its Market Participant Energy Withdrawals scheduled in the Day-ahead Energy Market at the Day-ahead System Energy Price to be served in the PJM Interchange Energy Market.

(c) Each Market Participant shall be paid for all of its Market Participant Energy Injections scheduled in the Day-ahead Energy Market at the Day-ahead System Energy Price to be delivered to the PJM Interchange Energy Market.

(d) For each Day-ahead Settlement Interval during an Operating Day, the Office of the Interconnection shall calculate Spot Market Energy charges for each Market Participant as the difference between the sum of its Market Participant Energy Withdrawals scheduled times the Day-ahead System Energy Price and the sum of its Market Participant Energy Injections scheduled times the Day-ahead System Energy Price.

(e) For each Real-time Settlement Interval during an Operating Day, the Office of the Interconnection shall calculate Spot Market Energy charges for each Market Participant as the difference between the sum of its real-time Market Participant Energy Withdrawals less its scheduled Market Participant Energy Withdrawals times the Real-time System Energy Price and the sum of its real-time Market Participant Energy Injections less scheduled Market Participant Energy Injections times the Real-time System Energy Price. The Revenue Data for Settlements determined for each Real-time Settlement Interval in accordance with Operating Agreement, Schedule 1, section 3.1A shall be used in determining the real-time Market Participant Energy Withdrawals and Market Participant Energy Injections used to calculate Spot Market Energy charges under this subsection (e).

(f) For pool External Resources, the Office of the Interconnection shall model, based on an appropriate flow analysis, the megawatts of real-time energy injections to be delivered from each such resource to the corresponding Interface Pricing Point between adjacent Control Areas and the PJM Region.

3.2.2 Regulation.

(a) Each Market Participant that is a Load Serving Entity in a Regulation Zone shall have an hourly Regulation objective equal to its pro rata share of the Regulation Requirement of such Regulation Zone for the hour, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Regulation Zone for the hour ("Regulation Obligation"). A Market Participant with an hourly Regulation Obligation shall be charged the pro rata share of the sum of the Regulation market mileage clearing price credits and Regulation market capability clearing price credits for the Real-time Settlement Intervals in an hour.

Regulation Charge = Hourly Regulation Obligation Share * (sum of the Real-time Settlement Interval Regulation credits in an hour)

(b) Each Market Participant supplying Regulation in a Regulation Zone at the direction of the Office of the Interconnection shall be credited for each of its resources such that the calculated credit for each increment of Regulation provided by each resource shall be the higher of: (i) the Regulation market-clearing price; or (ii) the sum of the applicable Regulation offers for a resource determined pursuant to section 3.2.2A.1 below, the resource-specific shoulder opportunity costs described in subsection (e) of this section, the resource-specific inter-temporal opportunity costs discussed in subsection (d), and the resource-specific opportunity costs discussed in subsection (e) of this section.

(c) The Office of the Interconnection shall commit resources to provide Regulation every 30 minutes, for the clock intervals of the first 30 minutes of an hour and the second 30 minutes of an hour, up to the Regulation Requirement of such Regulation Zone. The Office of the Interconnection shall select resources in merit order, taking into account the resource's mileage Regulation offer, capability Regulation offer, and estimated resource-specific opportunity cost, all converted into their performance adjusted values as further detailed in the PJM Manuals. The total Regulation market-clearing price in each Regulation Zone shall be determined in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval. The total Regulation market-clearing price shall include: (i) the mileage Regulation market-clearing price in a Regulation Zone that shall be calculated in accordance with subsection (g) of this section; (ii) the capability Regulation market-clearing price that shall be calculated in accordance with subsection (h) of this section; and (iii) a Regulation resource's unit-specific opportunity costs during the 5-minute period, determined as described in subsection (d) below. A resource's Regulation offer by any Market Seller that fails the three-pivotal supplier test set forth in section 3.2.2A.1 below shall not exceed the cost of providing Regulation from such resource, plus twelve dollars, as determined pursuant to the formula in Operating Agreement, Schedule 1, section 1.10.1A(e).

(d) In determining the Regulation 5-minute clearing price for each Regulation Zone, the resource-specific opportunity costs (in dollars) of a resource offering to sell Regulation in each regulating interval, except for hydroelectric resources, shall be equal to the area bounded by (i) Locational Marginal Price at the generation bus for the regulating resource, (ii) the resource's Final Offer, (iii) the resource's tracking ramp-rate limited expected output level if it had been

dispatched for energy in economic merit order, as further described in the PJM Manuals, and (iv) the resource's regulation set point on the energy schedule curve on which the resource is running in the PJM Interchange Energy Market. The area is divided by the resource performance score and further divided by the resource's regulation assigned megawatt to convert to dollars per megawatt.

For hydroelectric resources offering to sell Regulation in a regulating interval, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the full value of the Locational Marginal Price at that generation bus for each megawatt of Regulation capability.

The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead megawatt commitment greater than zero shall be equal to the product of (i) the deviation of the set point of the hydroelectric resource that is expected to be required in order to provide Regulation from the hydroelectric resource's expected output level if it had been dispatched in economic merit order times (ii) the difference between the expected Locational Marginal Price at the generation bus for the hydroelectric resource and the average of the Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. Estimated opportunity costs shall be zero for hydroelectric resources for which the average Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period, excluding those Real-time Settlement Intervals during which all available units at the hydroelectric resource were operating is higher than the actual Locational Marginal Price at the generator bus for the Real-time Settlement Interval.

The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead megawatt commitment greater than zero shall be equal to the product of (i) the deviation of the set point of the hydroelectric resource that is expected to be required in order to provide Regulation from the hydroelectric resource's expected output level if it had been dispatched in economic merit order times (ii) the difference between the average of the Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating and the expected Locational Marginal Price at the generation bus for the hydroelectric resource. Estimated opportunity costs shall be zero for hydroelectric resources for which the actual Locational Marginal Price at the generator bus for the Real-time Settlement Interval is higher than the average Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period, excluding those Real-time Settlement Intervals during which all available units at the hydroelectric resource were operating.

For the purpose of committing resources and setting Regulation market clearing prices, the Office of the Interconnection shall utilize day-ahead Locational Marginal Prices to calculate the average of the Locational Marginal Price values used in the calculation for opportunity costs for hydroelectric resources. For the purposes of settlements, the Office of the Interconnection shall

utilize the real-time Locational Marginal Prices to calculate the average of the Locational Marginal Price used in the calculation for opportunity costs for hydroelectric resources.

Opportunity costs for Economic Load Response Participant resources and regulation-only resources to provide Regulation are zero for the purpose of committing resources, setting Regulation clearing prices, and settlements.

(e) In determining the credit under subsection (b) to a Market Participant selected to provide Regulation in a Regulation Zone and that actively follows the Office of the Interconnection's Regulation signals and instructions, the unit-specific opportunity cost of a generation resource shall be determined for (1) each Real-time Settlement Interval that the Office of the Interconnection requires a generation resource to provide Regulation, and (2) the two Real-time Settlement Intervals preceding the regulation commitment and the two Real-time Settlement Intervals following the regulation commitment in accordance with the PJM Manuals and below.

The unit-specific opportunity cost in dollars, incurred during the Real-time Settlement Interval in which the Regulation obligation is fulfilled, shall be equal to the area bounded by (i) the Locational Marginal Price at the generation bus for the regulating resource, (ii) the resource's Final Offer, (iii) the generation resource's tracking ramp-rate limited expected output level if it had been dispatched in economic merit order, as further described in the PJM Manuals, and (iv) the generation resource's regulation set point, and adjusted for the performance score of the resource. Opportunity costs for Economic Load Response Participant or regulation only resources to provide Regulation are zero.

The unit-specific opportunity costs associated with uneconomic operation during each of the preceding two Real-time Settlement Intervals of the regulation commitment shall be equal to the product of (i) the deviation between the set point of the generation resource that is expected to be required in the initial regulating Real-time Settlement Interval in order to provide Regulation and the resource's tracking expected ramp rate limited output in each of the preceding two Real-time Settlement Intervals of the regulation commitment times (ii) the absolute value of the difference between the Locational Marginal Price at the generation bus for the generation resource in each of the preceding two Real-time Settlement Intervals of the regulation commitment and the energy offer, using the Final Offer, at the megawatt level of the Regulation set point for the resource in the initial regulating Real-time Settlement Interval, in the PJM Interchange Energy Market, all as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals.

The unit-specific opportunity costs associated with uneconomic operation during each of the following two Real-time Settlement Intervals of the regulation commitment shall be equal to the product of (i) the deviation between the set point of the generation resource that is expected to be required in the final regulating Real-time Settlement Interval in order to provide Regulation and the resource's tracking expected ramp-rate limited output in each of the following two Real-time Settlement Intervals of the regulation commitment times, and (ii) the absolute value of the difference between the Locational Marginal Price at the generation bus for the generation resource in each of the following two Real-time Settlement Intervals of the regulation

commitment and the energy offer, using the Final Offer, at the megawatt level of the Regulation set point for the resource in final regulating hour, in the PJM Interchange Energy Market all as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals.

(f) Any amounts credited for Regulation in an hour in excess of the Regulation market-clearing price in that hour shall be allocated and charged to each Market Participant in a Regulation Zone that does not meet its hourly Regulation obligation in proportion to its purchases of Regulation in such Regulation Zone in megawatt-hours during that hour.

(g) To determine the Regulation market mileage-clearing price, the Office of the Interconnection shall adjust the submitted mileage offer for each resource in accordance with the historical performance score of that resource, and the amount of historically dispatched Regulation (mileage) calculated by the Office of the Interconnection. The maximum adjusted mileage offer of all cleared resources will set the Regulation market mileage-clearing price.

The owner of each Regulation resource that actively follows the Office of the Interconnection's Regulation signals and instructions, will be credited for Regulation mileage by multiplying the assigned MW(s) by the Regulation market mileage-clearing price, by the ratio between the requested mileage for the Regulation dispatch signal and the historic requested mileage for the Regulation dispatch signal, calculated by the Office of the Interconnection, and by the Regulation resource's performance score calculated in accordance with subsection (j) of this section.

(h) The Office of the Interconnection shall divide each Regulation resource's capability offer by the historic performance score for the resource for the purposes of committing resources and setting the market clearing prices.

The Office of the Interconnection shall calculate the Regulation market capability-clearing price for each Regulation Zone by subtracting the Regulation market mileage-clearing price described in subsection (g) from the total Regulation market clearing price described in subsection (c). This residual sets the Regulation market capability-clearing price for that market Real-time Settlement Interval.

The owner of each Regulation resource that actively follows the Office of the Interconnection's Regulation signals and instructions will be credited for Regulation capability based on the assigned MW and the capability Regulation market-clearing price multiplied by the Regulation resource's performance score calculated in accordance with subsection (j) of this section.

(i) In accordance with the processes described in the PJM Manuals, the Office of the Interconnection shall: (i) calculate inter-temporal opportunity costs for each applicable resource; (ii) include such inter-temporal opportunity costs in each applicable resource's offer to sell frequency Regulation service; and (iii) account for such inter-temporal opportunity costs in the Regulation market-clearing price.

(j) The Office of the Interconnection shall calculate each Regulation resource's performance score. The performance score shall be a function of the difference in the energy provided versus the energy requested by the Regulation signal while scaling for the number of samples. The error measured shall be the difference of the resources response and the dispatch signal, adjusted by the assigned MW and signal dispatch of the Regulation resource. The performance score is calculated using the following equations:

$$\text{Performance Score} = 1 - 1/n \sum \text{Abs (Error)};$$

Error = Average of Abs (Abs (Response - Regulation Signal) / (0.5*Interval Average Regulation Signal + 0.5*AREG)); and

n = the number of samples in the interval

AREG = assigned regulation megawatt.

The Office of the Interconnection shall calculate a performance score for each Regulation resource for each five-minute period the Regulation resource is assigned to provide Regulation.

The historic performance score will be based on a 100 clock-hour rolling average of the Real-time Settlement Interval performance scores, with consideration of the qualification score, for resources without adequate historical data, as defined in the PJM Manuals.

Regulation resources that have a Real-time Settlement Interval performance score below 25% will be ineligible for Regulation credits for that Real-time Settlement Interval.

Regulation resources that have historical performance scores fall below 40% shall be disqualified from providing Regulation until they are able to re-qualify, as defined in the PJM Manuals.

(k) During a Market Suspension where the suspension is less than or equal to 24 consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Regulation, the resources providing Regulation at the direction of the Office of the Interconnection will be compensated based on a calculated Regulation market-clearing price. Regulation market-clearing prices for each Real-time Settlement Interval associated with such Market Suspension shall be the average of the Regulation market-clearing prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

During a Market Suspension where the suspension is greater than 24 consecutive hours, if the Office of the Interconnection is assigning Regulation, resources providing Regulation at the direction of the Office of the Interconnection will be compensated based on a calculated Regulation clearing price. The Regulation clearing price for each Real-time Settlement Interval will be determined by calculating a Regulation clearing cost for the online resources providing Regulation during the Market Suspension. The resource's Regulation clearing cost is determined by the summation of their adjusted Regulation offer and adjusted opportunity cost. The opportunity cost will be based on the resource's cost-based offer and will be determined as follows:

For online resources providing Regulation on a cost-based offer at the time of the Market Suspension, that cost-based offer will be used.

For online resources providing Regulation on a price-based offer at the time of the Market Suspension, the Office of the Interconnection shall use the cheapest available cost-based offer based on the dispatch cost formula as defined in Operating Agreement, Schedule 1, section 6.4.1(g) using the available cost-based offers in the Office of the Interconnection system at the time of the Market Suspension.

The highest cost resource, based on this Regulation clearing cost, will set the Regulation market-clearing price for each hour of the Market Suspension.

During a Market Suspension, if the Office of the Interconnection is not assigning Regulation resources, then the Regulation market-clearing price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period and no resource-specific opportunity cost will be calculated.

During a Market Suspension, the following Regulation components for all Real-time Settlement Intervals in the Market Suspension period will be determined as follows:

- (i) If the regulation performance score cannot be calculated during a Market Suspension, the historic performance score will be used for the Market Suspension period.
- (ii) If the regulation mileage cannot be calculated during a Market Suspension, the mileage will be set to one (1) for the Market Suspension period.

3.2.2A Offer Price Caps.

3.2.2A.1 Applicability.

(a) For each Regulation market clearing interval, the Office of the Interconnection shall conduct a Regulation three-pivotal supplier test as described in this section. Regulation offers from Market Sellers that fail the Regulation three-pivotal supplier test shall be capped in the interval in which they failed the test at their cost based offers as determined pursuant to Operating Agreement, Schedule 1, section 1.10.1A(e). A Regulation supplier fails the three-pivotal supplier test in any Regulation market clearing interval in which such Regulation supplier and the two largest other Regulation suppliers are jointly pivotal.

(b) For the purposes of conducting the three-pivotal supplier test pursuant to this section, the following applies:

- (i) The Regulation three-pivotal supplier test will include in the definition of available supply all offer megawatts from resources capable of satisfying the Regulation

Requirement of the PJM Region multiplied by the historic performance score of the resource for which the capability cost-based offer plus the mileage cost-based offer plus any eligible opportunity costs is no greater than 150% of the clearing price that would be calculated if all offers were limited to cost (plus eligible opportunity costs).

(ii) The Regulation three-pivotal supplier test will apply on a Regulation supplier basis (i.e. not a resource by resource basis) and only the Regulation suppliers that fail the three-pivotal supplier test will have their Regulation offers capped. A Regulation supplier for the purposes of this section includes corporate affiliates. Regulation from resources controlled by a Regulation supplier or its affiliates, whether by contract with unaffiliated third parties or otherwise, will be included as Regulation of that Regulation supplier. Regulation provided by resources owned by a Regulation supplier but controlled by an unaffiliated third party, whether by contract or otherwise, will be included as Regulation of that third party.

(iii) Each supplier shall be ranked from the largest to the smallest offered megawatt of eligible Regulation supply adjusted by the historic performance of each resource. Suppliers are then tested in order, starting with the three largest suppliers. For each iteration of the test, the two largest suppliers are combined with a third supplier, and the combined supply is subtracted from total effective supply. The resulting net amount of eligible supply is divided by the Regulation Requirement for the Regulation clearing interval to determine the residual supply index. Where the residual supply index for Regulation three pivotal suppliers is less than or equal to 1.0, then the three suppliers are jointly pivotal and the suppliers being tested fail the three pivotal supplier test. Iterations of the test continue until the combination of the two largest suppliers and a third supplier result in a residual supply index greater than 1.0, at which point the remaining suppliers pass the test. Any resource owner that fails the three-pivotal supplier test will be offer-capped.

3.2.3 Operating Reserves.

(a) A Market Seller's pool-scheduled resources capable of providing Operating Reserves shall be credited as specified below based on the applicable offer for the operation of such resource, provided that the resource was available for the entire time specified in the Offer Data for such resource. To the extent that sections 3.2.3A, 3.2.3A.001, and 3.2.3A.01 below do not meet the Synchronized Reserve Requirements, the Primary Reserve Requirements, and the 30-minute Reserve Requirements, the Office of the Interconnection shall schedule additional Operating Reserves pursuant to Section 1.7.17 and 1.10 of Schedule 1 of this Agreement. In addition the Office of the Interconnection shall schedule Operating Reserves pursuant to those sections to satisfy any unforeseen Operating Reserve requirements that are not reflected in the day-ahead market. PJMSettlement shall be the Counterparty to the purchases and sales of Operating Reserve in the PJM Interchange Energy Market.

(b) The following determination shall be made for each pool-scheduled resource that is scheduled in the Day-ahead Energy Market: the total offered price for Start-up Costs and No-load Costs and energy, determined on the basis of the resource's scheduled output, shall be

compared to the total value of that resource's energy – as determined by the Day-ahead Energy Market and the Day-ahead Prices applicable to the relevant generation bus in the Day-ahead Energy Market. PJM shall also (i) determine whether any resources were scheduled in the Day-ahead Energy Market to provide Black Start service, Reactive Services or transfer interface control during the Operating Day because they are known or expected to be needed to maintain system reliability in a Zone during the Operating Day in order to minimize the total cost of Operating Reserves associated with the provision of such services and reflect the most accurate possible expectation of real-time operating conditions in the day-ahead model, which resources would not have otherwise been committed in the day-ahead security-constrained dispatch and (ii) report on the day following the Operating Day the megawatt quantities scheduled in the Day-ahead Energy Market for the above-enumerated purposes for the entire RTO.

Except as provided in section 3.2.3(n) below, if the total offered price for Start-up Costs (shutdown costs for Economic Load Response Participant resources) and No-load Costs and energy summed over all Day-ahead Settlement Intervals exceeds the total value summed over all Day-ahead Settlement Intervals, the difference shall be credited to the Market Seller as a day-ahead Operating Reserve credit.

However, for the Day-ahead Settlement Intervals in which the resource is scheduled to provide energy in the Operating Day and the resource actually provides energy in at least one Real-time Settlement Interval in an hour that corresponds to such scheduled Day-ahead Settlement Intervals, a resource's day-ahead Operating Reserve credit shall be reduced by the greater of zero or the difference of the resource's Day-ahead Operating Reserve Target and the Balancing Operating Reserve Target, as determined below.

A resource's Day-ahead Operating Reserve Target shall be determined in accordance with the following equation:

$$(A + B) - C$$

Where:

A = Start-up Costs

B = the sum of day-ahead No-load Costs and energy over the applicable Real-time Settlement Intervals that correspond with Day-ahead Settlement Intervals in which the resource is scheduled. The day-ahead No-load Costs and energy are divided by twelve to determine the cost for each Real-time Settlement Interval.

C = the sum of the day-ahead revenues calculated for each Real-time Settlement Interval that corresponds with a Day-ahead Settlement Interval in which the resource is scheduled, where the day-ahead revenue for each such Real-time Settlement Interval equals the product of the megawatt amount of energy scheduled in the Day-ahead Energy Market and the Day-ahead Price at the applicable pricing point for the resource divided by twelve.

A resource's Balancing Operating Reserve Target shall be determined in accordance with the following equation:

$$D - (E + F)$$

Where:

D = the sum of Start-up Costs and No-load Costs and the incremental cost of energy summed over all Real-time Settlement Intervals that correspond to the Day-ahead Settlement Intervals in which the resource was scheduled;

E = [(the megawatt amount of energy provided in the Real-time Energy Market minus the megawatt amount of energy scheduled in the Day-ahead Energy Market) multiplied by the Real-time Price at the applicable pricing point for the resource] plus the sum of the day-ahead revenues as determined in part C of the above formula for determining the Day-ahead Operating Reserve Target, summed over the applicable Real-time Settlement Intervals; and

F = the sum of all revenues earned for providing Secondary Reserves, Synchronized Reserves, Non-Synchronized Reserves, and Reactive Services over the applicable Real-time Settlement Intervals.

The Office of the Interconnection shall apply any balancing Operating Reserve credits allocated pursuant to this section 3.2.3(b) to real-time deviations or real-time load share plus exports, pursuant to Operating Agreement, Schedule 1, section 3.2.3(p), depending on whether the balancing Operating Reserve credits are related to resources scheduled during the reliability analysis for an Operating Day, or during the actual Operating Day.

(i) For resources scheduled by the Office of the Interconnection during the reliability analysis for an Operating Day, the associated balancing Operating Reserve credits shall be allocated based on the reason the resource was scheduled according to the following provisions:

(A) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to operate in real-time to augment the physical resources committed in the Day-ahead Energy Market to meet the forecasted real-time load plus the Operating Reserve requirement, the associated balancing Operating Reserve credits, identified as RA Credits for Deviations, shall be allocated to real-time deviations.

(B) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to maintain system reliability, the associated balancing Operating Reserve credits, identified as RA Credits for Reliability, shall be allocated according to ratio share of real time load plus export transactions.

(C) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource with a day-ahead schedule is required to deviate from that schedule to provide balancing Operating Reserves, the associated balancing Operating Reserve credits shall be segmented and separately allocated pursuant to subsections 3.2.3(b)(i)(A) or 3.2.3(b)(i)(B) hereof. Balancing Operating Reserve credits for such resources will be identified in the same manner as units committed during the reliability analysis pursuant to subsections 3.2.3(b)(i)(A) and 3.2.3(b)(i)(B) hereof.

(ii) For resources scheduled during an Operating Day, the associated balancing Operating Reserve credits shall be allocated according to the following provisions:

(A) If the Office of the Interconnection directs a resource to operate during an Operating Day to provide balancing Operating Reserves, the associated balancing Operating Reserve credits, identified as RT Credits for Reliability, shall be allocated according to ratio share of load plus exports. The foregoing notwithstanding, credits will be applied pursuant to this section only if the LMP at the resource's bus does not meet or exceed the applicable offer of the resource for at least four 5-minute intervals during one or more discrete clock hours during each period the resource operated and produced MWs during the relevant Operating Day. If a resource operated and produced MWs for less than four 5-minute intervals during one or more discrete clock hours during the relevant Operating Day, the credits for that resource during the hour it was operated less than four 5-minute intervals will be identified as being in the same category (RT Credits for Reliability or RT Credits for Deviations) as identified for the Operating Reserves for the other discrete clock hours.

(B) If the Office of the Interconnection directs a resource not covered by section 3.2.3(b)(ii)(A) hereof to operate in real-time during an Operating Day, the associated balancing Operating Reserve credits, identified as RT Credits for Deviations, shall be allocated according to real-time deviations from day-ahead schedules.

(iii) PJM shall post on its Web site the aggregate amount of MWs committed that meet the criteria referenced in subsections (b)(i) and (b)(ii) hereof.

(c) The sum of the foregoing credits calculated in accordance with section 3.2.3(b) plus any unallocated charges from section 3.2.3(h) and Operating Agreement, Schedule 1, section 5.1.7, and any shortfalls paid pursuant to the Market Settlement provision of the Day-ahead Economic Load Response Program, shall be the cost of Operating Reserves in the Day-ahead Energy Market.

(d) The cost of Operating Reserves in the Day-ahead Energy Market shall be allocated and charged to each Market Participant in proportion to the sum of its (i) scheduled load (net of Behind The Meter Generation expected to be operating, but not to be less than zero),

accepted Decrement Bids in the Day-ahead Energy Market in megawatt-hours for that Operating Day and accepted Up-to Congestion Transactions in the Day-ahead Energy Market in megawatt-hours for the Operating Day at the sink of the transaction; and (ii) scheduled energy sales in the Day-ahead Energy Market from within the PJM Region to load outside such region in megawatt-hours for that Operating Day, but not including its bilateral transactions that are Dynamic Transfers to load outside such area pursuant to Operating Agreement, Schedule 1, section 1.12, except to the extent PJM scheduled resources to provide Black Start service, Reactive Services or transfer interface control. The cost of Operating Reserves in the Day-ahead Energy Market for resources scheduled to provide Black Start service for the Operating Day which resources would not have otherwise been committed in the day-ahead security constrained dispatch shall be allocated by ratio share of the monthly transmission use of each Network Customer or Transmission Customer serving Zone Load or Non-Zone Load, as determined in accordance with the formulas contained in Tariff, Schedule 6A. The cost of Operating Reserves in the Day-ahead Energy Market for resources scheduled to provide Reactive Services or transfer interface control because they are known or expected to be needed to maintain system reliability in a Zone during the Operating Day and would not have otherwise been committed in the day-ahead security constrained dispatch shall be allocated and charged to each Market Participant in proportion to the sum of its real-time deliveries of energy to load (net of operating Behind The Meter Generation) in such Zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such Zone.

(e) At the end of each Operating Day, the following determination shall be made for each synchronized pool-scheduled resource of each Market Seller that operates as requested by the Office of the Interconnection. For each calendar day, pool-scheduled resources in the Real-time Energy Market shall be made whole for each of the following Segments: 1) the greater of their day-ahead schedules and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Economic Load Response Participant resources); and 2) any block of Real-time Settlement Intervals the resource operates at PJM's direction in excess of the greater of its day-ahead schedule and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Economic Load Response Participant resources). For each calendar day, and for each synchronized start of a generation resource or PJM-dispatched economic load reduction, there will be a maximum of two Segments for each resource. Segment 1 will be the greater of the day-ahead schedule and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Demand Resources) and Segment 2 will include the remainder of the contiguous Real-time Settlement Intervals when the resource is operating at the direction of the Office of the Interconnection, provided that a segment is limited to the Operating Day in which it commenced and cannot include any part of the following Operating Day.

A Generation Capacity Resource that operates outside of its unit-specific parameters will not receive Operating Reserve Credits nor be made whole for such operation when not dispatched by the Office of the Interconnection, unless the Market Seller of the Generation Capacity Resource can justify to the Office of the Interconnection that operation outside of such unit-specific parameters was the result of an actual constraint. Such Market Seller shall provide to the Market Monitoring Unit and the Office of the Interconnection its request to receive Operating Reserve

Credits and/or to be made whole for such operation, along with documentation explaining in detail the reasons for operating its resource outside of its unit-specific parameters, within thirty calendar days following the issuance of billing statement for the Operating Day. The Market Seller shall also respond to additional requests for information from the Market Monitoring Unit and the Office of the Interconnection. The Market Monitoring Unit shall evaluate such request for compensation and provide its determination of whether there was an exercise of market power to the Office of the Interconnection by no later than twenty-five calendar days after receiving the Market Seller's request for compensation. The Office of the Interconnection shall make its determination whether the Market Seller justified that it is entitled to receive Operating Reserve Credits and/or be made whole for such operation of its resource for the day(s) in question, by no later than thirty calendar days after receiving the Market Seller's request for compensation.

Nuclear generation resources shall not be eligible for Operating Reserve payments unless: 1) the Office of the Interconnection directs such resources to reduce output, in which case, such units shall be compensated in accordance with Tariff, Attachment K-Appendix, section 3.2.3(f) and the parallel provision of Operating Agreement, Schedule 1, section 3.2.3(f); or 2) the resource submits a request for a risk premium to the Market Monitoring Unit under the procedures specified in Tariff, Attachment M – Appendix, section II.B. A nuclear generation resource (i) must submit a risk premium consistent with its agreement under such process, or, (ii) if it has not agreed with the Market Monitoring Unit on an appropriate risk premium, may submit its own determination of an appropriate risk premium to the Office of the Interconnection, subject to acceptance by the Office of the Interconnection, with or without prior approval from the Commission.

Credits received pursuant to this section shall be equal to the positive difference between a resource's Total Operating Reserve Offer, and the total value of the resource's energy in the Day-ahead Energy Market plus any credit or change for quantity deviations, at PJM dispatch direction (excluding quantity deviations caused by an increase in the Market Seller's Real-time Offer), from the Day-ahead Energy Market during the Operating Day at the real-time LMP(s) applicable to the relevant generation bus in the Real-time Energy Market. The foregoing notwithstanding, credits for Segment 2 shall exclude start up (shutdown costs for Economic Load Response Participant resources) costs for generation resources.

Except as provided in section 3.2.3(m), if the total offered price exceeds the total value, the difference less any credit as determined pursuant to section 3.2.3(b), and less the absolute value of any negative Synchronized Reserve lost opportunity cost credit, as determined in section 3.2.3A(f)(iv) below, and less the absolute value of any negative Non-Synchronized Reserve lost opportunity cost credit determined in section 3.2.3.A.001(d)(iii) below, and less any amounts credited for providing Reactive Services as specified in section 3.2.3B, and the absolute value of any negative Secondary Reserve lost opportunity cost credit, as determined in section 3.2.3A.01(f)(iv) below, and plus the sum of the Market Revenue Neutrality Offsets for Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve, shall be credited to the Market Seller.

Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve credits applied against Operating Reserve credits pursuant to this section shall be netted against the Operating Reserve credits earned in the corresponding Real-time Settlement Interval(s) in which the Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve credits accrued, provided that for condensing combustion turbines, Synchronized Reserve credits will be netted against the total Operating Reserve credits accrued during each Real-time Settlement Interval the unit operates in condensing and generation mode.

(f) A Market Seller of a unit not defined in subsection (f-1), (f-2), or (f-4) hereof (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3(c) hereof), the output of which is reduced or suspended at the request of the Office of the Interconnection due to a transmission constraint or other reliability issue, and for which the real-time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall be credited for each Real-time Settlement Interval in an amount equal to the product of (A) the LOC Deviation times (B) the Locational Marginal Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A * B) - C$. If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.11.6, where the suspension is greater than twenty-four (24) consecutive hours, resources will not be compensated for lost opportunity costs.

(f-1) With the exception of Market Sellers of Flexible Resources that submit a Real-time Offer greater than their resource's Committed Offer in the Day-ahead Energy Market, a Market Seller of a Flexible Resource shall be compensated for lost opportunity cost, and shall be limited to the lesser of the unit's Economic Maximum or the unit's Generation Resource Maximum Output, if either of the following conditions occur:

- (i) if the unit output is reduced at the direction of the Office of the Interconnection and the real time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as directed by the PJM dispatcher), then the Market Seller shall be credited in a manner consistent with that described in section 3.2.3(f).
- (ii) If the unit is scheduled to produce energy in the Day-ahead Energy Market for a Day-ahead Settlement Interval, but the unit is not called on by the Office of the Interconnection and does not operate in the corresponding Real-time Settlement Interval(s), then the Market Seller shall be credited in an amount equal to the higher of:
 - 1) the product of (A) the amount of megawatts committed in the Day-ahead Energy Market for the generating unit, and (B) the Real-time Price at the generation bus for the generating unit, minus the sum of (C) the Total Lost Opportunity Cost Offer plus No-load Costs, plus (D) the Start-up Cost, divided by the

Real-time Settlement Intervals committed for each set of contiguous hours for which the unit was scheduled in Day-ahead Energy Market. This equation is represented as $(A*B) - (C+D)$. The startup cost, (D), shall be excluded from this calculation if the unit operates in real time following the Office of the Interconnection's direction during any portion of the set of contiguous hours for which the unit was scheduled in Day-ahead Energy Market, or

- 2) the Real-time Price at the unit's bus minus the Day-ahead Price at the unit's bus, multiplied by the number of megawatts committed in the Day-ahead Energy Market for the generating unit.

(f-2) A Market Seller of a hydroelectric resource that is pool-scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3(c) hereof), the output of which is altered at the request of the Office of the Interconnection from the schedule submitted by the owner, due to a transmission constraint or other reliability issue, shall be compensated for lost opportunity cost in the same manner as provided in sections 3.2.2(d) and 3.2.3A(f) and further detailed in the PJM Manuals.

(f-3) If a Market Seller believes that, due to specific pre-existing binding commitments to which it is a party, and that properly should be recognized for purposes of this section, the above calculations do not accurately compensate the Market Seller for opportunity cost associated with following PJM dispatch instructions and reducing or suspending a unit's output due to a transmission constraint or other reliability issue, then the Office of the Interconnection, the Market Monitoring Unit and the individual Market Seller will discuss a mutually acceptable, modified amount of opportunity cost compensation, taking into account the specific circumstances binding on the Market Seller. Following such discussion, if the Office of the Interconnection accepts a modified amount of opportunity cost compensation, the Office of the Interconnection shall invoice the Market Seller accordingly. If the Market Monitoring Unit disagrees with the modified amount of opportunity cost compensation, as accepted by the Office of the Interconnection, it will exercise its powers to inform the Commission staff of its concerns.

(f-4) A Market Seller of a wind generating unit that is pool-scheduled or self-scheduled, has SCADA capability to transmit and receive instructions from the Office of the Interconnection, has provided data and established processes to follow PJM basepoints pursuant to the requirements for wind generating units as further detailed in this Agreement, the Tariff and the PJM Manuals, and which is operating as requested by the Office of the Interconnection, the output of which is reduced or suspended at the request of the Office of the Interconnection due to a transmission constraint or other reliability issue, and for which the , real-time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall be credited for each Real-time Settlement Interval in an amount equal to the product of (A) the LOC Deviation times (B) the Real-time Price at the generation bus for the generating unit,

minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A*B) - C$.

(f-5) (i) A Market Seller of a pool-scheduled resource or a dispatchable self-scheduled resource shall receive Dispatch Differential Lost Opportunity Cost credits as calculated under subsection (iv) below if the resource is dispatched to provide energy in the Real-time Energy Market, provided such resource is not committed to provide real-time ancillary services (Regulation, reserves, reactive service) or instructed to reduce or suspend output due to a transmission constraint or other reliability issue pursuant to Operating Agreement, Schedule 1, section 3.2.3(f-1) through Operating Agreement, Schedule 1, section (f-4).

(ii) PJM will calculate the revenue above cost for the pricing run for each Real-time Settlement Interval in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = the resource's expected output level based on its resource parameters at the Real-time Price at the applicable pricing point;

B = the Real-time Price at the applicable pricing point; and

C = the sum of the resource's Real-time Energy Market offer integrated under the Final Offer for the resource's expected output level based on its resource parameters at the Real-time Price at the applicable pricing point.

(iii) PJM will calculate the revenue above cost for the dispatch run for each Real-time Settlement Interval in accordance with the following equation:

$$(\text{greater of A and B}) - (\text{lesser of C and D})$$

Where:

A = the product of the amount of megawatts of energy dispatched in the Real-time Energy Market dispatch run for the resource in that Real-time Settlement Interval and the Real-time Price at the applicable pricing point;

B = the product of the amount of megawatts of energy the resource actually provided in that Real-time Settlement Interval and the Real-time Price at the applicable pricing point;

C = the resource's Real-time Energy Market offer integrated under the Final Offer for the amount of megawatts dispatched in the Real-time Energy Market dispatch run;

D = the resource's Real-time Energy Market offer integrated under the Final Offer for the amount of megawatts the resource actually provided in that Real-time Settlement Interval.

(iv) The Dispatch Differential Lost Opportunity Cost credit shall equal the greater of (A) the difference between the revenue above cost based on the pricing run determined in subsection (f-5)(ii) and the revenue above cost based on the dispatch run determined in subsection (f-5)(iii) or (B) zero.

(v) For each hour in an Operating Day, the total cost of the Dispatch Differential Lost Opportunity Cost credits shall be allocated and charged to each Market Participant in proportion to the sum of its (i) deliveries of energy to load ((a) net of operating Behind The Meter Generation, but not to be less than zero; and (b) excluding Direct Charging Energy) in the PJM Region, served under Network Transmission Service, in megawatt-hours; and (ii) deliveries of energy sales from within the PJM Region to load outside such region in megawatt-hours but not including its bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Operating Agreement, Schedule 1, section 1.12, as compared to the sum of all such deliveries for all Market Participants.

(g) The sum of the foregoing credits in Operating Agreement, Schedule 1, section 3.2.3(f-1) through Operating Agreement, Schedule 1, section 3.2.3(f-4), plus any cancellation fees paid in accordance with Operating Agreement, Schedule 1, section 1.10.2(d), such cancellation fees to be applied to the Operating Day for which the unit was scheduled, plus any shortfalls paid pursuant to the Market Settlement provision of the real-time Economic Load Response Program, less any payments received from another Control Area for Operating Reserves shall be the cost of Operating Reserves for the Real-time Energy Market in each Operating Day.

(h) The cost of Operating Reserves for the Real-time Energy Market for each Operating Day, except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, shall be allocated and charged to each Market Participant based on their daily total of hourly deviations determined in accordance with the following equation:

$$\sum_h (A + B + C)$$

Where:

h = the hours in the applicable Operating Day;

A = For each Real-time Settlement Interval in an hour, the sum of the absolute value of the withdrawal deviations (in MW) between the quantities scheduled in the Day-ahead Energy Market and the Market Participant's energy withdrawals (net of operating Behind The Meter Generation) in the Real-time Energy Market, except as noted in subsection (h)(ii) below and in the PJM Manuals divided by the number of Real-time Settlement Intervals for that hour. The summation of each Real-time Settlement Interval's

withdrawal deviation in an hour will be the Market Participant's total hourly withdrawal deviations. Market Participant bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Operating Agreement, Schedule 1, section 1.12 are not included in the determination of withdrawal deviations;

B = For each Real-time Settlement Interval in an hour, the sum of the absolute value of generation deviations (in MW and not including deviations in Behind The Meter Generation) as determined in subsection (o) divided by the number of Real-time Settlement Intervals for that hour;

C = For each Real-time Settlement Interval in an hour, the sum of the absolute value of the injection deviations (in MW) between the quantities scheduled in the Day-ahead Energy Market and the Market Participant's energy injections in the Real-time Energy Market divided by the number of Real-time Settlement Intervals for that hour. The summation of the injection deviations for each Real-time Settlement Interval in an hour will be the Market Participant's total hourly injection deviations. The determination of injection deviations does not include generation resources.

The Revenue Data for Settlements determined for each Real-time Settlement Interval in accordance with Operating Agreement, Schedule 1, section 3.1A shall be used in determining the real-time withdrawal deviations, generation deviations and injection deviations used to calculate Operating Reserve under this subsection (e).

The costs associated with scheduling of units for Black Start service or testing of Black Start Units shall be allocated by ratio share of the monthly transmission use of each Network Customer or Transmission Customer serving Zone Load or Non-Zone Load, as determined in accordance with the formulas contained in Tariff, Schedule 6A.

Notwithstanding section (h)(1) above, as more fully set forth in the PJM Manuals, load deviations from the Day-ahead Energy Market shall not be assessed Operating Reserves charges to the extent attributable to reductions in the load of Price Responsive Demand that is in response to an increase in Locational Marginal Price from the Day-ahead Energy Market to the Real-time Energy Market and that is in accordance with a properly submitted PRD Curve.

Deviations that occur within a single Zone shall be associated with the Eastern or Western Region, as defined in section 3.2.3(q) below, and shall be subject to the regional balancing Operating Reserve rate determined in accordance with Section 3.2.3(q). Deviations at a hub shall be associated with the Eastern or Western Region if all the buses that define the hub are located in the region. Deviations at an Interface Pricing Point shall be associated with whichever region, the Eastern or Western Region, with which the majority of the buses that define that Interface Pricing Point are most closely electrically associated. If deviations at interfaces and hubs are associated with the Eastern or Western region, they shall be subject to the regional balancing Operating Reserve rate. Demand and supply deviations shall be based on total activity in a Zone, including all aggregates and hubs defined by buses that are wholly contained within the same Zone.

The foregoing notwithstanding, netting deviations shall be allowed for each Real-time Settlement Interval in accordance with the following provisions:

(i) Generation resources with multiple units located at a single bus shall be able to offset deviations in accordance with the PJM Manuals to determine the net deviation MW at the relevant bus.

(ii) Demand deviations will be assessed by comparing all day-ahead demand transactions, which include the components referenced in section 3.2.3(d) regarding the cost of Operating Reserves in the Day-ahead Energy Market, at a single transmission zone, hub, or interface against the real-time demand transactions at that same transmission zone, hub, or interface; except that the positive values of demand deviations, as set forth in the PJM Manuals, will not be assessed Operating Reserve charges in the event of a Primary Reserve or Synchronized Reserve shortage in real-time or where PJM initiates the request for emergency load reductions in real-time in order to avoid a Primary Reserve or Synchronized Reserve shortage.

(iii) Supply deviations will be assessed by comparing all day-ahead transactions at a single transmission zone, hub, or interface against the real-time transactions at that same transmission zone, hub, or interface.

(iv) Bilateral transactions inside the PJM Region, as defined in Operating Agreement, Schedule 1, section 1.7.10, will not be included in the determination of Supply or Demand deviations.

(i) At the end of each Operating Day, Market Sellers shall be credited on the basis of their offered prices for synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, as well as the credits calculated as specified in Section 3.2.3(b) for those generators committed solely for the purpose of providing synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, at the request of the Office of the Interconnection.

(j) The sum of the foregoing credits as specified in section 3.2.3(i) shall be the cost of Operating Reserves for synchronous condensing for the PJM Region for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, or in association with post-contingency operation for the Operating Day and shall be separately determined for the PJM Region.

(k) The cost of Operating Reserves for synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, or in association with post-contingency operation for each Operating Day shall be allocated and charged to each Market Participant in proportion to the sum of its (i) deliveries of energy to load (net of operating Behind The Meter Generation, but not to be less than zero) in the PJM Region, served under Network Transmission Service, in megawatt-hours during that Operating Day; and (ii) deliveries of energy sales from within the PJM Region to load outside such region in megawatt-hours during that Operating Day, but not including its bilateral transactions that are

Dynamic Transfers to load outside the PJM Region pursuant to Operating Agreement, Schedule 1, section 1.12, as compared to the sum of all such deliveries for all Market Participants.

(l) For any Operating Day in either, as applicable, the Day-ahead Energy Market or the Real-time Energy Market for which, for all or any part of such Operating Day, the Office of the Interconnection: (i) declares a Maximum Generation Emergency; (ii) issues an alert that a Maximum Generation Emergency may be declared (“Maximum Generation Emergency Alert”); or (iii) schedules units based on the anticipation of a Maximum Generation Emergency or a Maximum Generation Emergency Alert, the Operating Reserves credit otherwise provided by section 3.2.3.(b) or section 3.2.3(e) in connection with market-based offers shall be limited as provided in subsections (n) or (m), respectively. The Office of the Interconnection shall provide timely notice on its internet site of the commencement and termination of any of the actions described in subsection (i), (ii), or (iii) of this subsection (l) (collectively referred to as “MaxGen Conditions”). Following the posting of notice of the commencement of a MaxGen Condition, a Market Seller may elect to submit a cost-based offer in accordance with Operating Agreement, Schedule 2, in which case subsections (m) and (n) shall not apply to such offer; provided, however, that such offer must be submitted in accordance with the deadlines in Operating Agreement, Schedule 1, section 1.10 for the submission of offers in the Day-ahead Energy Market or Real-time Energy Market, as applicable. Submission of a cost-based offer under such conditions shall not be precluded by Operating Agreement, Schedule 1, section 1.9.7(b); provided, however, that the Market Seller must return to compliance with Operating Agreement, Schedule 1, section 1.9.7(b) when it submits its bid for the first Operating Day after termination of the MaxGen Condition.

(m) For the Real-time Energy Market, if the Effective Offer Price (as defined below) for a market-based offer is greater than \$1,000/MWh and greater than the Market Seller’s lowest available and applicable cost-based offer, the Market Seller shall not receive any credit for Operating Reserves. For purposes of this subsection (m), the Effective Offer Price shall be the amount that, absent subsections (l) and (m), would have been credited for Operating Reserves for such Operating Day pursuant to section 3.2.3(e) plus the Real-time Energy Market revenues for the Real-time Settlement Intervals that the offer is economic divided by the megawatt hours of energy provided during the Real-time Settlement Intervals that the offer is economic. The Real-time Settlement Intervals that the offer is economic shall be: (i) the Real-time Settlement Intervals that the offer price for energy is less than or equal to the Real-time Price for the relevant generation bus, (ii) the Real-time Settlement Intervals in which the offer for energy is greater than Locational Marginal Price and the unit is operated at the direction of the Office of the Interconnection that are in addition to any Real-time Settlement Intervals required due to the minimum run time or other operating constraint of the unit, and (iii) for any unit with a minimum run time of one hour or less and with more than one start available per day, any hours the unit operated at the direction of the Office of the Interconnection.

(n) For the Day-ahead Energy Market, if notice of a MaxGen Condition is provided prior to 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled and the Effective Offer Price for a market-based offer is greater than \$1,000/MWh and greater than the Market Seller’s lowest available and applicable cost-based offer, the Market Seller shall not receive any credit for Operating Reserves. If notice of a MaxGen Condition is

provided after 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled and the Effective Offer Price is greater than \$1,000/MWh, the Market Seller shall receive credit for Operating Reserves determined in accordance with section 3.2.3(b), subject to the limit on total compensation stated below. If the Effective Offer Price is less than or equal to \$1,000/MWh, regardless of when notice of a MaxGen Condition is provided, the Market Seller shall receive credit for Operating Reserves determined in accordance with section 3.2.3(b), subject to the limit on total compensation stated below. For purposes of this subsection (n), the Effective Offer Price shall be the amount that, absent subsections (l) and (n), would have been credited for Operating Reserves for such Operating Day divided by the megawatt hours of energy offered during the Specified Hours, plus the offer for energy during such hours. The Specified Hours shall be the lesser of: (1) the minimum run hours stated by the Market Seller in its Offer Data; and (2) either (i) for steam-electric generating units and for combined-cycle units when such units are operating in combined-cycle mode, the six consecutive hours of highest Day-ahead Price during such Operating Day when such units are running or (ii) for combustion turbine units and for combined-cycle units when such units are operating in combustion turbine mode, the two consecutive hours of highest Day-ahead Price during such Operating Day when such units are running. Notwithstanding any other provision in this subsection, the total compensation to a Market Seller on any Operating Day that includes a MaxGen Condition shall not exceed \$1,000/MWh during the Specified Hours, where such total compensation in each such hour is defined as the amount that, absent subsections (l) and (n), would have been credited for Operating Reserves for such Operating Day pursuant to section 3.2.3(b) divided by the Specified Hours, plus the Day-ahead Price for such hour, and no Operating Reserves payments shall be made for any other hour of such Operating Day. If a unit operates in real time at the direction of the Office of the Interconnection consistently with its day-ahead clearing, then subsection (m) does not apply.

(o) Dispatchable pool-scheduled generation resources and dispatchable self-scheduled generation resources that follow dispatch shall not be assessed balancing Operating Reserve deviations. Pool-scheduled generation resources and dispatchable self-scheduled generation resources that do not follow dispatch shall be assessed balancing Operating Reserve deviations in accordance with the calculations described below and in the PJM Manuals.

The Office of the Interconnection shall calculate a ramp-limited desired MW value for generation resources where the economic minimum and economic maximum are at least as far apart in real-time as they are in day-ahead according to the following parameters:

(i) real-time economic minimum \leq 105% of day-ahead economic minimum or day-ahead economic minimum plus 5 MW, whichever is greater.

(ii) real-time economic maximum \geq 95% day-ahead economic maximum or day-ahead economic maximum minus 5 MW, whichever is lower.

The ramp-limited desired MW value for a generation resource shall be equal to:

$$Ramp_Request_t = (Dispatch_target_{t-1} - AOutput_{t-1}) / (LAtime_{t-1})$$

$$RL_Desired_t = AOutput_{t-1} + (Ramp_Request_t * Case_Eff_time_{t-1})$$

where:

1. Dispatchtarget = Dispatch Signal for the previous approved Dispatch case
2. AOutput = Unit's achievable target MW at case solution time as defined in the PJM Manuals
3. LAtime = Dispatch look ahead time
4. Case_Eff_time = Time between signal changes
5. RL_Desired = Ramp-limited desired MW

To determine if a generation resource is following dispatch the Office of the Interconnection shall determine the unit's MW off dispatch and % off dispatch by using the lesser of the difference between the actual output and the dispatch signal or the actual output and ramp-limited desired MW value for each Real-time Settlement Interval. If the dispatch signal and the ramp-limited desired MW for the resource are unavailable, the Office of the Interconnection will determine the unit's MW off dispatch and % off dispatch by calculating the lesser of the difference between the actual output and the dispatch LMP Desired MW for each Real-time Settlement Interval.

A pool-scheduled or dispatchable self-scheduled resource is considered to be following dispatch if its actual output is between its ramp-limited desired MW value and dispatch signal, or if its % off dispatch is ≤ 10 , or its Real-time Settlement Interval MWh is within 5% of the Real-time Settlement Interval ramp-limited desired MW. A self-scheduled generator must also be dispatched above economic minimum. The degree of deviations for resources that are not following dispatch shall be determined for each Real-time Settlement Interval in accordance with the following provisions:

- A dispatchable self-scheduled resource that is not dispatched above economic minimum shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – Day-Ahead MWh.
- A resource that is dispatchable day-ahead but is Fixed Gen in real-time shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – dispatch LMP Desired MW.
- Pool-scheduled generators that are not following dispatch shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – Ramp-Limited Desired MW.

- If a resource's real-time economic minimum is greater than its day-ahead economic minimum by 5% or 5 MW, whichever is greater, or its real-time economic maximum is less than its Day Ahead economic maximum by 5% or 5 MW, whichever is lower, and dispatch LMP Desired MWh for the Real-time Settlement Interval is either below the real time economic minimum or above the real time economic maximum, then balancing Operating Reserve deviations for the resource shall be assessed according to the following formula: Real time Settlement Interval MWh – dispatch LMP Desired MWh.
- If a resource is not following dispatch and its % Off Dispatch is $\leq 20\%$, balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – Ramp-Limited Desired MW. If deviation value is within 5% of Ramp-Limited Desired MW, balancing Operating Reserve deviations shall not be assessed.
- If a resource is not following dispatch and its % off Dispatch is $> 20\%$, balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – dispatch LMP Desired MWh.
- If a resource is not following dispatch, and the resource has tripped, for the Real-time Settlement Interval the resource tripped and the Real-time Settlement Intervals it remains offline throughout its day-ahead schedule balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – Day-Ahead MWh.
- For resources that are not dispatchable in both the Day-Ahead and Real-time Energy Markets balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh - Day-ahead MWh.

If a resource has a sum of the absolute value of generator deviations for an hour that is less than 5 MWh, then the resource shall not be assessed balancing Operating Reserve deviations for that hour.

(o-1) Dispatchable economic load reduction resources that follow dispatch shall not be assessed balancing Operating Reserve deviations. Economic Load Response Participant resources that do not follow dispatch shall be assessed balancing Operating Reserve deviations as described in this subsection and as further specified in the PJM Manuals.

The Desired MW quantity for such resources for each hour shall be the hourly integrated MW quantity to which the load reduction resource was dispatched for each hour (where the hourly integrated value is the average of the dispatched values as determined by the Office of the Interconnection for the resource for each hour).

If the actual reduction quantity for the load reduction resource for a given hour deviates by no more than 20% above or below the Desired MW quantity, then no balancing Operating Reserve deviation will accrue for that hour. If the actual reduction quantity for the load reduction

resource for a given hour is outside the 20% bandwidth, the balancing Operating Reserve deviations will accrue for that hour in the amount of the absolute value of (Desired MW – actual reduction quantity). For those hours where the actual reduction quantity is within the 20% bandwidth specified above, the load reduction resource will be eligible to be made whole for the total value of its offer as defined in Operating Agreement, Schedule 1, section 3.3A. Hours for which the actual reduction quantity is outside the 20% bandwidth will not be eligible for the make-whole payment. If at least one hour is not eligible for make-whole payment based on the 20% criteria, then the resource will also not be made whole for its shutdown cost.

(p) The Office of the Interconnection shall allocate the charges assessed pursuant to Operating Agreement, Schedule 1, section 3.2.3(h) except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, to real-time deviations from day-ahead schedules or real-time load share plus exports depending on whether the underlying balancing Operating Reserve credits are related to resources scheduled during the reliability analysis for an Operating Day, or during the actual Operating Day. If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, section 1.11.6, the Office of the Interconnection shall allocate the charges to the ratio share of real-time load plus export transactions.

(i) For resources scheduled by the Office of the Interconnection during the reliability analysis for an Operating Day, the associated balancing Operating Reserve charges shall be allocated based on the reason the resource was scheduled according to the following provisions:

(A) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to operate in real-time to augment the physical resources committed in the Day-ahead Energy Market to meet the forecasted real-time load plus the Operating Reserve requirement, the associated balancing Operating Reserve charges shall be allocated to real-time deviations from day-ahead schedules.

(B) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to maintain system reliability, the associated balancing Operating Reserve charges shall be allocated according to ratio share of real time load plus export transactions.

(C) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource with a day-ahead schedule is required to deviate from that schedule to provide balancing Operating Reserves, the associated balancing Operating Reserve charges shall be allocated pursuant to (A) or (B) above.

(ii) For resources scheduled during an Operating Day, the associated balancing Operating Reserve charges shall be allocated according to the following provisions:

(A) If the Office of the Interconnection directs a resource to operate during an Operating Day to provide balancing Operating Reserves, the associated balancing Operating Reserve charges shall be allocated according to ratio share of load plus exports. The foregoing notwithstanding, charges will be assessed pursuant to this section only if the LMP at the resource's bus does not meet or exceeds the applicable offer of the resource for at least four 5-minute intervals during one or more discrete clock hours during each period the resource operated and produced MWs during the relevant Operating Day. If a resource operated and produced MWs for less than four 5-minute intervals during one or more discrete clock hours during the relevant Operating Day, the charges for that resource during the hour it was operated less than four 5-minute intervals will be identified as being in the same category as identified for the Operating Reserves for the other discrete clock hours.

(B) If the Office of the Interconnection directs a resource not covered by Operating Agreement, Schedule 1, section 3.2.3(h)(ii)(A) to operate in real-time during an Operating Day, the associated balancing Operating Reserve charges shall be allocated according to real-time deviations from day-ahead schedules.

(q) The Office of the Interconnection shall determine regional balancing Operating Reserve rates for the Western and Eastern Regions of the PJM Region. For the purposes of this section, the Western Region shall be the AEP, APS, ComEd, Duquesne, Dayton, ATSI, DEOK, EKPC, OVEC transmission Zones, and the Eastern Region shall be the AEC, BGE, Dominion, PENELEC, PEPCO, ME, PPL, JCPL, PECO, DPL, PSEG, RE transmission Zones. The regional balancing Operating Reserve rates shall be determined in accordance with the following provisions:

(i) The Office of the Interconnection shall calculate regional adder rates for the Eastern and Western Regions. Regional adder rates shall be equal to the total balancing Operating Reserve credits paid to generators for transmission constraints that occur on transmission system capacity equal to or less than 345kv. The regional adder rates shall be separated into reliability and deviation charges, which shall be allocated to real-time load or real-time deviations, respectively. Whether the underlying credits are designated as reliability or deviation charges shall be determined in accordance with section 3.2.3(p).

(ii) The Office of the Interconnection shall calculate RTO balancing Operating Reserve rates. RTO balancing Operating Reserve rates shall be equal to balancing Operating Reserve credits except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, in excess of the regional adder rates calculated pursuant to Operating Agreement, Schedule 1, section 3.2.3(q)(i) of Schedule 1 of this Agreement. The RTO balancing Operating Reserve rates shall be separated into reliability and deviation charges, which shall be allocated to real-time load or real-time deviations, respectively. Whether the

underlying credits are allocated as reliability or deviation charges shall be determined in accordance with section 3.2.3(p).

(iii) Reliability and deviation regional balancing Operating Reserve rates shall be determined by summing the relevant RTO balancing Operating Reserve rates and regional adder rates.

(iv) If the Eastern and/or Western Regions do not have regional adder rates, the relevant regional balancing Operating Reserve rate shall be the reliability and/or deviation RTO balancing Operating Reserve rate.

(r) Market Sellers that incur incremental operating costs for a generation resource that are either greater than \$1,000/MWh as determined in accordance with the Market Seller's PJM-approved Fuel Cost Policy, Operating Agreement, Schedule 2 and PJM Manual 15, but are not verified at the time of dispatch of the resource under section 6.4.3 of this Schedule, or greater than \$2,000/MWh as determined in accordance with the Market Seller's PJM-approved Fuel Cost Policy, Operating Agreement, Schedule 2, and PJM Manual 15, will be eligible to receive credit for Operating Reserves upon review of the Market Monitoring Unit and the Office of the Interconnection, and approval of the Office of the Interconnection. Market Sellers must submit to the Office of the Interconnection and the Market Monitoring Unit all relevant documentation demonstrating the calculation of costs greater than \$2,000/MWh, and costs greater than \$1,000/MWh which were not verified at the time of dispatch of the resource under Operating Agreement, Schedule 1, section 6.4.3. The Office of the Interconnection must approve any Operating Reserve credits paid to a Market Seller under this subsection (r).

3.2.3A Synchronized Reserve.

(a) Each Market Participant that is a Load Serving Entity that is not part of an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have an obligation for hourly Synchronized Reserve equal to its pro rata share of Synchronized Reserve requirements for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone or Reserve Sub-zone for the hour ("Synchronized Reserve Obligation"), less any amount obtained from condensers associated with provision of Reactive Services as described in section 3.2.3B(i) and any amount obtained from condensers associated with post-contingency operations, as described in section 3.2.3C(b). Those entities that participate in an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have their reserve obligations determined based on the stipulations in such agreement. A Market Participant's hourly Synchronized Reserve Obligation shall be adjusted by any Synchronized Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Synchronized Reserve Obligation shall be charged the pro rata share of the sum of day-ahead and real-time credits for Synchronized Reserve as defined in sections 3.2.3A(b)(i) and (ii) below.

(b) A resource supplying Synchronized Reserve at the direction of the Office of the Interconnection shall be credited as follows:

i) Credits for Synchronized Reserve provided by generation and Economic Load Response Participant resources assigned to provide Synchronized Reserve by the Office of the Interconnection or self-scheduled in the Day-ahead Synchronized Reserve Market shall be equal to the product of the Day-ahead Synchronized Reserve Market Clearing Price multiplied by the megawatt amount of Synchronized Reserve such resource is assigned to provide..

ii) Credits for Synchronized Reserve provided by generation resources and Economic Load Response Participant resources assigned to provide Synchronized Reserve by the Office of the Interconnection or self-scheduled in the Real-time Synchronized Reserve Market shall be determined for each operating hour based on the sum of their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Synchronized Reserve from that resource assigned by the Office of the Interconnection or self-scheduled in the Real-time Synchronized Reserve Market. The megawatt value is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval where there is not a Synchronized Reserve event;

B = For each Real-time Settlement Interval, the megawatts of Synchronized Reserve from that resource assigned by the Office of the Interconnection or self-scheduled in the Day-ahead Synchronized Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Synchronized Reserve Market Clearing Price.

If a Synchronized Reserve Event is initiated by the Office of the Interconnection and the Economic Load Response Participant resource reduced its load in response to the event, the resource shall be eligible to receive a credit for the fixed costs associated with achieving the load reduction, as specified in the PJM Manuals.

iii) Pool-scheduled resources shall be credited a Synchronized Reserve lost opportunity cost credit, where positive, as described in subsection (f)(iv) below.

(c) [Reserved for future use]

(d) Synchronized Reserve Market Clearing Prices

(i) For the Day-ahead Synchronized Reserve Market, the Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Synchronized Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for Synchronized Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Synchronized Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Synchronized Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Synchronized Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute and (B) the price of serving the next increment of demand for Primary Reserve and 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute, provided that the Synchronized Reserve Market Clearing Price shall be less than or equal to the sum of no more than two of the Reserve Penalty Factors for the Synchronized Reserve Requirement, the Primary Reserve Requirement, and the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Synchronized Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Synchronized Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Synchronized Reserve market quantities and prices as determined pursuant to subsection (d)(ii) hereof.

(ii) For the Real-time Synchronized Reserve Market, the Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for Synchronized Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Synchronized Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Synchronized Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Synchronized Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute and (B) the price of serving the next increment of demand for Primary Reserve and 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute, provided that the Synchronized Reserve Market Clearing Price shall be less than or equal to the sum of no more than two of the Reserve Penalty Factors for the

Synchronized Reserve Requirement, the Primary Reserve Requirement, and the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Synchronized Reserves, then the Synchronized Reserve Market Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Synchronized Reserves, then the Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Synchronized Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Synchronized Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Synchronized Reserve Market Clearing Prices exist, then the Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, and the Office of the Interconnection is assigning Synchronized Reserves, the Office of the Interconnection will set the Synchronized Reserve Market Clearing Price to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period. Resources will be compensated for lost opportunity cost per subsection (f) hereof using the energy price as determined in Operating Agreement, Schedule 1, section 2.5.2.iii. The opportunity cost shall be zero for all resources self-scheduled to provide Synchronized Reserve, synchronous condensers and Economic Load Response Participant resources.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action as described in the PJM Manuals or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Synchronized Reserve Market Clearing Price shall be the sum of the Reserve Penalty Factors for the Primary

Reserve Requirement, and the Synchronized Reserve Requirement for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the Synchronized Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended Synchronized Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Synchronized Reserve Penalty Factors are warranted for subsequent Delivery Year(s).

(e) (i) For determining the Synchronized Reserve Market Clearing Price in each hour of the Day-ahead Synchronized Reserve Market, the estimated resource-specific opportunity cost for a generation resource or Economic Load Response Participant resource shall be the difference between the Locational Marginal Price at the generation or Economic Load Response Participant resource bus and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) or offer price to reduce energy from the Economic Load Response Participant resource in the PJM Interchange Energy Market when the Locational Marginal Price at the generation or Economic Load Participant resource bus is greater than the offer price for energy from the generation resource or the offer price to reduce energy from the Economic Load Response Participant resource.

However, the opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve and for synchronous condensers and for Economic Load Response Participant resources that do not receive a day-ahead commitment to provide energy in the same operating hour in which such resource is committed to provide Synchronized Reserve.

(ii) For determining the Synchronized Reserve Market Clearing Price for each Real-time Settlement Interval in the Real-time Synchronized Reserve Market, the estimated unit-specific opportunity cost for a generation resource that is not a hydroelectric resource shall be the difference between the Locational Marginal Price at the generation bus for the generation resource and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) in the PJM Interchange Energy Market when the Locational Marginal Price at the generation bus is greater than the offer price for energy from the generation resource.

For hydroelectric resources, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the expected real-time Locational Marginal Price at that generation bus. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions, as

defined in the PJM Manuals, and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the expected real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average day-ahead Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

The opportunity costs shall be zero for all resources self-scheduled to provide Synchronized Reserve, synchronous condensers and Economic Load Response Participant resources.

(f) (i) In determining the credit under subsection (b) to a generation resource, except a generation resource that is operating as a synchronous condenser, selected to provide Synchronized Reserve in the Day-ahead Synchronized Reserve Market, or an Economic Load Response Participant resource that is selected to provide Synchronized Reserve in the Day-ahead Synchronized Reserve Market for the same operating hour in which such resource receives a day-ahead commitment to provide energy, the opportunity cost of a resource shall be determined for each operating hour that the Office of the Interconnection requires a resource to provide Synchronized Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Day-ahead Locational Marginal Price at the generation bus of the generation resource or the applicable pricing point for the Economic Load Response Participant resource;

B = The deviation of the resource's energy output or load reduction necessary to supply a Day-ahead Synchronized Reserve assignment from the resource's energy expected output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load; and

C = The Day-ahead Energy market offer integrated under the applicable energy offer curve for the resource's energy output or load reduction necessary to provide a Day-ahead Synchronized Reserve Market assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load.

For a generation resource that is operating as a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [energy use for providing synchronous condensing multiplied by A] plus [the applicable condense start-up cost divided by the number of hours the resource is assigned Synchronized Reserve].

(ii) In determining the credit under subsection (b) to a generation resource, except a generation resource that is operating as a synchronous condenser, selected to provide Synchronized Reserve in the Real-time Synchronized Reserve Market in excess of the resource's Day-ahead Synchronized Reserve Market assignment and that actively follows the Office of the Interconnection's signals and instructions, the unit-specific opportunity cost of that generation resource shall be determined for each Real-time Settlement Interval that the Office of the Interconnection requires that generation resource to provide Synchronized Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Real-time Locational Marginal Price at the generation bus of the generation resource;

B = The deviation of the generation resource's output necessary to supply Synchronized Reserve in real-time, reduced by the amount of Synchronized Reserve the resource failed to respond during a Synchronized Reserve Event during the Operating Day, in excess of its Day-ahead Synchronized Reserve Market assignment and follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy; and

C = The energy offer integrated under the applicable energy offer curve for the generation resource's output necessary to supply Synchronized Reserve in real-time from the lesser of the generation resource's output necessary to provide a Day-ahead Synchronized Reserve Market assignment or follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [additional energy use in excess of day-ahead energy use for providing synchronous condensing in real-time multiplied by A] plus [any applicable condense start-up costs due to additional condense start-ups in real-time in excess of day-ahead condense start-ups allocated to each Real-time Settlement Interval as described in PJM Manuals].

For hydroelectric resources, the unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the real-time Locational Marginal Price at that generation bus multiplied by the additional megawatts assigned to supply Synchronized Reserve in real-time in excess of its Day-ahead Synchronized Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average real-time Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating multiplied by the additional megawatts assigned to supply the hourly Synchronized Reserve in real-time in excess of its Day-ahead Synchronized Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

(iii) For each Real-time Settlement Interval, a Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in the resource's real-time reserve MW from a day-ahead market assignment in more than one market for that Real-time Settlement Interval, the total Market Revenue Neutrality Offset is allocated to the Synchronized Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Synchronized Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Synchronized Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Synchronized Reserve in a Real-time Settlement Interval for any of the following conditions:

- (A) A resource's real-time Synchronized Reserve assignment decreases due to the resource being self-scheduled to provide energy or Regulation;
- (B) A resource reduces its flexibility in real-time such that the resource no longer qualifies to provide Synchronized Reserve in real-time;
- (C) A resource's Final Offer is less than its Committed Offer;
- (D) A resource trips offline or otherwise becomes unavailable in real-time;
- (E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above; or
- (F) A resource increases its Synchronized Reserve offer price in the Real-time Synchronized Reserve Market from its offer price in the Day-ahead Synchronized Reserve Market.

(iv) A Synchronized Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(A + B + C + D) - (E + F + G + H)$$

Where:

A = day-ahead Synchronized Reserve offer price times the Synchronized Reserve MW assignment;

B = real-time Synchronized Reserve offer price times the Synchronized Reserve MW assigned in real-time in excess of the Synchronized Reserve MW assigned day-ahead, where the Synchronized Reserve MW assigned is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval where there is not a Synchronized Reserve event;

C = day-ahead opportunity cost as determined in subsection (f)(i) above;

D = real-time opportunity cost as determined in subsection (f)(ii) above;

E = day-ahead clearing price credits as determined in subsection (b)(i) above;

F = real-time clearing price credits as determined in subsection (b)(ii) above less any applicable charges for failure to respond to a Synchronized Reserve Event as determined in subsection (j) below;

G = the applicable Market Revenue Neutrality Offset as determined in subsection (f)(iii) above; and

H = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A(f)(iii) above if not eligible for Market Revenue Neutrality Offset.

(v) The opportunity costs for an Economic Load Response Participant resource assigned Synchronized Reserve in real-time or any resource self-scheduled for Synchronized Reserves shall be zero.

(g) [Reserved for future use]

(h) For each operating hour, the sum of the Synchronized Reserve lost opportunity cost credits credited in accordance with subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Synchronized Reserve Obligation in proportion to its real-time purchases of Synchronized Reserve in megawatt-hours during that hour.

(i) [Reserved for future use]

(j) In the event a generation resource or Economic Load Response Participant Resource that either has been assigned by the Office of the Interconnection or self-scheduled to provide Synchronized Reserve in real-time fails to provide the assigned or self-scheduled amount of Synchronized Reserve in response to a Synchronized Reserve Event, the resource will be charged at the Real-time Synchronized Reserve Market Clearing Price for the real-time Synchronized Reserve assignment, in excess of amount that actually responded for all Real-time Settlement Intervals the resource was assigned or self-scheduled Synchronized Reserve real-time, which is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements for the resource on the Operating Day during which the event occurred. The determination of the amount of Synchronized Reserve credited to a resource shall be on an individual resource basis, not on an aggregate basis.

The resource shall refund payments received for Synchronized Reserve it failed to provide. For purposes of determining the amount of the payments to be refunded by a Market Participant, the Office of the Interconnection shall calculate the shortfall of Synchronized Reserve on an individual resource basis unless the Market Participant had multiple resources that were assigned or self-scheduled to provide Synchronized Reserve, in which case the shortfall will be determined on an aggregate basis. For performance determined on an aggregate basis, the response of any resource that provided more Synchronized Reserve than it was assigned or self-scheduled to provide will be used to offset the performance of other resources that provided less Synchronized Reserve than they were assigned or self-scheduled to provide during a Synchronized Reserve Event, as calculated in the PJM Manuals. The determination of a Market Participant's aggregate response shall not be taken into consideration in the determination of the amount of Synchronized Reserve credited to each individual resource.

The amount refunded shall be determined by multiplying the retroactive penalty megawatts by the Real-time Synchronized Reserve Market Clearing Price for all intervals the resource was assigned or self-scheduled to provide Synchronized Reserve for a period of time immediately preceding the Synchronized Reserve Event equal to the lesser of the average number of days between Synchronized Reserve Events, or the number of days since the resource last failed to provide the amount of Synchronized Reserve it was assigned or self-scheduled to provide in response to a Synchronized Reserve Event. The retroactive penalty megawatts for each interval shall be the lesser of the amount of the shortfall of Synchronized Reserve, measured in megawatts, and the real-time Synchronized Reserve assignment for each interval, which is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements for the resource. The average number of days between Synchronized Reserve Events for purposes of this calculation shall be determined by an annual review of the twenty-four month period ending October 31 of the calendar year in which the review is performed, and shall be rounded down to a whole day value. The Office of the Interconnection shall report the results of its annual review to stakeholders by no later than December 31, and the average number of days between Synchronized Reserve Events shall be effective as of the following January 1. The refunded charges shall be allocated as credits to Market Participants based on its pro rata share of the Synchronized Reserve Obligation

megawatts in the hour(s) of the Synchronized Reserve Event for the Reserve Sub-zone or Reserve Zone, except that Market Participants that incur a refund obligation and also have an applicable Synchronized Reserve Obligation during the hour(s) of the Synchronized Reserve Event shall not be included in the allocation of such refund credits. If the event spans multiple hours, the refund credits will be prorated hourly based on the duration of the event within each clock hour.

(k) The magnitude of response to a Synchronized Reserve Event by a generation resource or an Economic Load Response Participant resource, except for Batch Load Economic Load Response Participant resources covered by section 3.2.3A(l), is the difference between the generation resource's output or the Economic Load Response Participant resource's consumption at the start of the event and its output or consumption 10 minutes after the start of the event. In order to allow for small fluctuations and possible telemetry delays, generation resource output or Economic Load Response Participant resource consumption at the start of the event is defined as the lowest telemetered generator resource output or greatest Economic Load Response Participant resource consumption between one minute prior to and one minute following the start of the event. Similarly, a generation resource's output or an Economic Load Response Participant resource's consumption 10 minutes after the event is defined as the greatest generator resource output or lowest Economic Load Response Participant resource consumption achieved between 9 and 11 minutes after the start of the event. The response actually credited to a generation resource will be reduced by the amount the megawatt output of the generation resource falls below the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter. The response actually credited to an Economic Load Response Participant resource will be reduced by the amount the megawatt consumption of the Economic Load Response Participant resource exceeds the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter.

(l) The magnitude of response by a Batch Load Economic Load Response Participant resource that is at the stage in its production cycle when its energy consumption is less than the level of megawatts in its offer at the start of a Synchronized Reserve Event shall be the difference between (i) the Batch Load Economic Load Response Participant resource's consumption at the end of the Synchronized Reserve Event and (ii) the Batch Load Economic Load Response Participant resource's consumption during the minute within the ten minutes after the end of the Synchronized Reserve Event in which the Batch Load Economic Load Response Participant resource's consumption was highest and for which its consumption in all subsequent minutes within the ten minutes was not less than fifty percent of the consumption in such minute; provided that, the magnitude of the response shall be zero if, when the Synchronized Reserve Event commences, the scheduled off-cycle stage of the production cycle is greater than ten minutes. .

3.2.3A.001 Non-Synchronized Reserve.

(a) Each Market Participant that is a Load Serving Entity that is not part of an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have an obligation for hourly Non-Synchronized Reserve equal to its pro rata share of Non-

Synchronized Reserve assigned for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone and Reserve Sub-zone for the hour ("Non-Synchronized Reserve Obligation"). Those entities that participate in an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have their reserve obligations determined based on the stipulations in such agreement. A Market Participant's hourly Non-Synchronized Reserve Obligation shall be adjusted by any Non-Synchronized Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Non-Synchronized Reserve Obligation shall be charged the pro rata share of the sum day-ahead and real-time credits for Non-Synchronized Reserve as defined in sections 3.2.3A.001(b)(i) and (ii) below.

(b) Resources assigned to provide Non-Synchronized Reserve at the direction of the Office of the Interconnection shall be credited as follows:

(i) Credits for Non-Synchronized Reserve provided by generation resources assigned to provide Non-Synchronized Reserve by the Office of the Interconnection in the Day-ahead Non-Synchronized Reserve Market shall be equal to the product of the Day-ahead Non-Synchronized Market Clearing Price multiplied by the megawatt amount of Non-Synchronized Reserve such resource is assigned to provide.

(ii) Credits for Non-Synchronized Reserve provided by generation resources assigned to provide Non-Synchronized Reserve by the Office of the Interconnection in the Real-time Non-Synchronized Reserve Market shall be determined for each operating hour based on the sum on their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Non-Synchronized Reserve from that resource assigned by the Office of the Interconnection in the Real-time Non-Synchronized Reserve Market;

B = For each Real-time Settlement Interval, the megawatts of Non-Synchronized Reserve from that resource assigned by the Office of the Interconnection in the Day-ahead Non-Synchronized Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Non-Synchronized Reserve Market Clearing Price.

(iii) Pool-scheduled generation resources assigned to provide Non-Synchronized Reserve in the Day-ahead Non-Synchronized Reserve Market shall be credited a Non-Synchronized Reserve lost opportunity cost credit, where positive, as

determined in accordance with subsection (d)(iii) below, to recover any net monetary loss to the Market Seller of such resource associated with the purchase of Non-Synchronized Reserve in the Real-time Non-Synchronized Reserve Market as a result of following the dispatch direction of the Office of the Interconnection.

(c) Non-Synchronized Reserve Market Clearing Prices

(i) For the Day-ahead Non-Synchronized Reserve Market, the Non-Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Non-Synchronized Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for Primary Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Non-Synchronized Reserve offer prices and the applicable Operating Reserve Demand Curve for Non-Synchronized Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Primary Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute and (B) the price of serving the next increment of demand for 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute, provided that the Non-Synchronized Reserve Market Clearing Price shall be less than or equal to the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Non-Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Non-Synchronized Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Non-Synchronized Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Non-Synchronized Reserve market quantities and prices as determined pursuant to subsection (c)(ii) hereof.

(ii) For the Real-time Non-Synchronized Reserve Market, the Non-Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for Primary Reserve in a Reserve Zone or Reserve Sub-zone determined by the interaction between a supply curve formed using Non-Synchronized Reserve offer prices and the applicable Operating Reserve Demand Curve for Non-Synchronized Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Primary Reserve for any

other Reserve Zone or Reserve Subzone to which the next increment of demand for Primary Reserve can contribute and (B) the price of serving the next increment of demand for 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute, provided that the Non-Synchronized Reserve Market Clearing Price shall be less than or equal to the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Non-Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Non-Synchronized Reserves, then the Non-Synchronized Reserve Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Non-Synchronized Reserves, then the Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Non-Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Non-Synchronized Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Non-Synchronized Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Non-Synchronized Reserve Market Clearing Prices exist, then the Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Non-Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, the Non-Synchronized Reserve Market Clearing Price will be set to zero dollars per megawatt-hour regardless of whether the Office of the Interconnection is assigning Non-Synchronized Reserves.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action as described in the PJM Manuals or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Non-Synchronized Reserve Market Clearing Price shall be the product of 1.5 multiplied by the

Reserve Penalty Factor for the Primary Reserve Requirement for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the Primary Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended Primary Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Primary Reserve Penalty Factors are warranted for subsequent Delivery Year(s).

(d) (i) For determining the Non-Synchronized Reserve clearing price for each hour in the Day-ahead Non-Synchronized Reserve Market and for each Real-time Settlement Interval in the Real-time Non-Synchronized Reserve Market, including during a declaration of a Market Suspension, the unit-specific opportunity cost for a generation resource that is not providing energy because they are providing Non-Synchronized Reserves will be zero.

(ii) For each Real-time Settlement Interval, a total Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in real-time reserve MW from a day-ahead market assignment in more than one market for that Real-time Settlement Interval, the total Market Revenue Neutrality Offset is allocated to the Non-Synchronized Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Non-Synchronized Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Non-Synchronized Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Non-Synchronized Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Non-Synchronized Reserve assignment decreases due to the resource being self-scheduled to provide energy, Synchronized Reserve, or Regulation;

(B) A resource reduces flexibility in real-time such that the resource no longer qualifies to provide Non-Synchronized Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time; or

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above.

(iii) A Non-Synchronized Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(\text{zero}) - (A + B + C + D)$$

Where:

A = day-ahead clearing price credits as determined in subsection (b)(i) above;

B = real-time clearing price credits as determined in subsection (b)(ii) above;

C = the applicable Market Revenue Neutrality Offset as determined in subsection (d)(ii) above; and

D = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A.001(d)(ii) above if not eligible for Market Revenue Neutrality Offset.

(e) [Reserved for future use]

(f) For each operating hour, the sum of the Non-Synchronized Reserve lost opportunity cost credits credited in subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Non-Synchronized Reserve Obligation in proportion to its real-time purchases of Non-Synchronized Reserve in megawatt-hours during that hour.

(g) The magnitude of response to a Non-Synchronized Reserve Event by a generation resource is the difference between the generation resource's output at the start of the event and its output 10 minutes after the start of the event. In order to allow for small fluctuations and possible telemetry delays, generation resource output at the start of the event is defined as the lowest telemetered generator resource output between one minute prior to and one minute following the start of the event. Similarly, a generation resource's output 10 minutes after the start of the event is defined as the greatest generator resource output achieved between 9 and 11 minutes after the start of the event. The response actually credited to a generation resource will be reduced by the amount the megawatt output of the generation resource falls below the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter.

(h) In the event a generation resource that has been assigned by the Office of the Interconnection to provide Non-Synchronized Reserve fails to provide the assigned amount of Non-Synchronized Reserve in response to a Non-Synchronized Reserve Event, the resource will be credited for Non-Synchronized Reserve capacity in the amount that actually responded for the contiguous Real-time Settlement Interval the resource was assigned Non-Synchronized Reserve during which the event occurred.

3.2.3A.01 Secondary Reserve.

(a) Each Market Participant that is a Load Serving Entity shall have an obligation for hourly Secondary Reserve equal to its pro rata share of Secondary Reserve assigned for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone and Reserve Sub-zone for the hour ("Secondary Reserve Obligation"). A Market Participant's hourly Secondary Reserve Obligation shall be adjusted by any Secondary Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Secondary Reserve Obligation shall be charged the pro rata share of the sum of day-ahead and real-time credits for Secondary Reserve as defined in sections 3.2.3A.01(b)(i) and (ii) below.

(b) Resources assigned to provide Secondary Reserve at the direction of the Office of the Interconnection shall be credited as follows:

(i) Credits for Secondary Reserve provided by generation resources and Economic Load Response Participant resources assigned to provide Secondary Reserve by the Office of the Interconnection in the Day-ahead Secondary Reserve Market shall be equal to the product of the Day-ahead Secondary Reserve Market Clearing Price multiplied by the megawatt amount of Secondary Reserve such resource is scheduled to provide.

(ii) Credits for Secondary Reserve provided by generation resources and Economic Load Response Participant resources scheduled to provide Secondary Reserve by the Office of the Interconnection in the Real-time Secondary Reserve Market shall be determined for each operating hour based on the sum of their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Secondary Reserve from that resource assigned by the Office of the Interconnection in the Real-time Secondary Reserve Market. The megawatt value is capped at the lesser of the Economic Maximum or Secondary Reserve maximum MW minus the Revenue

Data for Settlements of the resource for each Real-time Settlement Interval minus the Real-time Synchronized Reserve assignment;

B = For each Real-time Settlement Interval, the megawatts of Secondary Reserve from that resource scheduled by the Office of the Interconnection in the Day-ahead Secondary Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Secondary Reserve Market Clearing Price.

(iii) Pool-scheduled resources and Economic Load Response Participant resources shall be credited a Secondary Reserve lost opportunity cost credit, where positive, as described in subsection (f)(iv) below.

(c) [Reserved for future use]

(d) Secondary Reserve Market Clearing Prices

(i) For the Day-ahead Secondary Reserve Market, the Secondary Reserve Market Clearing Price shall be determined for each Reserve Zone and, as applicable, Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Secondary Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for 30-minute Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Secondary Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Secondary Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus the price of serving the next increment of demand for 30-minute Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute, but the Secondary Reserve Market Clearing Price shall not exceed the Reserve Penalty Factor for the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Secondary Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Secondary Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Secondary Reserve market quantities and prices as determined pursuant to subsection (d)(ii) hereof.

(ii) For the Real-time Secondary Reserve Market, the Secondary Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each Real-time Settlement Interval of the

Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for 30-minute Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Secondary Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Secondary Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus the price of serving the next increment of demand for 30-minute Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute but the Secondary Reserve Market Clearing Price shall not exceed the Reserve Penalty Factor for the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Secondary Reserves, then the Secondary Reserve Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Secondary Reserves, then the Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Secondary Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Secondary Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Secondary Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Secondary Reserve Market Clearing Prices exist, then the Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Secondary Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, and the Office of the Interconnection is assigning Secondary Reserves, the Secondary Reserve Market Clearing Price will be set to zero dollars per megawatt-hour. Resources will be compensated for lost opportunity cost per subsection (f) hereof using the energy price as determined in Operating Agreement, Schedule 1, section 2.5.2.iii.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Secondary Reserve Market Clearing Price for a given Reserve Zone or Sub-zone shall be the Reserve Penalty Factor for the 30-minute Reserve Requirements for that Reserve Zone or Reserve Sub-zone

(iii) The Reserve Penalty Factor for the 30-minute Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended 30-minute Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Reserve Penalty Factor for 30-minute Reserve are warranted for subsequent Delivery Year(s).

(e) (i) For determining the Secondary Reserve Market Clearing Price for each hour in the Day-ahead Secondary Reserve Market, the estimated resource-specific opportunity cost for a generation resource or Economic Load Response Participant resources shall be the difference between the Locational Marginal Price at the generation or Economic Load Response Participant resource bus and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) or offer price to reduce energy from the Economic Load Response Participant resource in the PJM Interchange Energy Market when the Locational Marginal Price at the Economic Load Response Participant resource bus is greater than the offer price for energy from the generation resource or the offer price to reduce energy from the Economic Load Response Participant resource.

However, opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve, and for synchronous condensers and for Economic Load Response Participant resources that do not receive a day-ahead commitment to provide energy in the same operating hour in which such resource is committed to provide Secondary Reserve.

(ii) For determining the Secondary Reserve Market Clearing Price for each Real-time Settlement Interval in the Real-time Secondary Reserve Market, the estimated unit-specific opportunity cost for a generation resource that is not a hydroelectric resource shall be the difference between the Locational Marginal Price at the generation bus for the generation resource and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) in the PJM Interchange Energy Market when the Locational Marginal Price at the generation bus is greater than the offer price for energy from the generation resource.

For hydroelectric resources, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the expected real-time Locational Marginal Price at that generation bus. The estimated unit-

specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the expected real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average day-ahead Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

However, the opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve, and for synchronous condensers and Economic Load Response Participant resources.

(f) (i) In determining the credit under subsection (b) to a generation resource, except a generation resource that is a synchronous condenser, selected to provide Secondary Reserve in the Day-ahead Secondary Reserve Market or an Economic Load Response Participant resource that is selected to provide Secondary Reserve in the Day-ahead Secondary Reserve Market in the same operating hour in which such resource receives a day-ahead commitment to provide energy, the opportunity cost of a resource shall be determined for each operating hour that the Office of the Interconnection requires a resource to provide Secondary Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Day-ahead Locational Marginal Price at the generation bus of the generation resource or the applicable pricing point for the Economic Load Response Participant resource;

B= The deviation of the resource's energy output or load reduction necessary to supply a Day-ahead Secondary Reserve assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load less any Day-ahead Synchronized Reserve Market assignment; and

C = The Day-ahead Energy Market offer integrated under the applicable energy offer curve for the resource's energy output or load reduction necessary to provide a Day-ahead Secondary Reserve Market assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load less any Day-ahead Synchronized Reserve Market assignment.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [energy use for providing synchronous condensing multiplied by A] plus [the applicable condense start-up cost divided by the number of hours the resource is assigned Secondary Reserve].

(ii) In determining the credit under subsection (b) to a generation resource, except a generation that is a synchronous condenser, selected to provide Secondary Reserve in the Real-time Secondary Reserve Market in excess of the resource's Day-ahead Secondary Reserve Market assignment and that actively follows the Office of the Interconnection's signals and instructions, the unit-specific opportunity cost of that generation resource shall be determined for each Real-time Settlement Interval that the Office of the Interconnection requires that generation resource to provide Secondary Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Real-time Locational Marginal Price at the generation bus of the generation resource;

B= The deviation of the generation resource's output necessary to supply Secondary Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment and follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy less any Real-time Synchronized Reserve Market assignment; and

C = The energy offer integrated under the applicable energy offer curve for the generation resource's output necessary to supply Secondary Reserve in real-time from the lesser of the generation resource's output necessary to provide a Day-ahead Secondary Reserve Market assignment or follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy less any Real-time Synchronized Reserve Market assignment.

For hydroelectric resources, the unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the real-time Locational Marginal Price at that generation bus multiplied by the additional megawatts assigned to supply Synchronized Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the

average real-time Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating multiplied by the additional megawatts assigned to supply Secondary Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: additional energy use in excess of day-ahead energy use for providing synchronous condensing in real-time multiplied by A plus [any applicable condense start-up costs due to additional condense start-ups in real-time in excess of day-ahead condense start-ups allocated to each Real-time Settlement Interval as described in PJM Manuals]. If the generation resource is operating as a synchronous condenser and also has a Real-time Synchronized Reserve assignment, resource's unit-specific opportunity cost in the Secondary Reserve Market shall be zero,

(iii) For each Real-time Settlement Interval, a total Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in real-time reserve MW from a day-ahead market assignment in more than one market for that real-time settlement interval, the total Market Revenue Neutrality Offset is allocated to the Secondary Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Secondary Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Secondary Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Secondary Reserve in a Real-time Settlement Interval for any of the following conditions:

- (A) A resource's real-time Secondary Reserve assignment decreases due to the resource being self-scheduled to provide energy, Synchronized Reserve, or Regulation;
- (B) A resource reduces flexibility in real-time such that the resource no longer qualifies to provide Secondary Reserve in real-time;
- (C) A resource's Final Offer is less than its Committed Offer;
- (D) A resource trips offline or otherwise becomes unavailable in real-time;
- (E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above; or

(F) A resource that fails to come online and reach Economic Minimum output within 30 minutes as described in section 3.2.3A.01(h)(i) below.

(iv) A Secondary Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(A + B) - (C + D + E + F)$$

Where:

A = day-ahead opportunity cost as determined in subsection (f)(i) above;

B = real-time opportunity cost as determined in subsection (f)(ii) above;

C = day-ahead clearing price credits as determined in subsection (b)(i) above;

D = real-time clearing price credits as determined subsection (b)(ii) above;

E = the applicable Market Revenue Neutrality Offset as determined in subsection (f)(iii) above; and

F = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A.01(f)(iii) above if not eligible for Market Revenue Neutrality Offset.

(v) The opportunity costs for Economic Load Response Participant resources and generation resources not synchronized to the grid shall be zero, except that Economic Load Response Participant resources may have a day-ahead opportunity cost, as determined in subsection (f)(i) above.

(g) For each operating hour, the sum of the Secondary Reserve lost opportunity cost credits credited in accordance with subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Secondary Reserve Obligation in proportion to its real-time purchases of Secondary Reserve in megawatt-hours during that hour.

(h) (i) In the event an offline generation resource has been assigned by the Office of the Interconnection to provide Secondary Reserve in real-time and is subsequently dispatched by the Office of the Interconnection to supply energy during that Operating Day and the resource qualifies as a Secondary Reserve resource at the time it is dispatched to provide energy, the Office of the Interconnection will assess the resource's performance as follows:

For each generation resource that fails to come online and reach Economic Minimum output within 30 minutes as instructed by the Office of the Interconnection, the

resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval and for all prior intervals in which the resource was assigned to provide Secondary Reserve in the Real-time Secondary Reserve Market starting at the later of (A) the last interval the resource was online or (B) the beginning of that Operating Day and continuing up to the interval the resource failed to come online. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time not being paid for the assigned MW.

(ii) In the event an Economic Load Response Participant resource has been assigned by the Office of the Interconnection to provide Secondary Reserve in real-time and is subsequently dispatched to supply the Secondary Reserve assignment as a load reduction, the Office of the Interconnection will assess the resource's performance as follows:

For the purposes of this subsection, a resource's starting MW usage shall be the greatest telemetered consumption between one minute prior to and one minute following the issuance of a dispatch instruction from the Office of the Interconnection, and a resource's ending MW usage shall be the lowest consumption between 29 and 31 minutes after the issuance of a dispatch instruction from the Office of the Interconnection.

For each Economic Load Response Participant resource that fails to reduce load by at least the Economic Minimum, where the measured response is the difference between the resource's starting MW usage and the resource's ending MW usage as described above, within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval, and for all prior intervals in which the resource was assigned to provide Secondary Reserve in the Real-time Secondary Reserve Market between such non-performance event starting at the later of (A) the last interval the resource reduced load at the instruction of the Office of the Interconnection or (B) the beginning of that Operating Day, and for all subsequent intervals through the earlier of (C) the next interval in which the resource is dispatched to reduce load or (D) the end of the Operating Day. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time, refunding all payments due for Secondary Reserve during such period.

(iii) For Batch Load Economic Load Response Participant Resources, a second method of verification will be used for instances where a Secondary Reserve assignment dispatched as an energy load reduction is initiated and the resource is operating at the minimum consumption level of its duty cycle. In this case, the magnitude of the response will be measured as the difference between (A) the minimum of the resource's consumption between the minute before and the minute after the end of the last settlement interval the resource reduced load at the instruction of the Office of the Interconnection and (B) the maximum consumption within a ten (10) minute period following the end of the last settlement interval the resource reduced load provided that

all subsequent minutes following that minute are no less than 50% of the consumption in that minute.

For each Batch Load Economic Load Response Participant Resource that fails to reduce load by at least the Economic Minimum, where the measured response is the difference between the resource's starting MW usage and the resource's ending MW usage as described in section (ii) above or the difference between (A) and (B) as described in section (iii) above, within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval, and for all prior intervals in which the resource was assigned to provide Secondary Reserve in either the Day-ahead or Real-time Secondary Reserve Markets between such non-performance event starting at the later of (A) the last interval the resource reduced load at the instruction of the Office of the Interconnection or (B) the beginning of that Operating Day, and for all subsequent intervals through the earlier of (C) the next interval in which the resource is dispatched to reduce load or (D) the end of the Operating Day. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time, refunding all payments due for Secondary Reserve during such period.

3.2.3A.02 Operating Reserve Demand Curves

The Office of the Interconnection shall establish Operating Reserve Demand Curves for clearing 30-minute Reserve, Primary Reserve, and Synchronized Reserve, for, as applicable, each Reserve Zone or Reserve Sub-zone to procure sufficient reserves to meet, as applicable, (a) 30-minute Reserve Requirement and Extended 30-minute Reserve Requirement; (b) Primary Reserve Requirement and Extended Primary Reserve Requirement; and (c) Synchronized Reserve Requirement and Extended Synchronized Reserve Requirement. The Operating Reserve Demand Curves established for each reserve type shall be used to commit such reserves in both the day-ahead and real-time reserve markets. The Operating Reserve Demand Curves shall be determined in accordance with the applicable Reserve Penalty Factors and PJM Manuals.

3.2.3B Reactive Services.

(a) A Market Seller providing Reactive Services at the direction of the Office of the Interconnection shall be credited as specified below for the operation of its resource. These provisions are intended to provide payments to generating units when the LMP dispatch algorithms would not result in the dispatch needed for the required reactive service. LMP will be used to compensate generators that are subject to redispatch for reactive transfer limits.

(b) At the end of each Operating Day, where the active energy output of a Market Seller's resource is reduced or suspended at the request of the Office of the Interconnection for the purpose of maintaining reactive reliability within the PJM Region, the Market Seller shall be credited according to sections 3.2.3B(c) & 3.2.3B(d).

(c) A Market Seller providing Reactive Services from either a steam-electric generating unit or combined cycle unit operating in combined cycle mode, where such unit is pool-scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1,

section 1.10.3 (c) hereof), and where the real time LMP at the unit's bus is higher than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override) shall be compensated for lost opportunity cost by receiving a credit for each Real-time Settlement Interval in an amount equal to the product of (A) the deviation of the generating unit's output necessary to follow the Office of the Interconnection's signals and the generating unit's expected output level if it had been dispatched in economic merit order, times (B) the Real-time Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A*B) - C$.

(d) A Market Seller providing Reactive Services from either a combustion turbine unit or combined cycle unit operating in simple cycle mode that is pool scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3 (c) hereof), operated as requested by the Office of the Interconnection, shall be compensated for lost opportunity cost for each Real-time Settlement Interval, limited to the lesser of the unit's Economic Maximum or the unit's Generation Resource Maximum Output, if the unit output is reduced at the direction of the Office of the Interconnection and the real time LMP at the unit's bus is higher than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection as directed by the PJM dispatcher, then the Market Seller shall be credited in a manner consistent with that described above in section 3.2.3B(c) for a steam unit or a combined cycle unit operating in combined cycle mode.

(e) At the end of each Operating Day, where the active energy output of a Market Seller's unit is increased at the request of the Office of the Interconnection for the purpose of maintaining reactive reliability within the PJM Region and the offered price of the energy is above the real-time LMP at the unit's bus, the Market Seller shall be credited according to section 3.2.3B(f).

(f) A Market Seller providing Reactive Services from either a steam-electric generating unit, combined cycle unit or combustion turbine unit, where such unit is pool scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3 (c) hereof), and where the real time LMP at the unit's bus is lower than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall receive a credit in an amount equal to $\{(AG - LMPDMW) \times (UB - URTLMP)\}$ where:

AG equals the actual output of the unit;

LMPDMW equals the level of output for the unit determined according to the point on the scheduled offer curve on which the unit was operating corresponding to the real time LMP at the unit's bus and adjusted for any Regulation or Tier 2 Synchronized Reserve assignments;

UB equals the unit offer for that unit for which output is increased, determined according to the lesser of the Final Offer or Committed Offer;

URTLMP equals the real time LMP at the unit's bus; and

where $UB - URTLMP$ shall not be negative.

(g) A Market Seller providing Reactive Services from a hydroelectric resource where such resource is pool scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3 (c) hereof), and where the output of such resource is altered from the schedule submitted by the Market Seller for the purpose of maintaining reactive reliability at the request of the Office of the Interconnection, shall be compensated for lost opportunity cost in the same manner as provided in sections 3.2.2(d) and 3.2.3A(f) and further detailed in the PJM Manuals.

(h) If a Market Seller believes that, due to specific pre-existing binding commitments to which it is a party, and that properly should be recognized for purposes of this section, the above calculations do not accurately compensate the Market Seller for lost opportunity cost associated with following the Office of the Interconnection's dispatch instructions to reduce or suspend a unit's output for the purpose of maintaining reactive reliability, then the Office of the Interconnection, the Market Monitoring Unit and the individual Market Seller will discuss a mutually acceptable, modified amount of such alternate lost opportunity cost compensation, taking into account the specific circumstances binding on the Market Seller. Following such discussion, if the Office of the Interconnection accepts a modified amount of alternate lost opportunity cost compensation, the Office of the Interconnection shall invoice the Market Participant accordingly. If the Market Monitoring Unit disagrees with the modified amount of alternate lost opportunity cost compensation, as accepted by the Office of the Interconnection, it will exercise its powers to inform the Commission staff of its concerns.

(i) The amount of Synchronized Reserve provided by generating units maintaining reactive reliability shall be counted as Synchronized Reserve satisfying the overall PJM Synchronized Reserve requirements. Operators of these generating units shall be notified of such provision, and to the extent a generating unit's operator indicates that the generating unit is capable of providing Synchronized Reserve, shall be subject to the same requirements contained in section 3.2.3A regarding provision of Synchronized Reserve. At the end of each Operating Day, to the extent a condenser operated to provide Reactive Services also provided Synchronized Reserve, a Market Seller shall be credited for providing synchronous condensing for the purpose of maintaining reactive reliability at the request of the Office of the Interconnection, in an amount equal to the higher of (i) the Synchronized Reserve Market Clearing Price for each Real-time Settlement Interval a generating unit provided synchronous condensing multiplied by the amount of Synchronized reserve provided by the synchronous condenser or (ii) the sum of (A) the generating unit's cost to provide synchronous condensing, calculated in accordance with the PJM Manuals, (B) the product of MW energy usage for providing synchronous condensing multiplied by the real time LMP at the generating unit's bus, (C) the generating unit's startup-cost of providing synchronous condensing, and (D) the unit-specific lost opportunity cost of the generating resource supplying the increment of Synchronized Reserve as determined by the

Office of the Interconnection in accordance with procedures specified in the PJM Manuals. To the extent a condenser operated to provide Reactive Services was not also providing Synchronized Reserve, the Market Seller shall be credited only for the generating unit's cost to condense, as described in (ii) above. The total Synchronized Reserve Obligations of all Load Serving Entities under section 3.2.3A(a) in the zone where these condensers are located shall be reduced by the amount counted as satisfying the PJM Synchronized Reserve requirements. The Synchronized Reserve Obligation of each Load Serving Entity in the zone under section 3.2.3A(a) shall be reduced to the same extent that the costs of such condensers counted as Synchronized Reserve are allocated to such Load Serving Entity pursuant to subsection (l) below.

(j) A Market Seller's pool scheduled steam-electric generating unit or combined cycle unit operating in combined cycle mode, that is not committed to operate in the Day-ahead Market, but that is directed by the Office of the Interconnection to operate solely for the purpose of maintaining reactive reliability, at the request of the Office of the Interconnection, shall be credited in the amount of the unit's offered price for start-up and no-load fees. The unit also shall receive, if applicable, compensation in accordance with Sections 3.2.3B(e)-(f).

(k) The sum of the foregoing credits as specified in Sections 3.2.3B(b)-(j) shall be the cost of Reactive Services for the purpose of maintaining reactive reliability for the Operating Day and shall be separately determined for each transmission zone in the PJM Region based on whether the resource was dispatched for the purpose of maintaining reactive reliability in such transmission zone.

(l) The cost of Reactive Services for the purpose of maintaining reactive reliability in a transmission zone in the PJM Region for each Operating Day shall be allocated and charged to each Market Participant in proportion to its deliveries of energy to load (net of operating Behind The Meter Generation) in such transmission zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such transmission zone.

(m) Generating units receiving dispatch instructions from the Office of the Interconnection under the expectation of increased actual or reserve reactive shall inform the Office of the Interconnection dispatcher if the requested reactive capability is not achievable. Should the operator of a unit receiving such instructions realize at any time during which said instruction is effective that the unit is not, or likely would not be able to, provide the requested amount of reactive support, the operator shall as soon as practicable inform the Office of the Interconnection dispatcher of the unit's inability, or expected inability, to provide the required reactive support, so that the associated dispatch instruction may be cancelled. PJM Performance Compliance personnel will audit operations after-the-fact to determine whether a unit that has altered its active power output at the request of the Office of the Interconnection has provided the actual reactive support or the reactive reserve capability requested by the Office of the Interconnection. PJM shall utilize data including, but not limited to, historical reactive performance and stated reactive capability curves in order to make this determination, and may withhold such compensation as described above if reactive support as requested by the Office of the Interconnection was not or could not have been provided.

3.2.3C Synchronous Condensing for Post-Contingency Operation.

(a) Under normal circumstances, PJM operates generation out of merit order to control contingency overloads when the flow on the monitored element for loss of the contingent element (“contingency flow”) exceeds the long-term emergency rating for that facility, typically a 4-hour or 2-hour rating. At times however, and under certain, specific system conditions, PJM does not operate generation out of merit order for certain contingency overloads until the contingency flow on the monitored element exceeds the 30-minute rating for that facility (“post-contingency operation”). In conjunction with such operation, when the contingency flow on such element exceeds the long-term emergency rating, PJM operates synchronous condensers in the areas affected by such constraints, to the extent they are available, to provide greater certainty that such resources will be capable of producing energy in sufficient time to reduce the flow on the monitored element below the normal rating should such contingency occur.

(b) The amount of Synchronized Reserve provided by synchronous condensers associated with post-contingency operation shall be counted as Synchronized Reserve satisfying the applicable Synchronized Reserve Requirements. Operators of these generation units shall be notified of such provision, and to the extent a generation unit’s operator indicates that the generation unit is capable of providing Synchronized Reserve, shall be subject to the same requirements contained in section 3.2.3A regarding provision of Synchronized Reserve. At the end of each Operating Day, to the extent a condenser operated in conjunction with post-contingency operation also provided Synchronized Reserve, a Market Seller shall be credited for providing synchronous condensing in conjunction with post-contingency operation at the request of the Office of the Interconnection, in an amount equal to the higher of (i) the Real-time Synchronized Reserve Market Clearing Price for each applicable interval a generation resource provided synchronous condensing multiplied by the amount of Synchronized Reserve provided by the synchronous condenser or (ii) the sum of (A) the generation resource’s applicable interval cost to provide synchronous condensing, calculated in accordance with the PJM Manuals, (B) the applicable interval product of the megawatts of energy used to provide synchronous condensing multiplied by the real-time LMP at the generation bus of the generation resource, (C) the generation resource’s start-up cost of providing synchronous condensing, and (D) the unit-specific lost opportunity cost of the generation resource supplying the increment of Synchronized Reserve as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals. To the extent a condenser operated in association with post-contingency constraint control was not also providing Synchronized Reserve, the Market Seller shall be credited only for the generation unit’s cost to condense, as described in (ii) above. The total Synchronized Reserve Obligations of all Load Serving Entities under section 3.2.3A(a) in the zone where these condensers are located shall be reduced by the amount counted as satisfying the PJM Synchronized Reserve requirements. The Synchronized Reserve Obligation of each Load Serving Entity in the zone under section 3.2.3A(a) shall be reduced to the same extent that the costs of such condensers counted as Synchronized Reserve are allocated to such Load Serving Entity pursuant to subsection (d) below.

(c) The sum of the foregoing credits as specified in section 3.2.3C(b) shall be the cost of synchronous condensers associated with post-contingency operations for the Operating Day

and shall be separately determined for each transmission zone in the PJM Region based on whether the resource was dispatched in association with post-contingency operation in such transmission zone.

(d) The cost of synchronous condensers associated with post-contingency operations in a transmission zone in the PJM Region for each Operating Day shall be allocated and charged to each Market Participant in proportion to its deliveries of energy to load (net of operating Behind The Meter Generation) in such transmission zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such transmission zone.

3.2.4 Transmission Congestion Charges.

Each Market Buyer shall be assessed Transmission Congestion Charges as specified in Operating Agreement, Schedule 1, section 5.

3.2.5 Transmission Loss Charges.

Each Market Buyer shall be assessed Transmission Loss Charges as specified in Operating Agreement, Schedule 1, section 5.

3.2.6 Emergency Energy.

(a) When the Office of the Interconnection has implemented Emergency procedures, resources offering Emergency energy are eligible to set real-time Locational Marginal Prices, capped at the energy offer cap plus the sum of the applicable Reserve Penalty Factors for the Synchronized Reserve Requirement and Primary Reserve Requirement, provided that the Emergency energy is needed to meet demand in the PJM Region.

(b) Market Participants shall be allocated a proportionate share of the net cost of Emergency energy purchased by the Office of the Interconnection. Such allocated share during each applicable interval of such Emergency energy purchase shall be in proportion to the amount of each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Energy Market, whenever that deviation increases the Market Participant's spot market purchases or decreases its spot market sales. This deviation shall not include any reduction or suspension of output of pool scheduled resources requested by PJM to manage an Emergency within the PJM Region.

(c) Net revenues in excess of Real-time Prices attributable to sales of energy in connection with Emergencies to other Control Areas shall be credited to Market Participants during each applicable interval of such Emergency energy sale in proportion to the sum of (i) each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Energy Market, whenever that deviation increases the Market Participant's spot market purchases or decreases its spot market sales, and (ii) each Market Participant's energy sales from within the PJM Region to entities outside the PJM Region that have been curtailed by PJM.

(d) The net costs or net revenues associated with sales or purchases of energy in connection with a Minimum Generation Emergency in the PJM Region, or in another Control Area, shall be allocated during each applicable interval of such Emergency sale or purchase to each Market Participant in proportion to the amount of each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Market, whenever that deviation increases the Market Participant's spot market sales or decreases its spot market purchases.

3.2.7 Billing.

(a) PJMSettlement shall prepare a billing statement each billing cycle for each Market Participant in accordance with the charges and credits specified in Operating Agreement, Schedule 1, sections 3.2.1 through 3.2.6, and showing the net amount to be paid or received by the Market Participant. Billing statements shall provide sufficient detail, as specified in the PJM Manuals, to allow verification of the billing amounts and completion of the Market Participant's internal accounting.

(b) If deliveries to a Market Participant that has PJM Interchange meters in accordance with Operating Agreement, section 14 include amounts delivered for a Market Participant that does not have PJM Interchange meters separate from those of the metered Market Participant, PJMSettlement shall prepare a separate billing statement for the unmetered Market Participant based on the allocation of deliveries agreed upon between the Market Participant and the unmetered Market Participant specified by them to the Office of the Interconnection.

Attachment C

Revisions to the
PJM Open Access Transmission Tariff
and Operating Agreement

(Phase 2)

(Marked/Redline Format)

Definitions – R - S

Ramping Capability:

“Ramping Capability” shall mean the sustained rate of change of generator output, in megawatts per minute.

Real-time Congestion Price:

“Real-time Congestion Price” shall mean the Congestion Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Loss Price:

“Real-time Loss Price” shall mean the Loss Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Energy Market:

“Real-time Energy Market” shall mean the purchase or sale of energy and payment of Transmission Congestion Charges for quantity deviations from the Day-ahead Energy Market in the Operating Day.

Real-time Offer:

“Real-time Offer” shall mean a new offer or an update to a Market Seller’s existing cost-based or market-based offer for a clock hour, submitted for use after the close of the Day-ahead Energy Market.

Real-time Prices:

“Real-time Prices” shall mean the Locational Marginal Prices resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Settlement Interval:

“Real-time Settlement Interval” shall mean the interval used by settlements, which shall be every five minutes.

Real-time System Energy Price:

“Real-time System Energy Price” shall mean the System Energy Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Reasonable Efforts:

“Reasonable Efforts” shall mean, with respect to any action required to be made, attempted, or taken by an Interconnection Party or by a Construction Party under Tariff, Part IV or Part VI, an Interconnection Service Agreement, or a Construction Service Agreement, such efforts as are timely and consistent with Good Utility Practice and with efforts that such party would undertake for the protection of its own interests.

Receiving Party:

“Receiving Party” shall mean the entity receiving the capacity and energy transmitted by the Transmission Provider to Point(s) of Delivery.

Referral:

“Referral” shall mean a formal report of the Market Monitoring Unit to the Commission for investigation of behavior of a Market Participant, of behavior of PJM, or of a market design flaw, pursuant to Tariff, Attachment M, section IV.I.

Reference Resource:

“Reference Resource” shall mean a combustion turbine generating station, configured with a single General Electric Frame 7HA turbine with evaporative cooling, Selective Catalytic Reduction technology all CONE Areas, dual fuel capability, and a heat rate of 9.134 Mmbtu/MWh.

Regional Entity:

“Regional Entity” shall have the same meaning specified in the Operating Agreement.

Regional Network Integration Transmission Service:

“Regional Network Integration Transmission Service” shall mean firm transmission service taken by Network Customers that involves the delivery of energy and/or capacity from Network Resources physically interconnected to the Transmission Provider’s transmission system to Network Load physically interconnected to the Transmission Provider’s transmission system.

Regional Transmission Expansion Plan:

“Regional Transmission Expansion Plan” shall mean the plan prepared by the Office of the Interconnection pursuant to Operating Agreement, Schedule 6 for the enhancement and expansion of the Transmission System in order to meet the demands for firm transmission service in the PJM Region.

Regional Transmission Group (RTG):

“Regional Transmission Group” or “RTG” shall mean a voluntary organization of transmission owners, transmission users and other entities approved by the Commission to efficiently

coordinate transmission planning (and expansion), operation and use on a regional (and interregional) basis.

Regulation:

“Regulation” shall mean the capability of a specific generation resource or Demand Resource with appropriate telecommunications, control and response capability to separately increase and decrease its output or adjust load in response to a regulating control signal, in accordance with the specifications in the PJM Manuals. Regulation is inclusive of Regulation-Down Service and Regulation-Up Service.

Regulation-Down Requirement:

“Regulation-Down Requirement” shall mean the required megawatts of performance-adjusted Regulation-Down Service capability to be maintained in a Regulation Zone. The Regulation-Down Requirement is defined as a set megawatt value by hour in accordance with the PJM Manuals, and can increase to account for additional operational uncertainty.

Regulation-Down Service

“Regulation-Down Service” shall mean the capability of a specific generation resource or Demand Resource with appropriate telecommunications and response capability to increase and decrease its output in the downward range from a set point or adjust load in response to a regulating-down control signal, in accordance with the specification in the PJM Manuals.

Regulation Requirement:

“Regulation Requirement” shall mean the required megawatts of performance-adjusted Regulation capability to be maintained in a Regulation Zone. The Regulation Requirement is defined as a set megawatt value by commitment interval and can increase to account for additional operational uncertainty, in accordance with the PJM Manuals.

Regulation-Up Requirement:

“Regulation-Up Requirement” shall mean the required megawatts of performance-adjusted Regulation-Up Service capability to be maintained in a Regulation Zone. The Regulation-Up Requirement is defined as a set megawatt value by hour in accordance with the PJM Manuals, and can increase to account for additional operational uncertainty.

Regulation-Up Service

“Regulation-Up Service” shall mean the capability of a specific generation resource or Demand Resource with appropriate telecommunications and response capability to increase and decrease its output in the upward range from a set point or adjust load in response to a regulating-up control signal, in accordance with the specification in the PJM Manuals.

Regulation Zone:

“Regulation Zone” shall mean any of those one or more geographic areas, each consisting of a combination of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, regulation service.

Relevant Electric Retail Regulatory Authority:

“Relevant Electric Retail Regulatory Authority” shall mean an entity that has jurisdiction over and establishes prices and policies for competition for providers of retail electric service to end-customers, such as the city council for a municipal utility, the governing board of a cooperative utility, the state public utility commission or any other such entity.

Reliability Assurance Agreement or PJM Reliability Assurance Agreement:

“Reliability Assurance Agreement” or “PJM Reliability Assurance Agreement” shall mean that certain Reliability Assurance Agreement Among Load Serving Entities in the PJM Region, on file with FERC as PJM Interconnection L.L.C. Rate Schedule FERC No. 44, and as amended from time to time thereafter.

Reliability Pricing Model Auction:

“Reliability Pricing Model Auction” or “RPM Auction” shall mean the Base Residual Auction or any Incremental Auction, or, for the 2016/2017 and 2017/2018 Delivery Years, any Capacity Performance Transition Incremental Auction.

Required Transmission Enhancements:

“Regional Transmission Enhancements” shall mean enhancements and expansions of the Transmission System that (1) a Regional Transmission Expansion Plan developed pursuant to Operating Agreement, Schedule 6 or (2) any joint planning or coordination agreement between PJM and another region or transmission planning authority set forth in Tariff, Schedule 12-Appendix B (“Appendix B Agreement”) designates one or more of the Transmission Owner(s) to construct and own or finance. Required Transmission Enhancements shall also include enhancements and expansions of facilities in another region or planning authority that meet the definition of transmission facilities pursuant to FERC’s Uniform System of Accounts or have been classified as transmission facilities in a ruling by FERC addressing such facilities constructed pursuant to an Appendix B Agreement cost responsibility for which has been assigned at least in part to PJM pursuant to such Appendix B Agreement.

Reserved Capacity:

“Reserved Capacity” shall mean the maximum amount of capacity and energy that the Transmission Provider agrees to transmit for the Transmission Customer over the Transmission Provider’s Transmission System between the Point(s) of Receipt and the Point(s) of Delivery

under Tariff, Part II. Reserved Capacity shall be expressed in terms of whole megawatts on a sixty (60) minute interval (commencing on the clock hour) basis.

Reserve Penalty Factor:

“Reserve Penalty Factor” shall mean the cost, in \$/MWh, associated with being unable to meet a specific reserve requirement in a Reserve Zone or Reserve Sub-zone. A Reserve Penalty Factor will be defined for each reserve requirement in a Reserve Zone or Reserve Sub-zone.

Reserve Sub-zone:

“Reserve Sub-zone” shall mean any of those geographic areas wholly contained within a Reserve Zone, consisting of a combination of a portion of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, reserve service.

Reserve Zone:

“Reserve Zone” shall mean any of those geographic areas consisting of a combination of one or more Control Zone(s), as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, reserve service.

Residual Auction Revenue Rights:

“Residual Auction Revenue Rights” shall mean incremental stage 1 Auction Revenue Rights created within a Planning Period by an increase in transmission system capability, including the return to service of existing transmission capability, that was not modeled pursuant to Operating Agreement, Schedule 1, section 7.5 and the parallel provisions of Tariff, Attachment K-Appendix, section 7.5 in compliance with Operating Agreement, Schedule 1, section 7.4.2 (h) and the parallel provisions of Tariff, Attachment K-Appendix, section 7.4.2(h), and, if modeled, would have increased the amount of stage 1 Auction Revenue Rights allocated pursuant to Operating Agreement, Schedule 1, section 7.4.2 and the parallel provisions of Tariff, Attachment K-Appendix, section 7.4.2; provided that, the foregoing notwithstanding, Residual Auction Revenue Rights shall exclude: 1) Incremental Auction Revenue Rights allocated pursuant to Tariff, Part VI; and 2) Auction Revenue Rights allocated to entities that are assigned cost responsibility pursuant to Operating Agreement, Schedule 6 for transmission upgrades that create such rights.

Residual Metered Load:

“Residual Metered Load” shall mean all load remaining in an electric distribution company’s fully metered franchise area(s) or service territory(ies) after all nodally priced load of entities serving load in such area(s) or territory(ies) has been carved out.

Resource Substitution Charge:

“Resource Substitution Charge” shall mean a charge assessed on Capacity Market Buyers in an Incremental Auction to recover the cost of replacement Capacity Resources.

Revenue Data for Settlements:

“Revenue Data for Settlements” shall mean energy quantities used in accounting and billing as determined pursuant to Tariff, Attachment K-Appendix and the corresponding provisions of Operating Agreement, Schedule 1.

RPM Seller Credit:

“RPM Seller Credit” shall mean an additional form of Unsecured Credit defined in Tariff, Attachment Q, section IV.

Scheduled Incremental Auctions:

“Scheduled Incremental Auctions” shall refer to the First, Second, or Third Incremental Auction.

Schedule of Work:

“Schedule of Work” shall mean that schedule attached to the Interconnection Construction Service Agreement setting forth the timing of work to be performed by the Constructing Entity pursuant to the Interconnection Construction Service Agreement, based upon the Facilities Study and subject to modification, as required, in accordance with Transmission Provider’s scope change process for interconnection projects set forth in the PJM Manuals.

Scope of Work:

“Scope of Work” shall mean that scope of the work attached as a schedule to the Interconnection Construction Service Agreement and to be performed by the Constructing Entity(ies) pursuant to the Interconnection Construction Service Agreement, provided that such Scope of Work may be modified, as required, in accordance with Transmission Provider’s scope change process for interconnection projects set forth in the PJM Manuals.

Seasonal Capacity Performance Resource:

“Seasonal Capacity Performance Resource” shall have the same meaning specified in Tariff, Attachment DD, section 5.5A.

Secondary Reserve:

“Secondary Reserve” shall mean the reserve capability of generation resources that can be converted fully into energy or Economic Load Response Participant resources whose demand can be reduced within 30 minutes (less the capability of such resources to provide Primary Reserve), from the request of the Office of the Interconnection, regardless of whether the equipment providing the reserve is electrically synchronized to the Transmission System or not.

Secondary Systems:

“Secondary Systems” shall mean control or power circuits that operate below 600 volts, AC or DC, including, but not limited to, any hardware, control or protective devices, cables, conductors, electric raceways, secondary equipment panels, transducers, batteries, chargers, and voltage and current transformers.

Second Incremental Auction:

“Second Incremental Auction” shall mean an Incremental Auction conducted ten months before the Delivery Year to which it relates.

Security:

“Security” shall mean the security provided by the New Service Customer pursuant to Tariff, section 212.4 or Tariff, Part VI, section 213.4 to secure the New Service Customer’s responsibility for Costs under the Interconnection Service Agreement or Upgrade Construction Service Agreement and Tariff, Part VI, section 217.

Segment:

“Segment” shall have the same meaning as described in Operating Agreement, Schedule 1, section 3.2.3(e).

Self-Supply:

“Self-Supply” shall mean Capacity Resources secured by a Load-Serving Entity, by ownership or contract, outside a Reliability Pricing Model Auction, and used to meet obligations under this Attachment or the Reliability Assurance Agreement through submission in a Base Residual Auction or an Incremental Auction of a Sell Offer indicating such Market Seller’s intent that such Capacity Resource be Self-Supply. Self-Supply may be either committed regardless of clearing price or submitted as a Sell Offer with a price bid. A Load Serving Entity’s Sell Offer with a price bid for an owned or contracted Capacity Resource shall not be deemed “Self-Supply,” unless it is designated as Self-Supply and used by the LSE to meet obligations under this Attachment or the Reliability Assurance Agreement.

Self-Supply Entity:

“Self-Supply Entity” shall mean the following types of Load Serving Entity that operate under long-standing business models: single customer entity, public power entity, or vertically integrated utility, where “vertically integrated utility” means a utility that owns generation, includes such generation in its regulated rates, and earns a regulated return on its investment in such generation or receives any cost recovery for such generation through bilateral contracts; “single customer entity” means a Load Serving Entity that serves at retail only customers that are under common control with such Load Serving Entity, where such control means holding 51% or more of the voting securities or voting interests of the Load Serving Entity and all its

retail customers; and “public power entity” means cooperative and municipal utilities, including public power supply entities comprised of either or both of the same and rural electric cooperatives, and joint action agencies.

Self-Supply Seller:

“Self-Supply Seller” shall mean, for purposes of evaluating Buyer-Side Market Power, the following types of Load Serving Entities that operate under long-standing business models: vertically integrated utility or public power entity, where “vertically integrated utility” means a utility that owns generation, includes such generation in its state-regulated rates, and earns a state-regulated return on its investment in such generation; and “public power entity” means electric cooperatives that are either rate regulated by the state or have their long-term resource plan approved or otherwise reviewed and accepted by a Relevant Electric Retail Regulatory Authority and municipal utilities or joint action agencies that are subject to direct regulation by a Relevant Electric Retail Regulatory Authority.

Sell Offer:

“Sell Offer” shall mean an offer to sell Capacity Resources in a Base Residual Auction, Incremental Auction, or Reliability Backstop Auction.

Service Agreement:

“Service Agreement” shall mean the initial agreement and any amendments or supplements thereto entered into by the Transmission Customer and the Transmission Provider for service under the Tariff.

Service Commencement Date:

“Service Commencement Date” shall mean the date the Transmission Provider begins to provide service pursuant to the terms of an executed Service Agreement, or the date the Transmission Provider begins to provide service in accordance with Tariff, Part II, section 15.3 or Tariff, Part III, section 29.1.

Short-Term Firm Point-To-Point Transmission Service:

“Short-Term Firm Point-To-Point Transmission Service” shall mean Firm Point-To-Point Transmission Service under Tariff, Part II with a term of less than one year.

Short-term Project:

“Short-term Project” shall have the same meaning provided in the Operating Agreement.

Short-Term Resource Procurement Target:

“Short-Term Resource Procurement Target” shall mean, for Delivery Years through May 31, 2018, as to the PJM Region, for purposes of the Base Residual Auction, 2.5% of the PJM Region Reliability Requirement determined for such Base Residual Auction, for purposes of the First Incremental Auction, 2% of the of the PJM Region Reliability Requirement as calculated at the time of the Base Residual Auction; and, for purposes of the Second Incremental Auction, 1.5% of the of the PJM Region Reliability Requirement as calculated at the time of the Base Residual Auction; and, as to any Zone, an allocation of the PJM Region Short-Term Resource Procurement Target based on the Preliminary Zonal Forecast Peak Load, reduced by the amount of load served under the FRR Alternative. For any LDA, the LDA Short-Term Resource Procurement Target shall be the sum of the Short-Term Resource Procurement Targets of all Zones in the LDA.

Short-Term Resource Procurement Target Applicable Share:

“Short-Term Resource Procurement Target Applicable Share” shall mean, for Delivery Years through May 31, 2018: (i) for the PJM Region, as to the First and Second Incremental Auctions, 0.2 times the Short-Term Resource Procurement Target used in the Base Residual Auction and, as to the Third Incremental Auction for the PJM Region, 0.6 times such target; and (ii) for an LDA, as to the First and Second Incremental Auctions, 0.2 times the Short-Term Resource Procurement Target used in the Base Residual Auction for such LDA and, as to the Third Incremental Auction, 0.6 times such target.

Site:

“Site” shall mean all of the real property, including but not limited to any leased real property and easements, on which the Customer Facility is situated and/or on which the Customer Interconnection Facilities are to be located.

Small Commercial Customer:

“Small Commercial Customer,” as used in RAA, Schedule 6 and Tariff, Attachment DD-1, shall mean a commercial retail electric end-use customer of an electric distribution company that participates in a mass market demand response program under the jurisdiction of a RERRA and satisfies the definition of a “small commercial customer” under the terms of the applicable RERRA’s program, provided that the customer has an annual peak demand no greater than 100kW.

Small Generation Resource:

“Small Generation Resource” shall mean an Interconnection Customer’s device of 20 MW or less for the production and/or storage for later injection of electricity identified in an Interconnection Request, but shall not include the Interconnection Customer’s Interconnection Facilities. This term shall include Energy Storage Resources and/or other devices for storage for later injection of energy.

Small Inverter Facility:

“Small Inverter Facility” shall mean an Energy Resource that is a certified small inverter-based facility no larger than 10 kW.

Small Inverter ISA:

“Small Inverter ISA” shall mean an agreement among Transmission Provider, Interconnection Customer, and Interconnected Transmission Owner regarding interconnection of a Small Inverter Facility under Tariff, Part IV, section 112B.

Special Member:

“Special Member” shall mean an entity that satisfies the requirements of Operating Agreement, Schedule 1, section 1.5A.02, and the parallel provisions of Tariff, Attachment K-Appendix, section 1.5A.02, or the special membership provisions established under the Emergency Load Response and Pre-Emergency Load Response Programs.

Spot Market Backup:

“Spot Market Backup” shall mean the purchase of energy from, or the delivery of energy to, the PJM Interchange Energy Market in quantities sufficient to complete the delivery or receipt obligations of a bilateral contract that has been curtailed or interrupted for any reason.

Spot Market Energy:

“Spot Market Energy” shall mean energy bought or sold by Market Participants through the PJM Interchange Energy Market at System Energy Prices determined as specified in Operating Agreement, Schedule 1, section 2, and the parallel provisions of Tariff, Attachment K-Appendix, section 2.

Start Additional Labor Costs:

“Start Additional Labor Costs” shall mean additional labor costs for startup required above normal station manning levels.

Start Fuel:

For units without a soak process, “Start Fuel” shall consist of fuel consumed from first fire of the start process to first breaker closing, plus any fuel expended from last breaker opening to shutdown.

For units with a soak process, “Start Fuel” is fuel consumed from first fire of the start process (initial reactor criticality for nuclear units) to dispatchable output (including auxiliary boiler fuel), plus any fuel expended from last breaker opening to shutdown, excluding normal plant heating/auxiliary equipment fuel requirements. Start Fuel included for each temperature state from breaker closure to dispatchable output shall not exceed the unit specific soak time period

reviewed and approved as part of the unit-specific parameter process detailed in Tariff, Attachment K-Appendix, section 6.6(c) or the defaults below:

- Cold Soak Time = $0.73 * \text{unit specific Minimum Run Time (in hours)}$
- Intermediate Soak Time = $0.61 * \text{unit specific Minimum Run Time (in hours)}$
- Hot Soak Time = $0.43 * \text{unit specific Minimum Run Time (in hours)}$

Start-Up Costs:

“Start-Up Costs” shall consist primarily of the cost of fuel, as determined by the unit’s start heat input (adjusted by the performance factor) times the fuel cost. It also includes operating costs, Maintenance Adders, emissions allowances/adders, and station service cost. Start-Up Costs can vary with the unit offline time being categorized in three unit temperature conditions: hot, intermediate and cold.

For units with a steam turbine and a soak process (nuclear, steam, and combined cycle), “Start Fuel” is fuel consumed from first fire of start process (initial reactor criticality for nuclear units): Start-Up Costs shall mean the net unit costs from PJM’s notification to the level at which the unit can follow PJM’s dispatch, and from last breaker open to shutdown.

For units without a steam turbine and no soak process (engines, combustion turbines, Intermittent Resources, and Energy Storage Resources): Start-Up Costs shall mean the unit costs from PJM’s notification to first breaker close and from last breaker open to shutdown.

State:

“State” shall mean the District of Columbia and any State or Commonwealth of the United States.

State Commission:

“State Commission” shall mean any state regulatory agency having jurisdiction over retail electricity sales in any State in the PJM Region.

State Estimator:

“State Estimator” shall mean the computer model of power flows specified in Operating Agreement, Schedule 1, section 2.3 and the parallel provisions of Tariff, Attachment K-Appendix, section 2.3.

State Subsidy:

“State Subsidy” shall mean a direct or indirect payment, concession, rebate, subsidy, non-bypassable consumer charge, or other financial benefit that is as a result of any action, mandated process, or sponsored process of a state government, a political subdivision or agency of a state, or an electric cooperative formed pursuant to state law, and that

(1) is derived from or connected to the procurement of (a) electricity or electric generation capacity sold at wholesale in interstate commerce, or (b) an attribute of the generation process for electricity or electric generation capacity sold at wholesale in interstate commerce; or

(2) will support the construction, development, or operation of a new or existing Capacity Resource; or

(3) could have the effect of allowing the unit to clear in any PJM capacity auction.

Notwithstanding the foregoing, State Subsidy shall not include (a) payments, concessions, rebates, subsidies, or incentives designed to incent, or participation in a program, contract or other arrangement that utilizes criteria designed to incent or promote, general industrial development in an area or designed to incent siting facilities in that county or locality rather than another county or locality; (b) state action that imposes a tax or assesses a charge utilizing the parameters of a regional program on a given set of resources notwithstanding the tax or cost having indirect benefits on resources not subject to the tax or cost (e.g., Regional Greenhouse Gas Initiative); (c) any indirect benefits to a Capacity Resource as a result of any transmission project approved as part of the Regional Transmission Expansion Plan; (d) any contract, legally enforceable obligation, or rate pursuant to the Public Utility Regulatory Policies Act or any other state-administered federal regulatory program (e.g., the Cross-State Air Pollution Rule); (e) any revenues from the sale or allocation, either direct or indirect, to an Entity Providing Supply Services to Default Retail Service Provider where such entity's obligations was awarded through a state default procurement auction that was subject to independent oversight by a consultant or manager who certifies that the auction was conducted through a non-discriminatory and competitive bidding process, subject to the below condition, and provided further that nothing herein would exempt a Capacity Resource that would otherwise be subject to the minimum offer price rule pursuant to this Tariff; (f) any revenues for providing capacity as part of an FRR Capacity Plan or through bilateral transactions with FRR Entities; or (g) any voluntary and arm's length bilateral transaction (including but not limited to those reported pursuant to Tariff, Attachment DD, section 4.6), such as a power purchase agreement or other similar contract where the buyer is a Self-Supply Entity and the transaction is (1) a short term transaction (one-year or less) or (2) a long-term transaction that is the result of a competitive process that was not fuel-specific and is not used for the purpose of supporting uneconomic construction, development, or operation of the subject Capacity Resource, provided however that if the Self-Supply Entity is responsible for offering the Capacity Resource into an RPM Auction, the specified amount of installed capacity purchased by such Self-Supply Entity shall be considered to receive a State Subsidy in the same manner, under the same conditions, and to the same extent as any other Capacity Resource of a Self-Supply Entity. For purposes of subsection (e) of this definition, a state default procurement auction that has been certified to be a result of a non-discriminatory and competitive bidding process shall:

- (i) have no conditions based on the ownership (except supplier diversity requirements or limits), location (except to meet PJM deliverability requirements), affiliation, fuel type, technology, or emissions of any resources or supply (except state-mandated renewable portfolio standards for which Capacity Resources are separately subject to the minimum offer price rule or eligible for an exemption);
- (ii) result in contracts between an Entity Providing Supply Services to Default Retail Service Provider and the electric distribution company for a retail default

- generation supply product and none of those contracts require that the retail obligation be sourced from any specific Capacity Resource or resource type as set forth in subsection (i) above; and
- (iii) establish market-based compensation for a retail default generation supply product that retail customers can avoid paying for by obtaining supply from a competitive retail supplier of their choice.

State of Charge:

“State of Charge” shall mean the quantity of physical energy stored in an Energy Storage Resource Model Participant or in a storage component of a Hybrid Resource in proportion to its maximum State of Charge capability. State of Charge is quantified as defined in the PJM Manuals.

State of Charge Management:

“State of Charge Management” shall mean the control of State of Charge of an Energy Storage Resource Market Participant or a storage component of a Hybrid Resource using minimum and maximum discharge (and, as applicable, charge) limits, changes in operating mode (as applicable), discharging (and, as applicable, charging) offer curves, and self-scheduling of non-dispatchable sales (and, as applicable, purchases) of energy in the PJM markets. State of Charge Management shall not interfere with the obligation of a Market Seller of an Energy Storage Resource Model Participant or of a Hybrid Resource to follow PJM dispatch, consistent with all other resources.

Station Power:

“Station Power” shall mean energy used for operating the electric equipment on the site of a generation facility located in the PJM Region or for the heating, lighting, air-conditioning and office equipment needs of buildings on the site of such a generation facility that are used in the operation, maintenance, or repair of the facility. Station Power does not include any energy (i) used to power synchronous condensers; (ii) used for pumping at a pumped storage facility; (iii) used in association with restoration or black start service; or (iv) that is Direct Charging Energy.

Sub-Annual Resource Constraint:

“Sub-Annual Resource Constraint” shall mean, for the 2017/2018 Delivery Year and for FRR Capacity Plans the 2017/2018 and 2018/2019 Delivery Years, for the PJM Region or for each LDA for which the Office of the Interconnection is required under Tariff, Attachment DD, section 5.10(a) to establish a separate VRR Curve for a Delivery Year, a limit on the total amount of Unforced Capacity that can be committed as Limited Demand Resources and Extended Summer Demand Resources for the 2017/2018 Delivery Year in the PJM Region or in such LDA, calculated as the Sub-Annual Resource Reliability Target for the PJM Region or for such LDA, respectively, minus the Short-Term Resource Procurement Target for the PJM Region or for such LDA, respectively.

Sub-Annual Resource Price Decrement:

“Sub-Annual Resource Price Decrement” shall mean, for the 2017/2018 Delivery Year, a difference between the clearing price for Extended Summer Demand Resources and the clearing price for Annual Resources, representing the cost to procure additional Annual Resources out of merit order when the Sub-Annual Resource Constraint is binding.

Sub-Annual Resource Reliability Target:

“Sub-Annual Reliability Target” for the PJM Region or an LDA, shall mean the maximum amount of the combination of Extended Summer Demand Resources and Limited Demand Resources in Unforced Capacity determined by PJM to be consistent with the maintenance of reliability, stated in Unforced Capacity, that shall be used to calculate the Minimum Annual Resource Requirement for Delivery Years through May 31, 2017 and the Sub-Annual Resource Constraint for the 2017/2018 and 2018/2019 Delivery Years. As more fully set forth in the PJM Manuals, PJM calculates the Sub-Annual Resource Reliability Target, by first determining a reference annual loss of load expectation (“LOLE”) assuming no Demand Resources. The calculation for the unconstrained portion of the PJM Region uses a daily distribution of loads under a range of weather scenarios (based on the most recent load forecast and iteratively shifting the load distributions to result in the Installed Reserve Margin established for the Delivery Year in question) and a weekly capacity distribution (based on the cumulative capacity availability distributions developed for the Installed Reserve Margin study for the Delivery Year in question). The calculation for each relevant LDA uses a daily distribution of loads under a range of weather scenarios (based on the most recent load forecast for the Delivery Year in question) and a weekly capacity distribution (based on the cumulative capacity availability distributions developed for the Capacity Emergency Transfer Objective study for the Delivery Year in question). For the relevant LDA calculation, the weekly capacity distributions are adjusted to reflect the Capacity Emergency Transfer Limit for the Delivery Year in question.

For both the PJM Region and LDA analyses, PJM then models the commitment of varying amounts of DR (displacing otherwise committed generation) as interruptible from May 1 through October 31 and unavailable from November 1 through April 30 and calculates the LOLE at each DR level. The Extended Summer DR Reliability Target is the DR amount, stated as a percentage of the unrestricted peak load, that produces no more than a ten percent increase in the LOLE, compared to the reference value. The Sub-Annual Resource Reliability Target shall be expressed as a percentage of the forecasted peak load of the PJM Region or such LDA and is converted to Unforced Capacity by multiplying [the reliability target percentage] times [the Forecast Pool Requirement] times [the DR Factor] times [the forecasted peak load of the PJM Region or such LDA, reduced by the amount of load served under the FRR Alternative].

Sub-meter:

“Sub-meter” shall mean a metering point for electricity consumption that does not include all electricity consumption for the end-use customer as defined by the electric distribution company account number. PJM shall only accept sub-meter load data from end-use customers for

measurement and verification of Regulation service as set forth in the Economic Load Response rules and PJM Manuals.

Summer-Period Capacity Performance Resource:

“Summer-Period Capacity Performance Resource” shall have the same meaning specified in Tariff, Attachment DD, section 5.5A.

Surplus Interconnection Customer:

“Surplus Interconnection Customer” shall mean either an Interconnection Customer whose Generating Facility is already interconnected to the PJM Transmission System or one of its affiliates, or an unaffiliated entity that submits a Surplus Interconnection Request to utilize Surplus Interconnection Service within the Transmission System in the PJM Region. A Surplus Interconnection Customer is not a New Service Customer.

Surplus Interconnection Request:

“Surplus Interconnection Request” shall mean a request submitted by a Surplus Interconnection Customer, pursuant to Tariff, Attachment RR, to utilize Surplus Interconnection Service within the Transmission System in the PJM Region. A Surplus Interconnection Request is not a New Service Request.

Surplus Interconnection Service:

“Surplus Interconnection Service” shall mean any unneeded portion of Interconnection Service established in an Interconnection Service Agreement, such that if Surplus Interconnection Service is utilized, the total amount of Interconnection Service at the Point of Interconnection would remain the same.

Switching and Tagging Rules:

“Switching and Tagging Rules” shall mean the switching and tagging procedures of Interconnected Transmission Owners and Interconnection Customer as they may be amended from time to time.

Synchronized Reserve:

“Synchronized Reserve” shall mean the reserve capability of generation resources that can be converted fully into energy or Economic Load Response Participant resources whose demand can be reduced within ten minutes from the request of the Office of the Interconnection dispatcher, and is provided by equipment that is electrically synchronized to the Transmission System.

Synchronized Reserve Event:

“Synchronized Reserve Event” shall mean a request from the Office of the Interconnection to generation resources and/or Economic Load Response Participant resources able, assigned or self-scheduled to provide Synchronized Reserve in one or more specified Reserve Zones or Reserve Sub-zones, within ten minutes, to increase the energy output or reduce load by the amount of assigned or self-scheduled Synchronized Reserve capability.

Synchronized Reserve Requirement:

“Synchronized Reserve Requirement” shall mean the megawatts required to be maintained in a Reserve Zone or Reserve Sub-zone as Synchronized Reserve, absent any increase to account for additional reserves scheduled to address operational uncertainty. The Synchronized Reserve Requirement is calculated in accordance with the PJM Manuals. This requirement can only be satisfied by Synchronized Reserve resources.

System Condition:

“System Condition” shall mean a specified condition on the Transmission Provider’s system or on a neighboring system, such as a constrained transmission element or flowgate, that may trigger Curtailment of Long-Term Firm Point-to-Point Transmission Service using the curtailment priority pursuant to Tariff, Part II, section 13.6. Such conditions must be identified in the Transmission Customer’s Service Agreement.

System Energy Price:

“System Energy Price” shall mean the energy component of the Locational Marginal Price, which is the price at which the Market Seller has offered to supply an additional increment of energy from a resource, calculated as specified in Operating Agreement, Schedule 1, section 2 and the parallel provisions of Tariff, Attachment K-Appendix, section 2.

System Impact Study:

“System Impact Study” shall mean an assessment by the Transmission Provider of (i) the adequacy of the Transmission System to accommodate a Completed Application, an Interconnection Request or an Upgrade Request, (ii) whether any additional costs may be incurred in order to provide such transmission service or to accommodate an Interconnection Request, and (iii) with respect to an Interconnection Request, an estimated date that an Interconnection Customer’s Customer Facility can be interconnected with the Transmission System and an estimate of the Interconnection Customer’s cost responsibility for the interconnection; and (iv) with respect to an Upgrade Request, the estimated cost of the requested system upgrades or expansion, or of the cost of the system upgrades or expansion, necessary to provide the requested incremental rights.

System Protection Facilities:

“System Protection Facilities” shall refer to the equipment required to protect (i) the Transmission System, other delivery systems and/or other generating systems connected to the

Transmission System from faults or other electrical disturbance occurring at or on the Customer Facility, and (ii) the Customer Facility from faults or other electrical system disturbance occurring on the Transmission System or on other delivery systems and/or other generating systems to which the Transmission System is directly or indirectly connected. System Protection Facilities shall include such protective and regulating devices as are identified in the Applicable Technical Requirements and Standards or that are required by Applicable Laws and Regulations or other Applicable Standards, or as are otherwise necessary to protect personnel and equipment and to minimize deleterious effects to the Transmission System arising from the Customer Facility.

SCHEDULE 3 Regulation and Frequency Response Service

Regulation and Frequency Response Service is necessary to provide for the continuous balancing of resources with load and for maintaining scheduled Interconnection frequency at 60 cycles per second (60 Hz). Regulation and Frequency Response Service is accomplished by committing resources whose output is raised or lowered (predominantly through the use of automatic generating control equipment) and by other non-generation resources capable of providing this service as necessary to follow the moment-by-moment changes in load. The obligation to maintain this balance between resources and load lies with the Transmission Provider. The Transmission Provider must offer this service when the transmission service is used to serve load within its Control Area. The Transmission Customer must either purchase this service from the Transmission Provider or make alternative comparable arrangements to satisfy its Regulation and Frequency Response Service obligation. The Transmission Provider will take into account the speed and accuracy of Regulation resources in its determination of Regulation and Frequency Response reserve requirements, including as it reviews whether a self-supplying Transmission Customer has made alternative comparable arrangements. Upon request by the self-supplying Transmission Customer, the Transmission Provider will share with the Transmission Customer its reasoning and any related data used to make the determination of whether the Transmission Customer has made alternative comparable arrangements. The amount of and charges for Regulation and Frequency Response Service are set forth below. The Transmission Provider shall administer the purchases of Regulation Service in the PJM Interchange Energy Market. PJMSettlement shall be the Counterparty to the purchases by customers of Regulation Service in the PJM Interchange Energy Market; provided however, that PJMSettlement shall not be the contracting party to bilateral transactions between market participants or with respect to a self-schedule or self-supply of resources by a customer to satisfy its Regulation obligation.

For Regulation not satisfied by individual Transmission Owners on behalf of their Native Load Customers, Network Customers or other Transmission Customers serving load in the PJM Region, the Transmission Provider will order the lowest cost alternative for Regulation in service as needed to meet the Regulation Requirements of each Regulation Zone (as may be set forth in the PJM Manuals and as specified below:

- a. Regulation shall be supplied to meet the Regulation objective of a Regulation Zone from resources located within the metered electrical boundaries of such Regulation Zone. Resources offering Regulation shall comply with applicable standards and requirements for Regulation capability and dispatch specified in the PJM Manuals.
- b. The Office of the Interconnection shall obtain and maintain an amount of Regulation for each Regulation Zone equal to the Regulation objective for such Regulation Zone, as specified in the PJM Manuals.
- c. The Regulation megawatt range ~~of to~~ a resource providing Regulation-Up Service shall be less than or equal to, and within the Regulation range specified. The Regulation megawatt assigned to a resource providing Regulation-Down Service shall be less than or equal to, and within the Regulation range specified. The Regulation megawatt assigned to a resource

providing Regulation-Up and Regulation-Down Services in the same Regulation interval shall be less than or equal to half of, and within the Regulation range specified. ~~at least twice the amount of Regulation assigned.~~

d. A resource capable of automatic energy dispatch that is also providing Regulation shall have its energy dispatch range reduced from the Regulation range by at least ~~twice~~ the amount of ~~the Regulation provided assigned, in the upward direction for Regulation-Up Service and in the downward direction for Regulation-Down Service~~ with consideration of the Regulation limit(s) of the resource, as specified in the PJM Manuals.

e. Qualified Regulation resources must satisfy the measurement and verification tests described in the PJM Manuals.

f. A Transmission Owner, Network Customer or other Transmission Customer may satisfy its Regulation obligation from its own resources capable of performing Regulation service, by contractual arrangements with others able to provide Regulation service on a comparable basis, or by purchases from the PJM Regulation market.

g. The Office of the Interconnection shall obtain Regulation service from the least-cost alternatives available from either pool-scheduled or self-scheduled resources as needed to meet Regulation Zone requirements not otherwise satisfied by a Transmission Owner, Network Customer or other Transmission Customer, in accordance with Tariff, Attachment K-Appendix, section 1.11.4(b).

h. The Office of the Interconnection shall dispatch resources for Regulation by sending Regulation signals and instructions to resources from which Regulation service has been committed, in accordance with the PJM Manuals. Those resources shall comply with Regulation dispatch signals and instructions transmitted by the Office of the Interconnection and, in the event of conflict, Regulation dispatch signals and instructions shall take precedence over energy dispatch signals and instructions. Those providing Regulation shall exert all reasonable efforts to operate, or ensure the operation of, their resources supplying load in the PJM Region as close to desired output levels as practical, consistent with Good Utility Practice.

i. Each Transmission Owner (on behalf of its Native Load Customers), Network Customer or other Transmission Customer serving load within a Regulation Zone shall have an hourly Regulation objective equal to its pro rata share of the Regulation Requirement of such Regulation Zone for such hour, based on the entity's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Regulation Zone for such hour.

j. An entity supplying Regulation at the direction of the Office of the Interconnection in excess of its hourly Regulation obligation shall be credited for each increment of such Regulation at the price specified in Tariff, Attachment K-Appendix, section 3.2.2 and Tariff, Attachment K-Appendix, section 3.3.2 and the parallel provisions of Operating Agreement, Schedule 1, section 3.2.2 and Operating Agreement, Schedule 1, section 3.3.2. A Transmission Owner, Network Customer or other Transmission Customer that does not meet its hourly Regulation obligation shall be charged for Regulation dispatched by the Office of the

Interconnection to meet such obligation at the price specified in Tariff, Attachment K-Appendix, section 3.2.2 and Tariff, Attachment K-Appendix, section 3.3.2 and the parallel provisions of Operating Agreement, Schedule 1, section 3.2.2 and Operating Agreement, Schedule 1, section 3.3.2.

1.10 Scheduling.

1.10.1 General.

(a) The Office of the Interconnection shall administer scheduling processes to implement a Day-ahead Energy Market and a Real-time Energy Market. PJMSettlement shall be the Counterparty to the purchases and sales of energy that clear the Day-ahead Energy Market and the Real-time Energy Market; provided that PJMSettlement shall not be a contracting party to bilateral transactions between Market Participants or with respect to a Generating Market Buyer's self-schedule or self-supply of its generation resources up to that Generating Market Buyer's Equivalent Load.

(b) The Day-ahead Energy Market shall enable Market Participants to purchase and sell energy through the PJM Interchange Energy Market at Day-ahead Prices and enable Transmission Customers to reserve transmission service with Transmission Congestion Charges and Transmission Loss Charges based on locational differences in Day-ahead Prices. Up-to Congestion Transactions submitted in the Day-ahead Energy Market shall not require transmission service and Transmission Customers shall not reserve transmission service for such Up-to Congestion Transactions. Market Participants whose purchases and sales, and Transmission Customers whose transmission uses are scheduled in the Day-ahead Energy Market, shall be obligated to purchase or sell energy, or pay Transmission Congestion Charges and Transmission Loss Charges, at the applicable Day-ahead Prices for the amounts scheduled.

(c) (i) In the Real-time Energy Market, Market Participants that deviate from the amounts of energy purchases or sales scheduled in the Day-ahead Energy Market shall be obligated to purchase or sell energy for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.

(ii) In the Real-time Energy Market, Transmission Customers that deviate from the transmission uses, scheduled in the Day-ahead Energy Market shall be obligated to pay Transmission Congestion Charges and Transmission Loss Charges for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.

(iii) Market Participants that deviate in real-time from the amounts of Secondary Reserve, Non-Synchronized Reserve, or Synchronized Reserve sales, scheduled day-ahead shall be obligated to purchase Secondary Reserve, Non-Synchronized Reserve, or Synchronized Reserve for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.

(d) The following scheduling procedures and principles shall govern the commitment of resources to the Day-ahead Energy Market and the Real-time Energy Market over a period extending from one week to one hour prior to the real-time dispatch. Scheduling encompasses the day-ahead and hourly scheduling process, through which the Office of the Interconnection determines the Day-ahead Energy Market and determines, based on changing forecasts of

conditions and actions by Market Participants and system constraints, a plan to serve the hourly energy and reserve requirements of the Internal Market Buyers and the purchase requests of the External Market Buyers in the least costly manner, subject to maintaining the reliability of the PJM Region. Scheduling does not encompass Coordinated External Transactions, which are subject to the procedures of Tariff, Attachment K-Appendix, section 1.13. Scheduling shall be conducted as specified in section 1.10.1A below, subject to the following condition. If the Office of the Interconnection's forecast for the next seven days projects a likelihood of Emergency conditions, the Office of the Interconnection may commit, for all or part of such seven day period, to the use of generation resources with notification or start-up times greater than one day as necessary in order to alleviate or mitigate such Emergency, in accordance with the Market Sellers' offers for such units for such periods and the specifications in the PJM Manuals. Such resources committed by the Office of the Interconnection to alleviate or mitigate an Emergency will not receive Operating Reserve Credits nor otherwise be made whole for its hours of operation for the duration of any portion of such commitment that exceeds the maximum start-up and notification times for such resources during Hot Weather Alerts and Cold Weather Alerts, consistent with Tariff, Attachment K-Appendix, section 3.2.3 and Tariff, Attachment K-Appendix, section 6.6.

1.10.1A Day-ahead and Real-time Energy Market Scheduling.

The following actions shall occur not later than 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled, or such other deadline as may be specified by the Office of the Interconnection in order to comply with the practical requirements and the economic and efficiency objectives of the scheduling process specified in this Schedule.

(a) Each Market Participant may submit to the Office of the Interconnection specifications of the amount and location of its customer loads and/or energy purchases to be included in the Day-ahead Energy Market for each hour of the next Operating Day, such specifications to comply with the requirements set forth in the PJM Manuals. Each Market Buyer shall inform the Office of the Interconnection of the prices, if any, at which it desires not to include its load in the Day-ahead Energy Market rather than pay the Day-ahead Price. PRD Providers that have committed Price Responsive Demand in accordance with the Reliability Assurance Agreement shall submit to the Office of the Interconnection, in accordance with procedures specified in the PJM Manuals, any desired updates to their previously submitted PRD Curves, provided that such updates are consistent with their Price Responsive Demand commitments, and provided further that PRD Providers that are not Load Serving Entities for the Price Responsive Demand at issue may only submit PRD Curves for the Real-time Energy Market. Price Responsive Demand that has been committed in accordance with the Reliability Assurance Agreement shall be presumed available for the next Operating Day in accordance with the most recently submitted PRD Curve unless the PRD Curve is updated to indicate otherwise. PRD Providers may also submit PRD Curves for any Price Responsive Demand that is not committed in accordance with the Reliability Assurance Agreement; provided that PRD Providers that are not Load Serving Entities for the Price Responsive Demand at issue may only submit PRD Curves for the Real-time Energy Market. All PRD Curves shall be on a PRD Substation basis, and shall specify the maximum time period required to implement load reductions.

(b) Each Generating Market Buyer shall submit to the Office of the Interconnection: (i) hourly schedules for resource increments, including hydropower units, self-scheduled by the Market Buyer to meet its Equivalent Load; and (ii) the Dispatch Rate at which each such self-scheduled resource will disconnect or reduce output, or confirmation of the Market Buyer's intent not to reduce output.

(c) All Market Participants shall submit to the Office of the Interconnection schedules for any energy exports, energy imports, and wheel through transactions involving use of generation or Transmission Facilities as specified below, and shall inform the Office of the Interconnection if the transaction is to be scheduled in the Day-ahead Energy Market. Any Market Participant that elects to schedule an export, import or wheel through transaction in the Day-ahead Energy Market may specify the price (such price not to exceed \$2,000/MWh), if any, at which the export, import or wheel through transaction will be wholly or partially curtailed. The foregoing price specification shall apply to the applicable interface pricing point. Any Market Participant that elects not to schedule its export, import or wheel through transaction in the Day-ahead Energy Market shall inform the Office of the Interconnection if the parties to the transaction are not willing to incur Transmission Congestion and Loss Charges in the Real-time Energy Market in order to complete any such scheduled transaction. Such transactions in the Real-time Energy Market, other than Coordinated Transaction Schedules and emergency energy sales and purchases, may specify a price up to \$2,000/MWh. Scheduling of such transactions shall be conducted in accordance with the specifications in the PJM Manuals and the following requirements:

i) Market Participants shall submit schedules for all energy purchases for delivery within the PJM Region, whether from resources inside or outside the PJM Region;

ii) Market Participants shall submit schedules for exports for delivery outside the PJM Region from resources within the PJM Region that are not Dynamic Transfers to such entities pursuant to Tariff, Attachment K-Appendix, section 1.12; and

iii) In addition to the foregoing schedules for exports, imports and wheel through transactions, Market Participants shall submit confirmations of each scheduled transaction from each other party to the transaction in addition to the party submitting the schedule, or the adjacent Control Area.

(c-1) A Market Participant may elect to submit in the Day-ahead Energy Market a form of Virtual Transaction that combines an offer to sell energy at a source, with a bid to buy the same megawatt quantity of energy at a sink where such transaction specifies the maximum difference between the Locational Marginal Prices at the source and sink. The Office of Interconnection will schedule these transactions only to the extent this difference in Locational Marginal Prices is within the maximum amount specified by the Market Participant. A Virtual Transaction of this type is referred to as an "Up-to Congestion Transaction." Such Up-to Congestion Transactions may be wholly or partially scheduled depending on the price difference between the source and sink locations in the Day-ahead Energy Market. The maximum

difference between the source and sink prices that a participant may specify shall be limited to +/- \$50/MWh. The foregoing price specification shall apply to the price difference between the specified source and sink in the day-ahead scheduling process only. An accepted Up-to Congestion Transaction results in scheduled injection at a specified source and scheduled withdrawal of the same megawatt quantity at a specified sink in the Day-ahead Energy Market.

(c-2) A Market Participant may elect to submit an Increment Offer and/or Decrement Bid form of Virtual Transaction in the Day-ahead Energy Market and shall specify the price for such transaction which shall be limited to \$2,000/megawatt-hour.

(c-3) Up-to Congestion Transactions may only be submitted at hubs, Residual Metered Load and interfaces not described in Tariff, Attachment K-Appendix, section 2.6A(b). Increment Offers and Decrement Bids may be only submitted at hubs, nodes at which physical generation or load is settled, Residual Metered Load and interfaces not described in Tariff, Attachment K-Appendix, section 2.6A(b).

(d) Market Sellers in the Day-ahead Energy Market shall submit offers for the supply of energy, demand reductions, or other services for the following Operating Day for each clock hour for which the Market Seller desires or is required to make its resource available to the Office of the Interconnection. Offers for the supply of energy may be cost-based, market-based, or both, and may vary hourly. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, Operating Agreement, Schedule 2, and the PJM Manuals, as applicable. Market Sellers owning or controlling the output of a Generation Capacity Resource that is committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1, and that has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage shall submit offers for the available capacity of such Generation Capacity Resource, including any portion that is self-scheduled by the Generating Market Buyer. Such offers shall be based on the ICAP equivalent of the Market Seller's cleared UCAP capacity commitment, provided, however, where the underlying resource is a Capacity Storage Resource or an Intermittent Resource, the Market Seller shall satisfy the must offer requirement by either self-scheduling or offering the unit as a dispatchable resource, in accordance with the PJM Manuals, where the hourly day-ahead self-scheduled values for such Capacity Storage Resources and Intermittent Resources may vary hour to hour from the capacity commitment. Any offer not designated as a Maximum Emergency offer shall be considered available for scheduling and dispatch under both Emergency and non-Emergency conditions. Offers may only be designated as Maximum Emergency offers to the extent that the Generation Capacity Resource falls into at least one of the following categories:

i) Environmental limits. If the resource has a limit on its run hours imposed by a federal, state, or other governmental agency that will significantly limit its availability, on either a temporary or long-term basis. This includes a resource that is limited to operating only during declared PJM capacity emergencies by a governmental authority.

ii) Fuel limits. If physical events beyond the control of the resource owner result in the temporary interruption of fuel supply and there is limited on-site fuel storage. A fuel supplier's exercise of a contractual right to interrupt supply or delivery under an interruptible service agreement shall not qualify as an event beyond the control of the resource owner.

iii) Temporary emergency conditions at the unit. If temporary emergency physical conditions at the resource significantly limit its availability.

iv) Temporary megawatt additions. If a resource can provide additional megawatts on a temporary basis by oil topping, boiler over-pressure, or similar techniques, and such megawatts are not ordinarily otherwise available.

The submission of offers for resource increments that are not committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1 shall be optional, but any such offers must contain the information specified in the Office of the Interconnection's Offer Data specification, Operating Agreement, Schedule 1, sections 1.10.1A(d) and 1.10.9B, Operating Agreement, Schedule 2, and the PJM Manuals, as applicable. Energy offered from generation resources that are not committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1 shall not be supplied from resources that are included in or otherwise committed to supply the Operating Reserves of a Control Area outside the PJM Region.

The foregoing offers:

i) Shall specify the Generation Capacity Resource or Economic Load Response Participant resource and energy or demand reduction amount, respectively, for each clock hour in the offer period;

ii) Shall specify the amounts and prices for each clock hour during the entire Operating Day for each resource component offered by the Market Seller to the Office of the Interconnection;

iii) May specify for generation resources offer parameters for each clock hour during the entire Operating Day, as applicable and in accordance with section 1.10.9B below, including: (1) Minimum Run Time; (2) maximum run time; (3) Start-up Costs; (4) No-load Costs; (5) Incremental Energy Offer; (6) notification time; (7) availability; (8) ramp rate; (9) Economic Minimum; (10) Economic Maximum; (11) emergency minimum MW; (12) emergency maximum MW; (13) Synchronized Reserve maximum MW; (14) Secondary Reserve maximum MW; and (15) condense to generation time constraints, and may specify offer parameters for Economic Load Response Participant resources for each clock hour during the entire Operating Day, as applicable and in accordance with section 1.10.9B below, including: (1) minimum down time; (2) shutdown costs; (3) Incremental Energy Offer; (4) notification time; (5) Economic Minimum; and (6) Economic Maximum;

iv) Shall set forth any special conditions upon which the Market Seller proposes to supply a resource increment, including any curtailment rate specified in a bilateral contract for the output of the resource, or any cancellation fees;

v) May include a schedule of offers for prices and operating data contingent on acceptance by the deadline specified in this Schedule, with additional schedules applicable if accepted after the foregoing deadline;

vi) Shall constitute an offer to submit the resource increment to the Office of the Interconnection for scheduling and dispatch in accordance with the terms of the offer for the clock hour, which offer shall remain open through the Operating Day, for which the offer is submitted, unless the Market Seller a) submits a Real-time Offer for the applicable clock hour, or b) updates the availability of its offer for that hour, as further described in the PJM Manuals;

vii) Shall be final as to the price or prices at which the Market Seller proposes to supply energy or other services to the PJM Interchange Energy Market, such price or prices being guaranteed by the Market Seller for the period extending through the end of the following Operating Day, unless modified after the close of the Day-ahead Energy Market as permitted pursuant to sections 1.10.9A or 1.10.9B below;

viii) Shall not exceed an energy offer price of \$1,000/megawatt-hour for all generation resources, except (1) when a Market Seller's cost-based offer is above \$1,000/megawatt-hour and less than or equal to \$2,000/megawatt-hour, then its market-based offer must be less than or equal to the cost-based offer; and (2) when a Market Seller's cost-based offer is greater than \$2,000/megawatt-hour, then its market-based offer must be less than or equal to \$2,000/megawatt-hour;

ix) Shall not exceed a demand reduction offer price of \$1,000/megawatt-hour, except when an Economic Load Response Participant submits a cost-based offer that includes an incremental cost component that is above \$1,000/megawatt-hour, then its market-based offer must be less than or equal to the cost-based offer but in no event greater than \$2,000/megawatt-hour;

x) Shall not exceed an offer price as follows for Emergency Load Response and Pre-Emergency Load Response participants with:

a) a 30 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provision of RAA, Schedule 6, \$1,000/megawatt-hour, plus the applicable Reserve Penalty Factor for the Primary Reserve Requirement, minus \$1.00;

b) an approved 60 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provision of RAA, Schedule 6, \$1,000/megawatt hour, plus [the applicable Reserve Penalty Factor for the Primary Reserve Requirement divided by 2]; and

c) an approved 120 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provisions of RAA, Schedule 6, \$1,100/megawatt-hour; and

xi) Shall not exceed an energy offer price of \$0.00/MWh for pumped storage hydropower units scheduled by the Office of the Interconnection pursuant to the hydro optimization tool in the Day-ahead Energy Market.

(e) A Market Seller that wishes to make a resource available to sell Regulation-Up Service and/or Regulation-Down Service shall submit ~~an~~ offer(s) for the applicable Regulation service(s) for each 30 minute Regulation clearing interval for which the Market Seller desires to make its resource available to the Office of the Interconnection to provide Regulation that shall specify the megawatts of Regulation-Up and/or Regulation-Down being offered, which must equal or exceed 0.1 megawatts, in the Regulation Zone for which such Regulation-Up and/or Regulation-Down Service is offered, the price of the capability offer in dollars per MW, the price of the mileage offer in Dollars per change in MW, and such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer and the resource's opportunity costs for Regulation-Up and/or Regulation-Down Service(s). Such offers may vary for each 30 minute Regulation clearing interval, and may be updated each 30 minute Regulation clearing interval, up to 35 minutes before the applicable 30 minute Regulation clearing interval during the Operating Day. The total of the applicable Regulation service mileage offer multiplied by the applicable historical average mileage used in the market clearing plus the applicable Regulation service capability offer shall not exceed ~~\$10050~~/megawatt-hour for the Regulation-Down Service and Regulation-Up Service, independently. In addition to any market-based offer for Regulation-Up and/or Regulation-Down Service, the Market Seller also shall submit a cost-based offer. A cost-based offer must be in the form specified in the PJM Manuals and consist of the following components as well as any other components specified in the PJM Manuals:

i. The costs (in \$/MW) of the fuel cost increase due to the steady-state heat rate increase resulting from operating the unit at lower megawatt output incurred from the provision of Regulation shall apply to the capability offer for Regulation-Down Service;

ii. The cost increase (in \$/ΔMW) in costs associated with movement of the regulation resource incurred from the provision of Regulation shall apply to the mileage offer for Regulation-Down Service and Regulation-Up Service; and

a. Only Regulation-only resources may include all variable operation and maintenance expenses in the mileage offer, as defined in the PJM Manuals.

iii. An adder of up to ~~\$126~~.00 per megawatt of Regulation provided applied to the capability offer for Regulation-Down Service and an adder of up to \$6.00 per megawatt of Regulation provided applied to the capability offer for Regulation-Up Service.

Qualified Regulation capability must satisfy the measurement and verification tests specified in the PJM Manuals.

(f) Each Market Seller owning or controlling the output of a Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative shall submit a forecast of the availability of each such Generation Capacity Resource for the next seven days. A Market Seller (i) may submit a non-binding forecast of the price at which it expects to offer a generation resource increment to the Office of the Interconnection over the next seven days, and (ii) shall submit a binding offer for energy, along with Start-up Costs and No-load Costs, if any, for the next seven days or part thereof, for any generation resource with minimum notification or start-up requirement greater than 24 hours. Such resources committed by the Office of the Interconnection will not receive Operating Reserve Credits nor otherwise be made whole for its hours of operation for the duration of any portion of such commitment that exceeds the maximum start-up and notification times for such resources during Hot Weather Alerts and Cold Weather Alerts, consistent with Tariff, Attachment K-Appendix, section 3.2.3 and Tariff, Attachment K-Appendix, section 6.6.

(g) Each component of an offer by a Market Seller of a Generation Capacity Resource that is constant for the entire Operating Day and does not vary hour to hour shall remain in effect for subsequent Operating Days until superseded or canceled.

(h) The Office of the Interconnection shall post the total hourly loads scheduled in the Day-ahead Energy Market, as well as, its estimate of the combined hourly load of the Market Buyers for the next four days, and peak load forecasts for an additional three days.

(i) Except for Economic Load Response Participants, all Market Participants may submit Virtual Transactions that apply to the Day-ahead Energy Market only. Such Virtual Transactions must comply with the requirements set forth in the PJM Manuals and must specify amount, location and price, if any, at which the Market Participant desires to purchase or sell energy in the Day-ahead Energy Market. The Office of the Interconnection may require that a market participant shall not submit in excess of a defined number of bid/offer segments in the Day-ahead Energy Market, as specified in the PJM Manuals, when the Office of the Interconnection determines that such limit is required to avoid or mitigate significant system performance problems related to bid/offer volume. Notice of the need to impose such limit shall be provided prior to 10:00 a.m. EPT on the day that the Day-ahead Energy Market will clear. For purposes of this provision, a bid/offer segment is each pairing of price and megawatt quantity submitted as part of an Increment Offer or Decrement Bid. For purposes of applying this provision to an Up-to Congestion Transaction, a bid/offer segment shall refer to the pairing of a source and sink designation, as well as price and megawatt quantity, that comprise each Up-to Congestion Transaction.

(j) (i) Offers to Supply Synchronized and Non-Synchronized Reserves By Generation Resources in the Day-ahead and Real-time Reserve Markets

(1) Market Sellers owning or controlling the output of a Generation Capacity Resource that was committed in an FRR Capacity Plan, self-supplied,

offered and cleared in a Base Residual Auction or Incremental Auction, or designated as replacement capacity, as specified in Tariff, Attachment DD, is capable of providing Synchronized Reserve or Non-Synchronized Reserve as specified in section 1.7.19A(a), in section 1.7.19A.01(a) and in the PJM Manuals, and has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage, shall submit offers or otherwise make their 10-minute reserve capability available to supply Synchronized Reserve or, as applicable, Non-Synchronized Reserve, including any portion that is self-scheduled by the Generating Market Buyer, in an amount equal to the available 10-minute reserve capability of such Generation Capacity Resource. Market Sellers of Generation Capacity Resources subject to this must-offer requirement that do not make the reserve capability of such resources available when such resource is able to operate with a dispatchable range (e.g. through offering a fixed output) will be in violation of this provision.

(2) Market Sellers of all other generation resources that (A) are capable of providing Synchronized Reserve or Non-Synchronized Reserve, as specified in section 1.7.19A(a), in section 1.7.19A.01(a) and in the PJM Manuals, (B) are located within the metered boundaries of the PJM Region, and (C) have submitted offers for the supply of energy into the Day-ahead Energy Market and/or Real-time Energy Market shall be deemed to have made their reserve capability available to provide Synchronized Reserve or Non-Synchronized Reserve in the Day-ahead Energy Market and/or Real-time Energy Market for each clock hour for which the Market Seller submits an available offer to supply energy; provided, however that hydroelectric generation resources and Energy Storage Resources are not automatically deemed available to provide reserves based on the submission of an available energy offer but may submit offers to supply Synchronized Reserve and Non-Synchronized Reserve, as applicable.

(3) Offers for the supply of Synchronized Reserve by all generation resources must be cost-based. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A, section 1.10.9B below, and the PJM Manuals, as applicable. For offers to supply Synchronized Reserve, the offer price shall not exceed the expected value of the penalty for failing to provide Synchronized Reserve, where such expected value shall be recalculated annually, in accordance with the PJM Manuals, and posted on PJM's website. The expected value of the penalty is calculated as the product of: (A) the average penalty, expressed in \$/MWh, multiplied by (B) the average rate of non-performance during Synchronized Reserve events multiplied by (C) the probability a Synchronized Reserve event that will qualify for non-performance assessments will occur.

The expected value of the penalty shall be determined by an annual review of the twelve-month period ending October 31 of the calendar year in which the review is performed. The Office of the Interconnection shall post the results of its annual review by no later than December 15, and the revised offer price cap shall be effective as of the following January 1; provided, however, that at the time of implementation of this rule the expected value of the penalty shall be \$0.02/MWh, and for the period from the second month after implementation through the second December 31 following such date of implementation, the expected value of the penalty shall be recalculated on a monthly basis using data from the implementation date of this rule through the 15th day of the current month, and the revised value shall be effective the 1st day of the following month.

(4) All Non-Synchronized Reserve offers shall be for \$0.00/MWh. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this subsection (d) of this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(ii) Determination of Available Synchronized Reserve Capability of Generation Resources

(1) For each offer to supply reserves by a synchronized resource, the Office of the Interconnection shall determine the MW of available Synchronized Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market, in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Hydroelectric generation resources and Energy Storage Resources may submit offers for their available Synchronized Reserve capability as part of their offer into the Synchronized Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(j)(i) above must submit a Synchronized Reserve offer which specifies the MW of available Synchronized Reserve capability in order to remain compliant with such requirements.

(2) An on-line generation resource's available Synchronized Reserve capability, except for generation resources capable of synchronous condensing, shall be determined in accordance with the PJM Manuals and based on the resource's current performance and initial energy output and the following offer parameters submitted as part of the resource's energy offer: (A) ramp rate; (B) Economic Minimum; and (C) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller

has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Synchronized Reserves above the Synchronized Reserve maximum MW.

For generation resources capable of synchronous condensing, the resource's available Synchronized Reserve capability shall be based on the following offer parameters submitted as part of the resource's energy offer: (D) ramp rate; (E) condense to generation time constraints; (F) Economic Minimum; and (G) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Synchronized Reserves above the Synchronized Reserve maximum MW.

(3) Any Market Seller that believes its generating unit has operating modes, limits, or conditions where the unit would not be capable of providing Synchronized Reserves in real time, can submit to the Office of the Interconnection with a copy to the Market Monitoring Unit a request for an exception from being assigned Synchronized Reserves in the Real-time Synchronized Reserve Market during time periods in which the generating unit is in those operating modes, limits, or conditions. As part of the request, the Market Seller shall supply, for each generating unit, technical information about the operational modes, limits, or conditions to support the requested exception, as further detailed in the PJM Manuals. The Office of the Interconnection shall consult with the Market Monitoring Unit, and consider any input received from the Market Monitoring Unit, in its determination of a request for such an exception. Within 60 days of the submission of the request, the Office of the Interconnection shall notify the Market Seller in writing, with a copy to the Market Monitoring Unit, whether the request is approved or denied. The effective date of any approved request will be provided in the written notification. If a Market Seller has an approved exception, the Market Seller must communicate to the Office of the Interconnection when the unit cannot provide reserves, and the Office of the Interconnection will provide a mechanism for Market Sellers with an approved exception to provide such communication to the Office of the Interconnection in real time, as further detailed in the PJM Manuals. An approved exception will remain applicable to the unit until such time as the Office of the Interconnection determines that a change is needed or the Market Seller notifies the Office of the Interconnection, with a copy to the Market Monitoring Unit, that a change is needed based on changed operational capabilities of the unit. Market Sellers must notify the Office of the Interconnection, with a copy to the Market Monitoring Unit, within 30 days of any changed operational capabilities that necessitate a change in an approved exception.

(iii) Determination of Available Non-Synchronized Reserve Capability of Generation Resources

(1) For each offer to supply reserves by an off-line generation resource, the Office of the Interconnection shall determine the MW of available Non-Synchronized Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Such hydroelectric generation resources or Energy Storage Resources may submit offers for their available Non-Synchronized Reserve capability as part of their offer into the Non-Synchronized Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(j)(i) above must submit a Non-Synchronized Reserve offer which specifies the MW of available Non-Synchronized Reserve capability in order to remain compliant with such requirements.

(2) An off-line generation resource's available Non-Synchronized Reserve capability shall be determined in accordance with the PJM Manuals and based on the following offer parameters submitted as part of the resource's energy offer: (A) startup time; (B) notification time; (C) ramp rate; (D) Economic Minimum; and (E) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Non-Synchronized Reserves above its Synchronized Reserve maximum MW.

(iv) Offers to Supply Synchronized Reserves by Economic Load Response Participant Resources in the Day-ahead and Real-time Reserve Markets

(1) Economic Load Response Participants that submit offers to reduce demand into the Day-ahead Energy Market and Real-time Energy Market and wish to make their resources available to supply Synchronized Reserve may submit offers to supply Synchronized Reserve from such resources, where such offers shall specify the megawatts of Synchronized Reserve being offered, which must equal or exceed 0.1 megawatts and such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer. Such offers may vary hourly, and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day.

(2) All offers to supply Synchronized Reserve offers from Economic Load Response Participant resources shall not exceed the expected value of the penalty for failing to provide Synchronized Reserve, as determined in accordance with section 1.10.1A(j)(i)(3) above. Offers shall be submitted to the Office of the

Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(k) An Economic Load Response Participant that wishes to participate in the Day-ahead Energy Market by reducing demand shall submit an offer to reduce demand to the Office of the Interconnection for each clock hour for which the Economic Load Response Participant desires to make its resource available to the Office of the Interconnection to reduce demand. The offer must equal or exceed 0.1 megawatts, may vary hourly, and shall specify: (i) the amount of the offered curtailment in minimum increments of .1 megawatts; (ii) the Day-ahead Locational Marginal Price above which the end-use customer will reduce load, subject to section 1.10.1A(d)(ix); and (iii) at the Economic Load Response Participant's option, shutdown costs associated with reducing load, including direct labor and equipment costs, opportunity costs, and/or a minimum of number of contiguous hours for which the load reduction must be committed. Such offers may be updated each hour, up to 65 minutes before the applicable clock hour during the Operating Day. Economic Load Response Participants submitting offers to reduce demand in the Day-ahead Energy Market may establish an incremental offer curve, provided that such offer curve shall be limited to ten price pairs (in MWs) per hour.

(l) Market Sellers owning or controlling the output of an Economic Load Response Participant resource that was committed in an FRR Capacity Plan, or that was self-supplied or that offered and cleared in a Base Residual Auction or Incremental Auction, may submit demand reduction bids for the available load reduction capability of the Economic Load Response Participant resource. The submission of demand reduction bids for Economic Load Response Participant resource increments that were not committed in an FRR Capacity Plan, or that have not cleared in a Base Residual Auction or Incremental Auction, shall be optional, but any such bids must contain the information required to be included in such bids, as specified in the PJM Economic Load Response Program. An Economic Load Response Participant resource that was committed in an FRR Capacity Plan, or that was self-supplied or offered and cleared in a Base Residual Auction or Incremental Auction, may submit a demand reduction bid in the Day-ahead Energy Market as specified in the Economic Load Response Program; provided, however, that in the event of an Emergency PJM shall require Economic Load Response Participant resources to reduce load, notwithstanding that the Zonal LMP at the time such Emergency is declared is below the price identified in the demand reduction bid.

(m) (i) Offers to Supply Secondary Reserve By Generation Resources

(1) Market Sellers owning or controlling the output of a Generation Capacity Resource that was committed in an FRR Capacity Plan, self-supplied, offered and cleared in a Base Residual Auction or Incremental Auction, or designated as replacement capacity, as specified in Tariff, Attachment DD, that is available for energy, is capable of providing Secondary Reserve, as specified in section 1.7.19A.02(a) and in the PJM Manuals, and has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage shall submit offers to supply Secondary Reserve, or

otherwise make their Secondary Reserve capability available. Such offers shall be for an amount equal to the resource's available energy output achievable within thirty minutes (less its energy output achievable within ten minutes) from a request of the Office of the Interconnection. Market Sellers of Generation Capacity Resources subject to this must-offer requirement that do not make the reserve capability of such resources available when such resource is able to operate with a dispatchable range (e.g. through offering a fixed output) will be in violation of this provision.

(2) Market Sellers of all other generation resources located within the metered boundaries of the PJM Region that submit offers for the supply of energy into the Day-ahead Energy Market and/or Real-time Energy Market and are capable of providing Secondary Reserve, as specified in the PJM Manuals, shall be deemed to have made their reserve capability available to provide Secondary Reserve in the Day-ahead Energy Market and/or Real-time Energy Market for each clock hour for which the Market Seller submits an available offer to supply energy; provided, however that hydroelectric generation resources and Energy Storage Resources are not automatically deemed available to provide reserves based on the submission of an available energy offer but may submit offers to supply Secondary Reserve, as applicable.

(3) Offers for the supply of Secondary Reserve shall be for \$0.00/MWh. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this subsection (d) above, section 1.10.9B below, and the PJM Manuals, as applicable.

(ii) Determination of Available Secondary Reserve Capability of Generation Resources

(1) For each offer to supply Secondary Reserve by a generation resource, the Office of the Interconnection shall determine the MW of available Secondary Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Hydroelectric generation resources or Energy Storage Resources may submit their available Secondary Reserve capability as part of their offer into the Secondary Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(m)(i) above must submit a Secondary Reserve offer which specifies the MW of available Secondary Reserve capability in order to remain compliant with such requirements.

(2) (A) An on-line generation resource's available Secondary Reserve capability, except for generation resources capable of synchronous condensing, shall be based on the resource's current performance and initial energy output, the resource's available Synchronized Reserve capability; and the following offer parameters submitted as part of the energy offer: (i) ramp rate; (ii) Economic Minimum; and (iii) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(B) For generation resources capable of synchronous condensing, the resource's available Secondary Reserve capability shall be based on the following offer parameters submitted as part of the energy offer: (i) ramp rate; (ii) condense to generation time constraints; (iii) Economic Minimum; and (iv) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(C) An off-line generation resource's available Secondary Reserve capability, shall be based on the resource's available Secondary Reserve capability and the following offer parameters submitted as part of the resource's energy offer: (i) startup time; (ii) notification time; (iii) ramp rate; (iv) Economic Minimum; and (v) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(3) Any Market Seller that believes its generating unit has operating modes, limits, or conditions where the unit would not be capable of providing Secondary Reserves in real time, can submit to the Office of the Interconnection with a copy to the Market Monitoring Unit a request for an exception from being assigned Secondary Reserves in the Real-time

Secondary Reserve Market during time periods in which the generating unit is in those operating modes, limits, or conditions. As part of the request, the Market Seller shall supply, for each generating unit, technical information about the operational modes, limits, or conditions to support the requested exception, as further detailed in the PJM Manuals. The Office of the Interconnection shall consult with the Market Monitoring Unit, and consider any input received from the Market Monitoring Unit, in its determination of a request for such an exception. Within 60 days of the submission of the request, the Office of the Interconnection shall notify the Market Seller in writing, with a copy to the Market Monitoring Unit, whether the request is approved or denied. The effective date of any approved request will be provided in the written notification. If a Market Seller has an approved exception, the Market Seller must communicate to the Office of the Interconnection when the unit cannot provide reserves, and the Office of the Interconnection will provide a mechanism for Market Sellers with an approved exception to provide such communication to the Office of the Interconnection in real time, as further detailed in the PJM Manuals. An approved exception will remain applicable to the unit until such time as the Office of the Interconnection determines that a change is needed or the Market Seller notifies the Office of the Interconnection, with a copy to the Market Monitoring Unit, that a change is needed based on changed operational capabilities of the unit. Market Sellers must notify the Office of the Interconnection, with a copy to the Market Monitoring Unit, within 30 days of any changed operational capabilities that necessitate a change in an approved exception.

(iii) Offers to Supply Secondary Reserves by Economic Load Response Participant resources

(1) Each Economic Load Response Participant that submits offers to reduce demand into the Day-ahead Energy Market and Real-time Energy Market and wishes to make their resources available to supply Secondary Reserve shall submit offers to supply Secondary Reserve from such resources, where such offers shall specify the megawatts of Secondary Reserve being offered, which must equal or exceed 0.1 megawatts and include such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer. Such offers may vary hourly, and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day.

(2) All Secondary Reserve offers by Economic Load Response Participant resources shall be for \$0.00/MWh. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(n) A Market Participant may submit a Day-Ahead Pseudo-Tie Transaction for a Market Participant's generator within the PJM balancing authority area that is a Pseudo-Tie into

the MISO balancing authority area. Day-Ahead Pseudo-Tie Transactions combine an offer to sell energy at a source with a bid to buy the same megawatt quantity of energy at a sink where such transaction specifies the maximum difference between the Locational Marginal Prices at the source and sink.

Each Day-Ahead Pseudo-Tie Transaction shall: (1) source at a Market Participant's generator within the PJM balancing authority area that Pseudo-Ties into MISO; and (2) sink at the PJM-MISO interface. A Market Participant must reserve transmission service in accordance with the PJM Tariff for each Day-Ahead Pseudo-Tie Transaction. Megawatt quantities for Day-Ahead Pseudo-Tie Transactions shall be greater than zero and less than or equal to the transmission service reserved for the Day-Ahead Pseudo-Tie Transaction. An accepted Day-Ahead Pseudo-Tie Transaction results in scheduled injection at a specified source and scheduled withdrawal of the same megawatt quantity at a specified sink in the Day-Ahead Energy Market.

1.10.1B Demand Bid Scheduling and Screening

(a) The Office of the Interconnection shall apply Demand Bid Screening to all Demand Bids submitted in the Day-ahead Energy Market for each Load Serving Entity, separately by Zone. Using Demand Bid Screening, the Office of the Interconnection will automatically reject a Load Serving Entity's Demand Bids in any future Operating Day for which the Load Serving Entity submits bids if the total megawatt volume of such bids would exceed the Load Serving Entity's Demand Bid Limit for any hour in such Operating Day, unless the Office of the Interconnection permits an exception pursuant to subsection (d) below.

(b) On a daily basis, PJM will update and post each Load Serving Entity's Demand Bid Limit in each applicable Zone. Such Demand Bid Limit will apply to all Demand Bids submitted by that Load Serving Entity for each future Operating Day for which it submits bids. The Demand Bid Limit is calculated using the following equation:

Demand Bid Limit = greater of (Zonal Peak Demand Reference Point * 1.3), or (Zonal Peak Demand Reference Point + 10MW)

Where:

1. Zonal Peak Demand Reference Point = for each Zone: the product of (a) LSE Recent Load Share, multiplied by (b) Peak Daily Load Forecast.
2. LSE Recent Load Share is the Load Serving Entity's highest share of Network Load in each Zone for any hour over the most recently available seven Operating Days for which PJM has data.
3. Peak Daily Load Forecast is PJM's highest available peak load forecast for each applicable Zone that is calculated on a daily basis.

(c) A Load Serving Entity whose Demand Bids are rejected as a result of Demand Bid Screening may change its Demand Bids to reduce its total megawatt volume to a level that does not exceed its Demand Bid Limit, and may resubmit them subject to the applicable rules related to bid submission outlined in Tariff, Operating Agreement and PJM Manuals.

(d) PJM may allow a Load Serving Entity to submit bids in excess of its Demand Bid Limit when circumstances exist that will cause, or are reasonably expected to cause, a Load Serving Entity's actual load to exceed its Demand Bid Limit on a given Operating Day. Examples of such circumstances include, but are not limited to, changes in load commitments due to state sponsored auctions, mergers and acquisitions between PJM Members, and sales and divestitures between PJM Members. A Load Serving Entity may submit a written exception request to the Office of Interconnection for a higher Demand Bid Limit for an affected Operating Day. Such request must include a detailed explanation of the circumstances at issue and supporting documentation that justify the Load Serving Entity's expectation that its actual load will exceed its Demand Bid Limit.

1.10.2 Pool-scheduled Resources.

Pool-scheduled resources are those resources for which Market Participants submitted offers to sell energy in the Day-ahead Energy Market and offers to reduce demand in the Day-ahead Energy Market, which the Office of the Interconnection scheduled in the Day-ahead Energy Market as well as generators committed by the Office of the Interconnection subsequent to the Day-ahead Energy Market. Such resources shall be committed to provide energy in the real-time dispatch unless the schedules for such units are revised pursuant to section 1.10.9 below or Tariff, Attachment K-Appendix, section 1.11. Pool-scheduled resources shall be governed by the following principles and procedures.

(a) Pool-scheduled resources shall be selected by the Office of the Interconnection on the basis of the prices offered for energy and demand reductions and related services, whether the resource is expected to be needed to maintain system reliability during the Operating Day, Start-up Costs, No-load Costs and cancellation fees, and the specified operating characteristics, offered by Market Sellers to the Office of the Interconnection by the offer deadline specified in section 1.10.1A above. Hydropower units can only be pool-scheduled if they are pumped storage units and scheduled by the Office of the Interconnection pursuant to the hydro optimization tool in the Day-ahead Energy Market.

(b) A resource that is scheduled by a Market Participant to support a bilateral sale, or that is self-scheduled by a Generating Market Buyer, shall not be selected by the Office of the Interconnection as a pool-scheduled resource except in an Emergency.

(c) Market Sellers offering energy from hydropower or other facilities with fuel or environmental limitations may submit data to the Office of the Interconnection that is sufficient to enable the Office of the Interconnection to determine the available operating hours of such facilities.

(d) The Market Seller of a resource selected as a pool-scheduled resource shall receive payments or credits for energy, demand reductions or related services, or for Start-up Costs and No-load Costs, from the Office of the Interconnection on behalf of the Market Buyers in accordance with Tariff, Attachment K-Appendix, section 3. Alternatively, the Market Seller shall receive, in lieu of Start-up Costs and No-load Costs, its actual costs incurred, if any, up to a

cap of the resource's Start-up Costs, if the Office of the Interconnection cancels its selection of the resource as a pool-scheduled resource and so notifies the Market Seller before the resource is synchronized.

(e) Market Participants shall make available their pool-scheduled resources to the Office of the Interconnection for coordinated operation to supply the Operating Reserves needs of the applicable Control Zone.

(f) Economic Load Response Participants offering to reduce demand shall specify: (i) the amount of the offered curtailment, which must equal or exceed 0.1 megawatts, in minimum increments of 0.1 megawatts; (ii) the real-time Locational Marginal Price above which the end-use customer will reduce load; and (iii) at the Economic Load Response Participant's option, shut-down costs associated with reducing load, including direct labor and equipment costs, opportunity costs, and/or a minimum number of contiguous hours for which the load reduction must be committed. Economic Load Response Participants submitting offers to reduce demand in the Day-ahead Energy Market and/or the Real-time Energy Market may establish an incremental offer curve, provided that such offer curve shall be limited to ten price pairs (in MWs). Economic Load Response Participants offering to reduce demand shall also indicate the hours that the demand reduction is not available.

1.10.3 Self-scheduled Resources.

Self-scheduled resources shall be governed by the following principles and procedures.

(a) Each Generating Market Buyer shall use all reasonable efforts, consistent with Good Utility Practice, not to self-schedule resources in excess of its Equivalent Load.

(b) The offered prices of resources that are self-scheduled and not dispatchable by the Office of the Interconnection shall not be considered by the Office of the Interconnection in determining Locational Marginal Prices.

(c) Market Participants shall make available their self-scheduled resources to the Office of the Interconnection for coordinated operation to supply the Operating Reserves needs of the applicable Control Zone, by submitting an offer as to such resources.

(d) A Market Participant self-scheduling a resource in the Day-ahead Energy Market that does not deliver the energy in the Real-time Energy Market, shall replace the energy not delivered with energy from the Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(e) A Market Participant self-scheduling a resource to supply Synchronized Reserve in the Day-ahead Synchronized Reserve Market that does not deliver the scheduled megawatt quantity in the applicable real-time reserve market, shall replace the Synchronized Reserve not delivered and shall pay for such Synchronized Reserve at the applicable Real-time Synchronized Reserve Market Clearing Price. Market Participants shall not self-schedule a resource to provide Secondary Reserve or Non-Synchronized Reserve.

(f) For energy, hydropower units, excluding pumped storage units, may only be self-scheduled.

(g) A resource that has been self-scheduled shall not receive payments or credits for Start-up Costs or No-load Costs.

1.10.4 Capacity Resources.

(a) A Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative that is selected as a pool-scheduled resource shall be made available for scheduling and dispatch at the direction of the Office of the Interconnection. Such a Generation Capacity Resource that does not deliver energy as scheduled shall be deemed to have experienced a Generator Forced Outage to the extent of such energy not delivered. A Market Participant offering such Generation Capacity Resource in the Day-ahead Energy Market shall replace the energy not delivered with energy from the Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(b) Energy from a Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative that has not been scheduled in the Day-ahead Energy Market may be sold on a bilateral basis by the Market Seller, may be self-scheduled, or may be offered for dispatch during the Operating Day in accordance with the procedures specified in this Schedule. Such a Generation Capacity Resource that has not been scheduled in the Day-ahead Energy Market and that has been sold on a bilateral basis must be made available upon request to the Office of the Interconnection for scheduling and dispatch during the Operating Day if the Office of the Interconnection declares a Maximum Generation Emergency. Any such resource so scheduled and dispatched shall receive the applicable Real-time Price for energy delivered.

1.10.5 External Resources.

(a) External Resources may submit offers to the PJM Interchange Energy Market, in accordance with the day-ahead and real-time scheduling processes specified above. An External Resource selected as a pool-scheduled resource shall be made available for scheduling and dispatch at the direction of the Office of the Interconnection, and except as specified below shall be compensated on the same basis as other pool-scheduled resources. External Resources that are not capable of Dynamic Transfer shall, if selected by the Office of the Interconnection on the basis of the Market Seller's Offer Data, be block loaded on an hourly scheduled basis. Market Sellers shall offer External Resources to the PJM Interchange Energy Market on either a resource-specific or an aggregated resource basis. A Market Participant whose pool-scheduled resource does not deliver the energy scheduled in the Day-ahead Energy Market shall replace such energy not delivered as scheduled in the Day-ahead Energy Market with energy from the PJM Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(b) Offers for External Resources from an aggregation of two or more generating units shall so indicate, and shall specify, in accordance with the Offer Data requirements

specified by the Office of the Interconnection: (i) energy prices; (ii) hours of energy availability; (iii) a minimum dispatch level; (iv) a maximum dispatch level; and (v) unless such information has previously been made available to the Office of the Interconnection, sufficient information, as specified in the PJM Manuals, to enable the Office of the Interconnection to model the flow into the PJM Region of any energy from the External Resources scheduled in accordance with the Offer Data.

(c) Offers for External Resources on a resource-specific basis shall specify the resource being offered, along with the information specified in the Offer Data as applicable.

1.10.6 External Market Buyers.

(a) Deliveries to an External Market Buyer not subject to Dynamic Transfer by the Office of the Interconnection shall be delivered on a block loaded basis to the bus or buses at the electrical boundaries of the PJM Region, or in such area with respect to an External Market Buyer's load within such area not served by Network Service, at which the energy is delivered to or for the External Market Buyer. External Market Buyers shall be charged (which charge may be positive or negative) at either the Day-ahead Prices or Real-time Prices, whichever is applicable, for energy at the foregoing bus or buses.

(b) An External Market Buyer's hourly schedules for energy purchased from the PJM Interchange Energy Market shall conform to the ramping and other applicable requirements of the interconnection agreement between the PJM Region and the Control Area to which, whether as an intermediate or final point of delivery, the purchased energy will initially be delivered.

(c) The Office of the Interconnection shall curtail deliveries to an External Market Buyer if necessary to maintain appropriate reserve levels for a Control Zone as defined in the PJM Manuals, or to avoid shedding load in such Control Zone.

1.10.7 Bilateral Transactions.

Bilateral transactions as to which the parties have notified the Office of the Interconnection by the deadline specified in section 1.10.1A above that they elect not to be included in the Day-ahead Energy Market and that they are not willing to incur Transmission Congestion Charges in the Real-time Energy Market shall be curtailed by the Office of the Interconnection as necessary to reduce or alleviate transmission congestion. Bilateral transactions that were not included in the Day-ahead Energy Market and that are willing to incur congestion charges and bilateral transactions that were accepted in the Day-ahead Energy Market shall continue to be implemented during periods of congestion, except as may be necessary to respond to Emergencies.

1.10.8 Office of the Interconnection Responsibilities.

(a) The Office of the Interconnection shall use its best efforts to determine (i) the least-cost means of satisfying the projected hourly requirements for energy, Operating Reserves, and other ancillary services of the Market Buyers, including the reliability requirements of the

PJM Region, of the Day-ahead Energy Market, and (ii) the least-cost means of satisfying the Operating Reserve and other ancillary service requirements for any portion of the load forecast of the Office of the Interconnection for the Operating Day in excess of that scheduled in the Day-ahead Energy Market. In making these determinations, the Office of the Interconnection shall take into account: (i) the Office of the Interconnection's forecasts of PJM Interchange Energy Market and PJM Region energy requirements, giving due consideration to the energy requirement forecasts and purchase requests submitted by Market Buyers and PRD Curves properly submitted by PRD Providers; (ii) the offers submitted by Market Sellers; (iii) the availability of limited energy resources; (iv) the capacity, location, and other relevant characteristics of self-scheduled resources; (v) the objectives of each Control Zone for Operating Reserves, as specified in the PJM Manuals; (vi) the requirements of each Regulation Zone for Regulation and other ancillary services, as specified in the PJM Manuals; (vii) the benefits of avoiding or minimizing transmission constraint control operations, as specified in the PJM Manuals; and (viii) such other factors as the Office of the Interconnection reasonably concludes are relevant to the foregoing determination, including, without limitation, transmission constraints on external coordinated flowgates to the extent provided by Tariff, Attachment K-Appendix, section 1.7.6. The Office of the Interconnection shall develop a Day-ahead Energy Market based on the foregoing determination, and shall determine the Day-ahead Prices resulting from such schedule. The Office of the Interconnection shall report the planned schedule for a hydropower resource to the operator of that resource as necessary for plant safety and security, and legal limitations on pond elevations.

(b) By 1:30 p.m., or as soon as practicable thereafter, of the day before each Operating Day, or such other deadline as may be specified by the Office of the Interconnection in the PJM Manuals, the Office of the Interconnection shall: (i) post the aggregate Day-ahead Energy Market results; (ii) post the Day-ahead Prices; and (iii) inform the Market Sellers, Market Buyers, and Economic Load Response Participants of their scheduled injections, withdrawals, and demand reductions respectively. The foregoing notwithstanding, the deadlines set forth in this subsection shall not apply if the Office of the Interconnection is unable to obtain Market Participant bid/offer data due to extraordinary circumstances. For purposes of this subsection, extraordinary circumstances shall mean a technical malfunction that limits, prohibits or otherwise interferes with the ability of the Office of the Interconnection to obtain Market Participant bid/offer data prior to 11:59 p.m. on the day before the affected Operating Day. Extraordinary circumstances do not include a Market Participant's inability to submit bid/offer data to the Office of the Interconnection. If the Office of the Interconnection is unable to clear the Day-ahead Energy Market prior to 11:59 p.m. on the day before the affected Operating Day as a result of such extraordinary circumstances, the Office of the Interconnection shall notify Members as soon as practicable.

(c) Following posting of the information specified in section 1.10.8(b), and absent extraordinary circumstances preventing the clearing of the Day-ahead Energy Market, the Office of the Interconnection shall revise its schedule of generation resources to reflect updated projections of load, conditions affecting electric system operations in the PJM Region, the availability of and constraints on limited energy and other resources, transmission constraints, and other relevant factors.

(d) Market Buyers shall pay PJMSettlement and Market Sellers shall be paid by PJMSettlement for the quantities of energy scheduled in the Day-ahead Energy Market at the Day-ahead Prices when the Day-ahead Price is positive. Market Buyers shall be paid by PJMSettlement and Market Sellers shall pay PJMSettlement for the quantities of energy scheduled in the Day-ahead Energy Market at the Day-ahead Prices when the Day-ahead Price is negative. Economic Load Response Participants shall be paid for scheduled demand reductions pursuant to Tariff, Attachment K-Appendix, section 3.3A. Notwithstanding the foregoing, if the Office of the Interconnection is unable to clear the Day-ahead Energy Market prior to 11:59 p.m. on the day before the affected Operating Day due to extraordinary circumstances as described in subsection (b) above, it will be declared a Market Suspension, and Day-ahead Prices shall be determined pursuant to Operating Agreement, Schedule 1, section 2.6.1. If the Office of the Interconnection declares a Market Suspension, it shall notify Market Participants of the Market Suspension as soon as practicable.

(e) If the Office of the Interconnection discovers a *potential* error in prices and/or cleared quantities in the Day-ahead Energy Market or Day-ahead Ancillary Services Markets, or the Real-time Energy Market or Real-time Ancillary Services Markets after it has posted the results for these markets on its Web site, the Office of the Interconnection shall notify Market Participants as soon as possible after it is found, but in no event later than 12:00 p.m. of the second Business Day following the Operating Day for the Real-time Energy Market and Real-time Ancillary Services Markets, and no later than 5:00 p.m. of the second Business Day following the initial publication of the results for the Day-ahead Energy Market and Day-ahead Ancillary Services Markets. After this initial notification, if the Office of the Interconnection determines it is necessary to post modified results, it shall provide notification of its intent to do so, *along with a description detailing the cause and scope of the error*, by no later than 5:00 p.m. of the fifth Business Day following the Operating Day for the Real-time Energy Market and Real-time Ancillary Services Markets, and no later than 5:00 p.m. of the fifth Business Day following the initial publication of the results in the Day-ahead Energy Market and Day-ahead Ancillary Services Markets. *The provided description will not contain information that is market sensitive or confidential.* Thereafter, the Office of the Interconnection must post on its Web site the corrected results by no later than 5:00 p.m. of the tenth calendar day following the Operating Day for the Day-ahead Energy Market, Real-time Energy Market, and Day-ahead Ancillary Services Markets, and Real-time Ancillary Service Markets. Should any of the above deadlines pass without the associated action on the part of the Office of the Interconnection, the originally posted results will be considered final. Notwithstanding the foregoing, the deadlines set forth above shall not apply if the referenced market results are under publicly noticed review by the FERC.

(f) Consistent with Operating Agreement, section 18.17.1, and notwithstanding anything to the contrary in the Operating Agreement or in the PJM Tariff, to allow the tracking of Market Participants' non-aggregated bids and offers over time as required by FERC Order No. 719, the Office of the Interconnection shall post on its Web site the non-aggregated bid data and Offer Data submitted by Market Participants (for participation in the PJM Interchange Energy Market) approximately four months after the bid or offer was submitted to the Office of the Interconnection.

1.10.9 Hourly Scheduling.

(a) Following the initial posting by the Office of the Interconnection of the Locational Marginal Prices resulting from the Day-ahead Energy Market, and subject to the right of the Office of the Interconnection to schedule and dispatch pool-scheduled resources and to direct that schedules be changed in an Emergency, and absent extraordinary circumstances preventing the clearing of the Day-ahead Energy Market, a generation rebidding period shall exist. Typically the rebidding period shall be from the time the Office of the Interconnection posts the results of the Day-ahead Energy Market until 2:15 p.m. on the day before each Operating Day. However, should the clearing of the Day-ahead Energy Market be significantly delayed, the Office of the Interconnection may establish a revised rebidding period. During the rebidding period, Market Participants may submit revisions to generation Offer Data for the next Operating Day. Adjustments to the Day-ahead Energy Market shall be settled at the applicable Real-time Prices, and shall not affect the obligation to pay or receive payment for the quantities of energy scheduled in the Day-ahead Energy Market at the applicable Day-ahead Prices.

(b) A Market Participant may adjust the schedule of a resource under its dispatch control on an hour-to-hour basis beginning at 6:30 p.m. of the day before each Operating Day, provided that the Office of the Interconnection is notified not later than 65 minutes prior to the hour in which the adjustment is to take effect, as follows and as specified in section 1.10.9A below:

i) A Generating Market Buyer may self-schedule any of its resource increments, including hydropower resources, not previously designated as self-scheduled and not selected as a pool-scheduled resource in the Day-ahead Energy Market;

ii) A Market Participant may request the scheduling of a non-firm bilateral transaction; or

iii) A Market Participant may request the scheduling of deliveries or receipts of Spot Market Energy; or

iv) A Generating Market Buyer may remove from service a resource increment, including a hydropower resource, that it had previously designated as self-scheduled, provided that the Office of the Interconnection shall have the option to schedule energy from any such resource increment that is a Capacity Resource at the price offered in the scheduling process, with no obligation to pay any Start-Up Costs.

(c) An External Market Buyer may refuse delivery of some or all of the energy it requested to purchase in the Day-ahead Energy Market by notifying the Office of the Interconnection of the adjustment in deliveries not later than 65 minutes prior to the hour in which the adjustment is to take effect, but any such adjustment shall not affect the obligation of the External Market Buyer to pay for energy scheduled on its behalf in the Day-ahead Energy Market at the applicable Day-ahead Prices.

(d) The Office of the Interconnection shall provide External Market Buyers and External Market Sellers and parties to bilateral transactions with any revisions to their schedules resulting from the rebidding period by 6:30 p.m. on the day before each Operating Day. The Office of the Interconnection may also commit additional resources after such time as system conditions require. For each hour in the Operating Day, as soon as practicable after the deadlines specified in the foregoing subsection of this section 1.10, the Office of the Interconnection shall provide External Market Buyers and External Market Sellers and parties to bilateral transactions with any revisions to their schedules for the hour.

1.10.9A Updating Offers in Real-time

(a) Each Market Seller may submit Real-time Offers for a resource up to 65 minutes before the applicable clock hour, and such Real-time Offers shall supersede any previous offer for that resource for the clock hour, as further described in the PJM Manuals and subject to the following conditions:

(i) A market-based Real-time Offer shall not exceed the applicable energy offer caps specified in this Schedule. Once a Market Seller's resource is committed for an applicable clock hour, the Market Seller may not increase its Incremental Energy Offer and may only submit a market-based Real-time Offer that is higher than its market-based offer that was in effect at the time of commitment to reflect increases in the resource's cost-based Start-up Costs and cost-based No-load Costs. The Market Seller may elect not to have its market-based offer considered for dispatch and to have only its lowest cost-based offer considered for the remainder of the Operating Day.

(ii) Cost-based Real-time Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection's Offer Data specification, Operating Agreement, Schedule 1, sections 1.10.1A(d) and 1.10.9B, Operating Agreement, Schedule 2 and the PJM Manuals, as applicable. If a Market Seller submits a market-based Real-time Offer for a particular clock hour in accordance with subsection (c) below, or if updates to a cost-based offer are required by the Market Seller's approved Fuel Cost Policy, the Market Seller shall update its previously submitted cost-based Real-time Offer.

(iii) If a Market Seller's available cost-based offer is not compliant with Operating Agreement, Schedule 2 and the PJM Manuals at the time a Market Seller submits a market-based Real-time Offer for an applicable clock hour during the Operating Day, the Market Seller must submit an updated cost-based Real-time Offer consisting of an Incremental Energy Offer, Start-up Cost and No-load Cost for that clock hour that is compliant with Operating Agreement, Schedule 2 and the PJM Manuals.

(b) Each Market Seller may submit Real-time Offers for a resource during and through the end of the applicable clock hour to update only the following offer parameters, as further described in the PJM Manuals: (1) Economic Minimum; (2) Economic Maximum; (3) emergency minimum MW; (4) emergency maximum MW; (5) unit availability status; (6) fixed output indicator; (7) Synchronized Reserve maximum MW; and (8) Secondary Reserve

maximum MW. Such Real-time Offers shall supersede any previous offer for that resource for the clock hour.

1.10.9B Offer Parameter Flexibility

(a) Market Sellers may, in accordance with sections 1.10.1A and 1.10.9A above, this section 1.10.9B, and the PJM Manuals, update offer parameters at any time up to 65 minutes before the applicable clock hour, including prior to the close of the Day-ahead Energy Market and prior to the close of the rebidding period specified in section 1.10.9, except that Market Sellers may not update their offers for the supply of energy, Secondary Reserve, Synchronized Reserve, Non-Synchronized Reserve, or demand reduction: (1) during the period after the close the Day-ahead Energy Market and prior to the posting of the Day-ahead Energy Market results pursuant to section 1.10.8(b); or (2) during the period after close of the rebidding period and prior to PJM announcing the results of the rebidding period pursuant to section 1.10.9(d).

(b) For generation resource offers, Market Sellers may vary for each clock hour during the entire Operating Day the following offer parameters: (1) cost-based Start-up Costs; (2) cost-based No-load Costs; (3) Incremental Energy Offer; (4) Economic Minimum and Economic Maximum; (5) emergency minimum MW and emergency maximum MW; (6) ramp rate; (7) Synchronized Reserve maximum MW; (8) Secondary Reserve maximum MW; and (9) for Real-time Offers only, (i) notification time and (ii) for uncommitted hours only, Minimum Run Time.

(c) For Economic Load Response Participant resource offers, Market Sellers may vary for each clock hour during the entire Operating Day the following offer parameters: (1) shutdown costs, (2) Incremental Energy Offer; (3) Economic Minimum; (4) Economic Maximum; and (5) for Real-time Offers only, (i) notification time and (ii) for uncommitted hours only, minimum down time.

(d) After the announcement of the results of the rebidding period pursuant to section 1.10.9(d), a Market Seller may submit a Real-time Offer where offer parameters may differ from the offer originally submitted in the Day-ahead Energy Market, except that a Market Seller may not submit a Real-time Offer that changes, of the offer parameters listed in section 1.10.1A(d), the MW amounts specified in the Incremental Energy Offer, MW amounts specified in the ramp rate, maximum run time, and availability; provided, however, Market Sellers of dual-fueled resources may submit Real-time Offers for such resources that change the availability of a submitted cost-based offer.

3.2 Market Settlements.

If a dollar-per-MW-hour value is applied in a calculation under this section 3.2 where the interval of the value produced in that calculation is less than an hour, then for purposes of that calculation the dollar-per-MW hour value is divided by the number of Real-time Settlement Intervals in the hour.

3.2.1 Spot Market Energy.

(a) The Office of the Interconnection shall calculate System Energy Prices in the form of Day-ahead System Energy Prices and Real-time System Energy Prices for the PJM Region, in accordance with Tariff, Attachment K-Appendix, section 2.

(b) Each Market Participant shall be charged for all of its Market Participant Energy Withdrawals scheduled in the Day-ahead Energy Market at the Day-ahead System Energy Price to be served in the PJM Interchange Energy Market.

(c) Each Market Participant shall be paid for all of its Market Participant Energy Injections scheduled in the Day-ahead Energy Market at the Day-ahead System Energy Price to be delivered to the PJM Interchange Energy Market.

(d) For each Day-ahead Settlement Interval during an Operating Day, the Office of the Interconnection shall calculate Spot Market Energy charges for each Market Participant as the difference between the sum of its Market Participant Energy Withdrawals scheduled times the Day-ahead System Energy Price and the sum of its Market Participant Energy Injections scheduled times the Day-ahead System Energy Price.

(e) For each Real-time Settlement Interval during an Operating Day, the Office of the Interconnection shall calculate Spot Market Energy charges for each Market Participant as the difference between the sum of its real-time Market Participant Energy Withdrawals less its scheduled Market Participant Energy Withdrawals times the Real-time System Energy Price and the sum of its real-time Market Participant Energy Injections less scheduled Market Participant Energy Injections times the Real-time System Energy Price. The Revenue Data for Settlements determined for each Real-time Settlement Interval in accordance with Tariff, Attachment K-Appendix, section 3.1A shall be used in determining the real-time Market Participant Energy Withdrawals and Market Participant Energy Injections used to calculate Spot Market Energy charges under this subsection (e).

(f) For pool External Resources, the Office of the Interconnection shall model, based on an appropriate flow analysis, the megawatts of real-time energy injections to be delivered from each such resource to the corresponding Interface Pricing Point between adjacent Control Areas and the PJM Region.

3.2.2 Regulation.

(a) The Office of the Interconnection's Regulation service is comprised of Regulation-Down Service and Regulation-Up Service. Regulation-Down Service and Regulation-Up Service will have distinct requirements, clearing prices, and performance scores, calculated in accordance with the section(s) below and the PJM Manuals.

Each Market Participant that is a Load Serving Entity in a Regulation Zone shall have an hourly Regulation objective equal to its pro rata share of the Regulation-Down Requirement and Regulation-Up Requirement of such Regulation Zone for the hour, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Regulation Zone for the hour ("Regulation Obligation"). A Market Participant with an hourly Regulation Obligation shall be charged the pro rata share of the sum of the Regulation market mileage clearing price credits and Regulation market capability clearing price credits for the Real-time Settlement Intervals in an hour.

Regulation Charge = Hourly Regulation Obligation Share * (sum of the Real-time Settlement Interval Regulation credits in an hour)

(b) Each Market Participant supplying Regulation in a Regulation Zone at the direction of the Office of the Interconnection shall be credited for each of its resources such that the calculated credit for each increment of Regulation provided by each resource shall be the higher of: (i) the Regulation market-clearing price; or (ii) the sum of the applicable Regulation offers for a resource determined pursuant to section 3.2.2A.1 below, the resource-specific shoulder opportunity costs described in subsection (e) of this section, the resource-specific inter-temporal opportunity costs discussed in subsection (d), and the resource-specific opportunity costs discussed in subsection (e) of this section.

(c) The Office of the Interconnection shall commit resources to provide Regulation-Down Service and Regulation-Up Service every 30 minutes, for the clock intervals of the first 30 minutes of an hour and the second 30 minutes of an hour, ~~up to~~ meet the Regulation-Down Requirement and Regulation-Up Requirement of such Regulation Zone. The Office of the Interconnection shall select resources in merit order, taking into account the resource's mileage Regulation offer, capability Regulation offer, and estimated resource-specific opportunity cost, all converted into their performance adjusted values as further detailed in the PJM Manuals. The total Regulation market-clearing price for the Regulation-Down Service and Regulation-Up Service in each Regulation Zone shall be determined in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval. The total Regulation market-clearing price shall include: (i) the mileage Regulation market-clearing price in a Regulation Zone that shall be calculated in accordance with subsection (g) of this section; (ii) the capability Regulation market-clearing price that shall be calculated in accordance with subsection (h) of this section; and (iii) a Regulation resource's unit-specific opportunity costs during the 5-minute period, determined as described in subsection (d) below. A resource's Regulation offer by any Market Seller that fails the Regulation three-pivotal supplier test set forth in section 3.2.2A.1 below shall not exceed the cost of providing Regulation from such

resource, plus ~~twelve-six~~ dollars, as determined pursuant to the formula in Tariff, Attachment K-Appendix, section 1.10.1A(e).

(d) In determining the Regulation 5-minute clearing price for each Regulation Zone, the resource-specific opportunity costs (in dollars) of a resource offering to sell Regulation in each regulating interval, except for hydroelectric resources, shall be equal to the area bounded by (i) Locational Marginal Price at the generation bus for the regulating resource, (ii) the resource's Final Offer, (iii) the resource's tracking ramp-rate limited expected output level if it had been dispatched for energy in economic merit order, as further described in the PJM Manuals, and (iv) the resource's regulation set point on the energy schedule curve on which the resource is running in the PJM Interchange Energy Market. The area is divided by the resource performance score and further divided by the resource's regulation assigned megawatt to convert to dollars per megawatt.

For hydroelectric resources offering to sell Regulation in a regulating interval, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the full value of the Locational Marginal Price at that generation bus for each megawatt of Regulation capability.

The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead megawatt commitment greater than zero shall be equal to the product of (i) the deviation of the set point of the hydroelectric resource that is expected to be required in order to provide Regulation from the hydroelectric resource's expected output level if it had been dispatched in economic merit order times (ii) the difference between the expected Locational Marginal Price at the generation bus for the hydroelectric resource and the average of the Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. Estimated opportunity costs shall be zero for hydroelectric resources for which the average Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period, excluding those Real-time Settlement Intervals during which all available units at the hydroelectric resource were operating is higher than the actual Locational Marginal Price at the generator bus for the Real-time Settlement Interval.

The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead megawatt commitment greater than zero shall be equal to the product of (i) the deviation of the set point of the hydroelectric resource that is expected to be required in order to provide Regulation from the hydroelectric resource's expected output level if it had been dispatched in economic merit order times (ii) the difference between the average of the Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating and the expected Locational Marginal Price at the generation bus for the hydroelectric resource. Estimated opportunity costs shall be zero for hydroelectric resources for which the actual Locational Marginal Price at the generator bus for the Real-time Settlement Interval is higher than the average Locational Marginal Price at the generation bus for the appropriate on-peak or

off-peak period, excluding those Real-time Settlement Intervals during which all available units at the hydroelectric resource were operating.

For the purpose of committing resources and setting Regulation market clearing prices, the Office of the Interconnection shall utilize day-ahead Locational Marginal Prices to calculate the average of the Locational Marginal Price values used in the calculation for opportunity costs for hydroelectric resources. For the purposes of settlements, the Office of the Interconnection shall utilize the real-time Locational Marginal Prices to calculate the average of the Locational Marginal Price used in the calculation for opportunity costs for hydroelectric resources.

Opportunity costs for Economic Load Response Participant resources and regulation-only resources to provide Regulation are zero for the purpose of committing resources, setting Regulation clearing prices, and settlements.

(e) In determining the credit under subsection (b) to a Market Participant selected to provide Regulation in a Regulation Zone and that actively follows the Office of the Interconnection's Regulation signals and instructions, the Office of the Interconnection shall consider both the Regulation-Up Service and Regulation-Down Service selected MW assignments. The unit-specific opportunity cost of a generation resource shall be determined for (1) each Real-time Settlement Interval that the Office of the Interconnection requires a generation resource to provide Regulation, and (2) the two Real-time Settlement Intervals preceding the regulation commitment and the two Real-time Settlement Intervals following the regulation commitment in accordance with the PJM Manuals and below.

The unit-specific opportunity cost in dollars, incurred during the Real-time Settlement Interval, in which the Regulation obligation is fulfilled, shall be equal to the area bounded by (i) the Locational Marginal Price at the generation bus for the regulating resource, (ii) the resource's Final Offer, (iii) the generation resource's tracking ramp-rate limited expected output level if it had been dispatched in economic merit order, as further described in the PJM Manuals, and (iv) the generation resource's regulation set point, and adjusted for the performance score of the resource offset by the regulation signal bias, and adjusted for the performance score of the resource. Opportunity costs for Economic Load Response Participant or regulation only resources to provide Regulation are zero.

The unit-specific opportunity costs associated with uneconomic operation during each of the preceding two Real-time Settlement Intervals of the regulation commitment shall be equal to the product of (i) the deviation between the set point of the generation resource that is expected to be required in the initial regulating Real-time Settlement Interval in order to provide Regulation and the resource's tracking expected ramp rate limited output in each of the preceding two Real-time Settlement Intervals of the regulation commitment times (ii) the absolute value of the difference between the Locational Marginal Price at the generation bus for the generation resource in each of the preceding two Real-time Settlement Intervals of the regulation commitment and the energy offer, using the Final Offer, at the megawatt level of the Regulation set point for the resource in the initial regulating Real-time Settlement Interval, in the PJM Interchange Energy Market, all as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals.

The unit-specific opportunity costs associated with uneconomic operation during each of the following two Real-time Settlement Intervals of the regulation commitment shall be equal to the product of (i) the deviation between the set point of the generation resource that is expected to be required in the final regulating Real-time Settlement Interval in order to provide Regulation and the resource's tracking expected ramp-rate limited output in each of the following two Real-time Settlement Intervals of the regulation commitment times, and (ii) the absolute value of the difference between the Locational Marginal Price at the generation bus for the generation resource in each of the following two Real-time Settlement Intervals of the regulation commitment and the energy offer, using the Final Offer, at the megawatt level of the Regulation set point for the resource in final regulating hour, in the PJM Interchange Energy Market all as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals.

(f) Any amounts credited for Regulation in an hour in excess of the Regulation market-clearing prices in that hour shall be allocated and charged to each Market Participant in a Regulation Zone that does not meet its hourly Regulation obligation in proportion to its purchases of Regulation in such Regulation Zone in megawatt-hours during that hour.

(g) To determine the Regulation market mileage-clearing price for Regulation-Down Service and Regulation-Up Service, the Office of the Interconnection shall adjust the submitted applicable mileage offer for each resource in accordance with the historical performance score of that resource, and the amount of historically dispatched Regulation (mileage) for the given service, calculated by the Office of the Interconnection. The maximum adjusted mileage offer of all cleared resources for each regulation service will set the Regulation market mileage-clearing price for Regulation-Down Service and Regulation-Up Service.

The owner of each Regulation resource that is committed for a regulation service and actively follows the Office of the Interconnection's Regulation signals and instructions, will be credited for Regulation-Down Service and/or Regulation-Up Service mileage by multiplying the applicable regulation service assigned MW(s) by the applicable regulation service Regulation market mileage-clearing price, by the ratio between the requested mileage for the Regulation service dispatch signal and the historic requested mileage for the applicable Regulation service dispatch signal, calculated by the Office of the Interconnection, and by the Regulation resource's applicable regulation service performance score calculated in accordance with subsection (j) of this section.

(h) The Office of the Interconnection shall divide each Regulation resource's capability offer for Regulation-Down Service or Regulation-Up Service by the applicable regulation service historic performance score for the resource for the purposes of committing resources and setting the market clearing prices.

The Office of the Interconnection shall calculate the Regulation market capability-clearing price for Regulation-Down Service and Regulation-Up Service for each Regulation Zone by subtracting the applicable regulation service Regulation market mileage-clearing price described in subsection (g) from the total Regulation market clearing price described in subsection (c). This

residual sets the Regulation market capability-clearing price for ~~that market~~ the Regulation-Down Service and Regulation-Up Service Real-time Settlement Interval.

The owner of each Regulation resource that is committed for a regulation service and actively follows the Office of the Interconnection's Regulation signals and instructions will be credited for Regulation-Down Service and Regulation-Up Service capability by multiplying the applicable regulation service ~~based on the~~ assigned MW and the applicable regulation service capability Regulation market-clearing price multiplied by the Regulation resource's applicable regulation service performance score calculated in accordance with subsection (j) of this section.

(i) In accordance with the processes described in the PJM Manuals, the Office of the Interconnection shall: (i) calculate inter-temporal opportunity costs for each applicable resource; (ii) include such inter-temporal opportunity costs in each applicable resource's offer to sell frequency Regulation service; and (iii) account for such inter-temporal opportunity costs in the Regulation market-clearing price.

(j) The Office of the Interconnection shall calculate each Regulation resource's performance score for Regulation-Down Service and Regulation-Up Service. The performance score shall be a function of the difference in the energy provided versus the energy requested by the Regulation signal while scaling for the number of samples. The error measured shall be the difference of the resources response and the dispatch signal, adjusted by the assigned MW and signal dispatch of the Regulation resource. The performance score is calculated using the following equations:

$$\text{Performance Score} = 1 - 1/n \sum \text{Abs (Error)};$$

Error = Average of Abs (Abs (Response - Regulation Signal) / (0.5*Interval Average Regulation Signal + 0.5*AREG)); and

n = the number of samples in the interval

AREG = assigned regulation megawatt.

The Office of the Interconnection shall calculate a performance score for each Regulation resource for each regulation service for each five-minute period the Regulation resource is assigned to provide Regulation-Down Service and/or Regulation-Up Service.

The historic performance score for Regulation-Down Service and Regulation-Up Service will be based on a 100 clock-hour rolling average of the Real-time Settlement Interval performance scores, with consideration of the qualification score, for resources without adequate historical data, as defined in the PJM Manuals.

Regulation resources that have a Real-time Settlement Interval performance score below 25% will be ineligible for Regulation credits for that Real-time Settlement Interval.

Regulation resources that have historical performance scores fall below 40% shall be disqualified from providing the applicable Regulation service until they are able to re-qualify, as defined in the PJM Manuals.

(k) During a Market Suspension where the suspension is less than or equal to 24 consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Regulation, the resources providing Regulation at the direction of the Office of the Interconnection will be compensated based on a calculated Regulation market-clearing price. Regulation market-clearing prices for each Real-time Settlement Interval associated with such Market Suspension shall be the average of the Regulation market-clearing prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

During a Market Suspension where the suspension is greater than 24 consecutive hours, if the Office of the Interconnection is assigning Regulation, resources providing Regulation at the direction of the Office of the Interconnection will be compensated based on a calculated Regulation clearing price. The Regulation clearing price for each Real-time Settlement Interval will be determined by calculating a Regulation clearing cost for the online resources providing Regulation during the Market Suspension. The resource's Regulation clearing cost is determined by the summation of their adjusted Regulation offer and adjusted opportunity cost. The opportunity cost will be based on the resource's cost-based offer and will be determined as follows:

For online resources providing Regulation on a cost-based offer at the time of the Market Suspension, that cost-based offer will be used.

For online resources providing Regulation on a price-based offer at the time of the Market Suspension, the Office of the Interconnection shall use the cheapest available cost-based offer based on the dispatch cost formula as defined in Operating Agreement, Schedule 1, section 6.4.1(g) using the available cost-based offers in the Office of the Interconnection system at the time of the Market Suspension.

The highest cost resource, based on this Regulation clearing cost, will set the Regulation market-clearing price for each hour of the Market Suspension.

During a Market Suspension, if the Office of the Interconnection is not assigning Regulation resources, then the Regulation market-clearing price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period and no resource-specific opportunity cost will be calculated.

During a Market Suspension, the following Regulation components for all Real-time Settlement Intervals in the Market Suspension period will be determined as follows:

- (i) If the regulation performance score cannot be calculated during a Market Suspension, the performance score will be used for the Market Suspension period.

- (ii) If the regulation mileage ratio cannot be calculated during a Market Suspension, the mileage ratio will be set to one (1) for the Market Suspension period.

3.2.2A Offer Price Caps.

3.2.2A.1 Applicability.

(a) For each Regulation market clearing interval, the Office of the Interconnection shall conduct a Regulation three-pivotal supplier test as described in this section. Regulation offers from Market Sellers that fail the Regulation three-pivotal supplier test shall be capped in the interval in which they failed the test at their cost based offers as determined pursuant to Tariff, Attachment K-Appendix, section 1.10.1A(e). A Regulation supplier fails the three-pivotal supplier test in any Regulation market clearing interval in which such Regulation supplier and the two largest other Regulation suppliers are jointly pivotal. The Regulation three-pivotal supplier test will be conducted separately for Regulation-Down Service and Regulation-Up Service in the same Regulation market clearing interval.

(b) For the purposes of conducting the three-pivotal supplier test pursuant to this section, the following applies:

(i) The Regulation three-pivotal supplier test will include in the definition of available supply all offer megawatts from resources capable of satisfying the Regulation-Down Requirement and Regulation-Up Requirement of the PJM Region multiplied by the historic performance score of the resource for which the capability cost-based offer plus the mileage cost-based offer plus any eligible opportunity costs is no greater than 150% of the clearing price that would be calculated if all offers were limited to cost (plus eligible opportunity costs).

(ii) The Regulation three-pivotal supplier test will apply on a Regulation supplier basis (i.e. not a resource by resource basis) and only the Regulation suppliers that fail the three-pivotal supplier test will have their Regulation offers capped. A Regulation supplier for the purposes of this section includes corporate affiliates. Regulation from resources controlled by a Regulation supplier or its affiliates, whether by contract with unaffiliated third parties or otherwise, will be included as Regulation of that Regulation supplier. Regulation provided by resources owned by a Regulation supplier but controlled by an unaffiliated third party, whether by contract or otherwise, will be included as Regulation of that third party.

(iii) Each supplier shall be ranked from the largest to the smallest offered megawatt of eligible Regulation supply adjusted by the historic performance of each resource. Suppliers are then tested in order, starting with the three largest suppliers. For each iteration of the test, the two largest suppliers are combined with a third supplier, and the combined supply is subtracted from total effective supply. The resulting net amount of eligible supply is divided by the Regulation Requirement for the Regulation clearing interval to determine the residual supply index. Where the residual supply index for Regulation three pivotal suppliers is less than or equal to 1.0, then the three suppliers are

jointly pivotal and the suppliers being tested fail the three pivotal supplier test. Iterations of the test continue until the combination of the two largest suppliers and a third supplier result in a residual supply index greater than 1.0, at which point the remaining suppliers pass the test. Any resource owner that fails the three-pivotal supplier test will be offer-capped.

3.2.3 Operating Reserves.

(a) A Market Seller's pool-scheduled resources capable of providing Operating Reserves shall be credited as specified below based on the applicable offer for the operation of such resource, provided that the resource was available for the entire time specified in the Offer Data for such resource. To the extent that sections 3.2.3A, 3.2.3A.001, and 3.2.3A.01 below do not meet the Synchronized Reserve Requirements, the Primary Reserve Requirements, and the 30-minute Reserve Requirements, the Office of the Interconnection shall schedule additional Operating Reserves pursuant to Section 1.7.17 and 1.10 of Schedule 1 of this Agreement. In addition the Office of the Interconnection shall schedule Operating Reserves pursuant to those sections to satisfy any unforeseen Operating Reserve requirements that are not reflected in the day-ahead market. PJMSettlement shall be the Counterparty to the purchases and sales of Operating Reserve in the PJM Interchange Energy Market.

(b) The following determination shall be made for each pool-scheduled resource that is scheduled in the Day-ahead Energy Market: the total offered price for Start-up Costs and No-load Costs and energy, determined on the basis of the resource's scheduled output, shall be compared to the total value of that resource's energy – as determined by the Day-ahead Energy Market and the Day-ahead Prices applicable to the relevant generation bus in the Day-ahead Energy Market. PJM shall also (i) determine whether any resources were scheduled in the Day-ahead Energy Market to provide Black Start service, Reactive Services or transfer interface control during the Operating Day because they are known or expected to be needed to maintain system reliability in a Zone during the Operating Day in order to minimize the total cost of Operating Reserves associated with the provision of such services and reflect the most accurate possible expectation of real-time operating conditions in the day-ahead model, which resources would not have otherwise been committed in the day-ahead security-constrained dispatch and (ii) report on the day following the Operating Day the megawatt quantities scheduled in the Day-ahead Energy Market for the above-enumerated purposes for the entire RTO.

Except as provided in section 3.2.3(n) below, if the total offered price for Start-up Costs (shutdown costs for Economic Load Response Participant resources) and No-load Costs and energy summed over all Day-ahead Settlement Intervals exceeds the total value summed over all Day-ahead Settlement Intervals, the difference shall be credited to the Market Seller as a day-ahead Operating Reserve credit.

However, for the Day-ahead Settlement Intervals in which the resource is scheduled to provide energy in the Operating Day and the resource actually provides energy in at least one Real-time Settlement Interval in an hour that corresponds to such scheduled Day-ahead Settlement Intervals, a resource's day-ahead Operating Reserve credit shall be reduced by the greater of zero

or the difference of the resource's Day-ahead Operating Reserve Target and the Balancing Operating Reserve Target, as determined below.

A resource's Day-ahead Operating Reserve Target shall be determined in accordance with the following equation:

$$(A + B) - C$$

Where:

A = Start-up Costs

B = the sum of day-ahead No-load Costs and energy over the applicable Real-time Settlement Intervals that correspond with Day-ahead Settlement Intervals in which the resource is scheduled. The day-ahead No-load Costs and energy are divided by twelve to determine the cost for each Real-time Settlement Interval.

C = the sum of the day-ahead revenues calculated for each Real-time Settlement Interval that corresponds with a Day-ahead Settlement Interval in which the resource is scheduled, where the day-ahead revenue for each such Real-time Settlement Interval equals the product of the megawatt amount of energy scheduled in the Day-ahead Energy Market and the Day-ahead Price at the applicable pricing point for the resource divided by twelve.

A resource's Balancing Operating Reserve Target shall be determined in accordance with the following equation:

$$D - (E + F)$$

Where:

D = the sum of Start-up Costs and No-load Costs and the incremental cost of energy summed over all Real-time Settlement Intervals that correspond to the Day-ahead Settlement Intervals in which the resource was scheduled;

E = [(the megawatt amount of energy provided in the Real-time Energy Market minus the megawatt amount of energy scheduled in the Day-ahead Energy Market) multiplied by the Real-time Price at the applicable pricing point for the resource] plus the sum of the day-ahead revenues as determined in part C of the above formula for determining the Day-ahead Operating Reserve Target, summed over the applicable Real-time Settlement Intervals; and

F = the sum of all revenues earned for providing Secondary Reserves, Synchronized Reserves, Non-Synchronized Reserves, and Reactive Services over the applicable Real-time Settlement Intervals.

The Office of the Interconnection shall apply any balancing Operating Reserve credits allocated pursuant to this section 3.2.3(b) to real-time deviations or real-time load share plus exports, pursuant to Tariff, Attachment K-Appendix, section 3.2.3(p), depending on whether the balancing Operating Reserve credits are related to resources scheduled during the reliability analysis for an Operating Day, or during the actual Operating Day.

(i) For resources scheduled by the Office of the Interconnection during the reliability analysis for an Operating Day, the associated balancing Operating Reserve credits shall be allocated based on the reason the resource was scheduled according to the following provisions:

(A) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to operate in real-time to augment the physical resources committed in the Day-ahead Energy Market to meet the forecasted real-time load plus the Operating Reserve requirement, the associated balancing Operating Reserve credits, identified as RA Credits for Deviations, shall be allocated to real-time deviations.

(B) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to maintain system reliability, the associated balancing Operating Reserve credits, identified as RA Credits for Reliability, shall be allocated according to ratio share of real time load plus export transactions.

(C) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource with a day-ahead schedule is required to deviate from that schedule to provide balancing Operating Reserves, the associated balancing Operating Reserve credits shall be segmented and separately allocated pursuant to subsections 3.2.3(b)(i)(A) or 3.2.3(b)(i)(B) hereof. Balancing Operating Reserve credits for such resources will be identified in the same manner as units committed during the reliability analysis pursuant to subsections 3.2.3(b)(i)(A) and 3.2.3(b)(i)(B) hereof.

(ii) For resources scheduled during an Operating Day, the associated balancing Operating Reserve credits shall be allocated according to the following provisions:

(A) If the Office of the Interconnection directs a resource to operate during an Operating Day to provide balancing Operating Reserves, the associated balancing Operating Reserve credits, identified as RT Credits for Reliability, shall be allocated according to ratio share of load plus exports. The foregoing notwithstanding, credits will be applied pursuant to this section only if the LMP at the resource's bus does not meet or exceed the applicable offer of the resource for at least four 5-minute intervals during one or more discrete clock hours during each period the resource operated and produced MWs during the relevant Operating Day. If a resource operated and produced MWs for less than four 5-

minute intervals during one or more discrete clock hours during the relevant Operating Day, the credits for that resource during the hour it was operated less than four 5-minute intervals will be identified as being in the same category (RT Credits for Reliability or RT Credits for Deviations) as identified for the Operating Reserves for the other discrete clock hours.

(B) If the Office of the Interconnection directs a resource not covered by section 3.2.3(b)(ii)(A) hereof to operate in real-time during an Operating Day, the associated balancing Operating Reserve credits, identified as RT Credits for Deviations, shall be allocated according to real-time deviations from day-ahead schedules.

(iii) PJM shall post on its Web site the aggregate amount of MWs committed that meet the criteria referenced in subsections (b)(i) and (b)(ii) hereof.

(c) The sum of the foregoing credits calculated in accordance with section 3.2.3(b) plus any unallocated charges from section 3.2.3(h) and Tariff, Attachment K-Appendix, section 5.1.7, and any shortfalls paid pursuant to the Market Settlement provision of the Day-ahead Economic Load Response Program, shall be the cost of Operating Reserves in the Day-ahead Energy Market.

(d) The cost of Operating Reserves in the Day-ahead Energy Market shall be allocated and charged to each Market Participant in proportion to the sum of its (i) scheduled load (net of Behind The Meter Generation expected to be operating, but not to be less than zero), accepted Decrement Bids in the Day-ahead Energy Market in megawatt-hours for that Operating Day and accepted Up-to Congestion Transactions in the Day-ahead Energy Market in megawatt-hours for the Operating Day at the sink of the transaction; and (ii) scheduled energy sales in the Day-ahead Energy Market from within the PJM Region to load outside such region in megawatt-hours for that Operating Day, but not including its bilateral transactions that are Dynamic Transfers to load outside such area pursuant to Tariff, Attachment K-Appendix, section 1.12, except to the extent PJM scheduled resources to provide Black Start service, Reactive Services or transfer interface control. The cost of Operating Reserves in the Day-ahead Energy Market for resources scheduled to provide Black Start service for the Operating Day which resources would not have otherwise been committed in the day-ahead security constrained dispatch shall be allocated by ratio share of the monthly transmission use of each Network Customer or Transmission Customer serving Zone Load or Non-Zone Load, as determined in accordance with the formulas contained in Tariff, Schedule 6A. The cost of Operating Reserves in the Day-ahead Energy Market for resources scheduled to provide Reactive Services or transfer interface control because they are known or expected to be needed to maintain system reliability in a Zone during the Operating Day and would not have otherwise been committed in the day-ahead security constrained dispatch shall be allocated and charged to each Market Participant in proportion to the sum of its real-time deliveries of energy to load (net of operating Behind The Meter Generation) in such Zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such Zone.

(e) At the end of each Operating Day, the following determination shall be made for each synchronized pool-scheduled resource of each Market Seller that operates as requested by the Office of the Interconnection. For each calendar day, pool-scheduled resources in the Real-time Energy Market shall be made whole for each of the following Segments: 1) the greater of their day-ahead schedules and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Economic Load Response Participant resources); and 2) any block of Real-time Settlement Intervals the resource operates at PJM's direction in excess of the greater of its day-ahead schedule and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Economic Load Response Participant resources). For each calendar day, and for each synchronized start of a generation resource or PJM-dispatched economic load reduction, there will be a maximum of two Segments for each resource. Segment 1 will be the greater of the day-ahead schedule and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Demand Resources) and Segment 2 will include the remainder of the contiguous Real-time Settlement Intervals when the resource is operating at the direction of the Office of the Interconnection, provided that a segment is limited to the Operating Day in which it commenced and cannot include any part of the following Operating Day.

A Generation Capacity Resource that operates outside of its unit-specific parameters will not receive Operating Reserve Credits nor be made whole for such operation when not dispatched by the Office of the Interconnection, unless the Market Seller of the Generation Capacity Resource can justify to the Office of the Interconnection that operation outside of such unit-specific parameters was the result of an actual constraint. Such Market Seller shall provide to the Market Monitoring Unit and the Office of the Interconnection its request to receive Operating Reserve Credits and/or to be made whole for such operation, along with documentation explaining in detail the reasons for operating its resource outside of its unit-specific parameters, within thirty calendar days following the issuance of billing statement for the Operating Day. The Market Seller shall also respond to additional requests for information from the Market Monitoring Unit and the Office of the Interconnection. The Market Monitoring Unit shall evaluate such request for compensation and provide its determination of whether there was an exercise of market power to the Office of the Interconnection by no later than twenty-five calendar days after receiving the Market Seller's request for compensation. The Office of the Interconnection shall make its determination whether the Market Seller justified that it is entitled to receive Operating Reserve Credits and/or be made whole for such operation of its resource for the day(s) in question, by no later than thirty calendar days after receiving the Market Seller's request for compensation.

Nuclear generation resources shall not be eligible for Operating Reserve payments unless: 1) the Office of the Interconnection directs such resources to reduce output, in which case, such units shall be compensated in accordance with Tariff, Attachment K-Appendix, section 3.2.3(f) and the parallel provision of Operating Agreement, Schedule 1, section 3.2.3(f); or 2) the resource submits a request for a risk premium to the Market Monitoring Unit under the procedures specified in Tariff, Attachment M – Appendix, section II.B. A nuclear generation resource (i) must submit a risk premium consistent with its agreement under such process, or, (ii) if it has not agreed with the Market Monitoring Unit on an appropriate risk premium, may submit its own determination of an appropriate risk premium to the Office of the Interconnection, subject to

acceptance by the Office of the Interconnection, with or without prior approval from the Commission.

Credits received pursuant to this section shall be equal to the positive difference between a resource's Total Operating Reserve Offer, and the total value of the resource's energy in the Day-ahead Energy Market plus any credit or change for quantity deviations, at PJM dispatch direction (excluding quantity deviations caused by an increase in the Market Seller's Real-time Offer), from the Day-ahead Energy Market during the Operating Day at the real-time LMP(s) applicable to the relevant generation bus in the Real-time Energy Market. The foregoing notwithstanding, credits for Segment 2 shall exclude start up (shutdown costs for Economic Load Response Participant resources) costs for generation resources.

Except as provided in section 3.2.3(m), if the total offered price exceeds the total value, the difference less any credit as determined pursuant to section 3.2.3(b), and less the absolute value of any negative Synchronized Reserve lost opportunity cost credit, as determined in section 3.2.3A(f)(iv) below, and less the absolute value of any negative Non-Synchronized Reserve lost opportunity cost credit determined in section 3.2.3.A.001(d)(iii) below, and less any amounts credited for providing Reactive Services as specified in section 3.2.3B, and the absolute value of any negative Secondary Reserve lost opportunity cost credit, as determined in section 3.2.3A.01(f)(iv) below, and plus the sum of the Market Revenue Neutrality Offsets for Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve, shall be credited to the Market Seller.

Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve credits applied against Operating Reserve credits pursuant to this section shall be netted against the Operating Reserve credits earned in the corresponding Real-time Settlement Interval(s) in which the Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve credits accrued, provided that for condensing combustion turbines, Synchronized Reserve credits will be netted against the total Operating Reserve credits accrued during each Real-time Settlement Interval the unit operates in condensing and generation mode.

(f) A Market Seller of a unit not defined in subsection (f-1), (f-2), or (f-4) hereof (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3(c) hereof), the output of which is reduced or suspended at the request of the Office of the Interconnection due to a transmission constraint or other reliability issue, and for which the real-time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall be credited for each Real-time Settlement Interval in an amount equal to the product of (A) the LOC Deviation times (B) the Locational Marginal Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A * B) - C$. If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.11.6, where the suspension is greater than twenty-four (24) consecutive hours, resources will not be compensated for lost opportunity costs.

(f-1) With the exception of Market Sellers of Flexible Resources that submit a Real-time Offer greater than their resource's Committed Offer in the Day-ahead Energy Market, a Market Seller of a Flexible Resource shall be compensated for lost opportunity cost, and shall be limited to the lesser of the unit's Economic Maximum or the unit's Generation Resource Maximum Output, if either of the following conditions occur:

- (i) if the unit output is reduced at the direction of the Office of the Interconnection and the real time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as directed by the PJM dispatcher), then the Market Seller shall be credited in a manner consistent with that described in section 3.2.3(f).
- (ii) If the unit is scheduled to produce energy in the Day-ahead Energy Market for a Day-ahead Settlement Interval, but the unit is not called on by the Office of the Interconnection and does not operate in the corresponding Real-time Settlement Interval(s), then the Market Seller shall be credited in an amount equal to the higher of:
 - 1) the product of (A) the amount of megawatts committed in the Day-ahead Energy Market for the generating unit, and (B) the Real-time Price at the generation bus for the generating unit, minus the sum of (C) the Total Lost Opportunity Cost Offer plus No-load Costs, plus (D) the Start-up Cost, divided by the Real-time Settlement Intervals committed for each set of contiguous hours for which the unit was scheduled in Day-ahead Energy Market. This equation is represented as $(A*B) - (C+D)$. The startup cost, (D), shall be excluded from this calculation if the unit operates in real time following the Office of the Interconnection's direction during any portion of the set of contiguous hours for which the unit was scheduled in Day-ahead Energy Market, or
 - 2) the Real-time Price at the unit's bus minus the Day-ahead Price at the unit's bus, multiplied by the number of megawatts committed in the Day-ahead Energy Market for the generating unit.

(f-2) A Market Seller of a hydroelectric resource that is pool-scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3(c) hereof), the output of which is altered at the request of the Office of the Interconnection from the schedule submitted by the owner, due to a transmission constraint or other reliability issue, shall be compensated for lost opportunity cost in the same manner as provided in sections 3.2.2(d) and 3.2.3A(f) and further detailed in the PJM Manuals.

(f-3) If a Market Seller believes that, due to specific pre-existing binding commitments to which it is a party, and that properly should be recognized for purposes of this section, the

above calculations do not accurately compensate the Market Seller for opportunity cost associated with following PJM dispatch instructions and reducing or suspending a unit's output due to a transmission constraint or other reliability issue, then the Office of the Interconnection, the Market Monitoring Unit and the individual Market Seller will discuss a mutually acceptable, modified amount of opportunity cost compensation, taking into account the specific circumstances binding on the Market Seller. Following such discussion, if the Office of the Interconnection accepts a modified amount of opportunity cost compensation, the Office of the Interconnection shall invoice the Market Seller accordingly. If the Market Monitoring Unit disagrees with the modified amount of opportunity cost compensation, as accepted by the Office of the Interconnection, it will exercise its powers to inform the Commission staff of its concerns.

(f-4) A Market Seller of a wind generating unit that is pool-scheduled or self-scheduled, has SCADA capability to transmit and receive instructions from the Office of the Interconnection, has provided data and established processes to follow PJM basepoints pursuant to the requirements for wind generating units as further detailed in this Agreement, the Tariff and the PJM Manuals, and which is operating as requested by the Office of the Interconnection, the output of which is reduced or suspended at the request of the Office of the Interconnection due to a transmission constraint or other reliability issue, and for which the , real-time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall be credited for each Real-time Settlement Interval in an amount equal to the product of (A) the LOC Deviation times (B) the Real-time Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A*B) - C$.

(f-5) (i) A Market Seller of a pool-scheduled resource or a dispatchable self-scheduled resource shall receive Dispatch Differential Lost Opportunity Cost credits as calculated under subsection (iv) below if the resource is dispatched to provide energy in the Real-time Energy Market, provided such resource is not committed to provide real-time ancillary services (Regulation, reserves, reactive service) or instructed to reduce or suspend output due to a transmission constraint or other reliability issue pursuant to Tariff, Attachment K-Appendix, section 3.2.3(f-1) through Tariff, Attachment K-Appendix, section (f-4).

(ii) PJM will calculate the revenue above cost for the pricing run for each Real-time Settlement Interval in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = the resource's expected output level based on its resource parameters at the Real-time Price at the applicable pricing point;

B = the Real-time Price at the applicable pricing point; and

C = the sum of the resource's Real-time Energy Market offer integrated under the Final Offer for the resource's expected output level based on its resource parameters at the Real-time Price at the applicable pricing point.

(iii) PJM will calculate the revenue above cost for the dispatch run for each Real-time Settlement Interval in accordance with the following equation:

$$(\text{greater of A and B}) - (\text{lesser of C and D})$$

Where:

A = the product of the amount of megawatts of energy dispatched in the Real-time Energy Market dispatch run for the resource in that Real-time Settlement Interval and the Real-time Price at the applicable pricing point;

B = the product of the amount of megawatts of energy the resource actually provided in that Real-time Settlement Interval and the Real-time Price at the applicable pricing point;

C = the resource's Real-time Energy Market offer integrated under the Final Offer for the amount of megawatts dispatched in the Real-time Energy Market dispatch run;

D = the resource's Real-time Energy Market offer integrated under the Final Offer for the amount of megawatts the resource actually provided in that Real-time Settlement Interval.

(iv) The Dispatch Differential Lost Opportunity Cost credit shall equal the greater of (A) the difference between the revenue above cost based on the pricing run determined in subsection (f-5)(ii) and the revenue above cost based on the dispatch run determined in subsection (f-5)(iii) or (B) zero.

(v) For each hour in an Operating Day, the total cost of the Dispatch Differential Lost Opportunity Cost credits shall be allocated and charged to each Market Participant in proportion to the sum of its (i) deliveries of energy to load ((a) net of operating Behind The Meter Generation, but not to be less than zero; and (b) excluding Direct Charging Energy) in the PJM Region, served under Network Transmission Service, in megawatt-hours; and (ii) deliveries of energy sales from within the PJM Region to load outside such region in megawatt-hours but not including its bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Tariff, Attachment K-Appendix, section 1.12, as compared to the sum of all such deliveries for all Market Participants.

(g) The sum of the foregoing credits in Tariff, Attachment K-Appendix, section 3.2.3(f-1) through Tariff, Attachment K-Appendix, section 3.2.3(f-4), plus any cancellation fees paid in accordance with Tariff, Attachment K-Appendix, section 1.10.2(d), such cancellation fees to be applied to the Operating Day for which the unit was scheduled, plus any shortfalls paid

pursuant to the Market Settlement provision of the real-time Economic Load Response Program, less any payments received from another Control Area for Operating Reserves shall be the cost of Operating Reserves for the Real-time Energy Market in each Operating Day.

(h) The cost of Operating Reserves for the Real-time Energy Market for each Operating Day, except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, shall be allocated and charged to each Market Participant based on their daily total of hourly deviations determined in accordance with the following equation:

$$\sum_h (A + B + C)$$

Where:

h = the hours in the applicable Operating Day;

A = For each Real-time Settlement Interval in an hour, the sum of the absolute value of the withdrawal deviations (in MW) between the quantities scheduled in the Day-ahead Energy Market and the Market Participant's energy withdrawals (net of operating Behind The Meter Generation) in the Real-time Energy Market, except as noted in subsection (h)(ii) below and in the PJM Manuals divided by the number of Real-time Settlement Intervals for that hour. The summation of each Real-time Settlement Interval's withdrawal deviation in an hour will be the Market Participant's total hourly withdrawal deviations. Market Participant bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Tariff, Attachment K-Appendix, section 1.12 are not included in the determination of withdrawal deviations;

B = For each Real-time Settlement Interval in an hour, the sum of the absolute value of generation deviations (in MW and not including deviations in Behind The Meter Generation) as determined in subsection (o) divided by the number of Real-time Settlement Intervals for that hour;

C = For each Real-time Settlement Interval in an hour, the sum of the absolute value of the injection deviations (in MW) between the quantities scheduled in the Day-ahead Energy Market and the Market Participant's energy injections in the Real-time Energy Market divided by the number of Real-time Settlement Intervals for that hour. The summation of the injection deviations for each Real-time Settlement Interval in an hour will be the Market Participant's total hourly injection deviations. The determination of injection deviations does not include generation resources.

The Revenue Data for Settlements determined for each Real-time Settlement Interval in accordance with Tariff, Attachment K-Appendix, section 3.1A shall be used in determining the real-time withdrawal deviations, generation deviations and injection deviations used to calculate Operating Reserve under this subsection (e).

The costs associated with scheduling of units for Black Start service or testing of Black Start Units shall be allocated by ratio share of the monthly transmission use of each Network Customer or Transmission Customer serving Zone Load or Non-Zone Load, as determined in accordance with the formulas contained in Tariff, Schedule 6A.

Notwithstanding section (h)(1) above, as more fully set forth in the PJM Manuals, load deviations from the Day-ahead Energy Market shall not be assessed Operating Reserves charges to the extent attributable to reductions in the load of Price Responsive Demand that is in response to an increase in Locational Marginal Price from the Day-ahead Energy Market to the Real-time Energy Market and that is in accordance with a properly submitted PRD Curve.

Deviations that occur within a single Zone shall be associated with the Eastern or Western Region, as defined in section 3.2.3(q) below, and shall be subject to the regional balancing Operating Reserve rate determined in accordance with Section 3.2.3(q). Deviations at a hub shall be associated with the Eastern or Western Region if all the buses that define the hub are located in the region. Deviations at an Interface Pricing Point shall be associated with whichever region, the Eastern or Western Region, with which the majority of the buses that define that Interface Pricing Point are most closely electrically associated. If deviations at interfaces and hubs are associated with the Eastern or Western region, they shall be subject to the regional balancing Operating Reserve rate. Demand and supply deviations shall be based on total activity in a Zone, including all aggregates and hubs defined by buses that are wholly contained within the same Zone.

The foregoing notwithstanding, netting deviations shall be allowed for each Real-time Settlement Interval in accordance with the following provisions:

- (i) Generation resources with multiple units located at a single bus shall be able to offset deviations in accordance with the PJM Manuals to determine the net deviation MW at the relevant bus.
- (ii) Demand deviations will be assessed by comparing all day-ahead demand transactions, which include the components referenced in section 3.2.3(d) regarding the cost of Operating Reserves in the Day-ahead Energy Market, at a single transmission zone, hub, or interface against the real-time demand transactions at that same transmission zone, hub, or interface; except that the positive values of demand deviations, as set forth in the PJM Manuals, will not be assessed Operating Reserve charges in the event of a Primary Reserve or Synchronized Reserve shortage in real-time or where PJM initiates the request for emergency load reductions in real-time in order to avoid a Primary Reserve or Synchronized Reserve shortage.
- (iii) Supply deviations will be assessed by comparing all day-ahead transactions at a single transmission zone, hub, or interface against the real-time transactions at that same transmission zone, hub, or interface.
- (iv) Bilateral transactions inside the PJM Region, as defined in Operating Agreement, Schedule 1, section 1.7.10, will not be included in the determination of Supply or Demand deviations.

(i) At the end of each Operating Day, Market Sellers shall be credited on the basis of their offered prices for synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, as well as the credits calculated as specified in Section 3.2.3(b) for those generators committed solely for the purpose of providing synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, at the request of the Office of the Interconnection.

(j) The sum of the foregoing credits as specified in section 3.2.3(i) shall be the cost of Operating Reserves for synchronous condensing for the PJM Region for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, or in association with post-contingency operation for the Operating Day and shall be separately determined for the PJM Region.

(k) The cost of Operating Reserves for synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, or in association with post-contingency operation for each Operating Day shall be allocated and charged to each Market Participant in proportion to the sum of its (i) deliveries of energy to load (net of operating Behind The Meter Generation, but not to be less than zero) in the PJM Region, served under Network Transmission Service, in megawatt-hours during that Operating Day; and (ii) deliveries of energy sales from within the PJM Region to load outside such region in megawatt-hours during that Operating Day, but not including its bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Tariff, Attachment K-Appendix, section 1.12, as compared to the sum of all such deliveries for all Market Participants.

(l) For any Operating Day in either, as applicable, the Day-ahead Energy Market or the Real-time Energy Market for which, for all or any part of such Operating Day, the Office of the Interconnection: (i) declares a Maximum Generation Emergency; (ii) issues an alert that a Maximum Generation Emergency may be declared (“Maximum Generation Emergency Alert”); or (iii) schedules units based on the anticipation of a Maximum Generation Emergency or a Maximum Generation Emergency Alert, the Operating Reserves credit otherwise provided by section 3.2.3(b) or section 3.2.3(e) in connection with market-based offers shall be limited as provided in subsections (n) or (m), respectively. The Office of the Interconnection shall provide timely notice on its internet site of the commencement and termination of any of the actions described in subsection (i), (ii), or (iii) of this subsection (l) (collectively referred to as “MaxGen Conditions”). Following the posting of notice of the commencement of a MaxGen Condition, a Market Seller may elect to submit a cost-based offer in accordance with Operating Agreement, Schedule 2, in which case subsections (m) and (n) shall not apply to such offer; provided, however, that such offer must be submitted in accordance with the deadlines in Tariff, Attachment K-Appendix, section 1.10 for the submission of offers in the Day-ahead Energy Market or Real-time Energy Market, as applicable. Submission of a cost-based offer under such conditions shall not be precluded by Tariff, Attachment K-Appendix, section 1.9.7(b); provided, however, that the Market Seller must return to compliance with Tariff, Attachment K-Appendix, section 1.9.7(b) when it submits its bid for the first Operating Day after termination of the MaxGen Condition.

(m) For the Real-time Energy Market, if the Effective Offer Price (as defined below) for a market-based offer is greater than \$1,000/MWh and greater than the Market Seller's lowest available and applicable cost-based offer, the Market Seller shall not receive any credit for Operating Reserves. For purposes of this subsection (m), the Effective Offer Price shall be the amount that, absent subsections (l) and (m), would have been credited for Operating Reserves for such Operating Day pursuant to section 3.2.3(e) plus the Real-time Energy Market revenues for the Real-time Settlement Intervals that the offer is economic divided by the megawatt hours of energy provided during the Real-time Settlement Intervals that the offer is economic. The Real-time Settlement Intervals that the offer is economic shall be: (i) the Real-time Settlement Intervals that the offer price for energy is less than or equal to the Real-time Price for the relevant generation bus, (ii) the Real-time Settlement Intervals in which the offer for energy is greater than Locational Marginal Price and the unit is operated at the direction of the Office of the Interconnection that are in addition to any Real-time Settlement Intervals required due to the minimum run time or other operating constraint of the unit, and (iii) for any unit with a minimum run time of one hour or less and with more than one start available per day, any hours the unit operated at the direction of the Office of the Interconnection.

(n) For the Day-ahead Energy Market, if notice of a MaxGen Condition is provided prior to 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled and the Effective Offer Price for a market-based offer is greater than \$1,000/MWh and greater than the Market Seller's lowest available and applicable cost-based offer, the Market Seller shall not receive any credit for Operating Reserves. If notice of a MaxGen Condition is provided after 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled and the Effective Offer Price is greater than \$1,000/MWh, the Market Seller shall receive credit for Operating Reserves determined in accordance with section 3.2.3(b), subject to the limit on total compensation stated below. If the Effective Offer Price is less than or equal to \$1,000/MWh, regardless of when notice of a MaxGen Condition is provided, the Market Seller shall receive credit for Operating Reserves determined in accordance with section 3.2.3(b), subject to the limit on total compensation stated below. For purposes of this subsection (n), the Effective Offer Price shall be the amount that, absent subsections (l) and (n), would have been credited for Operating Reserves for such Operating Day divided by the megawatt hours of energy offered during the Specified Hours, plus the offer for energy during such hours. The Specified Hours shall be the lesser of: (1) the minimum run hours stated by the Market Seller in its Offer Data; and (2) either (i) for steam-electric generating units and for combined-cycle units when such units are operating in combined-cycle mode, the six consecutive hours of highest Day-ahead Price during such Operating Day when such units are running or (ii) for combustion turbine units and for combined-cycle units when such units are operating in combustion turbine mode, the two consecutive hours of highest Day-ahead Price during such Operating Day when such units are running. Notwithstanding any other provision in this subsection, the total compensation to a Market Seller on any Operating Day that includes a MaxGen Condition shall not exceed \$1,000/MWh during the Specified Hours, where such total compensation in each such hour is defined as the amount that, absent subsections (l) and (n), would have been credited for Operating Reserves for such Operating Day pursuant to section 3.2.3(b) divided by the Specified Hours, plus the Day-ahead Price for such hour, and no Operating Reserves payments shall be made for any other hour of such Operating Day. If a unit operates in real time at the

direction of the Office of the Interconnection consistently with its day-ahead clearing, then subsection (m) does not apply.

(o) Dispatchable pool-scheduled generation resources and dispatchable self-scheduled generation resources that follow dispatch shall not be assessed balancing Operating Reserve deviations. Pool-scheduled generation resources and dispatchable self-scheduled generation resources that do not follow dispatch shall be assessed balancing Operating Reserve deviations in accordance with the calculations described below and in the PJM Manuals.

The Office of the Interconnection shall calculate a ramp-limited desired MW value for generation resources where the economic minimum and economic maximum are at least as far apart in real-time as they are in day-ahead according to the following parameters:

(i) real-time economic minimum \leq 105% of day-ahead economic minimum or day-ahead economic minimum plus 5 MW, whichever is greater.

(ii) real-time economic maximum \geq 95% day-ahead economic maximum or day-ahead economic maximum minus 5 MW, whichever is lower.

The ramp-limited desired MW value for a generation resource shall be equal to:

$$Ramp_Request_t = \frac{(Dispatchtarget_{t-1} - AOutput_{t-1})}{(LAtime_{t-1})}$$

$$RL_Desired_t = AOutput_{t-1} + (Ramp_Request_t * Case_Eff_time_{t-1})$$

where:

1. Dispatchtarget = Dispatch Signal for the previous approved Dispatch case
2. AOutput = Unit's achievable target MW at case solution time as defined in the PJM Manuals
3. LAtime = Dispatch look ahead time
4. Case_Eff_time = Time between signal changes
5. RL_Desired = Ramp-limited desired MW

To determine if a generation resource is following dispatch the Office of the Interconnection shall determine the unit's MW off dispatch and % off dispatch by using the lesser of the difference between the actual output and the dispatch signal or the actual output and ramp-limited desired MW value for each Real-time Settlement Interval. If the dispatch signal and the ramp-limited desired MW for the resource are unavailable, the Office of the Interconnection will determine the unit's MW off dispatch and % off dispatch by calculating the lesser of the difference between the actual output and the dispatch LMP Desired MW for each Real-time Settlement Interval.

A pool-scheduled or dispatchable self-scheduled resource is considered to be following dispatch if its actual output is between its ramp-limited desired MW value and dispatch signal, or if its % off dispatch is ≤ 10 , or its Real-time Settlement Interval MWh is within 5% of the Real-time Settlement Interval ramp-limited desired MW. A self-scheduled generator must also be dispatched above economic minimum. The degree of deviations for resources that are not following dispatch shall be determined for each Real-time Settlement Interval in accordance with the following provisions:

- A dispatchable self-scheduled resource that is not dispatched above economic minimum shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – Day-Ahead MWh.
- A resource that is dispatchable day-ahead but is Fixed Gen in real-time shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – dispatch LMP Desired MW.
- Pool-scheduled generators that are not following dispatch shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – Ramp-Limited Desired MW.
- If a resource's real-time economic minimum is greater than its day-ahead economic minimum by 5% or 5 MW, whichever is greater, or its real-time economic maximum is less than its Day Ahead economic maximum by 5% or 5 MW, whichever is lower, and dispatch LMP Desired MWh for the Real-time Settlement Interval is either below the real time economic minimum or above the real time economic maximum, then balancing Operating Reserve deviations for the resource shall be assessed according to the following formula: Real time Settlement Interval MWh – dispatch LMP Desired MWh.
- If a resource is not following dispatch and its % Off Dispatch is $\leq 20\%$, balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – Ramp-Limited Desired MW. If deviation value is within 5% of Ramp-Limited Desired MW, balancing Operating Reserve deviations shall not be assessed.
- If a resource is not following dispatch and its % off Dispatch is $> 20\%$, balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – dispatch LMP Desired MWh.
- If a resource is not following dispatch, and the resource has tripped, for the Real-time Settlement Interval the resource tripped and the Real-time Settlement Intervals it remains offline throughout its day-ahead schedule balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – Day-Ahead MWh.

- For resources that are not dispatchable in both the Day-Ahead and Real-time Energy Markets balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh - Day-ahead MWh.

If a resource has a sum of the absolute value of generator deviations for an hour that is less than 5 MWh, then the resource shall not be assessed balancing Operating Reserve deviations for that hour.

(o-1) Dispatchable economic load reduction resources that follow dispatch shall not be assessed balancing Operating Reserve deviations. Economic Load Response Participant resources that do not follow dispatch shall be assessed balancing Operating Reserve deviations as described in this subsection and as further specified in the PJM Manuals.

The Desired MW quantity for such resources for each hour shall be the hourly integrated MW quantity to which the load reduction resource was dispatched for each hour (where the hourly integrated value is the average of the dispatched values as determined by the Office of the Interconnection for the resource for each hour).

If the actual reduction quantity for the load reduction resource for a given hour deviates by no more than 20% above or below the Desired MW quantity, then no balancing Operating Reserve deviation will accrue for that hour. If the actual reduction quantity for the load reduction resource for a given hour is outside the 20% bandwidth, the balancing Operating Reserve deviations will accrue for that hour in the amount of the absolute value of (Desired MW – actual reduction quantity). For those hours where the actual reduction quantity is within the 20% bandwidth specified above, the load reduction resource will be eligible to be made whole for the total value of its offer as defined in Tariff, Attachment K-Appendix, section 3.3A. Hours for which the actual reduction quantity is outside the 20% bandwidth will not be eligible for the make-whole payment. If at least one hour is not eligible for make-whole payment based on the 20% criteria, then the resource will also not be made whole for its shutdown cost.

(p) The Office of the Interconnection shall allocate the charges assessed pursuant to Tariff, Attachment K-Appendix, section 3.2.3(h) except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, to real-time deviations from day-ahead schedules or real-time load share plus exports depending on whether the underlying balancing Operating Reserve credits are related to resources scheduled during the reliability analysis for an Operating Day, or during the actual Operating Day. If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, section 1.11.6, the Office of the Interconnection shall allocate the charges to the ratio share of real-time load plus export transactions.

(i) For resources scheduled by the Office of the Interconnection during the reliability analysis for an Operating Day, the associated balancing Operating Reserve charges shall be allocated based on the reason the resource was scheduled according to the following provisions:

(A) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to operate in real-time to augment the physical resources committed in the Day-ahead Energy Market to meet the forecasted real-time load plus the Operating Reserve requirement, the associated balancing Operating Reserve charges shall be allocated to real-time deviations from day-ahead schedules.

(B) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to maintain system reliability, the associated balancing Operating Reserve charges shall be allocated according to ratio share of real time load plus export transactions.

(C) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource with a day-ahead schedule is required to deviate from that schedule to provide balancing Operating Reserves, the associated balancing Operating Reserve charges shall be allocated pursuant to (A) or (B) above.

(ii) For resources scheduled during an Operating Day, the associated balancing Operating Reserve charges shall be allocated according to the following provisions:

(A) If the Office of the Interconnection directs a resource to operate during an Operating Day to provide balancing Operating Reserves, the associated balancing Operating Reserve charges shall be allocated according to ratio share of load plus exports. The foregoing notwithstanding, charges will be assessed pursuant to this section only if the LMP at the resource's bus does not meet or exceeds the applicable offer of the resource for at least four 5-minute intervals during one or more discrete clock hours during each period the resource operated and produced MWs during the relevant Operating Day. If a resource operated and produced MWs for less than four 5-minute intervals during one or more discrete clock hours during the relevant Operating Day, the charges for that resource during the hour it was operated less than four 5-minute intervals will be identified as being in the same category as identified for the Operating Reserves for the other discrete clock hours.

(B) If the Office of the Interconnection directs a resource not covered by Tariff, Attachment K-Appendix, section 3.2.3(h)(ii)(A) to operate in real-time during an Operating Day, the associated balancing Operating Reserve charges shall be allocated according to real-time deviations from day-ahead schedules.

(q) The Office of the Interconnection shall determine regional balancing Operating Reserve rates for the Western and Eastern Regions of the PJM Region. For the purposes of this section, the Western Region shall be the AEP, APS, ComEd, Duquesne, Dayton, ATSI, DEOK, EKPC, OVEC transmission Zones, and the Eastern Region shall be the AEC, BGE, Dominion,

PENELEC, PEPCO, ME, PPL, JCPL, PECO, DPL, PSEG, RE transmission Zones. The regional balancing Operating Reserve rates shall be determined in accordance with the following provisions:

(i) The Office of the Interconnection shall calculate regional adder rates for the Eastern and Western Regions. Regional adder rates shall be equal to the total balancing Operating Reserve credits paid to generators for transmission constraints that occur on transmission system capacity equal to or less than 345kv. The regional adder rates shall be separated into reliability and deviation charges, which shall be allocated to real-time load or real-time deviations, respectively. Whether the underlying credits are designated as reliability or deviation charges shall be determined in accordance with section 3.2.3(p).

(ii) The Office of the Interconnection shall calculate RTO balancing Operating Reserve rates. RTO balancing Operating Reserve rates shall be equal to balancing Operating Reserve credits except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, in excess of the regional adder rates calculated pursuant to Tariff, Attachment K-Appendix, section 3.2.3(q)(i) of Schedule 1 of this Agreement. The RTO balancing Operating Reserve rates shall be separated into reliability and deviation charges, which shall be allocated to real-time load or real-time deviations, respectively. Whether the underlying credits are allocated as reliability or deviation charges shall be determined in accordance with section 3.2.3(p).

(iii) Reliability and deviation regional balancing Operating Reserve rates shall be determined by summing the relevant RTO balancing Operating Reserve rates and regional adder rates.

(iv) If the Eastern and/or Western Regions do not have regional adder rates, the relevant regional balancing Operating Reserve rate shall be the reliability and/or deviation RTO balancing Operating Reserve rate.

(r) Market Sellers that incur incremental operating costs for a generation resource that are either greater than \$1,000/MWh as determined in accordance with the Market Seller's PJM-approved Fuel Cost Policy, Operating Agreement, Schedule 2 and PJM Manual 15, but are not verified at the time of dispatch of the resource under section 6.4.3 of this Schedule, or greater than \$2,000/MWh as determined in accordance with the Market Seller's PJM-approved Fuel Cost Policy, Operating Agreement, Schedule 2, and PJM Manual 15, will be eligible to receive credit for Operating Reserves upon review of the Market Monitoring Unit and the Office of the Interconnection, and approval of the Office of the Interconnection. Market Sellers must submit to the Office of the Interconnection and the Market Monitoring Unit all relevant documentation demonstrating the calculation of costs greater than \$2,000/MWh, and costs greater than \$1,000/MWh which were not verified at the time of dispatch of the resource under Tariff, Attachment K-Appendix, section 6.4.3. The Office of the Interconnection must approve any Operating Reserve credits paid to a Market Seller under this subsection (r).

3.2.3A Synchronized Reserve.

(a) Each Market Participant that is a Load Serving Entity that is not part of an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have an obligation for hourly Synchronized Reserve equal to its pro rata share of Synchronized Reserve requirements for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone or Reserve Sub-zone for the hour ("Synchronized Reserve Obligation"), less any amount obtained from condensers associated with provision of Reactive Services as described in section 3.2.3B(i) and any amount obtained from condensers associated with post-contingency operations, as described in section 3.2.3C(b). Those entities that participate in an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have their reserve obligations determined based on the stipulations in such agreement. A Market Participant's hourly Synchronized Reserve Obligation shall be adjusted by any Synchronized Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Synchronized Reserve Obligation shall be charged the pro rata share of the sum of day-ahead and real-time credits for Synchronized Reserve as defined in sections 3.2.3A(b)(i) and (ii) below.

(b) A resource supplying Synchronized Reserve at the direction of the Office of the Interconnection shall be credited as follows:

i) Credits for Synchronized Reserve provided by generation and Economic Load Response Participant resources assigned to provide Synchronized Reserve by the Office of the Interconnection or self-scheduled in the Day-ahead Synchronized Reserve Market shall be equal to the product of the Day-ahead Synchronized Reserve Market Clearing Price multiplied by the megawatt amount of Synchronized Reserve such resource is assigned to provide..

ii) Credits for Synchronized Reserve provided by generation resources and Economic Load Response Participant resources assigned to provide Synchronized Reserve by the Office of the Interconnection or self-scheduled in the Real-time Synchronized Reserve Market shall be determined for each operating hour based on the sum of their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Synchronized Reserve from that resource assigned by the Office of the Interconnection or self-scheduled in the Real-time Synchronized Reserve Market. The megawatt value is capped at the lesser of the Economic Maximum and the Synchronized Reserve

maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval where there is not a Synchronized Reserve event;

B = For each Real-time Settlement Interval, the megawatts of Synchronized Reserve from that resource assigned by the Office of the Interconnection or self-scheduled in the Day-ahead Synchronized Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Synchronized Reserve Market Clearing Price.

If a Synchronized Reserve Event is initiated by the Office of the Interconnection and the Economic Load Response Participant resource reduced its load in response to the event, the resource shall be eligible to receive a credit for the fixed costs associated with achieving the load reduction, as specified in the PJM Manuals.

iii) Pool-scheduled resources shall be credited a Synchronized Reserve lost opportunity cost credit, where positive, as described in subsection (f)(iv) below.

(c) [Reserved for future use]

(d) Synchronized Reserve Market Clearing Prices

(i) For the Day-ahead Synchronized Reserve Market, the Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Synchronized Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for Synchronized Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Synchronized Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Synchronized Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Synchronized Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute and (B) the price of serving the next increment of demand for Primary Reserve and 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute, provided that the Synchronized Reserve Market Clearing Price shall be less than or equal to the sum of no more than two of the Reserve Penalty Factors for the Synchronized Reserve Requirement, the Primary Reserve Requirement, and the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Synchronized Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a

scheduled megawatt quantity and Day-ahead Synchronized Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Synchronized Reserve market quantities and prices as determined pursuant to subsection (d)(ii) hereof.

(ii) For the Real-time Synchronized Reserve Market, the Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for Synchronized Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Synchronized Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Synchronized Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Synchronized Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute and (B) the price of serving the next increment of demand for Primary Reserve and 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute, provided that the Synchronized Reserve Market Clearing Price shall be less than or equal to the sum of no more than two of the Reserve Penalty Factors for the Synchronized Reserve Requirement, the Primary Reserve Requirement, and the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Synchronized Reserves, then the Synchronized Reserve Market Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Synchronized Reserves, then the Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Synchronized Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Synchronized

Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Synchronized Reserve Market Clearing Prices exist, then the Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, and the Office of the Interconnection is assigning Synchronized Reserves, the Office of the Interconnection will set the Synchronized Reserve Market Clearing Price to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period. Resources will be compensated for lost opportunity cost per subsection (f) hereof using the energy price as determined in Operating Agreement, Schedule 1, section 2.5.2.iii. The opportunity cost shall be zero for all resources self-scheduled to provide Synchronized Reserve, synchronous condensers and Economic Load Response Participant resources.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action as described in the PJM Manuals or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Synchronized Reserve Market Clearing Price shall be the sum of the Reserve Penalty Factors for the Primary Reserve Requirement, and the Synchronized Reserve Requirement for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the Synchronized Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended Synchronized Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Synchronized Reserve Penalty Factors are warranted for subsequent Delivery Year(s).

(e) (i) For determining the Synchronized Reserve Market Clearing Price in each hour of the Day-ahead Synchronized Reserve Market, the estimated resource-specific opportunity cost for a generation resource or Economic Load Response Participant resource shall be the difference between the Locational Marginal Price at the generation or Economic Load Response Participant resource bus and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) or offer price to reduce energy from the Economic Load Response Participant resource in the PJM Interchange Energy Market when the Locational Marginal Price at the generation or Economic Load Participant resource bus is greater than the offer price

for energy from the generation resource or the offer price to reduce energy from the Economic Load Response Participant resource.

However, the opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve and for synchronous condensers and for Economic Load Response Participant resources that do not receive a day-ahead commitment to provide energy in the same operating hour in which such resource is committed to provide Synchronized Reserve.

(ii) For determining the Synchronized Reserve Market Clearing Price for each Real-time Settlement Interval in the Real-time Synchronized Reserve Market, the estimated unit-specific opportunity cost for a generation resource that is not a hydroelectric resource shall be the difference between the Locational Marginal Price at the generation bus for the generation resource and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) in the PJM Interchange Energy Market when the Locational Marginal Price at the generation bus is greater than the offer price for energy from the generation resource.

For hydroelectric resources, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the expected real-time Locational Marginal Price at that generation bus. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions, as defined in the PJM Manuals, and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the expected real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average day-ahead Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

The opportunity costs shall be zero for all resources self-scheduled to provide Synchronized Reserve, synchronous condensers and Economic Load Response Participant resources.

(f) (i) In determining the credit under subsection (b) to a generation resource, except a generation resource that is operating as a synchronous condenser, selected to provide Synchronized Reserve in the Day-ahead Synchronized Reserve Market, or an Economic Load Response Participant resource that is selected to provide Synchronized Reserve in the Day-ahead Synchronized Reserve Market for the same operating hour in which such resource receives a day-ahead commitment to provide energy, the opportunity cost of a resource shall be determined for each operating hour that the Office of the Interconnection requires a resource to provide Synchronized Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Day-ahead Locational Marginal Price at the generation bus of the generation resource or the applicable pricing point for the Economic Load Response Participant resource;

B = The deviation of the resource's energy output or load reduction necessary to supply a Day-ahead Synchronized Reserve assignment from the resource's energy expected output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load; and

C = The Day-ahead Energy market offer integrated under the applicable energy offer curve for the resource's energy output or load reduction necessary to provide a Day-ahead Synchronized Reserve Market assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load.

For a generation resource that is operating as a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [energy use for providing synchronous condensing multiplied by A] plus [the applicable condense start-up cost divided by the number of hours the resource is assigned Synchronized Reserve].

(ii) In determining the credit under subsection (b) to a generation resource, except a generation resource that is operating as a synchronous condenser, selected to provide Synchronized Reserve in the Real-time Synchronized Reserve Market in excess of the resource's Day-ahead Synchronized Reserve Market assignment and that actively follows the Office of the Interconnection's signals and instructions, the unit-specific opportunity cost of that generation resource shall be determined for each Real-time Settlement Interval that the Office of the Interconnection requires that generation resource to provide Synchronized Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Real-time Locational Marginal Price at the generation bus of the generation resource;

B = The deviation of the generation resource's output necessary to supply Synchronized Reserve in real-time, reduced by the amount of Synchronized Reserve the resource failed to respond during a Synchronized Reserve Event during the Operating Day, in excess of its Day-ahead Synchronized Reserve Market assignment and follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy; and

C = The energy offer integrated under the applicable energy offer curve for the generation resource's output necessary to supply Synchronized Reserve in real-time from the lesser of the generation resource's output necessary to provide a Day-ahead Synchronized Reserve Market assignment or follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [additional energy use in excess of day-ahead energy use for providing synchronous condensing in real-time multiplied by A] plus [any applicable condense start-up costs due to additional condense start-ups in real-time in excess of day-ahead condense start-ups allocated to each Real-time Settlement Interval as described in PJM Manuals].

For hydroelectric resources, the unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the real-time Locational Marginal Price at that generation bus multiplied by the additional megawatts assigned to supply Synchronized Reserve in real-time in excess of its Day-ahead Synchronized Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average real-time Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating multiplied by the additional megawatts assigned to supply the hourly Synchronized Reserve in real-time in excess of its Day-ahead Synchronized Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

(iii) For each Real-time Settlement Interval, a Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in the resource's real-time reserve MW from a day-ahead market assignment in more than one market for that Real-time Settlement Interval, the total Market Revenue Neutrality Offset is allocated to the Synchronized Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Synchronized Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Synchronized Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Synchronized Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Synchronized Reserve assignment decreases due to the resource being self-scheduled to provide energy or Regulation;

(B) A resource reduces its flexibility in real-time such that the resource no longer qualifies to provide Synchronized Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time;

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above; or

(F) A resource increases its Synchronized Reserve offer price in the Real-time Synchronized Reserve Market from its offer price in the Day-ahead Synchronized Reserve Market.

(iv) A Synchronized Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(A + B + C + D) - (E + F + G + H)$$

Where:

A = day-ahead Synchronized Reserve offer price times the Synchronized Reserve MW assignment;

B = real-time Synchronized Reserve offer price times the Synchronized Reserve MW assigned in real-time in excess of the Synchronized Reserve MW assigned day-ahead, where the Synchronized Reserve MW assigned is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval where there is not a Synchronized Reserve event;

C = day-ahead opportunity cost as determined in subsection (f)(i) above;

D = real-time opportunity cost as determined in subsection (f)(ii) above;

E = day-ahead clearing price credits as determined in subsection (b)(i) above;

F = real-time clearing price credits as determined in subsection (b)(ii) above less any applicable charges for failure to respond to a Synchronized Reserve Event as determined in subsection (j) below;

G = the applicable Market Revenue Neutrality Offset as determined in subsection (f)(iii) above; and

H = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A(f)(iii) above if not eligible for Market Revenue Neutrality Offset.

(v) The opportunity costs for an Economic Load Response Participant resource assigned Synchronized Reserve in real-time or any resource self-scheduled for Synchronized Reserves shall be zero.

(g) [Reserved for future use]

(h) For each operating hour, the sum of the Synchronized Reserve lost opportunity cost credits credited in accordance with subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Synchronized Reserve Obligation in proportion to its real-time purchases of Synchronized Reserve in megawatt-hours during that hour.

(i) [Reserved for future use]

(j) In the event a generation resource or Economic Load Response Participant Resource that either has been assigned by the Office of the Interconnection or self-scheduled to provide Synchronized Reserve in real-time fails to provide the assigned or self-scheduled amount of Synchronized Reserve in response to a Synchronized Reserve Event, the resource will be charged at the Real-time Synchronized Reserve Market Clearing Price for the real-time Synchronized Reserve assignment, in excess of amount that actually responded for all Real-time Settlement Intervals the resource was assigned or self-scheduled Synchronized Reserve real-time, which is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements for the resource on the Operating Day during which the event occurred. The determination of the amount of Synchronized Reserve credited to a resource shall be on an individual resource basis, not on an aggregate basis.

The resource shall refund payments received for Synchronized Reserve it failed to provide. For purposes of determining the amount of the payments to be refunded by a Market Participant, the Office of the Interconnection shall calculate the shortfall of Synchronized Reserve on an individual resource basis unless the Market Participant had multiple resources that were assigned or self-scheduled to provide Synchronized Reserve, in which case the shortfall will be determined on an aggregate basis. For performance determined on an aggregate basis, the response of any resource that provided more Synchronized Reserve than it was assigned or self-scheduled to provide will be used to offset the performance of other resources that provided less Synchronized Reserve than they were assigned or self-scheduled to provide during a

Synchronized Reserve Event, as calculated in the PJM Manuals. The determination of a Market Participant's aggregate response shall not be taken into consideration in the determination of the amount of Synchronized Reserve credited to each individual resource.

The amount refunded shall be determined by multiplying the retroactive penalty megawatts by the Real-time Synchronized Reserve Market Clearing Price for all intervals the resource was assigned or self-scheduled to provide Synchronized Reserve for a period of time immediately preceding the Synchronized Reserve Event equal to the lesser of the average number of days between Synchronized Reserve Events, or the number of days since the resource last failed to provide the amount of Synchronized Reserve it was assigned or self-scheduled to provide in response to a Synchronized Reserve Event. The retroactive penalty megawatts for each interval shall be the lesser of the amount of the shortfall of Synchronized Reserve, measured in megawatts, and the real-time Synchronized Reserve assignment for each interval, which is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements for the resource. The average number of days between Synchronized Reserve Events for purposes of this calculation shall be determined by an annual review of the twenty-four month period ending October 31 of the calendar year in which the review is performed, and shall be rounded down to a whole day value. The Office of the Interconnection shall report the results of its annual review to stakeholders by no later than December 31, and the average number of days between Synchronized Reserve Events shall be effective as of the following January 1. The refunded charges shall be allocated as credits to Market Participants based on its pro rata share of the Synchronized Reserve Obligation megawatts in the hour(s) of the Synchronized Reserve Event for the Reserve Sub-zone or Reserve Zone, except that Market Participants that incur a refund obligation and also have an applicable Synchronized Reserve Obligation during the hour(s) of the Synchronized Reserve Event shall not be included in the allocation of such refund credits. If the event spans multiple hours, the refund credits will be prorated hourly based on the duration of the event within each clock hour.

(k) The magnitude of response to a Synchronized Reserve Event by a generation resource or an Economic Load Response Participant resource, except for Batch Load Economic Load Response Participant resources covered by section 3.2.3A(l), is the difference between the generation resource's output or the Economic Load Response Participant resource's consumption at the start of the event and its output or consumption 10 minutes after the start of the event. In order to allow for small fluctuations and possible telemetry delays, generation resource output or Economic Load Response Participant resource consumption at the start of the event is defined as the lowest telemetered generator resource output or greatest Economic Load Response Participant resource consumption between one minute prior to and one minute following the start of the event. Similarly, a generation resource's output or an Economic Load Response Participant resource's consumption 10 minutes after the event is defined as the greatest generator resource output or lowest Economic Load Response Participant resource consumption achieved between 9 and 11 minutes after the start of the event. The response actually credited to a generation resource will be reduced by the amount the megawatt output of the generation resource falls below the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter. The response actually credited to an Economic Load Response Participant resource will be reduced by the amount the megawatt

consumption of the Economic Load Response Participant resource exceeds the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter.

(l) The magnitude of response by a Batch Load Economic Load Response Participant resource that is at the stage in its production cycle when its energy consumption is less than the level of megawatts in its offer at the start of a Synchronized Reserve Event shall be the difference between (i) the Batch Load Economic Load Response Participant resource's consumption at the end of the Synchronized Reserve Event and (ii) the Batch Load Economic Load Response Participant resource's consumption during the minute within the ten minutes after the end of the Synchronized Reserve Event in which the Batch Load Economic Load Response Participant resource's consumption was highest and for which its consumption in all subsequent minutes within the ten minutes was not less than fifty percent of the consumption in such minute; provided that, the magnitude of the response shall be zero if, when the Synchronized Reserve Event commences, the scheduled off-cycle stage of the production cycle is greater than ten minutes. .

3.2.3A.001 Non-Synchronized Reserve.

(a) Each Market Participant that is a Load Serving Entity that is not part of an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have an obligation for hourly Non-Synchronized Reserve equal to its pro rata share of Non-Synchronized Reserve assigned for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone and Reserve Sub-zone for the hour ("Non-Synchronized Reserve Obligation"). Those entities that participate in an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have their reserve obligations determined based on the stipulations in such agreement. A Market Participant's hourly Non-Synchronized Reserve Obligation shall be adjusted by any Non-Synchronized Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Non-Synchronized Reserve Obligation shall be charged the pro rata share of the sum day-ahead and real-time credits for Non-Synchronized Reserve as defined in sections 3.2.3A.001(b)(i) and (ii) below.

(b) Resources assigned to provide Non-Synchronized Reserve at the direction of the Office of the Interconnection shall be credited as follows:

(i) Credits for Non-Synchronized Reserve provided by generation resources assigned to provide Non-Synchronized Reserve by the Office of the Interconnection in the Day-ahead Non-Synchronized Reserve Market shall be equal to the product of the Day-ahead Non-Synchronized Market Clearing Price multiplied by the megawatt amount of Non-Synchronized Reserve such resource is assigned to provide.

(ii) Credits for Non-Synchronized Reserve provided by generation resources assigned to provide Non-Synchronized Reserve by the Office of the Interconnection in the Real-time Non-Synchronized Reserve Market shall be determined for each operating

hour based on the sum on their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Non-Synchronized Reserve from that resource assigned by the Office of the Interconnection in the Real-time Non-Synchronized Reserve Market;

B = For each Real-time Settlement Interval, the megawatts of Non-Synchronized Reserve from that resource assigned by the Office of the Interconnection in the Day-ahead Non-Synchronized Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Non-Synchronized Reserve Market Clearing Price.

(iii) Pool-scheduled generation resources assigned to provide Non-Synchronized Reserve in the Day-ahead Non-Synchronized Reserve Market shall be credited a Non-Synchronized Reserve lost opportunity cost credit, where positive, as determined in accordance with subsection (d)(iii) below, to recover any net monetary loss to the Market Seller of such resource associated with the purchase of Non-Synchronized Reserve in the Real-time Non-Synchronized Reserve Market as a result of following the dispatch direction of the Office of the Interconnection.

(c) Non-Synchronized Reserve Market Clearing Prices

(i) For the Day-ahead Non-Synchronized Reserve Market, the Non-Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Non-Synchronized Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for Primary Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Non-Synchronized Reserve offer prices and the applicable Operating Reserve Demand Curve for Non-Synchronized Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Primary Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute and (B) the price of serving the next increment of demand for 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute, provided that the Non-Synchronized Reserve Market Clearing Price shall be less than or equal to the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for the

Reserve Zone or Reserve Sub-zone to which the next increment of demand for Non-Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Non-Synchronized Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Non-Synchronized Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Non-Synchronized Reserve market quantities and prices as determined pursuant to subsection (c)(ii) hereof.

(ii) For the Real-time Non-Synchronized Reserve Market, the Non-Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for Primary Reserve in a Reserve Zone or Reserve Sub-zone determined by the interaction between a supply curve formed using Non-Synchronized Reserve offer prices and the applicable Operating Reserve Demand Curve for Non-Synchronized Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Primary Reserve for any other Reserve Zone or Reserve Subzone to which the next increment of demand for Primary Reserve can contribute and (B) the price of serving the next increment of demand for 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute, provided that the Non-Synchronized Reserve Market Clearing Price shall be less than or equal to the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Non-Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Non-Synchronized Reserves, then the Non-Synchronized Reserve Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Non-Synchronized Reserves, then the Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Non-Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Non-Synchronized Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Non-Synchronized Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Non-Synchronized Reserve Market Clearing Prices exist, then the Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Non-Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, the Non-Synchronized Reserve Market Clearing Price will be set to zero dollars per megawatt-hour regardless of whether the Office of the Interconnection is assigning Non-Synchronized Reserves.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action as described in the PJM Manuals or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Non-Synchronized Reserve Market Clearing Price shall be the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the Primary Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended Primary Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Primary Reserve Penalty Factors are warranted for subsequent Delivery Year(s).

(d) (i) For determining the Non-Synchronized Reserve clearing price for each hour in the Day-ahead Non-Synchronized Reserve Market and for each Real-time Settlement Interval in the Real-time Non-Synchronized Reserve Market, including during a declaration of a Market Suspension, the unit-specific opportunity cost for a generation resource that is not providing energy because they are providing Non-Synchronized Reserves will be zero.

(ii) For each Real-time Settlement Interval, a total Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in real-time

reserve MW from a day-ahead market assignment in more than one market for that Real-time Settlement Interval, the total Market Revenue Neutrality Offset is allocated to the Non-Synchronized Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Non-Synchronized Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Non-Synchronized Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Non-Synchronized Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Non-Synchronized Reserve assignment decreases due to the resource being self-scheduled to provide energy, Synchronized Reserve, or Regulation;

(B) A resource reduces flexibility in real-time such that the resource no longer qualifies to provide Non-Synchronized Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time; or

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above.

(iii) A Non-Synchronized Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(\text{zero}) - (A + B + C + D)$$

Where:

A = day-ahead clearing price credits as determined in subsection (b)(i) above;

B = real-time clearing price credits as determined in subsection (b)(ii) above;

C = the applicable Market Revenue Neutrality Offset as determined in subsection (d)(ii) above; and

D = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A.001(d)(ii) above if not eligible for Market Revenue Neutrality Offset.

(e) [Reserved for future use]

(f) For each operating hour, the sum of the Non-Synchronized Reserve lost opportunity cost credits credited in subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Non-Synchronized Reserve Obligation in proportion to its real-time purchases of Non-Synchronized Reserve in megawatt-hours during that hour.

(g) The magnitude of response to a Non-Synchronized Reserve Event by a generation resource is the difference between the generation resource's output at the start of the event and its output 10 minutes after the start of the event. In order to allow for small fluctuations and possible telemetry delays, generation resource output at the start of the event is defined as the lowest telemetered generator resource output between one minute prior to and one minute following the start of the event. Similarly, a generation resource's output 10 minutes after the start of the event is defined as the greatest generator resource output achieved between 9 and 11 minutes after the start of the event. The response actually credited to a generation resource will be reduced by the amount the megawatt output of the generation resource falls below the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter.

(h) In the event a generation resource that has been assigned by the Office of the Interconnection to provide Non-Synchronized Reserve fails to provide the assigned amount of Non-Synchronized Reserve in response to a Non-Synchronized Reserve Event, the resource will be credited for Non-Synchronized Reserve capacity in the amount that actually responded for the contiguous Real-time Settlement Interval the resource was assigned Non-Synchronized Reserve during which the event occurred.

3.2.3A.01 Secondary Reserve.

(a) Each Market Participant that is a Load Serving Entity shall have an obligation for hourly Secondary Reserve equal to its pro rata share of Secondary Reserve assigned for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone and Reserve Sub-zone for the hour ("Secondary Reserve Obligation"). A Market Participant's hourly Secondary Reserve Obligation shall be adjusted by any Secondary Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Secondary Reserve Obligation shall be charged the pro rata share of the sum of day-ahead and real-time credits for Secondary Reserve as defined in sections 3.2.3A.01(b)(i) and (ii) below.

(b) Resources assigned to provide Secondary Reserve at the direction of the Office of the Interconnection shall be credited as follows:

(i) Credits for Secondary Reserve provided by generation resources and Economic Load Response Participant resources assigned to provide Secondary Reserve by the Office of the Interconnection in the Day-ahead Secondary Reserve Market shall be equal to the product of the Day-ahead Secondary Reserve Market Clearing Price multiplied by the megawatt amount of Secondary Reserve such resource is scheduled to provide.

(ii) Credits for Secondary Reserve provided by generation resources and Economic Load Response Participant resources scheduled to provide Secondary Reserve by the Office of the Interconnection in the Real-time Secondary Reserve Market shall be determined for each operating hour based on the sum of their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Secondary Reserve from that resource assigned by the Office of the Interconnection in the Real-time Secondary Reserve Market. The megawatt value is capped at the lesser of the Economic Maximum or Secondary Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval minus the Real-time Synchronized Reserve assignment;

B = For each Real-time Settlement Interval, the megawatts of Secondary Reserve from that resource scheduled by the Office of the Interconnection in the Day-ahead Secondary Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Secondary Reserve Market Clearing Price.

(iii) Pool-scheduled resources and Economic Load Response Participant resources shall be credited a Secondary Reserve lost opportunity cost credit, where positive, as described in subsection (f)(iv) below.

(c) [Reserved for future use]

(d) Secondary Reserve Market Clearing Prices

(i) For the Day-ahead Secondary Reserve Market, the Secondary Reserve Market Clearing Price shall be determined for each Reserve Zone and, as applicable, Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Secondary Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for 30-minute Reserve in a Reserve Zone

or Reserve Sub-zone, determined by the interaction between a supply curve formed using Secondary Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Secondary Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus the price of serving the next increment of demand for 30-minute Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute, but the Secondary Reserve Market Clearing Price shall not exceed the Reserve Penalty Factor for the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Secondary Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Secondary Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Secondary Reserve market quantities and prices as determined pursuant to subsection (d)(ii) hereof.

(ii) For the Real-time Secondary Reserve Market, the Secondary Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for 30-minute Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Secondary Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Secondary Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus the price of serving the next increment of demand for 30-minute Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute but the Secondary Reserve Market Clearing Price shall not exceed the Reserve Penalty Factor for the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Secondary Reserves, then the Secondary Reserve Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Secondary Reserves, then the Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the

average of the Secondary Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Secondary Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Secondary Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Secondary Reserve Market Clearing Prices exist, then the Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Secondary Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, and the Office of the Interconnection is assigning Secondary Reserves, the Secondary Reserve Market Clearing Price will be set to zero dollars per megawatt-hour. Resources will be compensated for lost opportunity cost per subsection (f) hereof using the energy price as determined in Operating Agreement, Schedule 1, section 2.5.2.iii.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Secondary Reserve Market Clearing Price for a given Reserve Zone or Sub-zone shall be the Reserve Penalty Factor for the 30-minute Reserve Requirements for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the 30-minute Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended 30-minute Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Reserve Penalty Factor for 30-minute Reserve are warranted for subsequent Delivery Year(s).

(e) (i) For determining the Secondary Reserve Market Clearing Price for each hour in the Day-ahead Secondary Reserve Market, the estimated resource-specific opportunity cost for a generation resource or Economic Load Response Participant resources shall be the difference between the Locational Marginal Price at the generation or Economic Load Response Participant resource bus and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) or offer price to reduce energy from the Economic Load Response Participant

resource in the PJM Interchange Energy Market when the Locational Marginal Price at the Economic Load Response Participant resource bus is greater than the offer price for energy from the generation resource or the offer price to reduce energy from the Economic Load Response Participant resource.

However, opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve, and for synchronous condensers and for Economic Load Response Participant resources that do not receive a day-ahead commitment to provide energy in the same operating hour in which such resource is committed to provide Secondary Reserve.

(ii) For determining the Secondary Reserve Market Clearing Price for each Real-time Settlement Interval in the Real-time Secondary Reserve Market, the estimated unit-specific opportunity cost for a generation resource that is not a hydroelectric resource shall be the difference between the Locational Marginal Price at the generation bus for the generation resource and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) in the PJM Interchange Energy Market when the Locational Marginal Price at the generation bus is greater than the offer price for energy from the generation resource.

For hydroelectric resources, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the expected real-time Locational Marginal Price at that generation bus. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the expected real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average day-ahead Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

However, the opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve, and for synchronous condensers and Economic Load Response Participant resources.

(f) (i) In determining the credit under subsection (b) to a generation resource, except a generation resource that is a synchronous condenser, selected to provide Secondary Reserve in the Day-ahead Secondary Reserve Market or an Economic Load Response Participant resource that is selected to provide Secondary Reserve in the Day-ahead Secondary Reserve Market in the same operating hour in which such resource receives a day-ahead commitment to provide energy, the opportunity cost of a resource shall be determined for each operating hour that the Office of the Interconnection

requires a resource to provide Secondary Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Day-ahead Locational Marginal Price at the generation bus of the generation resource or the applicable pricing point for the Economic Load Response Participant resource;

B= The deviation of the resource's energy output or load reduction necessary to supply a Day-ahead Secondary Reserve assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load less any Day-ahead Synchronized Reserve Market assignment; and

C = The Day-ahead Energy Market offer integrated under the applicable energy offer curve for the resource's energy output or load reduction necessary to provide a Day-ahead Secondary Reserve Market assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load less any Day-ahead Synchronized Reserve Market assignment.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [energy use for providing synchronous condensing multiplied by A] plus [the applicable condense start-up cost divided by the number of hours the resource is assigned Secondary Reserve].

(ii) In determining the credit under subsection (b) to a generation resource, except a generation that is a synchronous condenser, selected to provide Secondary Reserve in the Real-time Secondary Reserve Market in excess of the resource's Day-ahead Secondary Reserve Market assignment and that actively follows the Office of the Interconnection's signals and instructions, the unit-specific opportunity cost of that generation resource shall be determined for each Real-time Settlement Interval that the Office of the Interconnection requires that generation resource to provide Secondary Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Real-time Locational Marginal Price at the generation bus of the generation resource;

B= The deviation of the generation resource's output necessary to supply Secondary Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment and follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy less any Real-time Synchronized Reserve Market assignment; and

C = The energy offer integrated under the applicable energy offer curve for the generation resource's output necessary to supply Secondary Reserve in real-time from the lesser of the generation resource's output necessary to provide a Day-ahead Secondary Reserve Market assignment or follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy less any Real-time Synchronized Reserve Market assignment.

For hydroelectric resources, the unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the real-time Locational Marginal Price at that generation bus multiplied by the additional megawatts assigned to supply Synchronized Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average real-time Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating multiplied by the additional megawatts assigned to supply Secondary Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: additional energy use in excess of day-ahead energy use for providing synchronous condensing in real-time multiplied by A plus [any applicable condense start-up costs due to additional condense start-ups in real-time in excess of day-ahead condense start-ups allocated to each Real-time Settlement Interval as described in PJM Manuals]. If the generation resource is operating as a synchronous condenser and also has a Real-time Synchronized Reserve assignment, resource's unit-specific opportunity cost in the Secondary Reserve Market shall be zero,

(iii) For each Real-time Settlement Interval, a total Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in real-time

reserve MW from a day-ahead market assignment in more than one market for that real-time settlement interval, the total Market Revenue Neutrality Offset is allocated to the Secondary Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Secondary Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Secondary Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Secondary Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Secondary Reserve assignment decreases due to the resource being self-scheduled to provide energy, Synchronized Reserve, or Regulation;

(B) A resource reduces flexibility in real-time such that the resource no longer qualifies to provide Secondary Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time;

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above; or

(F) A resource that fails to come online and reach Economic Minimum output within 30 minutes as described in section 3.2.3A.01(h)(i) below.

(iv) A Secondary Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(A + B) - (C + D + E + F)$$

Where:

A = day-ahead opportunity cost as determined in subsection (f)(i) above;

B = real-time opportunity cost as determined in subsection (f)(ii) above;

C = day-ahead clearing price credits as determined in subsection (b)(i) above;

D = real-time clearing price credits as determined subsection (b)(ii) above;

E = the applicable Market Revenue Neutrality Offset as determined in subsection (f)(iii) above; and

F = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A.01(f)(iii) above if not eligible for Market Revenue Neutrality Offset.

(v) The opportunity costs for Economic Load Response Participant resources and generation resources not synchronized to the grid shall be zero, except that Economic Load Response Participant resources may have a day-ahead opportunity cost, as determined in subsection (f)(i) above.

(g) For each operating hour, the sum of the Secondary Reserve lost opportunity cost credits credited in accordance with subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Secondary Reserve Obligation in proportion to its real-time purchases of Secondary Reserve in megawatt-hours during that hour.

(h) (i) In the event an offline generation resource has been assigned by the Office of the Interconnection to provide Secondary Reserve in real-time and is subsequently dispatched by the Office of the Interconnection to supply energy during that Operating Day and the resource qualifies as a Secondary Reserve resource at the time it is dispatched to provide energy, the Office of the Interconnection will assess the resource's performance as follows:

For each generation resource that fails to come online and reach Economic Minimum output within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval and for all prior intervals in which the resource was assigned to provide Secondary Reserve in the Real-time Secondary Reserve Market starting at the later of (A) the last interval the resource was online or (B) the beginning of that Operating Day and continuing up to the interval the resource failed to come online. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time not being paid for the assigned MW.

(ii) In the event an Economic Load Response Participant resource has been assigned by the Office of the Interconnection to provide Secondary Reserve in real-time and is subsequently dispatched to supply the Secondary Reserve assignment as a load reduction, the Office of the Interconnection will assess the resource's performance as follows:

For the purposes of this subsection, a resource's starting MW usage shall be the greatest telemetered consumption between one minute prior to and one minute following the issuance of a dispatch instruction from the Office of the Interconnection, and a resource's ending MW usage shall be the lowest consumption between 29 and 31 minutes after the issuance of a dispatch instruction from the Office of the Interconnection.

For each Economic Load Response Participant resource that fails to reduce load by at least the Economic Minimum, where the measured response is the difference between the resource's starting MW usage and the resource's ending MW usage as described above, within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval, and for all prior intervals in which the resource was assigned to provide Secondary Reserve in the Real-time Secondary Reserve Market between such non-performance event starting at the later of (A) the last interval the resource reduced load at the instruction of the Office of the Interconnection or (B) the beginning of that Operating Day, and for all subsequent intervals through the earlier of (C) the next interval in which the resource is dispatched to reduce load or (D) the end of the Operating Day. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time, refunding all payments due for Secondary Reserve during such period.

(iii) For Batch Load Economic Load Response Participant Resources, a second method of verification will be used for instances where a Secondary Reserve assignment dispatched as an energy load reduction is initiated and the resource is operating at the minimum consumption level of its duty cycle. In this case, the magnitude of the response will be measured as the difference between (A) the minimum of the resource's consumption between the minute before and the minute after the end of the last settlement interval the resource reduced load at the instruction of the Office of the Interconnection and (B) the maximum consumption within a ten (10) minute period following the end of the last settlement interval the resource reduced load provided that all subsequent minutes following that minute are no less than 50% of the consumption in that minute.

For each Batch Load Economic Load Response Participant Resource that fails to reduce load by at least the Economic Minimum, where the measured response is the difference between the resource's starting MW usage and the resource's ending MW usage as described in section (ii) above or the difference between (A) and (B) as described in section (iii) above, within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval, and for all prior intervals in which the resource was assigned to provide Secondary Reserve in either the Day-ahead or Real-time Secondary Reserve Markets between such non-performance event starting at the later of (A) the last interval the resource reduced load at the instruction of the Office of the Interconnection or (B) the beginning of that Operating Day, and for all subsequent intervals through the earlier of (C) the next interval in which the resource is dispatched to reduce load or (D) the end of the Operating Day. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time, refunding all payments due for Secondary Reserve during such period.

3.2.3A.02 Operating Reserve Demand Curves

The Office of the Interconnection shall establish Operating Reserve Demand Curves for clearing 30-minute Reserve, Primary Reserve, and Synchronized Reserve, for, as applicable, each Reserve Zone or Reserve Sub-zone to procure sufficient reserves to meet, as applicable, (a) 30-minute Reserve Requirement and Extended 30-minute Reserve Requirement; (b) Primary Reserve Requirement and Extended Primary Reserve Requirement; and (c) Synchronized Reserve Requirement and Extended Synchronized Reserve Requirement. The Operating Reserve Demand Curves established for each reserve type shall be used to commit such reserves in both the day-ahead and real-time reserve markets. The Operating Reserve Demand Curves shall be determined in accordance with the applicable Reserve Penalty Factors and PJM Manuals.

3.2.3B Reactive Services.

(a) A Market Seller providing Reactive Services at the direction of the Office of the Interconnection shall be credited as specified below for the operation of its resource. These provisions are intended to provide payments to generating units when the LMP dispatch algorithms would not result in the dispatch needed for the required reactive service. LMP will be used to compensate generators that are subject to redispatch for reactive transfer limits.

(b) At the end of each Operating Day, where the active energy output of a Market Seller's resource is reduced or suspended at the request of the Office of the Interconnection for the purpose of maintaining reactive reliability within the PJM Region, the Market Seller shall be credited according to sections 3.2.3B(c) & 3.2.3B(d).

(c) A Market Seller providing Reactive Services from either a steam-electric generating unit or combined cycle unit operating in combined cycle mode, where such unit is pool-scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3 (c) hereof), and where the real time LMP at the unit's bus is higher than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override) shall be compensated for lost opportunity cost by receiving a credit for each Real-time Settlement Interval in an amount equal to the product of (A) the deviation of the generating unit's output necessary to follow the Office of the Interconnection's signals and the generating unit's expected output level if it had been dispatched in economic merit order, times (B) the Real-time Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A*B) - C$.

(d) A Market Seller providing Reactive Services from either a combustion turbine unit or combined cycle unit operating in simple cycle mode that is pool scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3 (c) hereof), operated as requested by the Office of the Interconnection, shall be compensated for lost opportunity cost for each Real-time Settlement Interval, limited to the lesser of the unit's Economic Maximum or the unit's Generation Resource Maximum Output, if the unit output is reduced at the direction of the Office of the Interconnection and the real time LMP at the unit's

bus is higher than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection as directed by the PJM dispatcher, then the Market Seller shall be credited in a manner consistent with that described above in section 3.2.3B(c) for a steam unit or a combined cycle unit operating in combined cycle mode.

(e) At the end of each Operating Day, where the active energy output of a Market Seller's unit is increased at the request of the Office of the Interconnection for the purpose of maintaining reactive reliability within the PJM Region and the offered price of the energy is above the real-time LMP at the unit's bus, the Market Seller shall be credited according to section 3.2.3B(f).

(f) A Market Seller providing Reactive Services from either a steam-electric generating unit, combined cycle unit or combustion turbine unit, where such unit is pool scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3 (c) hereof), and where the real time LMP at the unit's bus is lower than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall receive a credit in an amount equal to $\{(AG - LMPDMW) \times (UB - URTLMP)\}$ where:

AG equals the actual output of the unit;

LMPDMW equals the level of output for the unit determined according to the point on the scheduled offer curve on which the unit was operating corresponding to the real time LMP at the unit's bus and adjusted for any Regulation or Tier 2 Synchronized Reserve assignments;

UB equals the unit offer for that unit for which output is increased, determined according to the lesser of the Final Offer or Committed Offer;

URLTMP equals the real time LMP at the unit's bus; and

where $UB - URTLMP$ shall not be negative.

(g) A Market Seller providing Reactive Services from a hydroelectric resource where such resource is pool scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3 (c) hereof), and where the output of such resource is altered from the schedule submitted by the Market Seller for the purpose of maintaining reactive reliability at the request of the Office of the Interconnection, shall be compensated for lost opportunity cost in the same manner as provided in sections 3.2.2(d) and 3.2.3A(f) and further detailed in the PJM Manuals.

(h) If a Market Seller believes that, due to specific pre-existing binding commitments to which it is a party, and that properly should be recognized for purposes of this section, the above calculations do not accurately compensate the Market Seller for lost opportunity cost associated with following the Office of the Interconnection's dispatch instructions to reduce or

suspend a unit's output for the purpose of maintaining reactive reliability, then the Office of the Interconnection, the Market Monitoring Unit and the individual Market Seller will discuss a mutually acceptable, modified amount of such alternate lost opportunity cost compensation, taking into account the specific circumstances binding on the Market Seller. Following such discussion, if the Office of the Interconnection accepts a modified amount of alternate lost opportunity cost compensation, the Office of the Interconnection shall invoice the Market Participant accordingly. If the Market Monitoring Unit disagrees with the modified amount of alternate lost opportunity cost compensation, as accepted by the Office of the Interconnection, it will exercise its powers to inform the Commission staff of its concerns.

(i) The amount of Synchronized Reserve provided by generating units maintaining reactive reliability shall be counted as Synchronized Reserve satisfying the overall PJM Synchronized Reserve requirements. Operators of these generating units shall be notified of such provision, and to the extent a generating unit's operator indicates that the generating unit is capable of providing Synchronized Reserve, shall be subject to the same requirements contained in section 3.2.3A regarding provision of Synchronized Reserve. At the end of each Operating Day, to the extent a condenser operated to provide Reactive Services also provided Synchronized Reserve, a Market Seller shall be credited for providing synchronous condensing for the purpose of maintaining reactive reliability at the request of the Office of the Interconnection, in an amount equal to the higher of (i) the Synchronized Reserve Market Clearing Price for each Real-time Settlement Interval a generating unit provided synchronous condensing multiplied by the amount of Synchronized reserve provided by the synchronous condenser or (ii) the sum of (A) the generating unit's cost to provide synchronous condensing, calculated in accordance with the PJM Manuals, (B) the product of MW energy usage for providing synchronous condensing multiplied by the real time LMP at the generating unit's bus, (C) the generating unit's startup-cost of providing synchronous condensing, and (D) the unit-specific lost opportunity cost of the generating resource supplying the increment of Synchronized Reserve as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals. To the extent a condenser operated to provide Reactive Services was not also providing Synchronized Reserve, the Market Seller shall be credited only for the generating unit's cost to condense, as described in (ii) above. The total Synchronized Reserve Obligations of all Load Serving Entities under section 3.2.3A(a) in the zone where these condensers are located shall be reduced by the amount counted as satisfying the PJM Synchronized Reserve requirements. The Synchronized Reserve Obligation of each Load Serving Entity in the zone under section 3.2.3A(a) shall be reduced to the same extent that the costs of such condensers counted as Synchronized Reserve are allocated to such Load Serving Entity pursuant to subsection (l) below.

(j) A Market Seller's pool scheduled steam-electric generating unit or combined cycle unit operating in combined cycle mode, that is not committed to operate in the Day-ahead Market, but that is directed by the Office of the Interconnection to operate solely for the purpose of maintaining reactive reliability, at the request of the Office of the Interconnection, shall be credited in the amount of the unit's offered price for start-up and no-load fees. The unit also shall receive, if applicable, compensation in accordance with Sections 3.2.3B(e)-(f).

(k) The sum of the foregoing credits as specified in Sections 3.2.3B(b)-(j) shall be the cost of Reactive Services for the purpose of maintaining reactive reliability for the Operating Day and shall be separately determined for each transmission zone in the PJM Region based on whether the resource was dispatched for the purpose of maintaining reactive reliability in such transmission zone.

(l) The cost of Reactive Services for the purpose of maintaining reactive reliability in a transmission zone in the PJM Region for each Operating Day shall be allocated and charged to each Market Participant in proportion to its deliveries of energy to load (net of operating Behind The Meter Generation) in such transmission zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such transmission zone.

(m) Generating units receiving dispatch instructions from the Office of the Interconnection under the expectation of increased actual or reserve reactive shall inform the Office of the Interconnection dispatcher if the requested reactive capability is not achievable. Should the operator of a unit receiving such instructions realize at any time during which said instruction is effective that the unit is not, or likely would not be able to, provide the requested amount of reactive support, the operator shall as soon as practicable inform the Office of the Interconnection dispatcher of the unit's inability, or expected inability, to provide the required reactive support, so that the associated dispatch instruction may be cancelled. PJM Performance Compliance personnel will audit operations after-the-fact to determine whether a unit that has altered its active power output at the request of the Office of the Interconnection has provided the actual reactive support or the reactive reserve capability requested by the Office of the Interconnection. PJM shall utilize data including, but not limited to, historical reactive performance and stated reactive capability curves in order to make this determination, and may withhold such compensation as described above if reactive support as requested by the Office of the Interconnection was not or could not have been provided.

3.2.3C Synchronous Condensing for Post-Contingency Operation.

(a) Under normal circumstances, PJM operates generation out of merit order to control contingency overloads when the flow on the monitored element for loss of the contingent element ("contingency flow") exceeds the long-term emergency rating for that facility, typically a 4-hour or 2-hour rating. At times however, and under certain, specific system conditions, PJM does not operate generation out of merit order for certain contingency overloads until the contingency flow on the monitored element exceeds the 30-minute rating for that facility ("post-contingency operation"). In conjunction with such operation, when the contingency flow on such element exceeds the long-term emergency rating, PJM operates synchronous condensers in the areas affected by such constraints, to the extent they are available, to provide greater certainty that such resources will be capable of producing energy in sufficient time to reduce the flow on the monitored element below the normal rating should such contingency occur.

(b) The amount of Synchronized Reserve provided by synchronous condensers associated with post-contingency operation shall be counted as Synchronized Reserve satisfying the applicable Synchronized Reserve Requirements. Operators of these generation units shall be

notified of such provision, and to the extent a generation unit's operator indicates that the generation unit is capable of providing Synchronized Reserve, shall be subject to the same requirements contained in section 3.2.3A regarding provision of Synchronized Reserve. At the end of each Operating Day, to the extent a condenser operated in conjunction with post-contingency operation also provided Synchronized Reserve, a Market Seller shall be credited for providing synchronous condensing in conjunction with post-contingency operation at the request of the Office of the Interconnection, in an amount equal to the higher of (i) the Real-time Synchronized Reserve Market Clearing Price for each applicable interval a generation resource provided synchronous condensing multiplied by the amount of Synchronized Reserve provided by the synchronous condenser or (ii) the sum of (A) the generation resource's applicable interval cost to provide synchronous condensing, calculated in accordance with the PJM Manuals, (B) the applicable interval product of the megawatts of energy used to provide synchronous condensing multiplied by the real-time LMP at the generation bus of the generation resource, (C) the generation resource's start-up cost of providing synchronous condensing, and (D) the unit-specific lost opportunity cost of the generation resource supplying the increment of Synchronized Reserve as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals. To the extent a condenser operated in association with post-contingency constraint control was not also providing Synchronized Reserve, the Market Seller shall be credited only for the generation unit's cost to condense, as described in (ii) above. The total Synchronized Reserve Obligations of all Load Serving Entities under section 3.2.3A(a) in the zone where these condensers are located shall be reduced by the amount counted as satisfying the PJM Synchronized Reserve requirements. The Synchronized Reserve Obligation of each Load Serving Entity in the zone under section 3.2.3A(a) shall be reduced to the same extent that the costs of such condensers counted as Synchronized Reserve are allocated to such Load Serving Entity pursuant to subsection (d) below.

(c) The sum of the foregoing credits as specified in section 3.2.3C(b) shall be the cost of synchronous condensers associated with post-contingency operations for the Operating Day and shall be separately determined for each transmission zone in the PJM Region based on whether the resource was dispatched in association with post-contingency operation in such transmission zone.

(d) The cost of synchronous condensers associated with post-contingency operations in a transmission zone in the PJM Region for each Operating Day shall be allocated and charged to each Market Participant in proportion to its deliveries of energy to load (net of operating Behind The Meter Generation) in such transmission zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such transmission zone.

3.2.4 Transmission Congestion Charges.

Each Market Buyer shall be assessed Transmission Congestion Charges as specified in Tariff, Attachment K-Appendix, section 5.

3.2.5 Transmission Loss Charges.

Each Market Buyer shall be assessed Transmission Loss Charges as specified in Tariff, Attachment K-Appendix, section 5.

3.2.6 Emergency Energy.

(a) When the Office of the Interconnection has implemented Emergency procedures, resources offering Emergency energy are eligible to set real-time Locational Marginal Prices, capped at the energy offer cap plus sum of the applicable Reserve Penalty Factors for the Synchronized Reserved Requirement and Primary Reserve Requirement, provided that the Emergency energy is needed to meet demand in the PJM Region.

(b) Market Participants shall be allocated a proportionate share of the net cost of Emergency energy purchased by the Office of the Interconnection. Such allocated share during each applicable interval of such Emergency energy purchase shall be in proportion to the amount of each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Energy Market, whenever that deviation increases the Market Participant's spot market purchases or decreases its spot market sales. This deviation shall not include any reduction or suspension of output of pool scheduled resources requested by PJM to manage an Emergency within the PJM Region.

(c) Net revenues in excess of Real-time Prices attributable to sales of energy in connection with Emergencies to other Control Areas shall be credited to Market Participants during each applicable interval of such Emergency energy sale in proportion to the sum of (i) each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Energy Market, whenever that deviation increases the Market Participant's spot market purchases or decreases its spot market sales, and (ii) each Market Participant's energy sales from within the PJM Region to entities outside the PJM Region that have been curtailed by PJM.

(d) The net costs or net revenues associated with sales or purchases of energy in connection with a Minimum Generation Emergency in the PJM Region, or in another Control Area, shall be allocated during each applicable interval of such Emergency sale or purchase to each Market Participant in proportion to the amount of each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Market, whenever that deviation increases the Market Participant's spot market sales or decreases its spot market purchases.

3.2.7 Billing.

(a) PJM Settlement shall prepare a billing statement each billing cycle for each Market Participant in accordance with the charges and credits specified in Tariff, Attachment K-Appendix, sections 3.2.1 through 3.2.6, and showing the net amount to be paid or received by the Market Participant. Billing statements shall provide sufficient detail, as specified in the PJM Manuals, to allow verification of the billing amounts and completion of the Market Participant's internal accounting.

(b) If deliveries to a Market Participant that has PJM Interchange meters in accordance with Operating Agreement, section 14 include amounts delivered for a Market

Participant that does not have PJM Interchange meters separate from those of the metered Market Participant, PJMSettlement shall prepare a separate billing statement for the unmetered Market Participant based on the allocation of deliveries agreed upon between the Market Participant and the unmetered Market Participant specified by them to the Office of the Interconnection.

Definitions Q - R

Ramping Capability:

“Ramping Capability” shall mean the sustained rate of change of generator output, in megawatts per minute.

Real-time Congestion Price:

“Real-time Congestion Price” shall mean the Congestion Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Loss Price:

“Real-time Loss Price” shall mean the Loss Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Offer:

“Real-time Offer” shall mean a new offer or an update to a Market Seller’s existing cost-based or market-based offer for a clock hour, submitted for use after the close of the Day-ahead Energy Market.

Real-time Prices:

“Real-time Prices” shall mean the Locational Marginal Prices resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Energy Market:

“Real-time Energy Market” shall mean the purchase or sale of energy and payment of Transmission Congestion Charges for quantity deviations from the Day-ahead Energy Market in the Operating Day.

Real-time Settlement Interval:

“Real-time Settlement Interval” shall mean the interval used by settlements, which shall be every five minutes.

Real-time State of Charge:

“Real-time State of Charge” shall mean the current State of Charge of an Energy Storage Resource Model Participant, measured in units of megawatt-hours.

Real-time System Energy Price:

“Real-time System Energy Price” shall mean the System Energy Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Regional Entity:

“Regional Entity” shall mean an organization that NERC has delegated the authority to propose and enforce reliability standards pursuant to the Federal Power Act.

Regional RTEP Project:

“Regional RTEP Project” shall mean a transmission expansion or enhancement rated at 230 kV or above which is required for compliance with the following PJM criteria: system reliability, operational performance or economic criteria, pursuant to a determination by the Office of the Interconnection.

Registered Entity:

“Registered Entity” shall mean the entity registered under the NERC Functional Model and NERC Rules of Procedures for the purpose of compliance with NERC Reliability Standards and responsible for carrying out the tasks within a NERC function without regard to whether a task or tasks are performed by another entity pursuant to the terms of the PJM Governing Agreements.

Regulation:

“Regulation” shall mean the capability of a specific generation resource or Demand Resource with appropriate telecommunications, control and response capability to separately increase and decrease its output or adjust load in response to a regulating control signal, in accordance with the specifications in the PJM Manuals. Regulation is inclusive of Regulation-Down Service and Regulation-Up Service.

Regulation-Down Requirement:

“Regulation-Down Requirement” shall mean the required megawatts of performance-adjusted Regulation-Down Service capability to be maintained in a Regulation Zone. The Regulation-Down Requirement is defined as a set megawatt value by hour in accordance with the PJM Manuals, and can increase to account for additional operational uncertainty.

Regulation-Down Service

“Regulation-Down Service” shall mean the capability of a specific generation resource or Demand Resource with appropriate telecommunications and response capability to increase and decrease its output in the downward range from a set point or adjust load in response to a regulating-down control signal, in accordance with the specification in the PJM Manuals.

Regulation Requirement:

~~“Regulation Requirement” shall mean the required megawatts of performance-adjusted Regulation capability to be maintained in a Regulation Zone. The Regulation Requirement is defined as a set megawatt value by commitment interval and can increase to account for additional operational uncertainty, in accordance with the PJM Manuals.~~

Regulation-Up Requirement:

“Regulation-Up Requirement” shall mean the required megawatts of performance-adjusted Regulation-Up Service capability to be maintained in a Regulation Zone. The Regulation-Up Requirement is defined as a set megawatt value by hour in accordance with the PJM Manuals, and can increase to account for additional operational uncertainty.

Regulation-Up Service

“Regulation-Up Service” shall mean the capability of a specific generation resource or Demand Resource with appropriate telecommunications and response capability to increase and decrease its output in the upward range from a set point or adjust load in response to a regulating-up control signal, in accordance with the specification in the PJM Manuals.

Regulation Zone:

“Regulation Zone” shall mean any of those one or more geographic areas, each consisting of a combination of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, regulation service.

Related Parties:

“Related Parties” shall mean, solely for purposes of the governance provisions of the Operating Agreement: (i) any generation and transmission cooperative and one of its distribution cooperative members; and (ii) any joint municipal agency and one of its members. For purposes of the Operating Agreement, representatives of state or federal government agencies shall not be deemed Related Parties with respect to each other, and a public body's regulatory authority, if any, over a Member shall not be deemed to make it a Related Party with respect to that Member.

Relevant Electric Retail Regulatory Authority:

“Relevant Electric Retail Regulatory Authority” shall mean an entity that has jurisdiction over and establishes prices and policies for competition for providers of retail electric service to end-customers, such as the city council for a municipal utility, the governing board of a cooperative utility, the state public utility commission or any other such entity.

Reliability Assurance Agreement or PJM Reliability Assurance Agreement:

“Reliability Assurance Agreement” or “PJM Reliability Assurance Agreement” shall mean that certain Reliability Assurance Agreement Among Load-Serving Entities in the PJM Region, on

file with FERC as PJM Interconnection, L.L.C. Rate Schedule FERC. No. 44, and as amended from time to time thereafter.

Reliability Coordinator:

“Reliability Coordinator” shall have the same meaning set forth in the NERC Glossary of Terms used in NERC Reliability Standards.

Reserve Penalty Factor:

“Reserve Penalty Factor” shall mean the cost, in \$/MWh, associated with being unable to meet a specific reserve requirement in a Reserve Zone or Reserve Sub-zone. A Reserve Penalty Factor will be defined for each reserve requirement in a Reserve Zone or Reserve Sub-zone.

Reserve Sub-zone:

“Reserve Sub-zone” shall mean any of those geographic areas wholly contained within a Reserve Zone, consisting of a combination of a portion of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, reserve service.

Reserve Zone:

“Reserve Zone” shall mean any of those geographic areas consisting of a combination of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, reserve service.

Residual Auction Revenue Rights:

“Residual Auction Revenue Rights” shall mean incremental stage 1 Auction Revenue Rights created within a Planning Period by an increase in transmission system capability, including the return to service of existing transmission capability, that was not modeled pursuant to Operating Agreement, Schedule 1, section 7.5, and the parallel provisions of Tariff, Attachment K-Appendix, section 7.5 in compliance with Operating Agreement, Schedule 1, section 7.4.2(h), and the parallel provisions of Tariff, Attachment K-Appendix, section 7.4.2(h), and, if modeled, would have increased the amount of stage 1 Auction Revenue Rights allocated pursuant to Operating Agreement, Schedule 1, section 7.4.2, and the parallel provisions of Attachment K-Appendix, section 7.4.2; provided that, the foregoing notwithstanding, Residual Auction Revenue Rights shall exclude: 1) Incremental Auction Revenue Rights allocated pursuant to Tariff, Part VI; and 2) Auction Revenue Rights allocated to entities that are assigned cost responsibility pursuant to Operating Agreement, Schedule 6 for transmission upgrades that create such rights.

Residual Metered Load:

“Residual Metered Load” shall mean all load remaining in an electric distribution company’s fully metered franchise area(s) or service territory(ies) after all nodally priced load of entities serving load in such area(s) or territory(ies) has been carved out.

Revenue Data for Settlements:

“Revenue Data for Settlements” shall mean energy quantities used in accounting and billing as determined pursuant to Tariff, Attachment K-Appendix and the corresponding provisions of Operating Agreement, Schedule 1.

1.10 Scheduling.

1.10.1 General.

- (a) The Office of the Interconnection shall administer scheduling processes to implement a Day-ahead Energy Market and a Real-time Energy Market. PJMSettlement shall be the Counterparty to the purchases and sales of energy that clear the Day-ahead Energy Market and the Real-time Energy Market; provided that PJMSettlement shall not be a contracting party to bilateral transactions between Market Participants or with respect to a Generating Market Buyer's self-schedule or self-supply of its generation resources up to that Generating Market Buyer's Equivalent Load.
- (b) The Day-ahead Energy Market shall enable Market Participants to purchase and sell energy through the PJM Interchange Energy Market at Day-ahead Prices and enable Transmission Customers to reserve transmission service with Transmission Congestion Charges and Transmission Loss Charges based on locational differences in Day-ahead Prices. Up-to Congestion Transactions submitted in the Day-ahead Energy Market shall not require transmission service and Transmission Customers shall not reserve transmission service for such Up-to Congestion Transactions. Market Participants whose purchases and sales, and Transmission Customers whose transmission uses are scheduled in the Day-ahead Energy Market, shall be obligated to purchase or sell energy, or pay Transmission Congestion Charges and Transmission Loss Charges, at the applicable Day-ahead Prices for the amounts scheduled.
- (c) (i) In the Real-time Energy Market, Market Participants that deviate from the amounts of energy purchases or sales scheduled in the Day-ahead Energy Market shall be obligated to purchase or sell energy for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.
- (ii) In the Real-time Energy Market, Transmission Customers that deviate from the transmission uses, scheduled in the Day-ahead Energy Market shall be obligated to pay Transmission Congestion Charges and Transmission Loss Charges for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.
- (iii) Market Participants that deviate in real-time from the amounts of Secondary Reserve, Non-Synchronized Reserve, or Synchronized Reserve sales, scheduled day-ahead shall be obligated to purchase Secondary Reserve, Non-Synchronized Reserve, or Synchronized Reserve for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.
- (d) The following scheduling procedures and principles shall govern the commitment of resources to the Day-ahead Energy Market and the Real-time Energy Market over a period extending from one week to one hour prior to the real-time dispatch. Scheduling encompasses the day-ahead and hourly scheduling process, through which the Office of the Interconnection determines the Day-ahead Energy Market and determines, based on changing forecasts of conditions and actions by Market Participants and system constraints, a plan to serve the hourly

energy and reserve requirements of the Internal Market Buyers and the purchase requests of the External Market Buyers in the least costly manner, subject to maintaining the reliability of the PJM Region. Scheduling does not encompass Coordinated External Transactions, which are subject to the procedures of Operating Agreement, Schedule 1, section 1.13. Scheduling shall be conducted as specified in section 1.10.1A below, subject to the following condition. If the Office of the Interconnection's forecast for the next seven days projects a likelihood of Emergency conditions, the Office of the Interconnection may commit, for all or part of such seven day period, to the use of generation resources with notification or start-up times greater than one day as necessary in order to alleviate or mitigate such Emergency, in accordance with the Market Sellers' offers for such units for such periods and the specifications in the PJM Manuals. Such resources committed by the Office of the Interconnection to alleviate or mitigate an Emergency will not receive Operating Reserve Credits nor otherwise be made whole for its hours of operation for the duration of any portion of such commitment that exceeds the maximum start-up and notification times for such resources during Hot Weather Alerts and Cold Weather Alerts, consistent with Operating Agreement, Schedule 1, section 3.2.3 and Operating Agreement, Schedule 1, section 6.6.

1.10.1A Day-ahead and Real-time Energy Market Scheduling.

The following actions shall occur not later than 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled, or such other deadline as may be specified by the Office of the Interconnection in order to comply with the practical requirements and the economic and efficiency objectives of the scheduling process specified in this Schedule.

(a) Each Market Participant may submit to the Office of the Interconnection specifications of the amount and location of its customer loads and/or energy purchases to be included in the Day-ahead Energy Market for each hour of the next Operating Day, such specifications to comply with the requirements set forth in the PJM Manuals. Each Market Buyer shall inform the Office of the Interconnection of the prices, if any, at which it desires not to include its load in the Day-ahead Energy Market rather than pay the Day-ahead Price. PRD Providers that have committed Price Responsive Demand in accordance with the Reliability Assurance Agreement shall submit to the Office of the Interconnection, in accordance with procedures specified in the PJM Manuals, any desired updates to their previously submitted PRD Curves, provided that such updates are consistent with their Price Responsive Demand commitments, and provided further that PRD Providers that are not Load Serving Entities for the Price Responsive Demand at issue may only submit PRD Curves for the Real-time Energy Market. Price Responsive Demand that has been committed in accordance with the Reliability Assurance Agreement shall be presumed available for the next Operating Day in accordance with the most recently submitted PRD Curve unless the PRD Curve is updated to indicate otherwise. PRD Providers may also submit PRD Curves for any Price Responsive Demand that is not committed in accordance with the Reliability Assurance Agreement; provided that PRD Providers that are not Load Serving Entities for the Price Responsive Demand at issue may only submit PRD Curves for the Real-time Energy Market. All PRD Curves shall be on a PRD Substation basis, and shall specify the maximum time period required to implement load reductions.

(b) Each Generating Market Buyer shall submit to the Office of the Interconnection:
(i) hourly schedules for resource increments, including hydropower units, self-scheduled by the Market Buyer to meet its Equivalent Load; and (ii) the Dispatch Rate at which each such self-scheduled resource will disconnect or reduce output, or confirmation of the Market Buyer's intent not to reduce output.

(c) All Market Participants shall submit to the Office of the Interconnection schedules for any energy exports, energy imports, and wheel through transactions involving use of generation or Transmission Facilities as specified below, and shall inform the Office of the Interconnection if the transaction is to be scheduled in the Day-ahead Energy Market. Any Market Participant that elects to schedule an export, import or wheel through transaction in the Day-ahead Energy Market may specify the price (such price not to exceed \$2,000/MWh), if any, at which the export, import or wheel through transaction will be wholly or partially curtailed. The foregoing price specification shall apply to the applicable interface pricing point. Any Market Participant that elects not to schedule its export, import or wheel through transaction in the Day-ahead Energy Market shall inform the Office of the Interconnection if the parties to the transaction are not willing to incur Transmission Congestion and Loss Charges in the Real-time Energy Market in order to complete any such scheduled transaction. Such transactions in the Real-time Energy Market, other than Coordinated Transaction Schedules and emergency energy sales and purchases, may specify a price up to \$2,000/MWh. Scheduling of such transactions shall be conducted in accordance with the specifications in the PJM Manuals and the following requirements:

- i) Market Participants shall submit schedules for all energy purchases for delivery within the PJM Region, whether from resources inside or outside the PJM Region;
- ii) Market Participants shall submit schedules for exports for delivery outside the PJM Region from resources within the PJM Region that are not Dynamic Transfers to such entities pursuant to Operating Agreement, Schedule 1, section 1.12; and
- iii) In addition to the foregoing schedules for exports, imports and wheel through transactions, Market Participants shall submit confirmations of each scheduled transaction from each other party to the transaction in addition to the party submitting the schedule, or the adjacent Control Area.

(c-1) A Market Participant may elect to submit in the Day-ahead Energy Market a form of Virtual Transaction that combines an offer to sell energy at a source, with a bid to buy the same megawatt quantity of energy at a sink where such transaction specifies the maximum difference between the Locational Marginal Prices at the source and sink. The Office of Interconnection will schedule these transactions only to the extent this difference in Locational Marginal Prices is within the maximum amount specified by the Market Participant. A Virtual Transaction of this type is referred to as an "Up-to Congestion Transaction." Such Up-to Congestion Transactions may be wholly or partially scheduled depending on the price difference between the source and sink locations in the Day-ahead Energy Market. The maximum difference between the source

and sink prices that a participant may specify shall be limited to +/- \$50/MWh. The foregoing price specification shall apply to the price difference between the specified source and sink in the day-ahead scheduling process only. An accepted Up-to Congestion Transaction results in scheduled injection at a specified source and scheduled withdrawal of the same megawatt quantity at a specified sink in the Day-ahead Energy Market.

(c-2) A Market Participant may elect to submit an Increment Offer and/or Decrement Bid form of Virtual Transaction in the Day-ahead Energy Market and shall specify the price for such transaction which shall be limited to \$2,000/megawatt-hour.

(c-3) Up-to Congestion Transactions may only be submitted at hubs, Residual Metered Load and interfaces not described in Tariff, Attachment K-Appendix, section 2.6A(b). Increment Offers and Decrement Bids may be only submitted at hubs, nodes at which physical generation or load is settled, Residual Metered Load and interfaces not described in Tariff, Attachment K-Appendix, section 2.6A(b).

(d) Market Sellers in the Day-ahead Energy Market shall submit offers for the supply of energy, demand reductions, or other services for the following Operating Day for each clock hour for which the Market Seller desires or is required to make its resource available to the Office of the Interconnection. Offers for the supply of energy may be cost-based, market-based, or both, and may vary hourly. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, Operating Agreement, Schedule 2, and the PJM Manuals, as applicable. Market Sellers owning or controlling the output of a Generation Capacity Resource that is committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1, and that has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage shall submit offers for the available capacity of such Generation Capacity Resource, including any portion that is self-scheduled by the Generating Market Buyer. Such offers shall be based on the ICAP equivalent of the Market Seller's cleared UCAP capacity commitment, provided, however, where the underlying resource is a Capacity Storage Resource or an Intermittent Resource, the Market Seller shall satisfy the must offer requirement by either self-scheduling or offering the unit as a dispatchable resource, in accordance with the PJM Manuals, where the hourly day-ahead self-scheduled values for such Capacity Storage Resources and Intermittent Resources may vary hour to hour from the capacity commitment. Any offer not designated as a Maximum Emergency offer shall be considered available for scheduling and dispatch under both Emergency and non-Emergency conditions. Offers may only be designated as Maximum Emergency offers to the extent that the Generation Capacity Resource falls into at least one of the following categories:

- i) Environmental limits. If the resource has a limit on its run hours imposed by a federal, state, or other governmental agency that will significantly limit its availability, on either a temporary or long-term basis. This includes a resource that is limited to operating only during declared PJM capacity emergencies by a governmental authority.

- ii) Fuel limits. If physical events beyond the control of the resource owner result in the temporary interruption of fuel supply and there is limited on-site fuel storage. A fuel supplier's exercise of a contractual right to interrupt supply or delivery under an interruptible service agreement shall not qualify as an event beyond the control of the resource owner.
- iii) Temporary emergency conditions at the unit. If temporary emergency physical conditions at the resource significantly limit its availability.
- iv) Temporary megawatt additions. If a resource can provide additional megawatts on a temporary basis by oil topping, boiler over-pressure, or similar techniques, and such megawatts are not ordinarily otherwise available.

The submission of offers for resource increments that are not committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1 shall be optional, but any such offers must contain the information specified in the Office of the Interconnection's Offer Data specification, Operating Agreement, Schedule 1, sections 1.10.1A(d) and 1.10.9B, Operating Agreement, Schedule 2, and the PJM Manuals, as applicable. Energy offered from generation resources that are not committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1 shall not be supplied from resources that are included in or otherwise committed to supply the Operating Reserves of a Control Area outside the PJM Region.

The foregoing offers:

- i) Shall specify the Generation Capacity Resource or Economic Load Response Participant resource and energy or demand reduction amount, respectively, for each clock hour in the offer period;
- ii) Shall specify the amounts and prices for each clock hour during the entire Operating Day for each resource component offered by the Market Seller to the Office of the Interconnection;
- iii) May specify for generation resources offer parameters for each clock hour during the entire Operating Day, as applicable and in accordance with section 1.10.9B below, including: (1) Minimum Run Time; (2) maximum run time; (3) Start-up Costs; (4) No-load Costs; (5) Incremental Energy Offer; (6) notification time; (7) availability; (8) ramp rate; (9) Economic Minimum; (10) Economic Maximum; (11) emergency minimum MW; (12) emergency maximum MW; (13) Synchronized Reserve maximum MW; (14) Secondary Reserve maximum MW; and (15) condense to generation time constraints, and may specify offer parameters for Economic Load Response Participant resources for each clock hour during the entire Operating Day, as applicable and in accordance with section 1.10.9B below, including: (1) minimum down time; (2) shutdown costs;

(3) Incremental Energy Offer; (4) notification time; (5) Economic Minimum; and (6) Economic Maximum;

- iv) Shall set forth any special conditions upon which the Market Seller proposes to supply a resource increment, including any curtailment rate specified in a bilateral contract for the output of the resource, or any cancellation fees;
- v) May include a schedule of offers for prices and operating data contingent on acceptance by the deadline specified in this Schedule, with additional schedules applicable if accepted after the foregoing deadline;
- vi) Shall constitute an offer to submit the resource increment to the Office of the Interconnection for scheduling and dispatch in accordance with the terms of the offer for the clock hour, which offer shall remain open through the Operating Day, for which the offer is submitted, unless the Market Seller a) submits a Real-time Offer for the applicable clock hour, or b) updates the availability of its offer for that hour, as further described in the PJM Manuals;
- vii) Shall be final as to the price or prices at which the Market Seller proposes to supply energy or other services to the PJM Interchange Energy Market, such price or prices being guaranteed by the Market Seller for the period extending through the end of the following Operating Day, unless modified after the close of the Day-ahead Energy Market as permitted pursuant to sections 1.10.9A or 1.10.9B below;
- viii) Shall not exceed an energy offer price of \$1,000/megawatt-hour for all generation resources, except (1) when a Market Seller's cost-based offer is above \$1,000/megawatt-hour and less than or equal to \$2,000/megawatt-hour, then its market-based offer must be less than or equal to the cost-based offer; and (2) when a Market Seller's cost-based offer is greater than \$2,000/megawatt-hour, then its market-based offer must be less than or equal to \$2,000/megawatt-hour;
- ix) Shall not exceed a demand reduction offer price of \$1,000/megawatt-hour, except when an Economic Load Response Participant submits a cost-based offer that includes an incremental cost component that is above \$1,000/megawatt-hour, then its market-based offer must be less than or equal to the cost-based offer but in no event greater than \$2,000/megawatt-hour;
- x) Shall not exceed an offer price as follows for Emergency Load Response and Pre-Emergency Load Response participants with:
 - a) a 30 minute lead time, pursuant to Tariff, Attachment DD-1,

section A.2 and the parallel provision of RAA, Schedule 6, \$1,000/megawatt-hour, plus the applicable Reserve Penalty Factor for the Primary Reserve Requirement, minus \$1.00;

b) an approved 60 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provision of RAA, Schedule 6, \$1,000/megawatt-hour, plus [the applicable Reserve Penalty Factor for the Primary Reserve Requirement divided by 2]; and

c) an approved 120 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provisions of RAA, Schedule 6, \$1,100/megawatt-hour; and

xi) Shall not exceed an energy offer price of \$0.00/MWh for pumped storage hydropower units scheduled by the Office of the Interconnection pursuant to the hydro optimization tool in the Day-ahead Energy Market.

(e) A Market Seller that wishes to make a resource available to sell Regulation-Up Service and/or Regulation-Down Service shall submit an offer(s) for the applicable Regulation service(s) for each 30 minute Regulation clearing interval for which the Market Seller desires to make its resource available to the Office of the Interconnection to provide Regulation that shall specify the megawatts of Regulation-Up and/or Regulation-Down being offered, which must equal or exceed 0.1 megawatts, in the Regulation Zone for which such Regulation-Up and/or Regulation-Down Service is offered, the price of the capability offer in dollars per MW, the price of the mileage offer in Dollars per change in MW, and such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer and the resource's opportunity costs for Regulation-Up and/or Regulation-Down Service(s). Such offers may vary for each 30 minute Regulation clearing interval, and may be updated each 30 minute Regulation clearing interval, up to 35 minutes before the applicable 30 minute Regulation clearing interval during the Operating Day. The total of the applicable Regulation service mileage offer multiplied by the applicable historical average mileage used in the market clearing plus the applicable Regulation service capability offer shall not exceed \$10050/megawatt-hour, for the Regulation-Down Service and Regulation-Up Service, independently. In addition to any market-based offer for Regulation-Up and/or Regulation-Down Service, the Market Seller also shall submit a cost-based offer. A cost-based offer must be in the form specified in the PJM Manuals and consist of the following components as well as any other components specified in the PJM Manuals:

i. The costs (in \$/MW) of the fuel cost increase due to the steady-state heat rate increase resulting from operating the unit at lower megawatt output incurred from the provision of Regulation shall apply to the capability offer for Regulation-Down Service;

ii. The cost increase (in \$/ΔMW) in costs associated with movement of the regulation resource incurred from the provision of Regulation shall apply to the mileage offer for Regulation-Down Service and Regulation-Up Service; and

- a. Only Regulation-only resources may include all variable operation and maintenance expenses in the mileage offer, as defined in the PJM Manuals.
- iii. An adder of up to \$~~126~~.00 per megawatt of Regulation provided applied to the capability offer for Regulation-Down Service and an adder of up to \$6.00 per megawatt of Regulation provided applied to the capability offer for Regulation-Up Service.

Qualified Regulation capability must satisfy the measurement and verification tests specified in the PJM Manuals.

(f) Each Market Seller owning or controlling the output of a Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative shall submit a forecast of the availability of each such Generation Capacity Resource for the next seven days. A Market Seller (i) may submit a non-binding forecast of the price at which it expects to offer a generation resource increment to the Office of the Interconnection over the next seven days, and (ii) shall submit a binding offer for energy, along with Start-up Costs and No-load Costs, if any, for the next seven days or part thereof, for any generation resource with minimum notification or start-up requirement greater than 24 hours. Such resources committed by the Office of the Interconnection will not receive Operating Reserve Credits nor otherwise be made whole for its hours of operation for the duration of any portion of such commitment that exceeds the maximum start-up and notification times for such resources during Hot Weather Alerts and Cold Weather Alerts, consistent with Operating Agreement, Schedule 1, section 3.2.3 and Operating Agreement, Schedule 1, section 6.6.

(g) Each component of an offer by a Market Seller of a Generation Capacity Resource that is constant for the entire Operating Day and does not vary hour to hour shall remain in effect for subsequent Operating Days until superseded or canceled.

(h) The Office of the Interconnection shall post the total hourly loads scheduled in the Day-ahead Energy Market, as well as, its estimate of the combined hourly load of the Market Buyers for the next four days, and peak load forecasts for an additional three days.

(i) Except for Economic Load Response Participants, all Market Participants may submit Virtual Transactions that apply to the Day-ahead Energy Market only. Such Virtual Transactions must comply with the requirements set forth in the PJM Manuals and must specify amount, location and price, if any, at which the Market Participant desires to purchase or sell energy in the Day-ahead Energy Market. The Office of the Interconnection may require that a market participant shall not submit in excess of a defined number of bid/offer segments in the Day-ahead Energy Market, as specified in the PJM Manuals, when the Office of the Interconnection determines that such limit is required to avoid or mitigate significant system performance problems related to bid/offer volume. Notice of the need to impose such limit shall be provided prior to 10:00 a.m. EPT on the day that the Day-ahead Energy Market will clear. For purposes of this provision, a bid/offer segment is each pairing of price and megawatt quantity submitted as part of an Increment Offer or Decrement Bid. For purposes of applying this provision to an Up-

to Congestion Transaction, a bid/offer segment shall refer to the pairing of a source and sink designation, as well as price and megawatt quantity, that comprise each Up-to Congestion Transaction.

(j) (i) Offers to Supply Synchronized and Non-Synchronized Reserves By Generation Resources in the Day-ahead and Real-time Reserve Markets

(1) Market Sellers owning or controlling the output of a Generation Capacity Resource that was committed in an FRR Capacity Plan, self-supplied, offered and cleared in a Base Residual Auction or Incremental Auction, or designated as replacement capacity, as specified in Tariff, Attachment DD, is capable of providing Synchronized Reserve or Non-Synchronized Reserve as specified in section 1.7.19A(a), in section 1.7.19A.01(a) and in the PJM Manuals, and has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage, shall submit offers or otherwise make their 10-minute reserve capability available to supply Synchronized Reserve or, as applicable, Non-Synchronized Reserve, including any portion that is self-scheduled by the Generating Market Buyer, in an amount equal to the available 10-minute reserve capability of such Generation Capacity Resource. Market Sellers of Generation Capacity Resources subject to this must-offer requirement that do not make the reserve capability of such resources available when such resource is able to operate with a dispatchable range (e.g. through offering a fixed output) will be in violation of this provision.

(2) Market Sellers of all other generation resources that (A) are capable of providing Synchronized Reserve or Non-Synchronized Reserve, as specified in section 1.7.19A(a), in section 1.7.19A.01(a) and in the PJM Manuals, (B) are located within the metered boundaries of the PJM Region, and (C) have submitted offers for the supply of energy into the Day-ahead Energy Market and/or Real-time Energy Market shall be deemed to have made their reserve capability available to provide Synchronized Reserve or Non-Synchronized Reserve in the Day-ahead Energy Market and/or Real-time Energy Market for each clock hour for which the Market Seller submits an available offer to supply energy; provided, however that hydroelectric generation resources and Energy Storage Resources are not automatically deemed available to provide reserves based on the submission of an available energy offer but may submit offers to supply Synchronized Reserve and Non-Synchronized Reserve, as applicable.

(3) Offers for the supply of Synchronized Reserve by all generation resources must be cost-based. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A, section 1.10.9B below, and the PJM Manuals, as applicable. For offers to supply Synchronized

Reserve, the offer price shall not exceed the expected value of the penalty for failing to provide Synchronized Reserve, where such expected value shall be recalculated annually, in accordance with the PJM Manuals, and posted on PJM's website. The expected value of the penalty is calculated as the product of: (A) the average penalty, expressed in \$/MWh, multiplied by (B) the average rate of non-performance during Synchronized Reserve events multiplied by (C) the probability a Synchronized Reserve event that will qualify for non-performance assessments will occur.

The expected value of the penalty shall be determined by an annual review of the twelve-month period ending October 31 of the calendar year in which the review is performed. The Office of the Interconnection shall post the results of its annual review by no later than December 15, and the revised offer price cap shall be effective as of the following January 1; provided, however, that at the time of implementation of this rule the expected value of the penalty shall be \$0.02/MWh, and for the period from the second month after implementation through the second December 31 following such date of implementation, the expected value of the penalty shall be recalculated on a monthly basis using data from the implementation date of this rule through the 15th day of the current month, and the revised value shall be effective the 1st day of the following month.

(4) All Non-Synchronized Reserve offers shall be for \$0.00/MWh. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this subsection (d) of this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(ii) Determination of Available Synchronized Reserve Capability of Generation Resources

(1) For each offer to supply reserves by a synchronized resource, the Office of the Interconnection shall determine the MW of available Synchronized Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market, in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Hydroelectric generation resources and Energy Storage Resources may submit offers for their available Synchronized Reserve capability as part of their offer into the Synchronized Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(j)(i) above must submit a Synchronized Reserve offer which specifies the MW of available Synchronized Reserve capability in order to remain compliant with such requirements.

(2) An on-line generation resource's available Synchronized Reserve capability, except for generation resources capable of synchronous condensing, shall be determined in accordance with the PJM Manuals and based on the resource's current performance and initial energy output and the following offer parameters submitted as part of the resource's energy offer: (A) ramp rate; (B) Economic Minimum; and (C) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Synchronized Reserves above the Synchronized Reserve maximum MW.

For generation resources capable of synchronous condensing, the resource's available Synchronized Reserve capability shall be based on the following offer parameters submitted as part of the resource's energy offer: (D) ramp rate; (E) condense to generation time constraints; (F) Economic Minimum; and (G) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Synchronized Reserves above the Synchronized Reserve maximum MW.

(3) Any Market Seller that believes its generating unit has operating modes, limits, or conditions where the unit would not be capable of providing Synchronized Reserves in real time, can submit to the Office of the Interconnection with a copy to the Market Monitoring Unit a request for an exception from being assigned Synchronized Reserves in the Real-time Synchronized Reserve Market during time periods in which the generating unit is in those operating modes, limits, or conditions. As part of the request, the Market Seller shall supply, for each generating unit, technical information about the operational modes, limits, or conditions to support the requested exception, as further detailed in the PJM Manuals. The Office of the Interconnection shall consult with the Market Monitoring Unit, and consider any input received from the Market Monitoring Unit, in its determination of a request for such an exception. Within 60 days of the submission of the request, the Office of the Interconnection shall notify the Market Seller in writing, with a copy to the Market Monitoring Unit, whether the request is approved or denied. The effective date of any approved request will be provided in the written notification. If a Market Seller has an approved exception, the Market Seller must communicate to the Office of the Interconnection when the unit cannot provide reserves, and the Office of the Interconnection will provide a mechanism for Market Sellers with an approved exception to provide such communication to the Office of the

Interconnection in real time, as further detailed in the PJM Manuals. An approved exception will remain applicable to the unit until such time as the Office of the Interconnection determines that a change is needed or the Market Seller notifies the Office of the Interconnection, with a copy to the Market Monitoring Unit, that a change is needed based on changed operational capabilities of the unit. Market Sellers must notify the Office of the Interconnection, with a copy to the Market Monitoring Unit, within 30 days of any changed operational capabilities that necessitate a change in an approved exception.

(iii) Determination of Available Non-Synchronized Reserve Capability of Generation Resources

(1) For each offer to supply reserves by an off-line generation resource, the Office of the Interconnection shall determine the MW of available Non-Synchronized Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Such hydroelectric generation resources or Energy Storage Resources may submit offers for their available Non-Synchronized Reserve capability as part of their offer into the Non-Synchronized Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(j)(i) above must submit a Non-Synchronized Reserve offer which specifies the MW of available Non-Synchronized Reserve capability in order to remain compliant with such requirements.

(2) An off-line generation resource's available Non-Synchronized Reserve capability shall be determined in accordance with the PJM Manuals and based on the following offer parameters submitted as part of the resource's energy offer: (A) startup time; (B) notification time; (C) ramp rate; (D) Economic Minimum; and (E) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Non-Synchronized Reserves above its Synchronized Reserve maximum MW.

(iv) Offers to Supply Synchronized Reserves by Economic Load Response Participant Resources in the Day-ahead and Real-time Reserve Markets

(1) Economic Load Response Participants that submit offers to reduce demand into the Day-ahead Energy Market and Real-time Energy Market and wish to make their resources available to supply Synchronized Reserve may submit offers to supply Synchronized Reserve from such resources, where such

offers shall specify the megawatts of Synchronized Reserve being offered, which must equal or exceed 0.1 megawatts and such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer. Such offers may vary hourly, and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day.

(2) All offers to supply Synchronized Reserve offers from Economic Load Response Participant resources shall not exceed the expected value of the penalty for failing to provide Synchronized Reserve, as determined in accordance with section 1.10.1A(j)(i)(3) above. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(k) An Economic Load Response Participant that wishes to participate in the Day-ahead Energy Market by reducing demand shall submit an offer to reduce demand to the Office of the Interconnection for each clock hour for which the Economic Load Response Participant desires to make its resource available to the Office of the Interconnection to reduce demand. The offer must equal or exceed 0.1 megawatts, may vary hourly, and shall specify: (i) the amount of the offered curtailment in minimum increments of .1 megawatts; (ii) the Day-ahead Locational Marginal Price above which the end-use customer will reduce load, subject to section 1.10.1A(d)(ix); and (iii) at the Economic Load Response Participant's option, shutdown costs associated with reducing load, including direct labor and equipment costs, opportunity costs, and/or a minimum of number of contiguous hours for which the load reduction must be committed. Such offers may be updated each hour, up to 65 minutes before the applicable clock hour during the Operating Day. Economic Load Response Participants submitting offers to reduce demand in the Day-ahead Energy Market may establish an incremental offer curve, provided that such offer curve shall be limited to ten price pairs (in MWs) per hour.

(l) Market Sellers owning or controlling the output of an Economic Load Response Participant resource that was committed in an FRR Capacity Plan, or that was self-supplied or that offered and cleared in a Base Residual Auction or Incremental Auction, may submit demand reduction bids for the available load reduction capability of the Economic Load Response Participant resource. The submission of demand reduction bids for Economic Load Response Participant resource increments that were not committed in an FRR Capacity Plan, or that have not cleared in a Base Residual Auction or Incremental Auction, shall be optional, but any such bids must contain the information required to be included in such bids, as specified in the PJM Economic Load Response Program. An Economic Load Response Participant resource that was committed in an FRR Capacity Plan, or that was self-supplied or offered and cleared in a Base Residual Auction or Incremental Auction, may submit a demand reduction bid in the Day-ahead Energy Market as specified in the Economic Load Response Program; provided, however, that in the event of an Emergency PJM shall require Economic Load Response Participant resources to reduce load, notwithstanding that the Zonal LMP at the time such Emergency is declared is below the price identified in the demand reduction bid.

(m) (i) Offers to Supply Secondary Reserve By Generation Resources

(1) Market Sellers owning or controlling the output of a Generation Capacity Resource that was committed in an FRR Capacity Plan, self-supplied, offered and cleared in a Base Residual Auction or Incremental Auction, or designated as replacement capacity, as specified in Tariff, Attachment DD, that is available for energy, is capable of providing Secondary Reserve, as specified in section 1.7.19A.02(a) and in the PJM Manuals, and has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage shall submit offers to supply Secondary Reserve, or otherwise make their Secondary Reserve capability available. Such offers shall be for an amount equal to the resource's available energy output achievable within thirty minutes (less its energy output achievable within ten minutes) from a request of the Office of the Interconnection. Market Sellers of Generation Capacity Resources subject to this must-offer requirement that do not make the reserve capability of such resources available when such resource is able to operate with a dispatchable range (e.g. through offering a fixed output) will be in violation of this provision.

(2) Market Sellers of all other generation resources located within the metered boundaries of the PJM Region that submit offers for the supply of energy into the Day-ahead Energy Market and/or Real-time Energy Market and are capable of providing Secondary Reserve, as specified in the PJM Manuals, shall be deemed to have made their reserve capability available to provide Secondary Reserve in the Day-ahead Energy Market and/or Real-time Energy Market for each clock hour for which the Market Seller submits an available offer to supply energy; provided, however that hydroelectric generation resources and Energy Storage Resources are not automatically deemed available to provide reserves based on the submission of an available energy offer but may submit offers to supply Secondary Reserve, as applicable.

(3) Offers for the supply of Secondary Reserve shall be for \$0.00/MWh. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this subsection (d) above, section 1.10.9B below, and the PJM Manuals, as applicable.

(ii) Determination of Available Secondary Reserve Capability of Generation Resources

(1) For each offer to supply Secondary Reserve by a generation resource, the Office of the Interconnection shall determine the MW of available Secondary Reserve capability offered in the Day-ahead Energy Market and Real-time Energy

Market in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Hydroelectric generation resources or Energy Storage Resources may submit their available Secondary Reserve capability as part of their offer into the Secondary Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(m)(i) above must submit a Secondary Reserve offer which specifies the MW of available Secondary Reserve capability in order to remain compliant with such requirements.

(2) (A) An on-line generation resource's available Secondary Reserve capability, except for generation resources capable of synchronous condensing, shall be based on the resource's current performance and initial energy output, the resource's available Synchronized Reserve capability; and the following offer parameters submitted as part of the energy offer: (i) ramp rate; (ii) Economic Minimum; and (iii) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(B) For generation resources capable of synchronous condensing, the resource's available Secondary Reserve capability shall be based on the following offer parameters submitted as part of the energy offer: (i) ramp rate; (ii) condense to generation time constraints; (iii) Economic Minimum; and (iv) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(C) An off-line generation resource's available Secondary Reserve capability, shall be based on the resource's available Secondary Reserve capability and the following offer parameters submitted as part of the resource's energy offer: (i) startup time; (ii) notification time; (iii) ramp rate; (iv) Economic Minimum; and (v) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the

Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(3) Any Market Seller that believes its generating unit has operating modes, limits, or conditions where the unit would not be capable of providing Secondary Reserves in real time, can submit to the Office of the Interconnection with a copy to the Market Monitoring Unit a request for an exception from being assigned Secondary Reserves in the Real-time Secondary Reserve Market during time periods in which the generating unit is in those operating modes, limits, or conditions. As part of the request, the Market Seller shall supply, for each generating unit, technical information about the operational modes, limits, or conditions to support the requested exception, as further detailed in the PJM Manuals. The Office of the Interconnection shall consult with the Market Monitoring Unit, and consider any input received from the Market Monitoring Unit, in its determination of a request for such an exception. Within 60 days of the submission of the request, the Office of the Interconnection shall notify the Market Seller in writing, with a copy to the Market Monitoring Unit, whether the request is approved or denied. The effective date of any approved request will be provided in the written notification. If a Market Seller has an approved exception, the Market Seller must communicate to the Office of the Interconnection when the unit cannot provide reserves, and the Office of the Interconnection will provide a mechanism for Market Sellers with an approved exception to provide such communication to the Office of the Interconnection in real time, as further detailed in the PJM Manuals. An approved exception will remain applicable to the unit until such time as the Office of the Interconnection determines that a change is needed or the Market Seller notifies the Office of the Interconnection, with a copy to the Market Monitoring Unit, that a change is needed based on changed operational capabilities of the unit. Market Sellers must notify the Office of the Interconnection, with a copy to the Market Monitoring Unit, within 30 days of any changed operational capabilities that necessitate a change in an approved exception.

(iii) Offers to Supply Secondary Reserves by Economic Load Response Participant resources

(1) Each Economic Load Response Participant that submits offers to reduce demand into the Day-ahead Energy Market and Real-time Energy Market and wishes to make their resources available to supply Secondary Reserve shall submit offers to supply Secondary Reserve from such resources, where such offers shall specify the megawatts of Secondary Reserve being offered, which must equal or exceed 0.1 megawatts and include such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer.

Such offers may vary hourly, and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day.

(2) All Secondary Reserve offers by Economic Load Response Participant resources shall be for \$0.00/MWh. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(n) A Market Participant may submit a Day-Ahead Pseudo-Tie Transaction for a Market Participant's generator within the PJM balancing authority area that is a Pseudo-Tie into the MISO balancing authority area. Day-Ahead Pseudo-Tie Transactions combine an offer to sell energy at a source with a bid to buy the same megawatt quantity of energy at a sink where such transaction specifies the maximum difference between the Locational Marginal Prices at the source and sink.

Each Day-Ahead Pseudo-Tie Transaction shall: (1) source at a Market Participant's generator within the PJM balancing authority area that Pseudo-Ties into MISO; and (2) sink at the PJM-MISO interface. A Market Participant must reserve transmission service in accordance with the PJM Tariff for each Day-Ahead Pseudo-Tie Transaction. Megawatt quantities for Day-Ahead Pseudo-Tie Transactions shall be greater than zero and less than or equal to the transmission service reserved for the Day-Ahead Pseudo-Tie Transaction. An accepted Day-Ahead Pseudo-Tie Transaction results in scheduled injection at a specified source and scheduled withdrawal of the same megawatt quantity at a specified sink in the Day-Ahead Energy Market.

1.10.1B Demand Bid Scheduling and Screening

(a) The Office of the Interconnection shall apply Demand Bid Screening to all Demand Bids submitted in the Day-ahead Energy Market for each Load Serving Entity, separately by Zone. Using Demand Bid Screening, the Office of the Interconnection will automatically reject a Load Serving Entity's Demand Bids in any future Operating Day for which the Load Serving Entity submits bids if the total megawatt volume of such bids would exceed the Load Serving Entity's Demand Bid Limit for any hour in such Operating Day, unless the Office of the Interconnection permits an exception pursuant to subsection (d) below.

(b) On a daily basis, PJM will update and post each Load Serving Entity's Demand Bid Limit in each applicable Zone. Such Demand Bid Limit will apply to all Demand Bids submitted by that Load Serving Entity for each future Operating Day for which it submits bids. The Demand Bid Limit is calculated using the following equation:

Demand Bid Limit = greater of (Zonal Peak Demand Reference Point * 1.3), or (Zonal Peak Demand Reference Point + 10MW)

Where:

1. Zonal Peak Demand Reference Point = for each Zone: the product of (a) LSE Recent Load Share, multiplied by (b) Peak Daily Load Forecast.
2. LSE Recent Load Share is the Load Serving Entity's highest share of Network Load in each Zone for any hour over the most recently available seven Operating Days for which PJM has data.
3. Peak Daily Load Forecast is PJM's highest available peak load forecast for each applicable Zone that is calculated on a daily basis.

(c) A Load Serving Entity whose Demand Bids are rejected as a result of Demand Bid Screening may change its Demand Bids to reduce its total megawatt volume to a level that does not exceed its Demand Bid Limit, and may resubmit them subject to the applicable rules related to bid submission outlined in Tariff, Operating Agreement and PJM Manuals.

(d) PJM may allow a Load Serving Entity to submit bids in excess of its Demand Bid Limit when circumstances exist that will cause, or are reasonably expected to cause, a Load Serving Entity's actual load to exceed its Demand Bid Limit on a given Operating Day. Examples of such circumstances include, but are not limited to, changes in load commitments due to state sponsored auctions, mergers and acquisitions between PJM Members, and sales and divestitures between PJM Members. A Load Serving Entity may submit a written exception request to the Office of Interconnection for a higher Demand Bid Limit for an affected Operating Day. Such request must include a detailed explanation of the circumstances at issue and supporting documentation that justify the Load Serving Entity's expectation that its actual load will exceed its Demand Bid Limit.

1.10.2 Pool-scheduled Resources.

Pool-scheduled resources are those resources for which Market Participants submitted offers to sell energy in the Day-ahead Energy Market and offers to reduce demand in the Day-ahead Energy Market, which the Office of the Interconnection scheduled in the Day-ahead Energy Market as well as generators committed by the Office of the Interconnection subsequent to the Day-ahead Energy Market. Such resources shall be committed to provide energy in the real-time dispatch unless the schedules for such units are revised pursuant to section 1.10.9 below or Operating Agreement, Schedule 1, section 1.11. Pool-scheduled resources shall be governed by the following principles and procedures.

(a) Pool-scheduled resources shall be selected by the Office of the Interconnection on the basis of the prices offered for energy and demand reductions and related services, whether the resource is expected to be needed to maintain system reliability during the Operating Day, Start-up Costs, No-load Costs, and cancellation fees, and the specified operating characteristics, offered by Market Sellers to the Office of the Interconnection by the offer deadline specified in section 1.10.1A above. Hydropower units can only be pool-scheduled if they are pumped storage units and scheduled by the Office of the Interconnection pursuant to the hydro optimization tool in the Day-ahead Energy Market.

(b) A resource that is scheduled by a Market Participant to support a bilateral sale, or that is self-scheduled by a Generating Market Buyer, shall not be selected by the Office of the Interconnection as a pool-scheduled resource except in an Emergency.

(c) Market Sellers offering energy from hydropower or other facilities with fuel or environmental limitations may submit data to the Office of the Interconnection that is sufficient to enable the Office of the Interconnection to determine the available operating hours of such facilities.

(d) The Market Seller of a resource selected as a pool-scheduled resource shall receive payments or credits for energy, demand reductions or related services, or for Start-up Costs and No-load Costs, from the Office of the Interconnection on behalf of the Market Buyers in accordance with Operating Agreement, Schedule 1, section 3. Alternatively, the Market Seller shall receive, in lieu of Start-up Costs and No-load Costs, its actual costs incurred, if any, up to a cap of the resource's Start-up Costs, if the Office of the Interconnection cancels its selection of the resource as a pool-scheduled resource and so notifies the Market Seller before the resource is synchronized.

(e) Market Participants shall make available their pool-scheduled resources to the Office of the Interconnection for coordinated operation to supply the Operating Reserves needs of the applicable Control Zone.

(f) Economic Load Response Participants offering to reduce demand shall specify: (i) the amount of the offered curtailment, which must equal or exceed 0.1 megawatts, in minimum increments of 0.1 megawatts; (ii) the real-time Locational Marginal Price above which the end-use customer will reduce load; and (iii) at the Economic Load Response Participant's option, shut-down costs associated with reducing load, including direct labor and equipment costs, opportunity costs, and/or a minimum number of contiguous hours for which the load reduction must be committed. Economic Load Response Participants submitting offers to reduce demand in the Day-ahead Energy Market and/or the Real-time Energy Market may establish an incremental offer curve, provided that such offer curve shall be limited to ten price pairs (in MWs). Economic Load Response Participants offering to reduce demand shall also indicate the hours that the demand reduction is not available.

1.10.3 Self-scheduled Resources.

Self-scheduled resources shall be governed by the following principles and procedures.

(a) Each Generating Market Buyer shall use all reasonable efforts, consistent with Good Utility Practice, not to self-schedule resources in excess of its Equivalent Load.

(b) The offered prices of resources that are self-scheduled and not dispatchable by the Office of the Interconnection shall not be considered by the Office of the Interconnection in determining Locational Marginal Prices.

(c) Market Participants shall make available their self-scheduled resources to the Office of the Interconnection for coordinated operation to supply the Operating Reserves needs of the applicable Control Zone, by submitting an offer as to such resources.

(d) A Market Participant self-scheduling a resource in the Day-ahead Energy Market that does not deliver the energy in the Real-time Energy Market, shall replace the energy not delivered with energy from the Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(e) A Market Participant self-scheduling a resource to supply Synchronized Reserve in the Day-ahead Synchronized Reserve Market that does not deliver the scheduled megawatt quantity in the applicable real-time reserve market, shall replace the Synchronized Reserve not delivered and shall pay for such Synchronized Reserve at the applicable Real-time Synchronized Reserve Market Clearing Price. Market Participants shall not self-schedule a resource to provide Secondary Reserve or Non-Synchronized Reserve.

(f) For energy, hydropower units, excluding pumped storage units, may only be self-scheduled.

(g) A resource that has been self-scheduled shall not receive payments or credits for Start-up Costs or No-load Costs.

1.10.4 Capacity Resources.

(a) A Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative that is selected as a pool-scheduled resource shall be made available for scheduling and dispatch at the direction of the Office of the Interconnection. Such a Generation Capacity Resource that does not deliver energy as scheduled shall be deemed to have experienced a Generator Forced Outage to the extent of such energy not delivered. A Market Participant offering such Generation Capacity Resource in the Day-ahead Energy Market shall replace the energy not delivered with energy from the Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(b) Energy from a Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative that has not been scheduled in the Day-ahead Energy Market may be sold on a bilateral basis by the Market Seller, may be self-scheduled, or may be offered for dispatch during the Operating Day in accordance with the procedures specified in this Schedule. Such a Generation Capacity Resource that has not been scheduled in the Day-ahead Energy Market and that has been sold on a bilateral basis must be made available upon request to the Office of the Interconnection for scheduling and dispatch during the Operating Day if the Office of the Interconnection declares a Maximum Generation Emergency. Any such resource so scheduled and dispatched shall receive the applicable Real-time Price for energy delivered.

1.10.5 External Resources.

(a) External Resources may submit offers to the PJM Interchange Energy Market, in accordance with the day-ahead and real-time scheduling processes specified above. An External Resource selected as a pool-scheduled resource shall be made available for scheduling and dispatch at the direction of the Office of the Interconnection, and except as specified below shall be compensated on the same basis as other pool-scheduled resources. External Resources that are not capable of Dynamic Transfer shall, if selected by the Office of the Interconnection on the basis of the Market Seller's Offer Data, be block loaded on an hourly scheduled basis. Market Sellers shall offer External Resources to the PJM Interchange Energy Market on either a resource-specific or an aggregated resource basis. A Market Participant whose pool-scheduled resource does not deliver the energy scheduled in the Day-ahead Energy Market shall replace such energy not delivered as scheduled in the Day-ahead Energy Market with energy from the PJM Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(b) Offers for External Resources from an aggregation of two or more generating units shall so indicate, and shall specify, in accordance with the Offer Data requirements specified by the Office of the Interconnection: (i) energy prices; (ii) hours of energy availability; (iii) a minimum dispatch level; (iv) a maximum dispatch level; and (v) unless such information has previously been made available to the Office of the Interconnection, sufficient information, as specified in the PJM Manuals, to enable the Office of the Interconnection to model the flow into the PJM Region of any energy from the External Resources scheduled in accordance with the Offer Data.

(c) Offers for External Resources on a resource-specific basis shall specify the resource being offered, along with the information specified in the Offer Data as applicable.

1.10.6 External Market Buyers.

(a) Deliveries to an External Market Buyer not subject to Dynamic Transfer by the Office of the Interconnection shall be delivered on a block loaded basis to the bus or buses at the electrical boundaries of the PJM Region, or in such area with respect to an External Market Buyer's load within such area not served by Network Service, at which the energy is delivered to or for the External Market Buyer. External Market Buyers shall be charged (which charge may be positive or negative) at either the Day-ahead Prices or Real-time Prices, whichever is applicable, for energy at the foregoing bus or buses.

(b) An External Market Buyer's hourly schedules for energy purchased from the PJM Interchange Energy Market shall conform to the ramping and other applicable requirements of the interconnection agreement between the PJM Region and the Control Area to which, whether as an intermediate or final point of delivery, the purchased energy will initially be delivered.

(c) The Office of the Interconnection shall curtail deliveries to an External Market Buyer if necessary to maintain appropriate reserve levels for a Control Zone as defined in the PJM Manuals, or to avoid shedding load in such Control Zone.

1.10.7 Bilateral Transactions.

Bilateral transactions as to which the parties have notified the Office of the Interconnection by the deadline specified in section 1.10.1A above that they elect not to be included in the Day-ahead Energy Market and that they are not willing to incur Transmission Congestion Charges in the Real-time Energy Market shall be curtailed by the Office of the Interconnection as necessary to reduce or alleviate transmission congestion. Bilateral transactions that were not included in the Day-ahead Energy Market and that are willing to incur congestion charges and bilateral transactions that were accepted in the Day-ahead Energy Market shall continue to be implemented during periods of congestion, except as may be necessary to respond to Emergencies.

1.10.8 Office of the Interconnection Responsibilities.

(a) The Office of the Interconnection shall use its best efforts to determine (i) the least-cost means of satisfying the projected hourly requirements for energy, Operating Reserves, and other ancillary services of the Market Buyers, including the reliability requirements of the PJM Region, of the Day-ahead Energy Market, and (ii) the least-cost means of satisfying the Operating Reserve and other ancillary service requirements for any portion of the load forecast of the Office of the Interconnection for the Operating Day in excess of that scheduled in the Day-ahead Energy Market. In making these determinations, the Office of the Interconnection shall take into account: (i) the Office of the Interconnection's forecasts of PJM Interchange Energy Market and PJM Region energy requirements, giving due consideration to the energy requirement forecasts and purchase requests submitted by Market Buyers and PRD Curves properly submitted by PRD Providers; (ii) the offers submitted by Market Sellers; (iii) the availability of limited energy resources; (iv) the capacity, location, and other relevant characteristics of self-scheduled resources; (v) the objectives of each Control Zone for Operating Reserves, as specified in the PJM Manuals; (vi) the requirements of each Regulation Zone for Regulation and other ancillary services, as specified in the PJM Manuals; (vii) the benefits of avoiding or minimizing transmission constraint control operations, as specified in the PJM Manuals; and (viii) such other factors as the Office of the Interconnection reasonably concludes are relevant to the foregoing determination, including, without limitation, transmission constraints on external coordinated flowgates to the extent provided by Operating Agreement, Schedule 1, section 1.7.6. The Office of the Interconnection shall develop a Day-ahead Energy Market based on the foregoing determination, and shall determine the Day-ahead Prices resulting from such schedule. The Office of the Interconnection shall report the planned schedule for a hydropower resource to the operator of that resource as necessary for plant safety and security, and legal limitations on pond elevations.

(b) By 1:30 p.m., or as soon as practicable thereafter, of the day before each Operating Day, or such other deadline as may be specified by the Office of the Interconnection in the PJM Manuals, the Office of the Interconnection shall: (i) post the aggregate Day-ahead Energy Market results; (ii) post the Day-ahead Prices; and (iii) inform the Market Sellers, Market Buyers, and Economic Load Response Participants of their scheduled injections, withdrawals, and demand reductions respectively. The foregoing notwithstanding, the deadlines set forth in this subsection shall not apply if the Office of the Interconnection is unable to obtain Market Participant bid/offer data due to extraordinary circumstances. For purposes of this subsection, extraordinary circumstances shall mean a technical malfunction that limits, prohibits or

otherwise interferes with the ability of the Office of the Interconnection to obtain Market Participant bid/offer data prior to 11:59 p.m. on the day before the affected Operating Day. Extraordinary circumstances do not include a Market Participant's inability to submit bid/offer data to the Office of the Interconnection. If the Office of the Interconnection is unable to clear the Day-ahead Energy Market prior to 11:59 p.m. on the day before the affected Operating Day as a result of such extraordinary circumstances, the Office of the Interconnection shall notify Members as soon as practicable.

(c) Following posting of the information specified in section 1.10.8(b), and absent extraordinary circumstances preventing the clearing of the Day-ahead Energy Market, the Office of the Interconnection shall revise its schedule of generation resources to reflect updated projections of load, conditions affecting electric system operations in the PJM Region, the availability of and constraints on limited energy and other resources, transmission constraints, and other relevant factors.

(d) Market Buyers shall pay PJMSettlement and Market Sellers shall be paid by PJMSettlement for the quantities of energy scheduled in the Day-ahead Energy Market at the Day-ahead Prices when the Day-ahead Price is positive. Market Buyers shall be paid by PJMSettlement and Market Sellers shall pay PJMSettlement for the quantities of energy scheduled in the Day-ahead Energy Market at the Day-ahead Prices when the Day-ahead Price is negative. Economic Load Response Participants shall be paid for scheduled demand reductions pursuant to Operating Agreement, Schedule 1, section 3.3A. Notwithstanding the foregoing, if the Office of the Interconnection is unable to clear the Day-ahead Energy Market prior to 11:59 p.m. on the day before the affected Operating Day due to extraordinary circumstances as described in subsection (b) above, it will be declared a Market Suspension, and Day-ahead Prices shall be determined pursuant to Operating Agreement, Schedule 1, section 2.6.1. If the Office of the Interconnection declares a Market Suspension, it shall notify Market Participants of the Market Suspension as soon as practicable.

(e) If the Office of the Interconnection discovers a *potential* error in prices and/or cleared quantities in the Day-ahead Energy Market or Day-ahead Ancillary Services Markets, or the Real-time Energy Market or Real-time Ancillary Services Markets after it has posted the results for these markets on its Web site, the Office of the Interconnection shall notify Market Participants as soon as possible after it is found, but in no event later than 12:00 p.m. of the second Business Day following the Operating Day for the Real-time Energy Market and Real-time Ancillary Services Markets, and no later than 5:00 p.m. of the second Business Day following the initial publication of the results for the Day-ahead Energy Market and Day-ahead Ancillary Services Markets. After this initial notification, if the Office of the Interconnection determines it is necessary to post modified results, it shall provide notification of its intent to do so, *along with a description detailing the cause and scope of the error*, by no later than 5:00 p.m. of the fifth Business Day following the Operating Day for the Real-time Energy Market and Real-time Ancillary Services Markets, and no later than 5:00 p.m. of the fifth Business Day following the initial publication of the results in the Day-ahead Energy Market and Day-ahead Ancillary Services Markets. *The provided description will not contain information that is market sensitive or confidential.* Thereafter, the Office of the Interconnection must post on its Web site the corrected results by no later than 5:00 p.m. of the tenth calendar day following the Operating

Day for the Day-ahead Energy Market, Real-time Energy Market, and Day-ahead Ancillary Services Markets, and Real-time Ancillary Service Markets. Should any of the above deadlines pass without the associated action on the part of the Office of the Interconnection, the originally posted results will be considered final. Notwithstanding the foregoing, the deadlines set forth above shall not apply if the referenced market results are under publicly noticed review by the FERC.

(f) Consistent with Operating Agreement, section 18.17.1, and notwithstanding anything to the contrary in the Operating Agreement or in the PJM Tariff, to allow the tracking of Market Participants' non-aggregated bids and offers over time as required by FERC Order No. 719, the Office of the Interconnection shall post on its Web site the non-aggregated bid data and Offer Data submitted by Market Participants (for participation in the PJM Interchange Energy Market) approximately four months after the bid or offer was submitted to the Office of the Interconnection.

1.10.9 Hourly Scheduling.

(a) Following the initial posting by the Office of the Interconnection of the Locational Marginal Prices resulting from the Day-ahead Energy Market, and subject to the right of the Office of the Interconnection to schedule and dispatch pool-scheduled resources and to direct that schedules be changed in an Emergency, and absent extraordinary circumstances preventing the clearing of the Day-ahead Energy Market, a generation rebidding period shall exist. Typically the rebidding period shall be from the time the Office of the Interconnection posts the results of the Day-ahead Energy Market until 2:15 p.m. on the day before each Operating Day. However, should the clearing of the Day-ahead Energy Market be significantly delayed, the Office of the Interconnection may establish a revised rebidding period. During the rebidding period, Market Participants may submit revisions to generation Offer Data for the next Operating Day. Adjustments to the Day-ahead Energy Market shall be settled at the applicable Real-time Prices, and shall not affect the obligation to pay or receive payment for the quantities of energy scheduled in the Day-ahead Energy Market at the applicable Day-ahead Prices.

(b) A Market Participant may adjust the schedule of a resource under its dispatch control on an hour-to-hour basis beginning at 6:30 p.m. of the day before each Operating Day, provided that the Office of the Interconnection is notified not later than 65 minutes prior to the hour in which the adjustment is to take effect, as follows and as specified in section 1.10.9A below:

- i) A Generating Market Buyer may self-schedule any of its resource increments, including hydropower resources, not previously designated as self-scheduled and not selected as a pool-scheduled resource in the Day-ahead Energy Market;
- ii) A Market Participant may request the scheduling of a non-firm bilateral transaction; or
- iii) A Market Participant may request the scheduling of deliveries or receipts of Spot Market Energy; or

iv) A Generating Market Buyer may remove from service a resource increment, including a hydropower resource, that it had previously designated as self-scheduled, provided that the Office of the Interconnection shall have the option to schedule energy from any such resource increment that is a Capacity Resource at the price offered in the scheduling process, with no obligation to pay any Start-Up Costs.

(c) An External Market Buyer may refuse delivery of some or all of the energy it requested to purchase in the Day-ahead Energy Market by notifying the Office of the Interconnection of the adjustment in deliveries not later than 65 minutes prior to the hour in which the adjustment is to take effect, but any such adjustment shall not affect the obligation of the External Market Buyer to pay for energy scheduled on its behalf in the Day-ahead Energy Market at the applicable Day-ahead Prices.

(d) The Office of the Interconnection shall provide External Market Buyers and External Market Sellers and parties to bilateral transactions with any revisions to their schedules resulting from the rebidding period by 6:30 p.m. on the day before each Operating Day. The Office of the Interconnection may also commit additional resources after such time as system conditions require. For each hour in the Operating Day, as soon as practicable after the deadlines specified in the foregoing subsection of this section 1.10, the Office of the Interconnection shall provide External Market Buyers and External Market Sellers and parties to bilateral transactions with any revisions to their schedules for the hour.

1.10.9A Updating Offers in Real-time

(a) Each Market Seller may submit Real-time Offers for a resource up to 65 minutes before the applicable clock hour, and such Real-time Offers shall supersede any previous offer for that resource for the clock hour, as further described in the PJM Manuals and subject to the following conditions:

(i) A market-based Real-time Offer shall not exceed the applicable energy offer caps specified in this Schedule. Once a Market Seller's resource is committed for an applicable clock hour, the Market Seller may not increase its Incremental Energy Offer and may only submit a market-based Real-time Offer that is higher than its market-based offer that was in effect at the time of commitment to reflect increases in the resource's cost-based Start-up Costs and cost-based No-load Costs. The Market Seller may elect not to have its market-based offer considered for dispatch and to have only its lowest cost-based offer considered for the remainder of the Operating Day.

(ii) Cost-based Real-time Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection's Offer Data specification, Operating Agreement, Schedule 1, sections 1.10.1A(d) and 1.10.9B, Operating Agreement, Schedule 2 and the PJM Manuals, as applicable. If a Market Seller submits a market-based Real-time Offer for a particular clock hour in accordance with subsection (c) below, or if updates to a cost-based offer are required by the Market

Seller's approved Fuel Cost Policy, the Market Seller shall update its previously submitted cost-based Real-time Offer.

(iii) If a Market Seller's available cost-based offer is not compliant with Operating Agreement, Schedule 2 and the PJM Manuals at the time a Market Seller submits a market-based Real-time Offer for an applicable clock hour during the Operating Day, the Market Seller must submit an updated cost-based Real-time Offer consisting of an Incremental Energy Offer, Start-up Cost, and No-load Cost for that clock hour that is compliant with Operating Agreement, Schedule 2 and the PJM Manuals.

(b) Each Market Seller may submit Real-time Offers for a resource during and through the end of the applicable clock hour to update only the following offer parameters, as further described in the PJM Manuals: (1) Economic Minimum; (2) Economic Maximum; (3) emergency minimum MW; (4) emergency maximum MW; (5) unit availability status; (6) fixed output indicator; (7) Synchronized Reserve maximum MW; and (8) Secondary Reserve maximum MW. Such Real-time Offers shall supersede any previous offer for that resource for the clock hour.

1.10.9B Offer Parameter Flexibility

(a) Market Sellers may, in accordance with sections 1.10.1A and 1.10.9A above, this section 1.10.9B, and the PJM Manuals, update offer parameters at any time up to 65 minutes before the applicable clock hour, including prior to the close of the Day-ahead Energy Market and prior to the close of the rebidding period specified in section 1.10.9, except that Market Sellers may not update their offers for the supply of energy, Secondary Reserve, Synchronized Reserve, Non-Synchronized Reserve, or demand reduction: (1) during the period after the close the Day-ahead Energy Market and prior to the posting of the Day-ahead Energy Market results pursuant to section 1.10.8(b); or (2) during the period after close of the rebidding period and prior to PJM announcing the results of the rebidding period pursuant to section 1.10.9(d).

(b) For generation resource offers, Market Sellers may vary for each clock hour during the entire Operating Day the following offer parameters: (1) cost-based Start-up Costs; (2) cost-based No-load Costs; (3) Incremental Energy Offer; (4) Economic Minimum and Economic Maximum; (5) emergency minimum MW and emergency maximum MW; (6) ramp rate; (7) Synchronized Reserve maximum MW; (8) Secondary Reserve maximum MW; and (9) for Real-time Offers only, (i) notification time and (ii) for uncommitted hours only, Minimum Run Time.

(c) For Economic Load Response Participant resource offers, Market Sellers may vary for each clock hour during the entire Operating Day the following offer parameters: (1) shutdown costs, (2) Incremental Energy Offer; (3) Economic Minimum; (4) Economic Maximum; and (5) for Real-time Offers only, (i) notification time and (ii) for uncommitted hours only, minimum down time.

(d) After the announcement of the results of the rebidding period pursuant to section 1.10.9(d), a Market Seller may submit a Real-time Offer where offer parameters may differ from the offer originally submitted in the Day-ahead Energy Market, except that a Market Seller may not submit a Real-time Offer that changes, of the offer parameters listed in section 1.10.1A(d), the MW amounts specified in the Incremental Energy Offer, MW amounts specified in the ramp rate, maximum run time, and availability; provided, however, Market Sellers of dual-fueled resources may submit Real-time Offers for such resources that change the availability of a submitted cost-based offer.

3.2 Market Settlements.

If a dollar-per-MW-hour value is applied in a calculation under this section 3.2 where the interval of the value produced in that calculation is less than an hour, then for purposes of that calculation the dollar-per-MW hour value is divided by the number of Real-time Settlement Intervals in the hour.

3.2.1 Spot Market Energy.

(a) The Office of the Interconnection shall calculate System Energy Prices in the form of Day-ahead System Energy Prices and Real-time System Energy Prices for the PJM Region, in accordance with Operating Agreement, Schedule 1, section 2.

(b) Each Market Participant shall be charged for all of its Market Participant Energy Withdrawals scheduled in the Day-ahead Energy Market at the Day-ahead System Energy Price to be served in the PJM Interchange Energy Market.

(c) Each Market Participant shall be paid for all of its Market Participant Energy Injections scheduled in the Day-ahead Energy Market at the Day-ahead System Energy Price to be delivered to the PJM Interchange Energy Market.

(d) For each Day-ahead Settlement Interval during an Operating Day, the Office of the Interconnection shall calculate Spot Market Energy charges for each Market Participant as the difference between the sum of its Market Participant Energy Withdrawals scheduled times the Day-ahead System Energy Price and the sum of its Market Participant Energy Injections scheduled times the Day-ahead System Energy Price.

(e) For each Real-time Settlement Interval during an Operating Day, the Office of the Interconnection shall calculate Spot Market Energy charges for each Market Participant as the difference between the sum of its real-time Market Participant Energy Withdrawals less its scheduled Market Participant Energy Withdrawals times the Real-time System Energy Price and the sum of its real-time Market Participant Energy Injections less scheduled Market Participant Energy Injections times the Real-time System Energy Price. The Revenue Data for Settlements determined for each Real-time Settlement Interval in accordance with Operating Agreement, Schedule 1, section 3.1A shall be used in determining the real-time Market Participant Energy Withdrawals and Market Participant Energy Injections used to calculate Spot Market Energy charges under this subsection (e).

(f) For pool External Resources, the Office of the Interconnection shall model, based on an appropriate flow analysis, the megawatts of real-time energy injections to be delivered from each such resource to the corresponding Interface Pricing Point between adjacent Control Areas and the PJM Region.

3.2.2 Regulation.

(a) The Office of the Interconnection's Regulation service is comprised of Regulation-Down Service and Regulation-Up Service. Regulation-Down Service and Regulation-Up Service will have distinct requirements, clearing prices, and performance scores, calculated in accordance with the section(s) below and the PJM Manuals.

Each Market Participant that is a Load Serving Entity in a Regulation Zone shall have an hourly Regulation objective equal to its pro rata share of the Regulation-Down Requirement and Regulation-Up Requirement of such Regulation Zone for the hour, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Regulation Zone for the hour ("Regulation Obligation"). A Market Participant with an hourly Regulation Obligation shall be charged the pro rata share of the sum of the Regulation market mileage clearing price credits and Regulation market capability clearing price credits for the Real-time Settlement Intervals in an hour.

Regulation Charge = Hourly Regulation Obligation Share * (sum of the Real-time Settlement Interval Regulation credits in an hour)

(b) Each Market Participant supplying Regulation in a Regulation Zone at the direction of the Office of the Interconnection shall be credited for each of its resources such that the calculated credit for each increment of Regulation provided by each resource shall be the higher of: (i) the Regulation market-clearing price; or (ii) the sum of the applicable Regulation offers for a resource determined pursuant to section 3.2.2A.1 below, the resource-specific shoulder opportunity costs described in subsection (e) of this section, the resource-specific inter-temporal opportunity costs discussed in subsection (d), and the resource-specific opportunity costs discussed in subsection (e) of this section.

(c) The Office of the Interconnection shall commit resources to provide Regulation-Down Service and Regulation-Up Service every 30 minutes, for the clock intervals of the first 30 minutes of an hour and the second 30 minutes of an hour, ~~up to~~ meet the Regulation-Down Requirement and Regulation-Up Requirement of such Regulation Zone. The Office of the Interconnection shall select resources in merit order, taking into account the resource's mileage Regulation offer, capability Regulation offer, and estimated resource-specific opportunity cost, all converted into their performance adjusted values as further detailed in the PJM Manuals. The total Regulation market-clearing price for the Regulation-Down Service and Regulation-Up Service in each Regulation Zone shall be determined in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval. The total Regulation market-clearing price shall include: (i) the mileage Regulation market-clearing price in a Regulation Zone that shall be calculated in accordance with subsection (g) of this section; (ii) the capability Regulation market-clearing price that shall be calculated in accordance with subsection (h) of this section; and (iii) a Regulation resource's unit-specific opportunity costs during the 5-minute period, determined as described in subsection (d) below. A resource's Regulation offer by any Market Seller that fails the Regulation three-pivotal supplier test set forth in section 3.2.2A.1 below shall not exceed the cost of providing Regulation from such

resource, plus ~~twelve-six~~ dollars, as determined pursuant to the formula in Operating Agreement, Schedule 1, section 1.10.1A(e).

(d) In determining the Regulation 5-minute clearing price for each Regulation Zone, the resource-specific opportunity costs (in dollars) of a resource offering to sell Regulation in each regulating interval, except for hydroelectric resources, shall be equal to the area bounded by (i) Locational Marginal Price at the generation bus for the regulating resource, (ii) the resource's Final Offer, (iii) the resource's tracking ramp-rate limited expected output level if it had been dispatched for energy in economic merit order, as further described in the PJM Manuals, and (iv) the resource's regulation set point on the energy schedule curve on which the resource is running in the PJM Interchange Energy Market. The area is divided by the resource performance score and further divided by the resource's regulation assigned megawatt to convert to dollars per megawatt.

For hydroelectric resources offering to sell Regulation in a regulating interval, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the full value of the Locational Marginal Price at that generation bus for each megawatt of Regulation capability.

The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead megawatt commitment greater than zero shall be equal to the product of (i) the deviation of the set point of the hydroelectric resource that is expected to be required in order to provide Regulation from the hydroelectric resource's expected output level if it had been dispatched in economic merit order times (ii) the difference between the expected Locational Marginal Price at the generation bus for the hydroelectric resource and the average of the Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. Estimated opportunity costs shall be zero for hydroelectric resources for which the average Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period, excluding those Real-time Settlement Intervals during which all available units at the hydroelectric resource were operating is higher than the actual Locational Marginal Price at the generator bus for the Real-time Settlement Interval.

The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead megawatt commitment greater than zero shall be equal to the product of (i) the deviation of the set point of the hydroelectric resource that is expected to be required in order to provide Regulation from the hydroelectric resource's expected output level if it had been dispatched in economic merit order times (ii) the difference between the average of the Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating and the expected Locational Marginal Price at the generation bus for the hydroelectric resource. Estimated opportunity costs shall be zero for hydroelectric resources for which the actual Locational Marginal Price at the generator bus for the Real-time Settlement Interval is higher than the average Locational Marginal Price at the generation bus for the appropriate on-peak or

off-peak period, excluding those Real-time Settlement Intervals during which all available units at the hydroelectric resource were operating.

For the purpose of committing resources and setting Regulation market clearing prices, the Office of the Interconnection shall utilize day-ahead Locational Marginal Prices to calculate the average of the Locational Marginal Price values used in the calculation for opportunity costs for hydroelectric resources. For the purposes of settlements, the Office of the Interconnection shall utilize the real-time Locational Marginal Prices to calculate the average of the Locational Marginal Price used in the calculation for opportunity costs for hydroelectric resources.

Opportunity costs for Economic Load Response Participant resources and regulation-only resources to provide Regulation are zero for the purpose of committing resources, setting Regulation clearing prices, and settlements.

(e) In determining the credit under subsection (b) to a Market Participant selected to provide Regulation in a Regulation Zone and that actively follows the Office of the Interconnection's Regulation signals and instructions, the Office of the Interconnection shall consider both the Regulation-Up Service and Regulation-Down Service selected MW assignments. The unit-specific opportunity cost of a generation resource shall be determined for (1) each Real-time Settlement Interval that the Office of the Interconnection requires a generation resource to provide Regulation, and (2) the two Real-time Settlement Intervals preceding the regulation commitment and the two Real-time Settlement Intervals following the regulation commitment in accordance with the PJM Manuals and below.

The unit-specific opportunity cost in dollars incurred during the Real-time Settlement Interval in which the Regulation obligation is fulfilled, shall be equal to the area bounded by (i) the Locational Marginal Price at the generation bus for the regulating resource, (ii) the resource's Final Offer, (iii) the generation resource's tracking ramp-rate limited expected output level if it had been dispatched in economic merit order, as further described in the PJM Manuals, and (iv) the generation resource's regulation set point, and adjusted for the performance score of the resource offset by the regulation signal bias, and adjusted for the performance score of the resource. Opportunity costs for Economic Load Response Participant or regulation only resources to provide Regulation are zero.

The unit-specific opportunity costs associated with uneconomic operation during each of the preceding two Real-time Settlement Intervals of the regulation commitment shall be equal to the product of (i) the deviation between the set point of the generation resource that is expected to be required in the initial regulating Real-time Settlement Interval in order to provide Regulation and the resource's tracking expected ramp rate limited output in each of the preceding two Real-time Settlement Intervals of the regulation commitment times (ii) the absolute value of the difference between the Locational Marginal Price at the generation bus for the generation resource in each of the preceding two Real-time Settlement Intervals of the regulation commitment and the energy offer, using the Final Offer, at the megawatt level of the Regulation set point for the resource in the initial regulating Real-time Settlement Interval, in the PJM Interchange Energy Market, all as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals.

The unit-specific opportunity costs associated with uneconomic operation during each of the following two Real-time Settlement Intervals of the regulation commitment shall be equal to the product of (i) the deviation between the set point of the generation resource that is expected to be required in the final regulating Real-time Settlement Interval in order to provide Regulation and the resource's tracking expected ramp-rate limited output in each of the following two Real-time Settlement Intervals of the regulation commitment times, and (ii) the absolute value of the difference between the Locational Marginal Price at the generation bus for the generation resource in each of the following two Real-time Settlement Intervals of the regulation commitment and the energy offer, using the Final Offer, at the megawatt level of the Regulation set point for the resource in final regulating hour, in the PJM Interchange Energy Market all as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals.

(f) Any amounts credited for Regulation in an hour in excess of the Regulation market-clearing prices in that hour shall be allocated and charged to each Market Participant in a Regulation Zone that does not meet its hourly Regulation obligation in proportion to its purchases of Regulation in such Regulation Zone in megawatt-hours during that hour.

(g) To determine the Regulation market mileage-clearing price for Regulation-Down Service and Regulation-Up Service, the Office of the Interconnection shall adjust the submitted applicable mileage offer for each resource in accordance with the historical performance score of that resource, and the amount of historically dispatched Regulation (mileage) for the given service, calculated by the Office of the Interconnection. The maximum adjusted mileage offer of all cleared resources for each regulation service will set the Regulation market mileage-clearing price for Regulation-Down Service and Regulation-Up Service.

The owner of each Regulation resource that is committed for a regulation service and actively follows the Office of the Interconnection's Regulation signals and instructions, will be credited for Regulation-Down Service and/or Regulation-Up Service mileage by multiplying the applicable regulation service assigned MW(s) by the applicable regulation service Regulation market mileage-clearing price, by the ratio between the requested mileage for the Regulation service dispatch signal and the historic requested mileage for the applicable Regulation service dispatch signal, calculated by the Office of the Interconnection, and by the Regulation resource's applicable regulation service performance score calculated in accordance with subsection (j) of this section.

(h) The Office of the Interconnection shall divide each Regulation resource's capability offer for Regulation-Down Service or Regulation-Up Service by the applicable regulation service historic performance score for the resource for the purposes of committing resources and setting the market clearing prices.

The Office of the Interconnection shall calculate the Regulation market capability-clearing price for Regulation-Down Service and Regulation-Up Service for each Regulation Zone by subtracting the applicable regulation service Regulation market mileage-clearing price described in subsection (g) from the total Regulation market clearing price described in subsection (c). This

residual sets the Regulation market capability-clearing price for ~~that market~~ the Regulation-Down Service and Regulation-Up Service Real-time Settlement Interval.

The owner of each Regulation resource that is committed for a regulation service and actively follows the Office of the Interconnection's Regulation signals and instructions will be credited for Regulation-Down Service and Regulation-Up Service capability by multiplying the applicable regulation service~~based on the~~ assigned MW and the applicable regulation service capability Regulation market-clearing price multiplied by the Regulation resource's applicable regulation service performance score calculated in accordance with subsection (j) of this section.

(i) In accordance with the processes described in the PJM Manuals, the Office of the Interconnection shall: (i) calculate inter-temporal opportunity costs for each applicable resource; (ii) include such inter-temporal opportunity costs in each applicable resource's offer to sell frequency Regulation service; and (iii) account for such inter-temporal opportunity costs in the Regulation market-clearing price.

(j) The Office of the Interconnection shall calculate each Regulation resource's performance score for Regulation-Down Service and Regulation-Up Service. The performance score shall be a function of the difference in the energy provided versus the energy requested by the Regulation signal while scaling for the number of samples. The error measured shall be the difference of the resources response and the dispatch signal, adjusted by the assigned MW and signal dispatch of the Regulation resource. The performance score is calculated using the following equations:

$$\text{Performance Score} = 1 - 1/n \sum \text{Abs (Error)};$$

Error = Average of Abs (Abs (Response - Regulation Signal) / (0.5*Interval Average Regulation Signal + 0.5*AREG)); and

n = the number of samples in the interval

AREG = assigned regulation megawatt.

The Office of the Interconnection shall calculate a performance score for each Regulation resource for each regulation service for each five-minute period the Regulation resource is assigned to provide Regulation-Down Service and/or Regulation-Up Service.

The historic performance score for Regulation-Down Service and Regulation-Up Service will be based on a 100 clock-hour rolling average of the Real-time Settlement Interval performance scores, with consideration of the qualification score, for resources without adequate historical data, as defined in the PJM Manuals.

Regulation resources that have a Real-time Settlement Interval performance score below 25% will be ineligible for Regulation credits for that Real-time Settlement Interval.

Regulation resources that have historical performance scores fall below 40% shall be disqualified from providing the applicable Regulation service until they are able to re-qualify, as defined in the PJM Manuals.

(k) During a Market Suspension where the suspension is less than or equal to 24 consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Regulation, the resources providing Regulation at the direction of the Office of the Interconnection will be compensated based on a calculated Regulation market-clearing price. Regulation market-clearing prices for each Real-time Settlement Interval associated with such Market Suspension shall be the average of the Regulation market-clearing prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

During a Market Suspension where the suspension is greater than 24 consecutive hours, if the Office of the Interconnection is assigning Regulation, resources providing Regulation at the direction of the Office of the Interconnection will be compensated based on a calculated Regulation clearing price. The Regulation clearing price for each Real-time Settlement Interval will be determined by calculating a Regulation clearing cost for the online resources providing Regulation during the Market Suspension. The resource's Regulation clearing cost is determined by the summation of their adjusted Regulation offer and adjusted opportunity cost. The opportunity cost will be based on the resource's cost-based offer and will be determined as follows:

For online resources providing Regulation on a cost-based offer at the time of the Market Suspension, that cost-based offer will be used.

For online resources providing Regulation on a price-based offer at the time of the Market Suspension, the Office of the Interconnection shall use the cheapest available cost-based offer based on the dispatch cost formula as defined in Operating Agreement, Schedule 1, section 6.4.1(g) using the available cost-based offers in the Office of the Interconnection system at the time of the Market Suspension.

The highest cost resource, based on this Regulation clearing cost, will set the Regulation market-clearing price for each hour of the Market Suspension.

During a Market Suspension, if the Office of the Interconnection is not assigning Regulation resources, then the Regulation market-clearing price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period and no resource-specific opportunity cost will be calculated.

During a Market Suspension, the following Regulation components for all Real-time Settlement Intervals in the Market Suspension period will be determined as follows:

- (i) If the regulation performance score cannot be calculated during a Market Suspension, the historic performance score will be used for the Market Suspension period.

- (ii) If the regulation mileage cannot be calculated during a Market Suspension, the mileage ratio will be set to one (1) for the Market Suspension period.

3.2.2A Offer Price Caps.

3.2.2A.1 Applicability.

(a) For each Regulation market clearing interval, the Office of the Interconnection shall conduct a Regulation three-pivotal supplier test as described in this section. Regulation offers from Market Sellers that fail the Regulation three-pivotal supplier test shall be capped in the interval in which they failed the test at their cost based offers as determined pursuant to Operating Agreement, Schedule 1, section 1.10.1A(e). A Regulation supplier fails the three-pivotal supplier test in any Regulation market clearing interval in which such Regulation supplier and the two largest other Regulation suppliers are jointly pivotal. The Regulation three-pivotal supplier test will be conducted separately for Regulation-Down Service and Regulation-Up Service in the same Regulation market clearing interval.

(b) For the purposes of conducting the three-pivotal supplier test pursuant to this section, the following applies:

(i) The Regulation three-pivotal supplier test will include in the definition of available supply all offer megawatts from resources capable of satisfying the Regulation-Down Requirement and Regulation-Up Requirement of the PJM Region multiplied by the historic performance score of the resource for which the capability cost-based offer plus the mileage cost-based offer plus any eligible opportunity costs is no greater than 150% of the clearing price that would be calculated if all offers were limited to cost (plus eligible opportunity costs).

(ii) The Regulation three-pivotal supplier test will apply on a Regulation supplier basis (i.e. not a resource by resource basis) and only the Regulation suppliers that fail the three-pivotal supplier test will have their Regulation offers capped. A Regulation supplier for the purposes of this section includes corporate affiliates. Regulation from resources controlled by a Regulation supplier or its affiliates, whether by contract with unaffiliated third parties or otherwise, will be included as Regulation of that Regulation supplier. Regulation provided by resources owned by a Regulation supplier but controlled by an unaffiliated third party, whether by contract or otherwise, will be included as Regulation of that third party.

(iii) Each supplier shall be ranked from the largest to the smallest offered megawatt of eligible Regulation supply adjusted by the historic performance of each resource. Suppliers are then tested in order, starting with the three largest suppliers. For each iteration of the test, the two largest suppliers are combined with a third supplier, and the combined supply is subtracted from total effective supply. The resulting net amount of eligible supply is divided by the Regulation Requirement for the Regulation clearing

interval to determine the residual supply index. Where the residual supply index for Regulation three pivotal suppliers is less than or equal to 1.0, then the three suppliers are jointly pivotal and the suppliers being tested fail the three pivotal supplier test. Iterations of the test continue until the combination of the two largest suppliers and a third supplier result in a residual supply index greater than 1.0, at which point the remaining suppliers pass the test. Any resource owner that fails the three-pivotal supplier test will be offer-capped.

3.2.3 Operating Reserves.

(a) A Market Seller's pool-scheduled resources capable of providing Operating Reserves shall be credited as specified below based on the applicable offer for the operation of such resource, provided that the resource was available for the entire time specified in the Offer Data for such resource. To the extent that sections 3.2.3A, 3.2.3A.001, and 3.2.3A.01 below do not meet the Synchronized Reserve Requirements, the Primary Reserve Requirements, and the 30-minute Reserve Requirements, the Office of the Interconnection shall schedule additional Operating Reserves pursuant to Section 1.7.17 and 1.10 of Schedule 1 of this Agreement. In addition the Office of the Interconnection shall schedule Operating Reserves pursuant to those sections to satisfy any unforeseen Operating Reserve requirements that are not reflected in the day-ahead market. PJM Settlement shall be the Counterparty to the purchases and sales of Operating Reserve in the PJM Interchange Energy Market.

(b) The following determination shall be made for each pool-scheduled resource that is scheduled in the Day-ahead Energy Market: the total offered price for Start-up Costs and No-load Costs and energy, determined on the basis of the resource's scheduled output, shall be compared to the total value of that resource's energy – as determined by the Day-ahead Energy Market and the Day-ahead Prices applicable to the relevant generation bus in the Day-ahead Energy Market. PJM shall also (i) determine whether any resources were scheduled in the Day-ahead Energy Market to provide Black Start service, Reactive Services or transfer interface control during the Operating Day because they are known or expected to be needed to maintain system reliability in a Zone during the Operating Day in order to minimize the total cost of Operating Reserves associated with the provision of such services and reflect the most accurate possible expectation of real-time operating conditions in the day-ahead model, which resources would not have otherwise been committed in the day-ahead security-constrained dispatch and (ii) report on the day following the Operating Day the megawatt quantities scheduled in the Day-ahead Energy Market for the above-enumerated purposes for the entire RTO.

Except as provided in section 3.2.3(n) below, if the total offered price for Start-up Costs (shutdown costs for Economic Load Response Participant resources) and No-load Costs and energy summed over all Day-ahead Settlement Intervals exceeds the total value summed over all Day-ahead Settlement Intervals, the difference shall be credited to the Market Seller as a day-ahead Operating Reserve credit.

However, for the Day-ahead Settlement Intervals in which the resource is scheduled to provide energy in the Operating Day and the resource actually provides energy in at least one Real-time Settlement Interval in an hour that corresponds to such scheduled Day-ahead Settlement

Intervals, a resource's day-ahead Operating Reserve credit shall be reduced by the greater of zero or the difference of the resource's Day-ahead Operating Reserve Target and the Balancing Operating Reserve Target, as determined below.

A resource's Day-ahead Operating Reserve Target shall be determined in accordance with the following equation:

$$(A + B) - C$$

Where:

A = Start-up Costs

B = the sum of day-ahead No-load Costs and energy over the applicable Real-time Settlement Intervals that correspond with Day-ahead Settlement Intervals in which the resource is scheduled. The day-ahead No-load Costs and energy are divided by twelve to determine the cost for each Real-time Settlement Interval.

C = the sum of the day-ahead revenues calculated for each Real-time Settlement Interval that corresponds with a Day-ahead Settlement Interval in which the resource is scheduled, where the day-ahead revenue for each such Real-time Settlement Interval equals the product of the megawatt amount of energy scheduled in the Day-ahead Energy Market and the Day-ahead Price at the applicable pricing point for the resource divided by twelve.

A resource's Balancing Operating Reserve Target shall be determined in accordance with the following equation:

$$D - (E + F)$$

Where:

D = the sum of Start-up Costs and No-load Costs and the incremental cost of energy summed over all Real-time Settlement Intervals that correspond to the Day-ahead Settlement Intervals in which the resource was scheduled;

E = [(the megawatt amount of energy provided in the Real-time Energy Market minus the megawatt amount of energy scheduled in the Day-ahead Energy Market) multiplied by the Real-time Price at the applicable pricing point for the resource] plus the sum of the day-ahead revenues as determined in part C of the above formula for determining the Day-ahead Operating Reserve Target, summed over the applicable Real-time Settlement Intervals; and

F = the sum of all revenues earned for providing Secondary Reserves, Synchronized Reserves, Non-Synchronized Reserves, and Reactive Services over the applicable Real-time Settlement Intervals.

The Office of the Interconnection shall apply any balancing Operating Reserve credits allocated pursuant to this section 3.2.3(b) to real-time deviations or real-time load share plus exports, pursuant to Operating Agreement, Schedule 1, section 3.2.3(p), depending on whether the balancing Operating Reserve credits are related to resources scheduled during the reliability analysis for an Operating Day, or during the actual Operating Day.

(i) For resources scheduled by the Office of the Interconnection during the reliability analysis for an Operating Day, the associated balancing Operating Reserve credits shall be allocated based on the reason the resource was scheduled according to the following provisions:

(A) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to operate in real-time to augment the physical resources committed in the Day-ahead Energy Market to meet the forecasted real-time load plus the Operating Reserve requirement, the associated balancing Operating Reserve credits, identified as RA Credits for Deviations, shall be allocated to real-time deviations.

(B) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to maintain system reliability, the associated balancing Operating Reserve credits, identified as RA Credits for Reliability, shall be allocated according to ratio share of real time load plus export transactions.

(C) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource with a day-ahead schedule is required to deviate from that schedule to provide balancing Operating Reserves, the associated balancing Operating Reserve credits shall be segmented and separately allocated pursuant to subsections 3.2.3(b)(i)(A) or 3.2.3(b)(i)(B) hereof. Balancing Operating Reserve credits for such resources will be identified in the same manner as units committed during the reliability analysis pursuant to subsections 3.2.3(b)(i)(A) and 3.2.3(b)(i)(B) hereof.

(ii) For resources scheduled during an Operating Day, the associated balancing Operating Reserve credits shall be allocated according to the following provisions:

(A) If the Office of the Interconnection directs a resource to operate during an Operating Day to provide balancing Operating Reserves, the associated balancing Operating Reserve credits, identified as RT Credits for Reliability, shall be allocated according to ratio share of load plus exports. The foregoing notwithstanding, credits will be applied pursuant to this section only if the LMP at the resource's bus does not meet or exceed the applicable offer of the resource for at least four 5-minute intervals during one or more discrete clock hours during each period the resource operated and produced MWs during the relevant

Operating Day. If a resource operated and produced MWs for less than four 5-minute intervals during one or more discrete clock hours during the relevant Operating Day, the credits for that resource during the hour it was operated less than four 5-minute intervals will be identified as being in the same category (RT Credits for Reliability or RT Credits for Deviations) as identified for the Operating Reserves for the other discrete clock hours.

(B) If the Office of the Interconnection directs a resource not covered by section 3.2.3(b)(ii)(A) hereof to operate in real-time during an Operating Day, the associated balancing Operating Reserve credits, identified as RT Credits for Deviations, shall be allocated according to real-time deviations from day-ahead schedules.

(iii) PJM shall post on its Web site the aggregate amount of MWs committed that meet the criteria referenced in subsections (b)(i) and (b)(ii) hereof.

(c) The sum of the foregoing credits calculated in accordance with section 3.2.3(b) plus any unallocated charges from section 3.2.3(h) and Operating Agreement, Schedule 1, section 5.1.7, and any shortfalls paid pursuant to the Market Settlement provision of the Day-ahead Economic Load Response Program, shall be the cost of Operating Reserves in the Day-ahead Energy Market.

(d) The cost of Operating Reserves in the Day-ahead Energy Market shall be allocated and charged to each Market Participant in proportion to the sum of its (i) scheduled load (net of Behind The Meter Generation expected to be operating, but not to be less than zero), accepted Decrement Bids in the Day-ahead Energy Market in megawatt-hours for that Operating Day and accepted Up-to Congestion Transactions in the Day-ahead Energy Market in megawatt-hours for the Operating Day at the sink of the transaction; and (ii) scheduled energy sales in the Day-ahead Energy Market from within the PJM Region to load outside such region in megawatt-hours for that Operating Day, but not including its bilateral transactions that are Dynamic Transfers to load outside such area pursuant to Operating Agreement, Schedule 1, section 1.12, except to the extent PJM scheduled resources to provide Black Start service, Reactive Services or transfer interface control. The cost of Operating Reserves in the Day-ahead Energy Market for resources scheduled to provide Black Start service for the Operating Day which resources would not have otherwise been committed in the day-ahead security constrained dispatch shall be allocated by ratio share of the monthly transmission use of each Network Customer or Transmission Customer serving Zone Load or Non-Zone Load, as determined in accordance with the formulas contained in Tariff, Schedule 6A. The cost of Operating Reserves in the Day-ahead Energy Market for resources scheduled to provide Reactive Services or transfer interface control because they are known or expected to be needed to maintain system reliability in a Zone during the Operating Day and would not have otherwise been committed in the day-ahead security constrained dispatch shall be allocated and charged to each Market Participant in proportion to the sum of its real-time deliveries of energy to load (net of operating Behind The Meter Generation) in such Zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such Zone.

(e) At the end of each Operating Day, the following determination shall be made for each synchronized pool-scheduled resource of each Market Seller that operates as requested by the Office of the Interconnection. For each calendar day, pool-scheduled resources in the Real-time Energy Market shall be made whole for each of the following Segments: 1) the greater of their day-ahead schedules and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Economic Load Response Participant resources); and 2) any block of Real-time Settlement Intervals the resource operates at PJM's direction in excess of the greater of its day-ahead schedule and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Economic Load Response Participant resources). For each calendar day, and for each synchronized start of a generation resource or PJM-dispatched economic load reduction, there will be a maximum of two Segments for each resource. Segment 1 will be the greater of the day-ahead schedule and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Demand Resources) and Segment 2 will include the remainder of the contiguous Real-time Settlement Intervals when the resource is operating at the direction of the Office of the Interconnection, provided that a segment is limited to the Operating Day in which it commenced and cannot include any part of the following Operating Day.

A Generation Capacity Resource that operates outside of its unit-specific parameters will not receive Operating Reserve Credits nor be made whole for such operation when not dispatched by the Office of the Interconnection, unless the Market Seller of the Generation Capacity Resource can justify to the Office of the Interconnection that operation outside of such unit-specific parameters was the result of an actual constraint. Such Market Seller shall provide to the Market Monitoring Unit and the Office of the Interconnection its request to receive Operating Reserve Credits and/or to be made whole for such operation, along with documentation explaining in detail the reasons for operating its resource outside of its unit-specific parameters, within thirty calendar days following the issuance of billing statement for the Operating Day. The Market Seller shall also respond to additional requests for information from the Market Monitoring Unit and the Office of the Interconnection. The Market Monitoring Unit shall evaluate such request for compensation and provide its determination of whether there was an exercise of market power to the Office of the Interconnection by no later than twenty-five calendar days after receiving the Market Seller's request for compensation. The Office of the Interconnection shall make its determination whether the Market Seller justified that it is entitled to receive Operating Reserve Credits and/or be made whole for such operation of its resource for the day(s) in question, by no later than thirty calendar days after receiving the Market Seller's request for compensation.

Nuclear generation resources shall not be eligible for Operating Reserve payments unless: 1) the Office of the Interconnection directs such resources to reduce output, in which case, such units shall be compensated in accordance with Tariff, Attachment K-Appendix, section 3.2.3(f) and the parallel provision of Operating Agreement, Schedule 1, section 3.2.3(f); or 2) the resource submits a request for a risk premium to the Market Monitoring Unit under the procedures specified in Tariff, Attachment M – Appendix, section II.B. A nuclear generation resource (i) must submit a risk premium consistent with its agreement under such process, or, (ii) if it has not agreed with the Market Monitoring Unit on an appropriate risk premium, may submit its own

determination of an appropriate risk premium to the Office of the Interconnection, subject to acceptance by the Office of the Interconnection, with or without prior approval from the Commission.

Credits received pursuant to this section shall be equal to the positive difference between a resource's Total Operating Reserve Offer, and the total value of the resource's energy in the Day-ahead Energy Market plus any credit or change for quantity deviations, at PJM dispatch direction (excluding quantity deviations caused by an increase in the Market Seller's Real-time Offer), from the Day-ahead Energy Market during the Operating Day at the real-time LMP(s) applicable to the relevant generation bus in the Real-time Energy Market. The foregoing notwithstanding, credits for Segment 2 shall exclude start up (shutdown costs for Economic Load Response Participant resources) costs for generation resources.

Except as provided in section 3.2.3(m), if the total offered price exceeds the total value, the difference less any credit as determined pursuant to section 3.2.3(b), and less the absolute value of any negative Synchronized Reserve lost opportunity cost credit, as determined in section 3.2.3A(f)(iv) below, and less the absolute value of any negative Non-Synchronized Reserve lost opportunity cost credit determined in section 3.2.3.A.001(d)(iii) below, and less any amounts credited for providing Reactive Services as specified in section 3.2.3B, and the absolute value of any negative Secondary Reserve lost opportunity cost credit, as determined in section 3.2.3A.01(f)(iv) below, and plus the sum of the Market Revenue Neutrality Offsets for Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve, shall be credited to the Market Seller.

Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve credits applied against Operating Reserve credits pursuant to this section shall be netted against the Operating Reserve credits earned in the corresponding Real-time Settlement Interval(s) in which the Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve credits accrued, provided that for condensing combustion turbines, Synchronized Reserve credits will be netted against the total Operating Reserve credits accrued during each Real-time Settlement Interval the unit operates in condensing and generation mode.

(f) A Market Seller of a unit not defined in subsection (f-1), (f-2), or (f-4) hereof (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3(c) hereof), the output of which is reduced or suspended at the request of the Office of the Interconnection due to a transmission constraint or other reliability issue, and for which the real-time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall be credited for each Real-time Settlement Interval in an amount equal to the product of (A) the LOC Deviation times (B) the Locational Marginal Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A*B) - C$. If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.11.6, where the suspension is greater than twenty-four (24) consecutive hours, resources will not be compensated for lost opportunity costs.

(f-1) With the exception of Market Sellers of Flexible Resources that submit a Real-time Offer greater than their resource's Committed Offer in the Day-ahead Energy Market, a Market Seller of a Flexible Resource shall be compensated for lost opportunity cost, and shall be limited to the lesser of the unit's Economic Maximum or the unit's Generation Resource Maximum Output, if either of the following conditions occur:

- (i) if the unit output is reduced at the direction of the Office of the Interconnection and the real time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as directed by the PJM dispatcher), then the Market Seller shall be credited in a manner consistent with that described in section 3.2.3(f).
- (ii) If the unit is scheduled to produce energy in the Day-ahead Energy Market for a Day-ahead Settlement Interval, but the unit is not called on by the Office of the Interconnection and does not operate in the corresponding Real-time Settlement Interval(s), then the Market Seller shall be credited in an amount equal to the higher of:
 - 1) the product of (A) the amount of megawatts committed in the Day-ahead Energy Market for the generating unit, and (B) the Real-time Price at the generation bus for the generating unit, minus the sum of (C) the Total Lost Opportunity Cost Offer plus No-load Costs, plus (D) the Start-up Cost, divided by the Real-time Settlement Intervals committed for each set of contiguous hours for which the unit was scheduled in Day-ahead Energy Market. This equation is represented as $(A*B) - (C+D)$. The startup cost, (D), shall be excluded from this calculation if the unit operates in real time following the Office of the Interconnection's direction during any portion of the set of contiguous hours for which the unit was scheduled in Day-ahead Energy Market, or
 - 2) the Real-time Price at the unit's bus minus the Day-ahead Price at the unit's bus, multiplied by the number of megawatts committed in the Day-ahead Energy Market for the generating unit.

(f-2) A Market Seller of a hydroelectric resource that is pool-scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3(c) hereof), the output of which is altered at the request of the Office of the Interconnection from the schedule submitted by the owner, due to a transmission constraint or other reliability issue, shall be compensated for lost opportunity cost in the same manner as provided in sections 3.2.2(d) and 3.2.3A(f) and further detailed in the PJM Manuals.

(f-3) If a Market Seller believes that, due to specific pre-existing binding commitments to which it is a party, and that properly should be recognized for purposes of this section, the above calculations do not accurately compensate the Market Seller for opportunity cost associated with following PJM dispatch instructions and reducing or suspending a unit's output due to a transmission constraint or other reliability issue, then the Office of the Interconnection, the Market Monitoring Unit and the individual Market Seller will discuss a mutually acceptable, modified amount of opportunity cost compensation, taking into account the specific circumstances binding on the Market Seller. Following such discussion, if the Office of the Interconnection accepts a modified amount of opportunity cost compensation, the Office of the Interconnection shall invoice the Market Seller accordingly. If the Market Monitoring Unit disagrees with the modified amount of opportunity cost compensation, as accepted by the Office of the Interconnection, it will exercise its powers to inform the Commission staff of its concerns.

(f-4) A Market Seller of a wind generating unit that is pool-scheduled or self-scheduled, has SCADA capability to transmit and receive instructions from the Office of the Interconnection, has provided data and established processes to follow PJM basepoints pursuant to the requirements for wind generating units as further detailed in this Agreement, the Tariff and the PJM Manuals, and which is operating as requested by the Office of the Interconnection, the output of which is reduced or suspended at the request of the Office of the Interconnection due to a transmission constraint or other reliability issue, and for which the , real-time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall be credited for each Real-time Settlement Interval in an amount equal to the product of (A) the LOC Deviation times (B) the Real-time Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A * B) - C$.

(f-5) (i) A Market Seller of a pool-scheduled resource or a dispatchable self-scheduled resource shall receive Dispatch Differential Lost Opportunity Cost credits as calculated under subsection (iv) below if the resource is dispatched to provide energy in the Real-time Energy Market, provided such resource is not committed to provide real-time ancillary services (Regulation, reserves, reactive service) or instructed to reduce or suspend output due to a transmission constraint or other reliability issue pursuant to Operating Agreement, Schedule 1, section 3.2.3(f-1) through Operating Agreement, Schedule 1, section (f-4).

(ii) PJM will calculate the revenue above cost for the pricing run for each Real-time Settlement Interval in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = the resource's expected output level based on its resource parameters at the Real-time Price at the applicable pricing point;

B = the Real-time Price at the applicable pricing point; and

C = the sum of the resource's Real-time Energy Market offer integrated under the Final Offer for the resource's expected output level based on its resource parameters at the Real-time Price at the applicable pricing point.

(iii) PJM will calculate the revenue above cost for the dispatch run for each Real-time Settlement Interval in accordance with the following equation:

$$(\text{greater of A and B}) - (\text{lesser of C and D})$$

Where:

A = the product of the amount of megawatts of energy dispatched in the Real-time Energy Market dispatch run for the resource in that Real-time Settlement Interval and the Real-time Price at the applicable pricing point;

B = the product of the amount of megawatts of energy the resource actually provided in that Real-time Settlement Interval and the Real-time Price at the applicable pricing point;

C = the resource's Real-time Energy Market offer integrated under the Final Offer for the amount of megawatts dispatched in the Real-time Energy Market dispatch run;

D = the resource's Real-time Energy Market offer integrated under the Final Offer for the amount of megawatts the resource actually provided in that Real-time Settlement Interval.

(iv) The Dispatch Differential Lost Opportunity Cost credit shall equal the greater of (A) the difference between the revenue above cost based on the pricing run determined in subsection (f-5)(ii) and the revenue above cost based on the dispatch run determined in subsection (f-5)(iii) or (B) zero.

(v) For each hour in an Operating Day, the total cost of the Dispatch Differential Lost Opportunity Cost credits shall be allocated and charged to each Market Participant in proportion to the sum of its (i) deliveries of energy to load ((a) net of operating Behind The Meter Generation, but not to be less than zero; and (b) excluding Direct Charging Energy) in the PJM Region, served under Network Transmission Service, in megawatt-hours; and (ii) deliveries of energy sales from within the PJM Region to load outside such region in megawatt-hours but not including its bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Operating Agreement, Schedule 1, section 1.12, as compared to the sum of all such deliveries for all Market Participants.

(g) The sum of the foregoing credits in Operating Agreement, Schedule 1, section 3.2.3(f-1) through Operating Agreement, Schedule 1, section 3.2.3(f-4), plus any cancellation

fees paid in accordance with Operating Agreement, Schedule 1, section 1.10.2(d), such cancellation fees to be applied to the Operating Day for which the unit was scheduled, plus any shortfalls paid pursuant to the Market Settlement provision of the real-time Economic Load Response Program, less any payments received from another Control Area for Operating Reserves shall be the cost of Operating Reserves for the Real-time Energy Market in each Operating Day.

(h) The cost of Operating Reserves for the Real-time Energy Market for each Operating Day, except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, shall be allocated and charged to each Market Participant based on their daily total of hourly deviations determined in accordance with the following equation:

$$\sum_h (A + B + C)$$

Where:

h = the hours in the applicable Operating Day;

A = For each Real-time Settlement Interval in an hour, the sum of the absolute value of the withdrawal deviations (in MW) between the quantities scheduled in the Day-ahead Energy Market and the Market Participant's energy withdrawals (net of operating Behind The Meter Generation) in the Real-time Energy Market, except as noted in subsection (h)(ii) below and in the PJM Manuals divided by the number of Real-time Settlement Intervals for that hour. The summation of each Real-time Settlement Interval's withdrawal deviation in an hour will be the Market Participant's total hourly withdrawal deviations. Market Participant bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Operating Agreement, Schedule 1, section 1.12 are not included in the determination of withdrawal deviations;

B = For each Real-time Settlement Interval in an hour, the sum of the absolute value of generation deviations (in MW and not including deviations in Behind The Meter Generation) as determined in subsection (o) divided by the number of Real-time Settlement Intervals for that hour;

C = For each Real-time Settlement Interval in an hour, the sum of the absolute value of the injection deviations (in MW) between the quantities scheduled in the Day-ahead Energy Market and the Market Participant's energy injections in the Real-time Energy Market divided by the number of Real-time Settlement Intervals for that hour. The summation of the injection deviations for each Real-time Settlement Interval in an hour will be the Market Participant's total hourly injection deviations. The determination of injection deviations does not include generation resources.

The Revenue Data for Settlements determined for each Real-time Settlement Interval in accordance with Operating Agreement, Schedule 1, section 3.1A shall be used in determining the

real-time withdrawal deviations, generation deviations and injection deviations used to calculate Operating Reserve under this subsection (e).

The costs associated with scheduling of units for Black Start service or testing of Black Start Units shall be allocated by ratio share of the monthly transmission use of each Network Customer or Transmission Customer serving Zone Load or Non-Zone Load, as determined in accordance with the formulas contained in Tariff, Schedule 6A.

Notwithstanding section (h)(1) above, as more fully set forth in the PJM Manuals, load deviations from the Day-ahead Energy Market shall not be assessed Operating Reserves charges to the extent attributable to reductions in the load of Price Responsive Demand that is in response to an increase in Locational Marginal Price from the Day-ahead Energy Market to the Real-time Energy Market and that is in accordance with a properly submitted PRD Curve.

Deviations that occur within a single Zone shall be associated with the Eastern or Western Region, as defined in section 3.2.3(q) below, and shall be subject to the regional balancing Operating Reserve rate determined in accordance with Section 3.2.3(q). Deviations at a hub shall be associated with the Eastern or Western Region if all the buses that define the hub are located in the region. Deviations at an Interface Pricing Point shall be associated with whichever region, the Eastern or Western Region, with which the majority of the buses that define that Interface Pricing Point are most closely electrically associated. If deviations at interfaces and hubs are associated with the Eastern or Western region, they shall be subject to the regional balancing Operating Reserve rate. Demand and supply deviations shall be based on total activity in a Zone, including all aggregates and hubs defined by buses that are wholly contained within the same Zone.

The foregoing notwithstanding, netting deviations shall be allowed for each Real-time Settlement Interval in accordance with the following provisions:

- (i) Generation resources with multiple units located at a single bus shall be able to offset deviations in accordance with the PJM Manuals to determine the net deviation MW at the relevant bus.
- (ii) Demand deviations will be assessed by comparing all day-ahead demand transactions, which include the components referenced in section 3.2.3(d) regarding the cost of Operating Reserves in the Day-ahead Energy Market, at a single transmission zone, hub, or interface against the real-time demand transactions at that same transmission zone, hub, or interface; except that the positive values of demand deviations, as set forth in the PJM Manuals, will not be assessed Operating Reserve charges in the event of a Primary Reserve or Synchronized Reserve shortage in real-time or where PJM initiates the request for emergency load reductions in real-time in order to avoid a Primary Reserve or Synchronized Reserve shortage.
- (iii) Supply deviations will be assessed by comparing all day-ahead transactions at a single transmission zone, hub, or interface against the real-time transactions at that same transmission zone, hub, or interface.

(iv) Bilateral transactions inside the PJM Region, as defined in Operating Agreement, Schedule 1, section 1.7.10, will not be included in the determination of Supply or Demand deviations.

(i) At the end of each Operating Day, Market Sellers shall be credited on the basis of their offered prices for synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, as well as the credits calculated as specified in Section 3.2.3(b) for those generators committed solely for the purpose of providing synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, at the request of the Office of the Interconnection.

(j) The sum of the foregoing credits as specified in section 3.2.3(i) shall be the cost of Operating Reserves for synchronous condensing for the PJM Region for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, or in association with post-contingency operation for the Operating Day and shall be separately determined for the PJM Region.

(k) The cost of Operating Reserves for synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, or in association with post-contingency operation for each Operating Day shall be allocated and charged to each Market Participant in proportion to the sum of its (i) deliveries of energy to load (net of operating Behind The Meter Generation, but not to be less than zero) in the PJM Region, served under Network Transmission Service, in megawatt-hours during that Operating Day; and (ii) deliveries of energy sales from within the PJM Region to load outside such region in megawatt-hours during that Operating Day, but not including its bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Operating Agreement, Schedule 1, section 1.12, as compared to the sum of all such deliveries for all Market Participants.

(l) For any Operating Day in either, as applicable, the Day-ahead Energy Market or the Real-time Energy Market for which, for all or any part of such Operating Day, the Office of the Interconnection: (i) declares a Maximum Generation Emergency; (ii) issues an alert that a Maximum Generation Emergency may be declared (“Maximum Generation Emergency Alert”); or (iii) schedules units based on the anticipation of a Maximum Generation Emergency or a Maximum Generation Emergency Alert, the Operating Reserves credit otherwise provided by section 3.2.3(b) or section 3.2.3(e) in connection with market-based offers shall be limited as provided in subsections (n) or (m), respectively. The Office of the Interconnection shall provide timely notice on its internet site of the commencement and termination of any of the actions described in subsection (i), (ii), or (iii) of this subsection (l) (collectively referred to as “MaxGen Conditions”). Following the posting of notice of the commencement of a MaxGen Condition, a Market Seller may elect to submit a cost-based offer in accordance with Operating Agreement, Schedule 2, in which case subsections (m) and (n) shall not apply to such offer; provided, however, that such offer must be submitted in accordance with the deadlines in Operating Agreement, Schedule 1, section 1.10 for the submission of offers in the Day-ahead Energy Market or Real-time Energy Market, as applicable. Submission of a cost-based offer under such conditions shall not be precluded by Operating Agreement, Schedule 1, section 1.9.7(b); provided, however, that the Market Seller must return to compliance with Operating Agreement,

Schedule 1, section 1.9.7(b) when it submits its bid for the first Operating Day after termination of the MaxGen Condition.

(m) For the Real-time Energy Market, if the Effective Offer Price (as defined below) for a market-based offer is greater than \$1,000/MWh and greater than the Market Seller's lowest available and applicable cost-based offer, the Market Seller shall not receive any credit for Operating Reserves. For purposes of this subsection (m), the Effective Offer Price shall be the amount that, absent subsections (l) and (m), would have been credited for Operating Reserves for such Operating Day pursuant to section 3.2.3(e) plus the Real-time Energy Market revenues for the Real-time Settlement Intervals that the offer is economic divided by the megawatt hours of energy provided during the Real-time Settlement Intervals that the offer is economic. The Real-time Settlement Intervals that the offer is economic shall be: (i) the Real-time Settlement Intervals that the offer price for energy is less than or equal to the Real-time Price for the relevant generation bus, (ii) the Real-time Settlement Intervals in which the offer for energy is greater than Locational Marginal Price and the unit is operated at the direction of the Office of the Interconnection that are in addition to any Real-time Settlement Intervals required due to the minimum run time or other operating constraint of the unit, and (iii) for any unit with a minimum run time of one hour or less and with more than one start available per day, any hours the unit operated at the direction of the Office of the Interconnection.

(n) For the Day-ahead Energy Market, if notice of a MaxGen Condition is provided prior to 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled and the Effective Offer Price for a market-based offer is greater than \$1,000/MWh and greater than the Market Seller's lowest available and applicable cost-based offer, the Market Seller shall not receive any credit for Operating Reserves. If notice of a MaxGen Condition is provided after 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled and the Effective Offer Price is greater than \$1,000/MWh, the Market Seller shall receive credit for Operating Reserves determined in accordance with section 3.2.3(b), subject to the limit on total compensation stated below. If the Effective Offer Price is less than or equal to \$1,000/MWh, regardless of when notice of a MaxGen Condition is provided, the Market Seller shall receive credit for Operating Reserves determined in accordance with section 3.2.3(b), subject to the limit on total compensation stated below. For purposes of this subsection (n), the Effective Offer Price shall be the amount that, absent subsections (l) and (n), would have been credited for Operating Reserves for such Operating Day divided by the megawatt hours of energy offered during the Specified Hours, plus the offer for energy during such hours. The Specified Hours shall be the lesser of: (1) the minimum run hours stated by the Market Seller in its Offer Data; and (2) either (i) for steam-electric generating units and for combined-cycle units when such units are operating in combined-cycle mode, the six consecutive hours of highest Day-ahead Price during such Operating Day when such units are running or (ii) for combustion turbine units and for combined-cycle units when such units are operating in combustion turbine mode, the two consecutive hours of highest Day-ahead Price during such Operating Day when such units are running. Notwithstanding any other provision in this subsection, the total compensation to a Market Seller on any Operating Day that includes a MaxGen Condition shall not exceed \$1,000/MWh during the Specified Hours, where such total compensation in each such hour is defined as the amount that, absent subsections (l) and (n), would have been credited for Operating Reserves for such Operating Day pursuant to section 3.2.3(b) divided by the

Specified Hours, plus the Day-ahead Price for such hour, and no Operating Reserves payments shall be made for any other hour of such Operating Day. If a unit operates in real time at the direction of the Office of the Interconnection consistently with its day-ahead clearing, then subsection (m) does not apply.

(o) Dispatchable pool-scheduled generation resources and dispatchable self-scheduled generation resources that follow dispatch shall not be assessed balancing Operating Reserve deviations. Pool-scheduled generation resources and dispatchable self-scheduled generation resources that do not follow dispatch shall be assessed balancing Operating Reserve deviations in accordance with the calculations described below and in the PJM Manuals.

The Office of the Interconnection shall calculate a ramp-limited desired MW value for generation resources where the economic minimum and economic maximum are at least as far apart in real-time as they are in day-ahead according to the following parameters:

- (i) real-time economic minimum \leq 105% of day-ahead economic minimum or day-ahead economic minimum plus 5 MW, whichever is greater.
- (ii) real-time economic maximum \geq 95% day-ahead economic maximum or day-ahead economic maximum minus 5 MW, whichever is lower.

The ramp-limited desired MW value for a generation resource shall be equal to:

$$Ramp_Request_t = \frac{(Dispatchtarget_{t-1} - AOutput_{t-1})}{(LAtime_{t-1})}$$

$$RL_Desired_t = AOutput_{t-1} + (Ramp_Request_t * Case_Eff_time_{t-1})$$

where:

1. Dispatchtarget = Dispatch Signal for the previous approved Dispatch case
2. AOutput = Unit's achievable target MW at case solution time as defined in the PJM Manuals
3. LAtime = Dispatch look ahead time
4. Case_Eff_time = Time between signal changes
5. RL_Desired = Ramp-limited desired MW

To determine if a generation resource is following dispatch the Office of the Interconnection shall determine the unit's MW off dispatch and % off dispatch by using the lesser of the difference between the actual output and the dispatch signal or the actual output and ramp-limited desired MW value for each Real-time Settlement Interval. If the dispatch signal and the ramp-limited desired MW for the resource are unavailable, the Office of the Interconnection will determine the unit's MW off dispatch and % off dispatch by calculating the lesser of the

difference between the actual output and the dispatch LMP Desired MW for each Real-time Settlement Interval.

A pool-scheduled or dispatchable self-scheduled resource is considered to be following dispatch if its actual output is between its ramp-limited desired MW value and dispatch signal, or if its % off dispatch is ≤ 10 , or its Real-time Settlement Interval MWh is within 5% of the Real-time Settlement Interval ramp-limited desired MW. A self-scheduled generator must also be dispatched above economic minimum. The degree of deviations for resources that are not following dispatch shall be determined for each Real-time Settlement Interval in accordance with the following provisions:

- A dispatchable self-scheduled resource that is not dispatched above economic minimum shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – Day-Ahead MWh.
- A resource that is dispatchable day-ahead but is Fixed Gen in real-time shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – dispatch LMP Desired MW.
- Pool-scheduled generators that are not following dispatch shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – Ramp-Limited Desired MW.
- If a resource's real-time economic minimum is greater than its day-ahead economic minimum by 5% or 5 MW, whichever is greater, or its real-time economic maximum is less than its Day Ahead economic maximum by 5% or 5 MW, whichever is lower, and dispatch LMP Desired MWh for the Real-time Settlement Interval is either below the real time economic minimum or above the real time economic maximum, then balancing Operating Reserve deviations for the resource shall be assessed according to the following formula: Real time Settlement Interval MWh – dispatch LMP Desired MWh.
- If a resource is not following dispatch and its % Off Dispatch is $\leq 20\%$, balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – Ramp-Limited Desired MW. If deviation value is within 5% of Ramp-Limited Desired MW, balancing Operating Reserve deviations shall not be assessed.
- If a resource is not following dispatch and its % off Dispatch is $> 20\%$, balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – dispatch LMP Desired MWh.
- If a resource is not following dispatch, and the resource has tripped, for the Real-time Settlement Interval the resource tripped and the Real-time Settlement Intervals it remains offline throughout its day-ahead schedule balancing Operating Reserve

deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – Day-Ahead MWh.

- For resources that are not dispatchable in both the Day-Ahead and Real-time Energy Markets balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh - Day-ahead MWh.

If a resource has a sum of the absolute value of generator deviations for an hour that is less than 5 MWh, then the resource shall not be assessed balancing Operating Reserve deviations for that hour.

(o-1) Dispatchable economic load reduction resources that follow dispatch shall not be assessed balancing Operating Reserve deviations. Economic Load Response Participant resources that do not follow dispatch shall be assessed balancing Operating Reserve deviations as described in this subsection and as further specified in the PJM Manuals.

The Desired MW quantity for such resources for each hour shall be the hourly integrated MW quantity to which the load reduction resource was dispatched for each hour (where the hourly integrated value is the average of the dispatched values as determined by the Office of the Interconnection for the resource for each hour).

If the actual reduction quantity for the load reduction resource for a given hour deviates by no more than 20% above or below the Desired MW quantity, then no balancing Operating Reserve deviation will accrue for that hour. If the actual reduction quantity for the load reduction resource for a given hour is outside the 20% bandwidth, the balancing Operating Reserve deviations will accrue for that hour in the amount of the absolute value of (Desired MW – actual reduction quantity). For those hours where the actual reduction quantity is within the 20% bandwidth specified above, the load reduction resource will be eligible to be made whole for the total value of its offer as defined in Operating Agreement, Schedule 1, section 3.3A. Hours for which the actual reduction quantity is outside the 20% bandwidth will not be eligible for the make-whole payment. If at least one hour is not eligible for make-whole payment based on the 20% criteria, then the resource will also not be made whole for its shutdown cost.

(p) The Office of the Interconnection shall allocate the charges assessed pursuant to Operating Agreement, Schedule 1, section 3.2.3(h) except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, to real-time deviations from day-ahead schedules or real-time load share plus exports depending on whether the underlying balancing Operating Reserve credits are related to resources scheduled during the reliability analysis for an Operating Day, or during the actual Operating Day. If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, section 1.11.6, the Office of the Interconnection shall allocate the charges to the ratio share of real-time load plus export transactions.

- (i) For resources scheduled by the Office of the Interconnection during the reliability analysis for an Operating Day, the associated balancing Operating Reserve

charges shall be allocated based on the reason the resource was scheduled according to the following provisions:

(A) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to operate in real-time to augment the physical resources committed in the Day-ahead Energy Market to meet the forecasted real-time load plus the Operating Reserve requirement, the associated balancing Operating Reserve charges shall be allocated to real-time deviations from day-ahead schedules.

(B) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to maintain system reliability, the associated balancing Operating Reserve charges shall be allocated according to ratio share of real time load plus export transactions.

(C) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource with a day-ahead schedule is required to deviate from that schedule to provide balancing Operating Reserves, the associated balancing Operating Reserve charges shall be allocated pursuant to (A) or (B) above.

(ii) For resources scheduled during an Operating Day, the associated balancing Operating Reserve charges shall be allocated according to the following provisions:

(A) If the Office of the Interconnection directs a resource to operate during an Operating Day to provide balancing Operating Reserves, the associated balancing Operating Reserve charges shall be allocated according to ratio share of load plus exports. The foregoing notwithstanding, charges will be assessed pursuant to this section only if the LMP at the resource's bus does not meet or exceeds the applicable offer of the resource for at least four 5-minute intervals during one or more discrete clock hours during each period the resource operated and produced MWs during the relevant Operating Day. If a resource operated and produced MWs for less than four 5-minute intervals during one or more discrete clock hours during the relevant Operating Day, the charges for that resource during the hour it was operated less than four 5-minute intervals will be identified as being in the same category as identified for the Operating Reserves for the other discrete clock hours.

(B) If the Office of the Interconnection directs a resource not covered by Operating Agreement, Schedule 1, section 3.2.3(h)(ii)(A) to operate in real-time during an Operating Day, the associated balancing Operating Reserve charges shall be allocated according to real-time deviations from day-ahead schedules.

(q) The Office of the Interconnection shall determine regional balancing Operating Reserve rates for the Western and Eastern Regions of the PJM Region. For the purposes of this section, the Western Region shall be the AEP, APS, ComEd, Duquesne, Dayton, ATSI, DEOK, EKPC, OVEC transmission Zones, and the Eastern Region shall be the AEC, BGE, Dominion, PENELEC, PEPCO, ME, PPL, JCPL, PECO, DPL, PSEG, RE transmission Zones. The regional balancing Operating Reserve rates shall be determined in accordance with the following provisions:

(i) The Office of the Interconnection shall calculate regional adder rates for the Eastern and Western Regions. Regional adder rates shall be equal to the total balancing Operating Reserve credits paid to generators for transmission constraints that occur on transmission system capacity equal to or less than 345kv. The regional adder rates shall be separated into reliability and deviation charges, which shall be allocated to real-time load or real-time deviations, respectively. Whether the underlying credits are designated as reliability or deviation charges shall be determined in accordance with section 3.2.3(p).

(ii) The Office of the Interconnection shall calculate RTO balancing Operating Reserve rates. RTO balancing Operating Reserve rates shall be equal to balancing Operating Reserve credits except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, in excess of the regional adder rates calculated pursuant to Operating Agreement, Schedule 1, section 3.2.3(q)(i) of Schedule 1 of this Agreement. The RTO balancing Operating Reserve rates shall be separated into reliability and deviation charges, which shall be allocated to real-time load or real-time deviations, respectively. Whether the underlying credits are allocated as reliability or deviation charges shall be determined in accordance with section 3.2.3(p).

(iii) Reliability and deviation regional balancing Operating Reserve rates shall be determined by summing the relevant RTO balancing Operating Reserve rates and regional adder rates.

(iv) If the Eastern and/or Western Regions do not have regional adder rates, the relevant regional balancing Operating Reserve rate shall be the reliability and/or deviation RTO balancing Operating Reserve rate.

(r) Market Sellers that incur incremental operating costs for a generation resource that are either greater than \$1,000/MWh as determined in accordance with the Market Seller's PJM-approved Fuel Cost Policy, Operating Agreement, Schedule 2 and PJM Manual 15, but are not verified at the time of dispatch of the resource under section 6.4.3 of this Schedule, or greater than \$2,000/MWh as determined in accordance with the Market Seller's PJM-approved Fuel Cost Policy, Operating Agreement, Schedule 2, and PJM Manual 15, will be eligible to receive credit for Operating Reserves upon review of the Market Monitoring Unit and the Office of the Interconnection, and approval of the Office of the Interconnection. Market Sellers must submit to the Office of the Interconnection and the Market Monitoring Unit all relevant documentation demonstrating the calculation of costs greater than \$2,000/MWh, and costs greater than

\$1,000/MWh which were not verified at the time of dispatch of the resource under Operating Agreement, Schedule 1, section 6.4.3. The Office of the Interconnection must approve any Operating Reserve credits paid to a Market Seller under this subsection (r).

3.2.3A Synchronized Reserve.

(a) Each Market Participant that is a Load Serving Entity that is not part of an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have an obligation for hourly Synchronized Reserve equal to its pro rata share of Synchronized Reserve requirements for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone or Reserve Sub-zone for the hour ("Synchronized Reserve Obligation"), less any amount obtained from condensers associated with provision of Reactive Services as described in section 3.2.3B(i) and any amount obtained from condensers associated with post-contingency operations, as described in section 3.2.3C(b). Those entities that participate in an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have their reserve obligations determined based on the stipulations in such agreement. A Market Participant's hourly Synchronized Reserve Obligation shall be adjusted by any Synchronized Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Synchronized Reserve Obligation shall be charged the pro rata share of the sum of day-ahead and real-time credits for Synchronized Reserve as defined in sections 3.2.3A(b)(i) and (ii) below.

(b) A resource supplying Synchronized Reserve at the direction of the Office of the Interconnection shall be credited as follows:

i) Credits for Synchronized Reserve provided by generation and Economic Load Response Participant resources assigned to provide Synchronized Reserve by the Office of the Interconnection or self-scheduled in the Day-ahead Synchronized Reserve Market shall be equal to the product of the Day-ahead Synchronized Reserve Market Clearing Price multiplied by the megawatt amount of Synchronized Reserve such resource is assigned to provide..

ii) Credits for Synchronized Reserve provided by generation resources and Economic Load Response Participant resources assigned to provide Synchronized Reserve by the Office of the Interconnection or self-scheduled in the Real-time Synchronized Reserve Market shall be determined for each operating hour based on the sum of their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Synchronized Reserve from that resource assigned by the Office of the Interconnection or self-scheduled in the Real-time Synchronized Reserve Market. The megawatt value is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval where there is not a Synchronized Reserve event;

B = For each Real-time Settlement Interval, the megawatts of Synchronized Reserve from that resource assigned by the Office of the Interconnection or self-scheduled in the Day-ahead Synchronized Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Synchronized Reserve Market Clearing Price.

If a Synchronized Reserve Event is initiated by the Office of the Interconnection and the Economic Load Response Participant resource reduced its load in response to the event, the resource shall be eligible to receive a credit for the fixed costs associated with achieving the load reduction, as specified in the PJM Manuals.

iii) Pool-scheduled resources shall be credited a Synchronized Reserve lost opportunity cost credit, where positive, as described in subsection (f)(iv) below.

(c) [Reserved for future use]

(d) Synchronized Reserve Market Clearing Prices

(i) For the Day-ahead Synchronized Reserve Market, the Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Synchronized Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for Synchronized Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Synchronized Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Synchronized Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Synchronized Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute and (B) the price of serving the next increment of demand for Primary Reserve and 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute, provided that the Synchronized Reserve Market Clearing Price shall be less than or equal to the sum of no more than two of the Reserve Penalty Factors for the Synchronized Reserve Requirement, the Primary Reserve Requirement, and the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Synchronized Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Synchronized Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Synchronized Reserve market quantities and prices as determined pursuant to subsection (d)(ii) hereof.

(ii) For the Real-time Synchronized Reserve Market, the Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for Synchronized Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Synchronized Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Synchronized Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Synchronized Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute and (B) the price of serving the next increment of demand for Primary Reserve and 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute, provided that the Synchronized Reserve Market Clearing Price shall be less than or equal to the sum of no more than two of the Reserve Penalty Factors for the Synchronized Reserve Requirement, the Primary Reserve Requirement, and the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Synchronized Reserves, then the Synchronized Reserve Market Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Synchronized Reserves, then the Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than

or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Synchronized Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Synchronized Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Synchronized Reserve Market Clearing Prices exist, then the Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, and the Office of the Interconnection is assigning Synchronized Reserves, the Office of the Interconnection will set the Synchronized Reserve Market Clearing Price to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period. Resources will be compensated for lost opportunity cost per subsection (f) hereof using the energy price as determined in Operating Agreement, Schedule 1, section 2.5.2.iii. The opportunity cost shall be zero for all resources self-scheduled to provide Synchronized Reserve, synchronous condensers and Economic Load Response Participant resources.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action as described in the PJM Manuals or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Synchronized Reserve Market Clearing Price shall be the sum of the Reserve Penalty Factors for the Primary Reserve Requirement, and the Synchronized Reserve Requirement for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the Synchronized Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended Synchronized Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Synchronized Reserve Penalty Factors are warranted for subsequent Delivery Year(s).

(e) (i) For determining the Synchronized Reserve Market Clearing Price in each hour of the Day-ahead Synchronized Reserve Market, the estimated resource-specific opportunity cost for a generation resource or Economic Load Response Participant resource shall be the difference between the Locational Marginal Price at the generation or Economic Load Response Participant resource bus and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the

resource) or offer price to reduce energy from the Economic Load Response Participant resource in the PJM Interchange Energy Market when the Locational Marginal Price at the generation or Economic Load Participant resource bus is greater than the offer price for energy from the generation resource or the offer price to reduce energy from the Economic Load Response Participant resource.

However, the opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve and for synchronous condensers and for Economic Load Response Participant resources that do not receive a day-ahead commitment to provide energy in the same operating hour in which such resource is committed to provide Synchronized Reserve.

(ii) For determining the Synchronized Reserve Market Clearing Price for each Real-time Settlement Interval in the Real-time Synchronized Reserve Market, the estimated unit-specific opportunity cost for a generation resource that is not a hydroelectric resource shall be the difference between the Locational Marginal Price at the generation bus for the generation resource and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) in the PJM Interchange Energy Market when the Locational Marginal Price at the generation bus is greater than the offer price for energy from the generation resource.

For hydroelectric resources, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the expected real-time Locational Marginal Price at that generation bus. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions, as defined in the PJM Manuals, and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the expected real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average day-ahead Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

The opportunity costs shall be zero for all resources self-scheduled to provide Synchronized Reserve, synchronous condensers and Economic Load Response Participant resources.

(f) (i) In determining the credit under subsection (b) to a generation resource, except a generation resource that is operating as a synchronous condenser, selected to provide Synchronized Reserve in the Day-ahead Synchronized Reserve Market, or an Economic Load Response Participant resource that is selected to provide Synchronized Reserve in the Day-ahead Synchronized Reserve Market for the same operating hour in which such resource receives a day-ahead commitment to provide energy, the opportunity cost of a resource shall be determined

for each operating hour that the Office of the Interconnection requires a resource to provide Synchronized Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Day-ahead Locational Marginal Price at the generation bus of the generation resource or the applicable pricing point for the Economic Load Response Participant resource;

B = The deviation of the resource's energy output or load reduction necessary to supply a Day-ahead Synchronized Reserve assignment from the resource's energy expected output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load; and

C = The Day-ahead Energy market offer integrated under the applicable energy offer curve for the resource's energy output or load reduction necessary to provide a Day-ahead Synchronized Reserve Market assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load.

For a generation resource that is operating as a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [energy use for providing synchronous condensing multiplied by A] plus [the applicable condense start-up cost divided by the number of hours the resource is assigned Synchronized Reserve].

(ii) In determining the credit under subsection (b) to a generation resource, except a generation resource that is operating as a synchronous condenser, selected to provide Synchronized Reserve in the Real-time Synchronized Reserve Market in excess of the resource's Day-ahead Synchronized Reserve Market assignment and that actively follows the Office of the Interconnection's signals and instructions, the unit-specific opportunity cost of that generation resource shall be determined for each Real-time Settlement Interval that the Office of the Interconnection requires that generation resource to provide Synchronized Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Real-time Locational Marginal Price at the generation bus of the generation resource;

B = The deviation of the generation resource's output necessary to supply Synchronized Reserve in real-time, reduced by the amount of Synchronized Reserve the resource failed to respond during a Synchronized Reserve Event

during the Operating Day, in excess of its Day-ahead Synchronized Reserve Market assignment and follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy; and

C = The energy offer integrated under the applicable energy offer curve for the generation resource's output necessary to supply Synchronized Reserve in real-time from the lesser of the generation resource's output necessary to provide a Day-ahead Synchronized Reserve Market assignment or follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [additional energy use in excess of day-ahead energy use for providing synchronous condensing in real-time multiplied by A] plus [any applicable condense start-up costs due to additional condense start-ups in real-time in excess of day-ahead condense start-ups allocated to each Real-time Settlement Interval as described in PJM Manuals].

For hydroelectric resources, the unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the real-time Locational Marginal Price at that generation bus multiplied by the additional megawatts assigned to supply Synchronized Reserve in real-time in excess of its Day-ahead Synchronized Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average real-time Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating multiplied by the additional megawatts assigned to supply the hourly Synchronized Reserve in real-time in excess of its Day-ahead Synchronized Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

(iii) For each Real-time Settlement Interval, a Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in the resource's real-time reserve MW from a day-ahead market assignment in more than one market for that Real-time Settlement Interval, the total Market Revenue Neutrality Offset is allocated to the Synchronized Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Synchronized Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time

from all reserve markets, not to exceed the resource's opportunity cost owed in the Synchronized Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Synchronized Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Synchronized Reserve assignment decreases due to the resource being self-scheduled to provide energy or Regulation;

(B) A resource reduces its flexibility in real-time such that the resource no longer qualifies to provide Synchronized Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time;

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above; or

(F) A resource increases its Synchronized Reserve offer price in the Real-time Synchronized Reserve Market from its offer price in the Day-ahead Synchronized Reserve Market.

(iv) A Synchronized Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(A + B + C + D) - (E + F + G + H)$$

Where:

A = day-ahead Synchronized Reserve offer price times the Synchronized Reserve MW assignment;

B = real-time Synchronized Reserve offer price times the Synchronized Reserve MW assigned in real-time in excess of the Synchronized Reserve MW assigned day-ahead, where the Synchronized Reserve MW assigned is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval where there is not a Synchronized Reserve event;

C = day-ahead opportunity cost as determined in subsection (f)(i) above;

D = real-time opportunity cost as determined in subsection (f)(ii) above;

E = day-ahead clearing price credits as determined in subsection (b)(i) above;

F = real-time clearing price credits as determined in subsection (b)(ii) above less any applicable charges for failure to respond to a Synchronized Reserve Event as determined in subsection (j) below;

G = the applicable Market Revenue Neutrality Offset as determined in subsection (f)(iii) above; and

H = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A(f)(iii) above if not eligible for Market Revenue Neutrality Offset.

(v) The opportunity costs for an Economic Load Response Participant resource assigned Synchronized Reserve in real-time or any resource self-scheduled for Synchronized Reserves shall be zero.

(g) [Reserved for future use]

(h) For each operating hour, the sum of the Synchronized Reserve lost opportunity cost credits credited in accordance with subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Synchronized Reserve Obligation in proportion to its real-time purchases of Synchronized Reserve in megawatt-hours during that hour.

(i) [Reserved for future use]

(j) In the event a generation resource or Economic Load Response Participant Resource that either has been assigned by the Office of the Interconnection or self-scheduled to provide Synchronized Reserve in real-time fails to provide the assigned or self-scheduled amount of Synchronized Reserve in response to a Synchronized Reserve Event, the resource will be charged at the Real-time Synchronized Reserve Market Clearing Price for the real-time Synchronized Reserve assignment, in excess of amount that actually responded for all Real-time Settlement Intervals the resource was assigned or self-scheduled Synchronized Reserve real-time, which is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements for the resource on the Operating Day during which the event occurred. The determination of the amount of Synchronized Reserve credited to a resource shall be on an individual resource basis, not on an aggregate basis.

The resource shall refund payments received for Synchronized Reserve it failed to provide. For purposes of determining the amount of the payments to be refunded by a Market Participant, the Office of the Interconnection shall calculate the shortfall of Synchronized Reserve on an individual resource basis unless the Market Participant had multiple resources that were assigned or self-scheduled to provide Synchronized Reserve, in which case the shortfall will be determined on an aggregate basis. For performance determined on an aggregate basis, the response of any resource that provided more Synchronized Reserve than it was assigned or self-scheduled to provide will be used to offset the performance of other resources that provided less

Synchronized Reserve than they were assigned or self-scheduled to provide during a Synchronized Reserve Event, as calculated in the PJM Manuals. The determination of a Market Participant's aggregate response shall not be taken into consideration in the determination of the amount of Synchronized Reserve credited to each individual resource.

The amount refunded shall be determined by multiplying the retroactive penalty megawatts by the Real-time Synchronized Reserve Market Clearing Price for all intervals the resource was assigned or self-scheduled to provide Synchronized Reserve for a period of time immediately preceding the Synchronized Reserve Event equal to the lesser of the average number of days between Synchronized Reserve Events, or the number of days since the resource last failed to provide the amount of Synchronized Reserve it was assigned or self-scheduled to provide in response to a Synchronized Reserve Event. The retroactive penalty megawatts for each interval shall be the lesser of the amount of the shortfall of Synchronized Reserve, measured in megawatts, and the real-time Synchronized Reserve assignment for each interval, which is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements for the resource. The average number of days between Synchronized Reserve Events for purposes of this calculation shall be determined by an annual review of the twenty-four month period ending October 31 of the calendar year in which the review is performed, and shall be rounded down to a whole day value. The Office of the Interconnection shall report the results of its annual review to stakeholders by no later than December 31, and the average number of days between Synchronized Reserve Events shall be effective as of the following January 1. The refunded charges shall be allocated as credits to Market Participants based on its pro rata share of the Synchronized Reserve Obligation megawatts in the hour(s) of the Synchronized Reserve Event for the Reserve Sub-zone or Reserve Zone, except that Market Participants that incur a refund obligation and also have an applicable Synchronized Reserve Obligation during the hour(s) of the Synchronized Reserve Event shall not be included in the allocation of such refund credits. If the event spans multiple hours, the refund credits will be prorated hourly based on the duration of the event within each clock hour.

(k) The magnitude of response to a Synchronized Reserve Event by a generation resource or an Economic Load Response Participant resource, except for Batch Load Economic Load Response Participant resources covered by section 3.2.3A(1), is the difference between the generation resource's output or the Economic Load Response Participant resource's consumption at the start of the event and its output or consumption 10 minutes after the start of the event. In order to allow for small fluctuations and possible telemetry delays, generation resource output or Economic Load Response Participant resource consumption at the start of the event is defined as the lowest telemetered generator resource output or greatest Economic Load Response Participant resource consumption between one minute prior to and one minute following the start of the event. Similarly, a generation resource's output or an Economic Load Response Participant resource's consumption 10 minutes after the event is defined as the greatest generator resource output or lowest Economic Load Response Participant resource consumption achieved between 9 and 11 minutes after the start of the event. The response actually credited to a generation resource will be reduced by the amount the megawatt output of the generation resource falls below the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter. The response actually credited to an

Economic Load Response Participant resource will be reduced by the amount the megawatt consumption of the Economic Load Response Participant resource exceeds the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter.

(l) The magnitude of response by a Batch Load Economic Load Response Participant resource that is at the stage in its production cycle when its energy consumption is less than the level of megawatts in its offer at the start of a Synchronized Reserve Event shall be the difference between (i) the Batch Load Economic Load Response Participant resource's consumption at the end of the Synchronized Reserve Event and (ii) the Batch Load Economic Load Response Participant resource's consumption during the minute within the ten minutes after the end of the Synchronized Reserve Event in which the Batch Load Economic Load Response Participant resource's consumption was highest and for which its consumption in all subsequent minutes within the ten minutes was not less than fifty percent of the consumption in such minute; provided that, the magnitude of the response shall be zero if, when the Synchronized Reserve Event commences, the scheduled off-cycle stage of the production cycle is greater than ten minutes. .

3.2.3A.001 Non-Synchronized Reserve.

(a) Each Market Participant that is a Load Serving Entity that is not part of an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have an obligation for hourly Non-Synchronized Reserve equal to its pro rata share of Non-Synchronized Reserve assigned for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone and Reserve Sub-zone for the hour ("Non-Synchronized Reserve Obligation"). Those entities that participate in an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have their reserve obligations determined based on the stipulations in such agreement. A Market Participant's hourly Non-Synchronized Reserve Obligation shall be adjusted by any Non-Synchronized Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Non-Synchronized Reserve Obligation shall be charged the pro rata share of the sum day-ahead and real-time credits for Non-Synchronized Reserve as defined in sections 3.2.3A.001(b)(i) and (ii) below.

(b) Resources assigned to provide Non-Synchronized Reserve at the direction of the Office of the Interconnection shall be credited as follows:

(i) Credits for Non-Synchronized Reserve provided by generation resources assigned to provide Non-Synchronized Reserve by the Office of the Interconnection in the Day-ahead Non-Synchronized Reserve Market shall be equal to the product of the Day-ahead Non-Synchronized Market Clearing Price multiplied by the megawatt amount of Non-Synchronized Reserve such resource is assigned to provide.

(ii) Credits for Non-Synchronized Reserve provided by generation resources assigned to provide Non-Synchronized Reserve by the Office of the Interconnection in the Real-time Non-Synchronized Reserve Market shall be determined for each operating

hour based on the sum on their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Non-Synchronized Reserve from that resource assigned by the Office of the Interconnection in the Real-time Non-Synchronized Reserve Market;

B = For each Real-time Settlement Interval, the megawatts of Non-Synchronized Reserve from that resource assigned by the Office of the Interconnection in the Day-ahead Non-Synchronized Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Non-Synchronized Reserve Market Clearing Price.

(iii) Pool-scheduled generation resources assigned to provide Non-Synchronized Reserve in the Day-ahead Non-Synchronized Reserve Market shall be credited a Non-Synchronized Reserve lost opportunity cost credit, where positive, as determined in accordance with subsection (d)(iii) below, to recover any net monetary loss to the Market Seller of such resource associated with the purchase of Non-Synchronized Reserve in the Real-time Non-Synchronized Reserve Market as a result of following the dispatch direction of the Office of the Interconnection.

(c) Non-Synchronized Reserve Market Clearing Prices

(i) For the Day-ahead Non-Synchronized Reserve Market, the Non-Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Non-Synchronized Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for Primary Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Non-Synchronized Reserve offer prices and the applicable Operating Reserve Demand Curve for Non-Synchronized Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Primary Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute and (B) the price of serving the next increment of demand for 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute, provided that the Non-Synchronized Reserve Market Clearing Price shall be less than or equal to the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve

Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Non-Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Non-Synchronized Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Non-Synchronized Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Non-Synchronized Reserve market quantities and prices as determined pursuant to subsection (c)(ii) hereof.

(ii) For the Real-time Non-Synchronized Reserve Market, the Non-Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for Primary Reserve in a Reserve Zone or Reserve Sub-zone determined by the interaction between a supply curve formed using Non-Synchronized Reserve offer prices and the applicable Operating Reserve Demand Curve for Non-Synchronized Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Primary Reserve for any other Reserve Zone or Reserve Subzone to which the next increment of demand for Primary Reserve can contribute and (B) the price of serving the next increment of demand for 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute, provided that the Non-Synchronized Reserve Market Clearing Price shall be less than or equal to the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Non-Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Non-Synchronized Reserves, then the Non-Synchronized Reserve Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Non-Synchronized Reserves, then the Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Non-Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Non-Synchronized Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Non-Synchronized Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Non-Synchronized Reserve Market Clearing Prices exist, then the Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Non-Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, the Non-Synchronized Reserve Market Clearing Price will be set to zero dollars per megawatt-hour regardless of whether the Office of the Interconnection is assigning Non-Synchronized Reserves.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action as described in the PJM Manuals or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Non-Synchronized Reserve Market Clearing Price shall be the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the Primary Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended Primary Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Primary Reserve Penalty Factors are warranted for subsequent Delivery Year(s).

(d) (i) For determining the Non-Synchronized Reserve clearing price for each hour in the Day-ahead Non-Synchronized Reserve Market and for each Real-time Settlement Interval in the Real-time Non-Synchronized Reserve Market, including during a declaration of a Market Suspension, the unit-specific opportunity cost for a generation resource that is not providing energy because they are providing Non-Synchronized Reserves will be zero.

(ii) For each Real-time Settlement Interval, a total Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in real-time

reserve MW from a day-ahead market assignment in more than one market for that Real-time Settlement Interval, the total Market Revenue Neutrality Offset is allocated to the Non-Synchronized Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Non-Synchronized Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Non-Synchronized Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Non-Synchronized Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Non-Synchronized Reserve assignment decreases due to the resource being self-scheduled to provide energy, Synchronized Reserve, or Regulation;

(B) A resource reduces flexibility in real-time such that the resource no longer qualifies to provide Non-Synchronized Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time; or

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above.

(iii) A Non-Synchronized Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(\text{zero}) - (A + B + C + D)$$

Where:

A = day-ahead clearing price credits as determined in subsection (b)(i) above;

B = real-time clearing price credits as determined in subsection (b)(ii) above;

C = the applicable Market Revenue Neutrality Offset as determined in subsection (d)(ii) above; and

D = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A.001(d)(ii) above if not eligible for Market Revenue Neutrality Offset.

(e) [Reserved for future use]

(f) For each operating hour, the sum of the Non-Synchronized Reserve lost opportunity cost credits credited in subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Non-Synchronized Reserve Obligation in proportion to its real-time purchases of Non-Synchronized Reserve in megawatt-hours during that hour.

(g) The magnitude of response to a Non-Synchronized Reserve Event by a generation resource is the difference between the generation resource's output at the start of the event and its output 10 minutes after the start of the event. In order to allow for small fluctuations and possible telemetry delays, generation resource output at the start of the event is defined as the lowest telemetered generator resource output between one minute prior to and one minute following the start of the event. Similarly, a generation resource's output 10 minutes after the start of the event is defined as the greatest generator resource output achieved between 9 and 11 minutes after the start of the event. The response actually credited to a generation resource will be reduced by the amount the megawatt output of the generation resource falls below the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter.

(h) In the event a generation resource that has been assigned by the Office of the Interconnection to provide Non-Synchronized Reserve fails to provide the assigned amount of Non-Synchronized Reserve in response to a Non-Synchronized Reserve Event, the resource will be credited for Non-Synchronized Reserve capacity in the amount that actually responded for the contiguous Real-time Settlement Interval the resource was assigned Non-Synchronized Reserve during which the event occurred.

3.2.3A.01 Secondary Reserve.

(a) Each Market Participant that is a Load Serving Entity shall have an obligation for hourly Secondary Reserve equal to its pro rata share of Secondary Reserve assigned for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone and Reserve Sub-zone for the hour ("Secondary Reserve Obligation"). A Market Participant's hourly Secondary Reserve Obligation shall be adjusted by any Secondary Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Secondary Reserve Obligation shall be charged the pro rata share of the sum of day-ahead and real-time credits for Secondary Reserve as defined in sections 3.2.3A.01(b)(i) and (ii) below.

(b) Resources assigned to provide Secondary Reserve at the direction of the Office of the Interconnection shall be credited as follows:

(i) Credits for Secondary Reserve provided by generation resources and Economic Load Response Participant resources assigned to provide Secondary Reserve by the Office of the Interconnection in the Day-ahead Secondary Reserve Market shall be equal to the product of the Day-ahead Secondary Reserve Market Clearing Price multiplied by the megawatt amount of Secondary Reserve such resource is scheduled to provide.

(ii) Credits for Secondary Reserve provided by generation resources and Economic Load Response Participant resources scheduled to provide Secondary Reserve by the Office of the Interconnection in the Real-time Secondary Reserve Market shall be determined for each operating hour based on the sum of their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Secondary Reserve from that resource assigned by the Office of the Interconnection in the Real-time Secondary Reserve Market. The megawatt value is capped at the lesser of the Economic Maximum or Secondary Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval minus the Real-time Synchronized Reserve assignment;

B = For each Real-time Settlement Interval, the megawatts of Secondary Reserve from that resource scheduled by the Office of the Interconnection in the Day-ahead Secondary Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Secondary Reserve Market Clearing Price.

(iii) Pool-scheduled resources and Economic Load Response Participant resources shall be credited a Secondary Reserve lost opportunity cost credit, where positive, as described in subsection (f)(iv) below.

(c) [Reserved for future use]

(d) Secondary Reserve Market Clearing Prices

(i) For the Day-ahead Secondary Reserve Market, the Secondary Reserve Market Clearing Price shall be determined for each Reserve Zone and, as applicable, Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Secondary Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for 30-minute Reserve in a Reserve Zone

or Reserve Sub-zone, determined by the interaction between a supply curve formed using Secondary Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Secondary Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus the price of serving the next increment of demand for 30-minute Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute, but the Secondary Reserve Market Clearing Price shall not exceed the Reserve Penalty Factor for the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Secondary Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Secondary Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Secondary Reserve market quantities and prices as determined pursuant to subsection (d)(ii) hereof.

(ii) For the Real-time Secondary Reserve Market, the Secondary Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for 30-minute Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Secondary Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Secondary Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus the price of serving the next increment of demand for 30-minute Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute but the Secondary Reserve Market Clearing Price shall not exceed the Reserve Penalty Factor for the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Secondary Reserves, then the Secondary Reserve Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Secondary Reserves, then the Secondary

Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Secondary Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Secondary Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Secondary Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Secondary Reserve Market Clearing Prices exist, then the Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Secondary Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, and the Office of the Interconnection is assigning Secondary Reserves, the Secondary Reserve Market Clearing Price will be set to zero dollars per megawatt-hour. Resources will be compensated for lost opportunity cost per subsection (f) hereof using the energy price as determined in Operating Agreement, Schedule 1, section 2.5.2.iii.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Secondary Reserve Market Clearing Price for a given Reserve Zone or Sub-zone shall be the Reserve Penalty Factor for the 30-minute Reserve Requirements for that Reserve Zone or Reserve Sub-zone

(iii) The Reserve Penalty Factor for the 30-minute Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended 30-minute Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Reserve Penalty Factor for 30-minute Reserve are warranted for subsequent Delivery Year(s).

(e) (i) For determining the Secondary Reserve Market Clearing Price for each hour in the Day-ahead Secondary Reserve Market, the estimated resource-specific opportunity cost for a generation resource or Economic Load Response Participant resources shall be the difference between the Locational Marginal Price at the generation or Economic Load Response Participant resource bus and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) or offer price to reduce energy from the Economic Load Response Participant resource in the PJM Interchange Energy Market when the Locational Marginal Price at

the Economic Load Response Participant resource bus is greater than the offer price for energy from the generation resource or the offer price to reduce energy from the Economic Load Response Participant resource.

However, opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve, and for synchronous condensers and for Economic Load Response Participant resources that do not receive a day-ahead commitment to provide energy in the same operating hour in which such resource is committed to provide Secondary Reserve.

(ii) For determining the Secondary Reserve Market Clearing Price for each Real-time Settlement Interval in the Real-time Secondary Reserve Market, the estimated unit-specific opportunity cost for a generation resource that is not a hydroelectric resource shall be the difference between the Locational Marginal Price at the generation bus for the generation resource and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) in the PJM Interchange Energy Market when the Locational Marginal Price at the generation bus is greater than the offer price for energy from the generation resource.

For hydroelectric resources, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the expected real-time Locational Marginal Price at that generation bus. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the expected real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average day-ahead Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

However, the opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve, and for synchronous condensers and Economic Load Response Participant resources.

(f) (i) In determining the credit under subsection (b) to a generation resource, except a generation resource that is a synchronous condenser, selected to provide Secondary Reserve in the Day-ahead Secondary Reserve Market or an Economic Load Response Participant resource that is selected to provide Secondary Reserve in the Day-ahead Secondary Reserve Market in the same operating hour in which such resource receives a day-ahead commitment to provide energy, the opportunity cost of a resource shall be determined for each operating hour that the Office of the Interconnection requires a resource to provide Secondary Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Day-ahead Locational Marginal Price at the generation bus of the generation resource or the applicable pricing point for the Economic Load Response Participant resource;

B= The deviation of the resource's energy output or load reduction necessary to supply a Day-ahead Secondary Reserve assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load less any Day-ahead Synchronized Reserve Market assignment; and

C = The Day-ahead Energy Market offer integrated under the applicable energy offer curve for the resource's energy output or load reduction necessary to provide a Day-ahead Secondary Reserve Market assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load less any Day-ahead Synchronized Reserve Market assignment.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [energy use for providing synchronous condensing multiplied by A] plus [the applicable condense start-up cost divided by the number of hours the resource is assigned Secondary Reserve].

(ii) In determining the credit under subsection (b) to a generation resource, except a generation that is a synchronous condenser, selected to provide Secondary Reserve in the Real-time Secondary Reserve Market in excess of the resource's Day-ahead Secondary Reserve Market assignment and that actively follows the Office of the Interconnection's signals and instructions, the unit-specific opportunity cost of that generation resource shall be determined for each Real-time Settlement Interval that the Office of the Interconnection requires that generation resource to provide Secondary Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Real-time Locational Marginal Price at the generation bus of the generation resource;

B= The deviation of the generation resource's output necessary to supply Secondary Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment and follow the Office of the Interconnection's signals and

instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy less any Real-time Synchronized Reserve Market assignment; and

C = The energy offer integrated under the applicable energy offer curve for the generation resource's output necessary to supply Secondary Reserve in real-time from the lesser of the generation resource's output necessary to provide a Day-ahead Secondary Reserve Market assignment or follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy less any Real-time Synchronized Reserve Market assignment.

For hydroelectric resources, the unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the real-time Locational Marginal Price at that generation bus multiplied by the additional megawatts assigned to supply Synchronized Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average real-time Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating multiplied by the additional megawatts assigned to supply Secondary Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: additional energy use in excess of day-ahead energy use for providing synchronous condensing in real-time multiplied by A plus [any applicable condense start-up costs due to additional condense start-ups in real-time in excess of day-ahead condense start-ups allocated to each Real-time Settlement Interval as described in PJM Manuals]. If the generation resource is operating as a synchronous condenser and also has a Real-time Synchronized Reserve assignment, resource's unit-specific opportunity cost in the Secondary Reserve Market shall be zero,

(iii) For each Real-time Settlement Interval, a total Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in real-time reserve MW from a day-ahead market assignment in more than one market for that real-time settlement interval, the total Market Revenue Neutrality Offset is allocated to the Secondary Reserve market based on the ratio of the opportunity cost owed due to a

reduction in assignment in real-time within the Secondary Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Secondary Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Secondary Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Secondary Reserve assignment decreases due to the resource being self-scheduled to provide energy, Synchronized Reserve, or Regulation;

(B) A resource reduces flexibility in real-time such that the resource no longer qualifies to provide Secondary Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time;

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above; or

(F) A resource that fails to come online and reach Economic Minimum output within 30 minutes as described in section 3.2.3A.01(h)(i) below.

(iv) A Secondary Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(A + B) - (C + D + E + F)$$

Where:

A = day-ahead opportunity cost as determined in subsection (f)(i) above;

B = real-time opportunity cost as determined in subsection (f)(ii) above;

C = day-ahead clearing price credits as determined in subsection (b)(i) above;

D = real-time clearing price credits as determined subsection (b)(ii) above;

E = the applicable Market Revenue Neutrality Offset as determined in subsection (f)(iii) above; and

F = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A.01(f)(iii) above if not eligible for Market Revenue Neutrality Offset.

(v) The opportunity costs for Economic Load Response Participant resources and generation resources not synchronized to the grid shall be zero, except that Economic Load Response Participant resources may have a day-ahead opportunity cost, as determined in subsection (f)(i) above.

(g) For each operating hour, the sum of the Secondary Reserve lost opportunity cost credits credited in accordance with subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Secondary Reserve Obligation in proportion to its real-time purchases of Secondary Reserve in megawatt-hours during that hour.

(h) (i) In the event an offline generation resource has been assigned by the Office of the Interconnection to provide Secondary Reserve in real-time and is subsequently dispatched by the Office of the Interconnection to supply energy during that Operating Day and the resource qualifies as a Secondary Reserve resource at the time it is dispatched to provide energy, the Office of the Interconnection will assess the resource's performance as follows:

For each generation resource that fails to come online and reach Economic Minimum output within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval and for all prior intervals in which the resource was assigned to provide Secondary Reserve in the Real-time Secondary Reserve Market starting at the later of (A) the last interval the resource was online or (B) the beginning of that Operating Day and continuing up to the interval the resource failed to come online. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time not being paid for the assigned MW.

(ii) In the event an Economic Load Response Participant resource has been assigned by the Office of the Interconnection to provide Secondary Reserve in real-time and is subsequently dispatched to supply the Secondary Reserve assignment as a load reduction, the Office of the Interconnection will assess the resource's performance as follows:

For the purposes of this subsection, a resource's starting MW usage shall be the greatest telemetered consumption between one minute prior to and one minute following the issuance of a dispatch instruction from the Office of the Interconnection, and a resource's ending MW usage shall be the lowest consumption between 29 and 31 minutes after the issuance of a dispatch instruction from the Office of the Interconnection.

For each Economic Load Response Participant resource that fails to reduce load by at least the Economic Minimum, where the measured response is the difference between the

resource's starting MW usage and the resource's ending MW usage as described above, within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval, and for all prior intervals in which the resource was assigned to provide Secondary Reserve in the Real-time Secondary Reserve Market between such non-performance event starting at the later of (A) the last interval the resource reduced load at the instruction of the Office of the Interconnection or (B) the beginning of that Operating Day, and for all subsequent intervals through the earlier of (C) the next interval in which the resource is dispatched to reduce load or (D) the end of the Operating Day. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time, refunding all payments due for Secondary Reserve during such period.

(iii) For Batch Load Economic Load Response Participant Resources, a second method of verification will be used for instances where a Secondary Reserve assignment dispatched as an energy load reduction is initiated and the resource is operating at the minimum consumption level of its duty cycle. In this case, the magnitude of the response will be measured as the difference between (A) the minimum of the resource's consumption between the minute before and the minute after the end of the last settlement interval the resource reduced load at the instruction of the Office of the Interconnection and (B) the maximum consumption within a ten (10) minute period following the end of the last settlement interval the resource reduced load provided that all subsequent minutes following that minute are no less than 50% of the consumption in that minute.

For each Batch Load Economic Load Response Participant Resource that fails to reduce load by at least the Economic Minimum, where the measured response is the difference between the resource's starting MW usage and the resource's ending MW usage as described in section (ii) above or the difference between (A) and (B) as described in section (iii) above, within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval, and for all prior intervals in which the resource was assigned to provide Secondary Reserve in either the Day-ahead or Real-time Secondary Reserve Markets between such non-performance event starting at the later of (A) the last interval the resource reduced load at the instruction of the Office of the Interconnection or (B) the beginning of that Operating Day, and for all subsequent intervals through the earlier of (C) the next interval in which the resource is dispatched to reduce load or (D) the end of the Operating Day. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time, refunding all payments due for Secondary Reserve during such period.

3.2.3A.02 Operating Reserve Demand Curves

The Office of the Interconnection shall establish Operating Reserve Demand Curves for clearing 30-minute Reserve, Primary Reserve, and Synchronized Reserve, for, as applicable, each Reserve Zone or Reserve Sub-zone to procure sufficient reserves to meet, as applicable, (a) 30-minute Reserve Requirement and Extended 30-minute Reserve Requirement; (b) Primary Reserve Requirement and Extended Primary Reserve Requirement; and (c) Synchronized

Reserve Requirement and Extended Synchronized Reserve Requirement. The Operating Reserve Demand Curves established for each reserve type shall be used to commit such reserves in both the day-ahead and real-time reserve markets. The Operating Reserve Demand Curves shall be determined in accordance with the applicable Reserve Penalty Factors and PJM Manuals.

3.2.3B Reactive Services.

(a) A Market Seller providing Reactive Services at the direction of the Office of the Interconnection shall be credited as specified below for the operation of its resource. These provisions are intended to provide payments to generating units when the LMP dispatch algorithms would not result in the dispatch needed for the required reactive service. LMP will be used to compensate generators that are subject to redispatch for reactive transfer limits.

(b) At the end of each Operating Day, where the active energy output of a Market Seller's resource is reduced or suspended at the request of the Office of the Interconnection for the purpose of maintaining reactive reliability within the PJM Region, the Market Seller shall be credited according to sections 3.2.3B(c) & 3.2.3B(d).

(c) A Market Seller providing Reactive Services from either a steam-electric generating unit or combined cycle unit operating in combined cycle mode, where such unit is pool-scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3 (c) hereof), and where the real time LMP at the unit's bus is higher than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override) shall be compensated for lost opportunity cost by receiving a credit for each Real-time Settlement Interval in an amount equal to the product of (A) the deviation of the generating unit's output necessary to follow the Office of the Interconnection's signals and the generating unit's expected output level if it had been dispatched in economic merit order, times (B) the Real-time Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A*B) - C$.

(d) A Market Seller providing Reactive Services from either a combustion turbine unit or combined cycle unit operating in simple cycle mode that is pool scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3 (c) hereof), operated as requested by the Office of the Interconnection, shall be compensated for lost opportunity cost for each Real-time Settlement Interval, limited to the lesser of the unit's Economic Maximum or the unit's Generation Resource Maximum Output, if the unit output is reduced at the direction of the Office of the Interconnection and the real time LMP at the unit's bus is higher than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection as directed by the PJM dispatcher, then the Market Seller shall be credited in a manner consistent with that described above in section 3.2.3B(c) for a steam unit or a combined cycle unit operating in combined cycle mode.

(e) At the end of each Operating Day, where the active energy output of a Market Seller's unit is increased at the request of the Office of the Interconnection for the purpose of maintaining reactive reliability within the PJM Region and the offered price of the energy is above the real-time LMP at the unit's bus, the Market Seller shall be credited according to section 3.2.3B(f).

(f) A Market Seller providing Reactive Services from either a steam-electric generating unit, combined cycle unit or combustion turbine unit, where such unit is pool scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3 (c) hereof), and where the real time LMP at the unit's bus is lower than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall receive a credit in an amount equal to $\{(AG - LMPDMW) \times (UB - URTLMP)\}$ where:

AG equals the actual output of the unit;

LMPDMW equals the level of output for the unit determined according to the point on the scheduled offer curve on which the unit was operating corresponding to the real time LMP at the unit's bus and adjusted for any Regulation or Tier 2 Synchronized Reserve assignments;

UB equals the unit offer for that unit for which output is increased, determined according to the lesser of the Final Offer or Committed Offer;

URLTMP equals the real time LMP at the unit's bus; and

where $UB - URTLMP$ shall not be negative.

(g) A Market Seller providing Reactive Services from a hydroelectric resource where such resource is pool scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3 (c) hereof), and where the output of such resource is altered from the schedule submitted by the Market Seller for the purpose of maintaining reactive reliability at the request of the Office of the Interconnection, shall be compensated for lost opportunity cost in the same manner as provided in sections 3.2.2(d) and 3.2.3A(f) and further detailed in the PJM Manuals.

(h) If a Market Seller believes that, due to specific pre-existing binding commitments to which it is a party, and that properly should be recognized for purposes of this section, the above calculations do not accurately compensate the Market Seller for lost opportunity cost associated with following the Office of the Interconnection's dispatch instructions to reduce or suspend a unit's output for the purpose of maintaining reactive reliability, then the Office of the Interconnection, the Market Monitoring Unit and the individual Market Seller will discuss a mutually acceptable, modified amount of such alternate lost opportunity cost compensation, taking into account the specific circumstances binding on the Market Seller. Following such discussion, if the Office of the Interconnection accepts a modified amount of alternate lost

opportunity cost compensation, the Office of the Interconnection shall invoice the Market Participant accordingly. If the Market Monitoring Unit disagrees with the modified amount of alternate lost opportunity cost compensation, as accepted by the Office of the Interconnection, it will exercise its powers to inform the Commission staff of its concerns.

(i) The amount of Synchronized Reserve provided by generating units maintaining reactive reliability shall be counted as Synchronized Reserve satisfying the overall PJM Synchronized Reserve requirements. Operators of these generating units shall be notified of such provision, and to the extent a generating unit's operator indicates that the generating unit is capable of providing Synchronized Reserve, shall be subject to the same requirements contained in section 3.2.3A regarding provision of Synchronized Reserve. At the end of each Operating Day, to the extent a condenser operated to provide Reactive Services also provided Synchronized Reserve, a Market Seller shall be credited for providing synchronous condensing for the purpose of maintaining reactive reliability at the request of the Office of the Interconnection, in an amount equal to the higher of (i) the Synchronized Reserve Market Clearing Price for each Real-time Settlement Interval a generating unit provided synchronous condensing multiplied by the amount of Synchronized reserve provided by the synchronous condenser or (ii) the sum of (A) the generating unit's cost to provide synchronous condensing, calculated in accordance with the PJM Manuals, (B) the product of MW energy usage for providing synchronous condensing multiplied by the real time LMP at the generating unit's bus, (C) the generating unit's startup-cost of providing synchronous condensing, and (D) the unit-specific lost opportunity cost of the generating resource supplying the increment of Synchronized Reserve as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals. To the extent a condenser operated to provide Reactive Services was not also providing Synchronized Reserve, the Market Seller shall be credited only for the generating unit's cost to condense, as described in (ii) above. The total Synchronized Reserve Obligations of all Load Serving Entities under section 3.2.3A(a) in the zone where these condensers are located shall be reduced by the amount counted as satisfying the PJM Synchronized Reserve requirements. The Synchronized Reserve Obligation of each Load Serving Entity in the zone under section 3.2.3A(a) shall be reduced to the same extent that the costs of such condensers counted as Synchronized Reserve are allocated to such Load Serving Entity pursuant to subsection (l) below.

(j) A Market Seller's pool scheduled steam-electric generating unit or combined cycle unit operating in combined cycle mode, that is not committed to operate in the Day-ahead Market, but that is directed by the Office of the Interconnection to operate solely for the purpose of maintaining reactive reliability, at the request of the Office of the Interconnection, shall be credited in the amount of the unit's offered price for start-up and no-load fees. The unit also shall receive, if applicable, compensation in accordance with Sections 3.2.3B(e)-(f).

(k) The sum of the foregoing credits as specified in Sections 3.2.3B(b)-(j) shall be the cost of Reactive Services for the purpose of maintaining reactive reliability for the Operating Day and shall be separately determined for each transmission zone in the PJM Region based on whether the resource was dispatched for the purpose of maintaining reactive reliability in such transmission zone.

(l) The cost of Reactive Services for the purpose of maintaining reactive reliability in a transmission zone in the PJM Region for each Operating Day shall be allocated and charged to each Market Participant in proportion to its deliveries of energy to load (net of operating Behind The Meter Generation) in such transmission zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such transmission zone.

(m) Generating units receiving dispatch instructions from the Office of the Interconnection under the expectation of increased actual or reserve reactive shall inform the Office of the Interconnection dispatcher if the requested reactive capability is not achievable. Should the operator of a unit receiving such instructions realize at any time during which said instruction is effective that the unit is not, or likely would not be able to, provide the requested amount of reactive support, the operator shall as soon as practicable inform the Office of the Interconnection dispatcher of the unit's inability, or expected inability, to provide the required reactive support, so that the associated dispatch instruction may be cancelled. PJM Performance Compliance personnel will audit operations after-the-fact to determine whether a unit that has altered its active power output at the request of the Office of the Interconnection has provided the actual reactive support or the reactive reserve capability requested by the Office of the Interconnection. PJM shall utilize data including, but not limited to, historical reactive performance and stated reactive capability curves in order to make this determination, and may withhold such compensation as described above if reactive support as requested by the Office of the Interconnection was not or could not have been provided.

3.2.3C Synchronous Condensing for Post-Contingency Operation.

(a) Under normal circumstances, PJM operates generation out of merit order to control contingency overloads when the flow on the monitored element for loss of the contingent element ("contingency flow") exceeds the long-term emergency rating for that facility, typically a 4-hour or 2-hour rating. At times however, and under certain, specific system conditions, PJM does not operate generation out of merit order for certain contingency overloads until the contingency flow on the monitored element exceeds the 30-minute rating for that facility ("post-contingency operation"). In conjunction with such operation, when the contingency flow on such element exceeds the long-term emergency rating, PJM operates synchronous condensers in the areas affected by such constraints, to the extent they are available, to provide greater certainty that such resources will be capable of producing energy in sufficient time to reduce the flow on the monitored element below the normal rating should such contingency occur.

(b) The amount of Synchronized Reserve provided by synchronous condensers associated with post-contingency operation shall be counted as Synchronized Reserve satisfying the applicable Synchronized Reserve Requirements. Operators of these generation units shall be notified of such provision, and to the extent a generation unit's operator indicates that the generation unit is capable of providing Synchronized Reserve, shall be subject to the same requirements contained in section 3.2.3A regarding provision of Synchronized Reserve. At the end of each Operating Day, to the extent a condenser operated in conjunction with post-contingency operation also provided Synchronized Reserve, a Market Seller shall be credited for providing synchronous condensing in conjunction with post-contingency operation at the request

of the Office of the Interconnection, in an amount equal to the higher of (i) the Real-time Synchronized Reserve Market Clearing Price for each applicable interval a generation resource provided synchronous condensing multiplied by the amount of Synchronized Reserve provided by the synchronous condenser or (ii) the sum of (A) the generation resource's applicable interval cost to provide synchronous condensing, calculated in accordance with the PJM Manuals, (B) the applicable interval product of the megawatts of energy used to provide synchronous condensing multiplied by the real-time LMP at the generation bus of the generation resource, (C) the generation resource's start-up cost of providing synchronous condensing, and (D) the unit-specific lost opportunity cost of the generation resource supplying the increment of Synchronized Reserve as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals. To the extent a condenser operated in association with post-contingency constraint control was not also providing Synchronized Reserve, the Market Seller shall be credited only for the generation unit's cost to condense, as described in (ii) above. The total Synchronized Reserve Obligations of all Load Serving Entities under section 3.2.3A(a) in the zone where these condensers are located shall be reduced by the amount counted as satisfying the PJM Synchronized Reserve requirements. The Synchronized Reserve Obligation of each Load Serving Entity in the zone under section 3.2.3A(a) shall be reduced to the same extent that the costs of such condensers counted as Synchronized Reserve are allocated to such Load Serving Entity pursuant to subsection (d) below.

(c) The sum of the foregoing credits as specified in section 3.2.3C(b) shall be the cost of synchronous condensers associated with post-contingency operations for the Operating Day and shall be separately determined for each transmission zone in the PJM Region based on whether the resource was dispatched in association with post-contingency operation in such transmission zone.

(d) The cost of synchronous condensers associated with post-contingency operations in a transmission zone in the PJM Region for each Operating Day shall be allocated and charged to each Market Participant in proportion to its deliveries of energy to load (net of operating Behind The Meter Generation) in such transmission zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such transmission zone.

3.2.4 Transmission Congestion Charges.

Each Market Buyer shall be assessed Transmission Congestion Charges as specified in Operating Agreement, Schedule 1, section 5.

3.2.5 Transmission Loss Charges.

Each Market Buyer shall be assessed Transmission Loss Charges as specified in Operating Agreement, Schedule 1, section 5.

3.2.6 Emergency Energy.

- (a) When the Office of the Interconnection has implemented Emergency procedures, resources offering Emergency energy are eligible to set real-time Locational Marginal Prices, capped at the energy offer cap plus the sum of the applicable Reserve Penalty Factors for the Synchronized Reserve Requirement and Primary Reserve Requirement, provided that the Emergency energy is needed to meet demand in the PJM Region.
- (b) Market Participants shall be allocated a proportionate share of the net cost of Emergency energy purchased by the Office of the Interconnection. Such allocated share during each applicable interval of such Emergency energy purchase shall be in proportion to the amount of each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Energy Market, whenever that deviation increases the Market Participant's spot market purchases or decreases its spot market sales. This deviation shall not include any reduction or suspension of output of pool scheduled resources requested by PJM to manage an Emergency within the PJM Region.
- (c) Net revenues in excess of Real-time Prices attributable to sales of energy in connection with Emergencies to other Control Areas shall be credited to Market Participants during each applicable interval of such Emergency energy sale in proportion to the sum of (i) each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Energy Market, whenever that deviation increases the Market Participant's spot market purchases or decreases its spot market sales, and (ii) each Market Participant's energy sales from within the PJM Region to entities outside the PJM Region that have been curtailed by PJM.
- (d) The net costs or net revenues associated with sales or purchases of energy in connection with a Minimum Generation Emergency in the PJM Region, or in another Control Area, shall be allocated during each applicable interval of such Emergency sale or purchase to each Market Participant in proportion to the amount of each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Market, whenever that deviation increases the Market Participant's spot market sales or decreases its spot market purchases.

3.2.7 Billing.

(a) PJMSettlement shall prepare a billing statement each billing cycle for each Market Participant in accordance with the charges and credits specified in Operating Agreement, Schedule 1, sections 3.2.1 through 3.2.6, and showing the net amount to be paid or received by the Market Participant. Billing statements shall provide sufficient detail, as specified in the PJM Manuals, to allow verification of the billing amounts and completion of the Market Participant's internal accounting.

(b) If deliveries to a Market Participant that has PJM Interchange meters in accordance with Operating Agreement, section 14 include amounts delivered for a Market Participant that does not have PJM Interchange meters separate from those of the metered Market Participant, PJMSettlement shall prepare a separate billing statement for the unmetered Market Participant based on the allocation of deliveries agreed upon between the Market Participant and the unmetered Market Participant specified by them to the Office of the Interconnection.

Attachment D

Revisions to the PJM Open Access Transmission Tariff and Operating Agreement

(Phase 2)

(Clean Format)

Definitions – R - S

Ramping Capability:

“Ramping Capability” shall mean the sustained rate of change of generator output, in megawatts per minute.

Real-time Congestion Price:

“Real-time Congestion Price” shall mean the Congestion Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Loss Price:

“Real-time Loss Price” shall mean the Loss Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Energy Market:

“Real-time Energy Market” shall mean the purchase or sale of energy and payment of Transmission Congestion Charges for quantity deviations from the Day-ahead Energy Market in the Operating Day.

Real-time Offer:

“Real-time Offer” shall mean a new offer or an update to a Market Seller’s existing cost-based or market-based offer for a clock hour, submitted for use after the close of the Day-ahead Energy Market.

Real-time Prices:

“Real-time Prices” shall mean the Locational Marginal Prices resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Settlement Interval:

“Real-time Settlement Interval” shall mean the interval used by settlements, which shall be every five minutes.

Real-time System Energy Price:

“Real-time System Energy Price” shall mean the System Energy Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Reasonable Efforts:

“Reasonable Efforts” shall mean, with respect to any action required to be made, attempted, or taken by an Interconnection Party or by a Construction Party under Tariff, Part IV or Part VI, an Interconnection Service Agreement, or a Construction Service Agreement, such efforts as are timely and consistent with Good Utility Practice and with efforts that such party would undertake for the protection of its own interests.

Receiving Party:

“Receiving Party” shall mean the entity receiving the capacity and energy transmitted by the Transmission Provider to Point(s) of Delivery.

Referral:

“Referral” shall mean a formal report of the Market Monitoring Unit to the Commission for investigation of behavior of a Market Participant, of behavior of PJM, or of a market design flaw, pursuant to Tariff, Attachment M, section IV.I.

Reference Resource:

“Reference Resource” shall mean a combustion turbine generating station, configured with a single General Electric Frame 7HA turbine with evaporative cooling, Selective Catalytic Reduction technology all CONE Areas, dual fuel capability, and a heat rate of 9.134 Mmbtu/MWh.

Regional Entity:

“Regional Entity” shall have the same meaning specified in the Operating Agreement.

Regional Network Integration Transmission Service:

“Regional Network Integration Transmission Service” shall mean firm transmission service taken by Network Customers that involves the delivery of energy and/or capacity from Network Resources physically interconnected to the Transmission Provider’s transmission system to Network Load physically interconnected to the Transmission Provider’s transmission system.

Regional Transmission Expansion Plan:

“Regional Transmission Expansion Plan” shall mean the plan prepared by the Office of the Interconnection pursuant to Operating Agreement, Schedule 6 for the enhancement and expansion of the Transmission System in order to meet the demands for firm transmission service in the PJM Region.

Regional Transmission Group (RTG):

“Regional Transmission Group” or “RTG” shall mean a voluntary organization of transmission owners, transmission users and other entities approved by the Commission to efficiently

coordinate transmission planning (and expansion), operation and use on a regional (and interregional) basis.

Regulation:

“Regulation” shall mean the capability of a specific generation resource or Demand Resource with appropriate telecommunications, control and response capability to separately increase and decrease its output or adjust load in response to a regulating control signal, in accordance with the specifications in the PJM Manuals. Regulation is inclusive of Regulation-Down Service and Regulation-Up Service.

Regulation-Down Requirement:

“Regulation-Down Requirement” shall mean the required megawatts of performance-adjusted Regulation-Down Service capability to be maintained in a Regulation Zone. The Regulation-Down Requirement is defined as a set megawatt value by hour in accordance with the PJM Manuals, and can increase to account for additional operational uncertainty.

Regulation-Down Service

“Regulation-Down Service” shall mean the capability of a specific generation resource or Demand Resource with appropriate telecommunications and response capability to increase and decrease its output in the downward range from a set point or adjust load in response to a regulating-down control signal, in accordance with the specification in the PJM Manuals.

Regulation-Up Requirement:

“Regulation-Up Requirement” shall mean the required megawatts of performance-adjusted Regulation-Up Service capability to be maintained in a Regulation Zone. The Regulation-Up Requirement is defined as a set megawatt value by hour in accordance with the PJM Manuals, and can increase to account for additional operational uncertainty.

Regulation-Up Service

“Regulation-Up Service” shall mean the capability of a specific generation resource or Demand Resource with appropriate telecommunications and response capability to increase and decrease its output in the upward range from a set point or adjust load in response to a regulating-up control signal, in accordance with the specification in the PJM Manuals.

Regulation Zone:

“Regulation Zone” shall mean any of those one or more geographic areas, each consisting of a combination of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, regulation service.

Relevant Electric Retail Regulatory Authority:

“Relevant Electric Retail Regulatory Authority” shall mean an entity that has jurisdiction over and establishes prices and policies for competition for providers of retail electric service to end-customers, such as the city council for a municipal utility, the governing board of a cooperative utility, the state public utility commission or any other such entity.

Reliability Assurance Agreement or PJM Reliability Assurance Agreement:

“Reliability Assurance Agreement” or “PJM Reliability Assurance Agreement” shall mean that certain Reliability Assurance Agreement Among Load Serving Entities in the PJM Region, on file with FERC as PJM Interconnection L.L.C. Rate Schedule FERC No. 44, and as amended from time to time thereafter.

Reliability Pricing Model Auction:

“Reliability Pricing Model Auction” or “RPM Auction” shall mean the Base Residual Auction or any Incremental Auction, or, for the 2016/2017 and 2017/2018 Delivery Years, any Capacity Performance Transition Incremental Auction.

Required Transmission Enhancements:

“Regional Transmission Enhancements” shall mean enhancements and expansions of the Transmission System that (1) a Regional Transmission Expansion Plan developed pursuant to Operating Agreement, Schedule 6 or (2) any joint planning or coordination agreement between PJM and another region or transmission planning authority set forth in Tariff, Schedule 12-Appendix B (“Appendix B Agreement”) designates one or more of the Transmission Owner(s) to construct and own or finance. Required Transmission Enhancements shall also include enhancements and expansions of facilities in another region or planning authority that meet the definition of transmission facilities pursuant to FERC’s Uniform System of Accounts or have been classified as transmission facilities in a ruling by FERC addressing such facilities constructed pursuant to an Appendix B Agreement cost responsibility for which has been assigned at least in part to PJM pursuant to such Appendix B Agreement.

Reserved Capacity:

“Reserved Capacity” shall mean the maximum amount of capacity and energy that the Transmission Provider agrees to transmit for the Transmission Customer over the Transmission Provider’s Transmission System between the Point(s) of Receipt and the Point(s) of Delivery under Tariff, Part II. Reserved Capacity shall be expressed in terms of whole megawatts on a sixty (60) minute interval (commencing on the clock hour) basis.

Reserve Penalty Factor:

“Reserve Penalty Factor” shall mean the cost, in \$/MWh, associated with being unable to meet a specific reserve requirement in a Reserve Zone or Reserve Sub-zone. A Reserve Penalty Factor will be defined for each reserve requirement in a Reserve Zone or Reserve Sub-zone.

Reserve Sub-zone:

“Reserve Sub-zone” shall mean any of those geographic areas wholly contained within a Reserve Zone, consisting of a combination of a portion of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, reserve service.

Reserve Zone:

“Reserve Zone” shall mean any of those geographic areas consisting of a combination of one or more Control Zone(s), as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, reserve service.

Residual Auction Revenue Rights:

“Residual Auction Revenue Rights” shall mean incremental stage 1 Auction Revenue Rights created within a Planning Period by an increase in transmission system capability, including the return to service of existing transmission capability, that was not modeled pursuant to Operating Agreement, Schedule 1, section 7.5 and the parallel provisions of Tariff, Attachment K-Appendix, section 7.5 in compliance with Operating Agreement, Schedule 1, section 7.4.2 (h) and the parallel provisions of Tariff, Attachment K-Appendix, section 7.4.2(h), and, if modeled, would have increased the amount of stage 1 Auction Revenue Rights allocated pursuant to Operating Agreement, Schedule 1, section 7.4.2 and the parallel provisions of Tariff, Attachment K-Appendix, section 7.4.2; provided that, the foregoing notwithstanding, Residual Auction Revenue Rights shall exclude: 1) Incremental Auction Revenue Rights allocated pursuant to Tariff, Part VI; and 2) Auction Revenue Rights allocated to entities that are assigned cost responsibility pursuant to Operating Agreement, Schedule 6 for transmission upgrades that create such rights.

Residual Metered Load:

“Residual Metered Load” shall mean all load remaining in an electric distribution company’s fully metered franchise area(s) or service territory(ies) after all nodally priced load of entities serving load in such area(s) or territory(ies) has been carved out.

Resource Substitution Charge:

“Resource Substitution Charge” shall mean a charge assessed on Capacity Market Buyers in an Incremental Auction to recover the cost of replacement Capacity Resources.

Revenue Data for Settlements:

“Revenue Data for Settlements” shall mean energy quantities used in accounting and billing as determined pursuant to Tariff, Attachment K-Appendix and the corresponding provisions of Operating Agreement, Schedule 1.

RPM Seller Credit:

“RPM Seller Credit” shall mean an additional form of Unsecured Credit defined in Tariff, Attachment Q, section IV.

Scheduled Incremental Auctions:

“Scheduled Incremental Auctions” shall refer to the First, Second, or Third Incremental Auction.

Schedule of Work:

“Schedule of Work” shall mean that schedule attached to the Interconnection Construction Service Agreement setting forth the timing of work to be performed by the Constructing Entity pursuant to the Interconnection Construction Service Agreement, based upon the Facilities Study and subject to modification, as required, in accordance with Transmission Provider’s scope change process for interconnection projects set forth in the PJM Manuals.

Scope of Work:

“Scope of Work” shall mean that scope of the work attached as a schedule to the Interconnection Construction Service Agreement and to be performed by the Constructing Entity(ies) pursuant to the Interconnection Construction Service Agreement, provided that such Scope of Work may be modified, as required, in accordance with Transmission Provider’s scope change process for interconnection projects set forth in the PJM Manuals.

Seasonal Capacity Performance Resource:

“Seasonal Capacity Performance Resource” shall have the same meaning specified in Tariff, Attachment DD, section 5.5A.

Secondary Reserve:

“Secondary Reserve” shall mean the reserve capability of generation resources that can be converted fully into energy or Economic Load Response Participant resources whose demand can be reduced within 30 minutes (less the capability of such resources to provide Primary Reserve), from the request of the Office of the Interconnection, regardless of whether the equipment providing the reserve is electrically synchronized to the Transmission System or not.

Secondary Systems:

“Secondary Systems” shall mean control or power circuits that operate below 600 volts, AC or DC, including, but not limited to, any hardware, control or protective devices, cables, conductors, electric raceways, secondary equipment panels, transducers, batteries, chargers, and voltage and current transformers.

Second Incremental Auction:

“Second Incremental Auction” shall mean an Incremental Auction conducted ten months before the Delivery Year to which it relates.

Security:

“Security” shall mean the security provided by the New Service Customer pursuant to Tariff, section 212.4 or Tariff, Part VI, section 213.4 to secure the New Service Customer’s responsibility for Costs under the Interconnection Service Agreement or Upgrade Construction Service Agreement and Tariff, Part VI, section 217.

Segment:

“Segment” shall have the same meaning as described in Operating Agreement, Schedule 1, section 3.2.3(e).

Self-Supply:

“Self-Supply” shall mean Capacity Resources secured by a Load-Serving Entity, by ownership or contract, outside a Reliability Pricing Model Auction, and used to meet obligations under this Attachment or the Reliability Assurance Agreement through submission in a Base Residual Auction or an Incremental Auction of a Sell Offer indicating such Market Seller’s intent that such Capacity Resource be Self-Supply. Self-Supply may be either committed regardless of clearing price or submitted as a Sell Offer with a price bid. A Load Serving Entity’s Sell Offer with a price bid for an owned or contracted Capacity Resource shall not be deemed “Self-Supply,” unless it is designated as Self-Supply and used by the LSE to meet obligations under this Attachment or the Reliability Assurance Agreement.

Self-Supply Entity:

“Self-Supply Entity” shall mean the following types of Load Serving Entity that operate under long-standing business models: single customer entity, public power entity, or vertically integrated utility, where “vertically integrated utility” means a utility that owns generation, includes such generation in its regulated rates, and earns a regulated return on its investment in such generation or receives any cost recovery for such generation through bilateral contracts; “single customer entity” means a Load Serving Entity that serves at retail only customers that are under common control with such Load Serving Entity, where such control means holding 51% or more of the voting securities or voting interests of the Load Serving Entity and all its retail customers; and “public power entity” means cooperative and municipal utilities, including public power supply entities comprised of either or both of the same and rural electric cooperatives, and joint action agencies.

Self-Supply Seller:

“Self-Supply Seller” shall mean, for purposes of evaluating Buyer-Side Market Power, the following types of Load Serving Entities that operate under long-standing business models:

vertically integrated utility or public power entity, where “vertically integrated utility” means a utility that owns generation, includes such generation in its state-regulated rates, and earns a state-regulated return on its investment in such generation; and “public power entity” means electric cooperatives that are either rate regulated by the state or have their long-term resource plan approved or otherwise reviewed and accepted by a Relevant Electric Retail Regulatory Authority and municipal utilities or joint action agencies that are subject to direct regulation by a Relevant Electric Retail Regulatory Authority.

Sell Offer:

“Sell Offer” shall mean an offer to sell Capacity Resources in a Base Residual Auction, Incremental Auction, or Reliability Backstop Auction.

Service Agreement:

“Service Agreement” shall mean the initial agreement and any amendments or supplements thereto entered into by the Transmission Customer and the Transmission Provider for service under the Tariff.

Service Commencement Date:

“Service Commencement Date” shall mean the date the Transmission Provider begins to provide service pursuant to the terms of an executed Service Agreement, or the date the Transmission Provider begins to provide service in accordance with Tariff, Part II, section 15.3 or Tariff, Part III, section 29.1.

Short-Term Firm Point-To-Point Transmission Service:

“Short-Term Firm Point-To-Point Transmission Service” shall mean Firm Point-To-Point Transmission Service under Tariff, Part II with a term of less than one year.

Short-term Project:

“Short-term Project” shall have the same meaning provided in the Operating Agreement.

Short-Term Resource Procurement Target:

“Short-Term Resource Procurement Target” shall mean, for Delivery Years through May 31, 2018, as to the PJM Region, for purposes of the Base Residual Auction, 2.5% of the PJM Region Reliability Requirement determined for such Base Residual Auction, for purposes of the First Incremental Auction, 2% of the of the PJM Region Reliability Requirement as calculated at the time of the Base Residual Auction; and, for purposes of the Second Incremental Auction, 1.5% of the of the PJM Region Reliability Requirement as calculated at the time of the Base Residual Auction; and, as to any Zone, an allocation of the PJM Region Short-Term Resource Procurement Target based on the Preliminary Zonal Forecast Peak Load, reduced by the amount of load served under the FRR Alternative. For any LDA, the LDA Short-Term Resource

Procurement Target shall be the sum of the Short-Term Resource Procurement Targets of all Zones in the LDA.

Short-Term Resource Procurement Target Applicable Share:

“Short-Term Resource Procurement Target Applicable Share” shall mean, for Delivery Years through May 31, 2018: (i) for the PJM Region, as to the First and Second Incremental Auctions, 0.2 times the Short-Term Resource Procurement Target used in the Base Residual Auction and, as to the Third Incremental Auction for the PJM Region, 0.6 times such target; and (ii) for an LDA, as to the First and Second Incremental Auctions, 0.2 times the Short-Term Resource Procurement Target used in the Base Residual Auction for such LDA and, as to the Third Incremental Auction, 0.6 times such target.

Site:

“Site” shall mean all of the real property, including but not limited to any leased real property and easements, on which the Customer Facility is situated and/or on which the Customer Interconnection Facilities are to be located.

Small Commercial Customer:

“Small Commercial Customer,” as used in RAA, Schedule 6 and Tariff, Attachment DD-1, shall mean a commercial retail electric end-use customer of an electric distribution company that participates in a mass market demand response program under the jurisdiction of a RERRA and satisfies the definition of a “small commercial customer” under the terms of the applicable RERRA’s program, provided that the customer has an annual peak demand no greater than 100kW.

Small Generation Resource:

“Small Generation Resource” shall mean an Interconnection Customer’s device of 20 MW or less for the production and/or storage for later injection of electricity identified in an Interconnection Request, but shall not include the Interconnection Customer’s Interconnection Facilities. This term shall include Energy Storage Resources and/or other devices for storage for later injection of energy.

Small Inverter Facility:

“Small Inverter Facility” shall mean an Energy Resource that is a certified small inverter-based facility no larger than 10 kW.

Small Inverter ISA:

“Small Inverter ISA” shall mean an agreement among Transmission Provider, Interconnection Customer, and Interconnected Transmission Owner regarding interconnection of a Small Inverter Facility under Tariff, Part IV, section 112B.

Special Member:

“Special Member” shall mean an entity that satisfies the requirements of Operating Agreement, Schedule 1, section 1.5A.02, and the parallel provisions of Tariff, Attachment K-Appendix, section 1.5A.02, or the special membership provisions established under the Emergency Load Response and Pre-Emergency Load Response Programs.

Spot Market Backup:

“Spot Market Backup” shall mean the purchase of energy from, or the delivery of energy to, the PJM Interchange Energy Market in quantities sufficient to complete the delivery or receipt obligations of a bilateral contract that has been curtailed or interrupted for any reason.

Spot Market Energy:

“Spot Market Energy” shall mean energy bought or sold by Market Participants through the PJM Interchange Energy Market at System Energy Prices determined as specified in Operating Agreement, Schedule 1, section 2, and the parallel provisions of Tariff, Attachment K-Appendix, section 2.

Start Additional Labor Costs:

“Start Additional Labor Costs” shall mean additional labor costs for startup required above normal station manning levels.

Start Fuel:

For units without a soak process, “Start Fuel” shall consist of fuel consumed from first fire of the start process to first breaker closing, plus any fuel expended from last breaker opening to shutdown.

For units with a soak process, “Start Fuel” is fuel consumed from first fire of the start process (initial reactor criticality for nuclear units) to dispatchable output (including auxiliary boiler fuel), plus any fuel expended from last breaker opening to shutdown, excluding normal plant heating/auxiliary equipment fuel requirements. Start Fuel included for each temperature state from breaker closure to dispatchable output shall not exceed the unit specific soak time period reviewed and approved as part of the unit-specific parameter process detailed in Tariff, Attachment K-Appendix, section 6.6(c) or the defaults below:

- Cold Soak Time = $0.73 * \text{unit specific Minimum Run Time (in hours)}$
- Intermediate Soak Time = $0.61 * \text{unit specific Minimum Run Time (in hours)}$
- Hot Soak Time = $0.43 * \text{unit specific Minimum Run Time (in hours)}$

Start-Up Costs:

“Start-Up Costs” shall consist primarily of the cost of fuel, as determined by the unit’s start heat input (adjusted by the performance factor) times the fuel cost. It also includes operating costs, Maintenance Adders, emissions allowances/adders, and station service cost. Start-Up Costs can vary with the unit offline time being categorized in three unit temperature conditions: hot, intermediate and cold.

For units with a steam turbine and a soak process (nuclear, steam, and combined cycle), “Start Fuel” is fuel consumed from first fire of start process (initial reactor criticality for nuclear units): Start-Up Costs shall mean the net unit costs from PJM’s notification to the level at which the unit can follow PJM’s dispatch, and from last breaker open to shutdown.

For units without a steam turbine and no soak process (engines, combustion turbines, Intermittent Resources, and Energy Storage Resources): Start-Up Costs shall mean the unit costs from PJM’s notification to first breaker close and from last breaker open to shutdown.

State:

“State” shall mean the District of Columbia and any State or Commonwealth of the United States.

State Commission:

“State Commission” shall mean any state regulatory agency having jurisdiction over retail electricity sales in any State in the PJM Region.

State Estimator:

“State Estimator” shall mean the computer model of power flows specified in Operating Agreement, Schedule 1, section 2.3 and the parallel provisions of Tariff, Attachment K-Appendix, section 2.3.

State Subsidy:

“State Subsidy” shall mean a direct or indirect payment, concession, rebate, subsidy, non-bypassable consumer charge, or other financial benefit that is as a result of any action, mandated process, or sponsored process of a state government, a political subdivision or agency of a state, or an electric cooperative formed pursuant to state law, and that

- (1) is derived from or connected to the procurement of (a) electricity or electric generation capacity sold at wholesale in interstate commerce, or (b) an attribute of the generation process for electricity or electric generation capacity sold at wholesale in interstate commerce; or
- (2) will support the construction, development, or operation of a new or existing Capacity Resource; or
- (3) could have the effect of allowing the unit to clear in any PJM capacity auction.

Notwithstanding the foregoing, State Subsidy shall not include (a) payments, concessions, rebates, subsidies, or incentives designed to incent, or participation in a program, contract or

other arrangement that utilizes criteria designed to incent or promote, general industrial development in an area or designed to incent siting facilities in that county or locality rather than another county or locality; (b) state action that imposes a tax or assesses a charge utilizing the parameters of a regional program on a given set of resources notwithstanding the tax or cost having indirect benefits on resources not subject to the tax or cost (e.g., Regional Greenhouse Gas Initiative); (c) any indirect benefits to a Capacity Resource as a result of any transmission project approved as part of the Regional Transmission Expansion Plan; (d) any contract, legally enforceable obligation, or rate pursuant to the Public Utility Regulatory Policies Act or any other state-administered federal regulatory program (e.g., the Cross-State Air Pollution Rule); (e) any revenues from the sale or allocation, either direct or indirect, to an Entity Providing Supply Services to Default Retail Service Provider where such entity's obligations was awarded through a state default procurement auction that was subject to independent oversight by a consultant or manager who certifies that the auction was conducted through a non-discriminatory and competitive bidding process, subject to the below condition, and provided further that nothing herein would exempt a Capacity Resource that would otherwise be subject to the minimum offer price rule pursuant to this Tariff; (f) any revenues for providing capacity as part of an FRR Capacity Plan or through bilateral transactions with FRR Entities; or (g) any voluntary and arm's length bilateral transaction (including but not limited to those reported pursuant to Tariff, Attachment DD, section 4.6), such as a power purchase agreement or other similar contract where the buyer is a Self-Supply Entity and the transaction is (1) a short term transaction (one-year or less) or (2) a long-term transaction that is the result of a competitive process that was not fuel-specific and is not used for the purpose of supporting uneconomic construction, development, or operation of the subject Capacity Resource, provided however that if the Self-Supply Entity is responsible for offering the Capacity Resource into an RPM Auction, the specified amount of installed capacity purchased by such Self-Supply Entity shall be considered to receive a State Subsidy in the same manner, under the same conditions, and to the same extent as any other Capacity Resource of a Self-Supply Entity. For purposes of subsection (e) of this definition, a state default procurement auction that has been certified to be a result of a non-discriminatory and competitive bidding process shall:

- (i) have no conditions based on the ownership (except supplier diversity requirements or limits), location (except to meet PJM deliverability requirements), affiliation, fuel type, technology, or emissions of any resources or supply (except state-mandated renewable portfolio standards for which Capacity Resources are separately subject to the minimum offer price rule or eligible for an exemption);
- (ii) result in contracts between an Entity Providing Supply Services to Default Retail Service Provider and the electric distribution company for a retail default generation supply product and none of those contracts require that the retail obligation be sourced from any specific Capacity Resource or resource type as set forth in subsection (i) above; and
- (iii) establish market-based compensation for a retail default generation supply product that retail customers can avoid paying for by obtaining supply from a competitive retail supplier of their choice.

State of Charge:

“State of Charge” shall mean the quantity of physical energy stored in an Energy Storage Resource Model Participant or in a storage component of a Hybrid Resource in proportion to its maximum State of Charge capability. State of Charge is quantified as defined in the PJM Manuals.

State of Charge Management:

“State of Charge Management” shall mean the control of State of Charge of an Energy Storage Resource Market Participant or a storage component of a Hybrid Resource using minimum and maximum discharge (and, as applicable, charge) limits, changes in operating mode (as applicable), discharging (and, as applicable, charging) offer curves, and self-scheduling of non-dispatchable sales (and, as applicable, purchases) of energy in the PJM markets. State of Charge Management shall not interfere with the obligation of a Market Seller of an Energy Storage Resource Model Participant or of a Hybrid Resource to follow PJM dispatch, consistent with all other resources.

Station Power:

“Station Power” shall mean energy used for operating the electric equipment on the site of a generation facility located in the PJM Region or for the heating, lighting, air-conditioning and office equipment needs of buildings on the site of such a generation facility that are used in the operation, maintenance, or repair of the facility. Station Power does not include any energy (i) used to power synchronous condensers; (ii) used for pumping at a pumped storage facility; (iii) used in association with restoration or black start service; or (iv) that is Direct Charging Energy.

Sub-Annual Resource Constraint:

“Sub-Annual Resource Constraint” shall mean, for the 2017/2018 Delivery Year and for FRR Capacity Plans the 2017/2018 and 2018/2019 Delivery Years, for the PJM Region or for each LDA for which the Office of the Interconnection is required under Tariff, Attachment DD, section 5.10(a) to establish a separate VRR Curve for a Delivery Year, a limit on the total amount of Unforced Capacity that can be committed as Limited Demand Resources and Extended Summer Demand Resources for the 2017/2018 Delivery Year in the PJM Region or in such LDA, calculated as the Sub-Annual Resource Reliability Target for the PJM Region or for such LDA, respectively, minus the Short-Term Resource Procurement Target for the PJM Region or for such LDA, respectively.

Sub-Annual Resource Price Decrement:

“Sub-Annual Resource Price Decrement” shall mean, for the 2017/2018 Delivery Year, a difference between the clearing price for Extended Summer Demand Resources and the clearing price for Annual Resources, representing the cost to procure additional Annual Resources out of merit order when the Sub-Annual Resource Constraint is binding.

Sub-Annual Resource Reliability Target:

“Sub-Annual Reliability Target” for the PJM Region or an LDA, shall mean the maximum amount of the combination of Extended Summer Demand Resources and Limited Demand Resources in Unforced Capacity determined by PJM to be consistent with the maintenance of reliability, stated in Unforced Capacity, that shall be used to calculate the Minimum Annual Resource Requirement for Delivery Years through May 31, 2017 and the Sub-Annual Resource Constraint for the 2017/2018 and 2018/2019 Delivery Years. As more fully set forth in the PJM Manuals, PJM calculates the Sub-Annual Resource Reliability Target, by first determining a reference annual loss of load expectation (“LOLE”) assuming no Demand Resources. The calculation for the unconstrained portion of the PJM Region uses a daily distribution of loads under a range of weather scenarios (based on the most recent load forecast and iteratively shifting the load distributions to result in the Installed Reserve Margin established for the Delivery Year in question) and a weekly capacity distribution (based on the cumulative capacity availability distributions developed for the Installed Reserve Margin study for the Delivery Year in question). The calculation for each relevant LDA uses a daily distribution of loads under a range of weather scenarios (based on the most recent load forecast for the Delivery Year in question) and a weekly capacity distribution (based on the cumulative capacity availability distributions developed for the Capacity Emergency Transfer Objective study for the Delivery Year in question). For the relevant LDA calculation, the weekly capacity distributions are adjusted to reflect the Capacity Emergency Transfer Limit for the Delivery Year in question.

For both the PJM Region and LDA analyses, PJM then models the commitment of varying amounts of DR (displacing otherwise committed generation) as interruptible from May 1 through October 31 and unavailable from November 1 through April 30 and calculates the LOLE at each DR level. The Extended Summer DR Reliability Target is the DR amount, stated as a percentage of the unrestricted peak load, that produces no more than a ten percent increase in the LOLE, compared to the reference value. The Sub-Annual Resource Reliability Target shall be expressed as a percentage of the forecasted peak load of the PJM Region or such LDA and is converted to Unforced Capacity by multiplying [the reliability target percentage] times [the Forecast Pool Requirement] times [the DR Factor] times [the forecasted peak load of the PJM Region or such LDA, reduced by the amount of load served under the FRR Alternative].

Sub-meter:

“Sub-meter” shall mean a metering point for electricity consumption that does not include all electricity consumption for the end-use customer as defined by the electric distribution company account number. PJM shall only accept sub-meter load data from end-use customers for measurement and verification of Regulation service as set forth in the Economic Load Response rules and PJM Manuals.

Summer-Period Capacity Performance Resource:

“Summer-Period Capacity Performance Resource” shall have the same meaning specified in Tariff, Attachment DD, section 5.5A.

Surplus Interconnection Customer:

“Surplus Interconnection Customer” shall mean either an Interconnection Customer whose Generating Facility is already interconnected to the PJM Transmission System or one of its affiliates, or an unaffiliated entity that submits a Surplus Interconnection Request to utilize Surplus Interconnection Service within the Transmission System in the PJM Region. A Surplus Interconnection Customer is not a New Service Customer.

Surplus Interconnection Request:

“Surplus Interconnection Request” shall mean a request submitted by a Surplus Interconnection Customer, pursuant to Tariff, Attachment RR, to utilize Surplus Interconnection Service within the Transmission System in the PJM Region. A Surplus Interconnection Request is not a New Service Request.

Surplus Interconnection Service:

“Surplus Interconnection Service” shall mean any unneeded portion of Interconnection Service established in an Interconnection Service Agreement, such that if Surplus Interconnection Service is utilized, the total amount of Interconnection Service at the Point of Interconnection would remain the same.

Switching and Tagging Rules:

“Switching and Tagging Rules” shall mean the switching and tagging procedures of Interconnected Transmission Owners and Interconnection Customer as they may be amended from time to time.

Synchronized Reserve:

“Synchronized Reserve” shall mean the reserve capability of generation resources that can be converted fully into energy or Economic Load Response Participant resources whose demand can be reduced within ten minutes from the request of the Office of the Interconnection dispatcher, and is provided by equipment that is electrically synchronized to the Transmission System.

Synchronized Reserve Event:

“Synchronized Reserve Event” shall mean a request from the Office of the Interconnection to generation resources and/or Economic Load Response Participant resources able, assigned or self-scheduled to provide Synchronized Reserve in one or more specified Reserve Zones or Reserve Sub-zones, within ten minutes, to increase the energy output or reduce load by the amount of assigned or self-scheduled Synchronized Reserve capability.

Synchronized Reserve Requirement:

“Synchronized Reserve Requirement” shall mean the megawatts required to be maintained in a Reserve Zone or Reserve Sub-zone as Synchronized Reserve, absent any increase to account for

additional reserves scheduled to address operational uncertainty. The Synchronized Reserve Requirement is calculated in accordance with the PJM Manuals. This requirement can only be satisfied by Synchronized Reserve resources.

System Condition:

“System Condition” shall mean a specified condition on the Transmission Provider’s system or on a neighboring system, such as a constrained transmission element or flowgate, that may trigger Curtailment of Long-Term Firm Point-to-Point Transmission Service using the curtailment priority pursuant to Tariff, Part II, section 13.6. Such conditions must be identified in the Transmission Customer’s Service Agreement.

System Energy Price:

“System Energy Price” shall mean the energy component of the Locational Marginal Price, which is the price at which the Market Seller has offered to supply an additional increment of energy from a resource, calculated as specified in Operating Agreement, Schedule 1, section 2 and the parallel provisions of Tariff, Attachment K-Appendix, section 2.

System Impact Study:

“System Impact Study” shall mean an assessment by the Transmission Provider of (i) the adequacy of the Transmission System to accommodate a Completed Application, an Interconnection Request or an Upgrade Request, (ii) whether any additional costs may be incurred in order to provide such transmission service or to accommodate an Interconnection Request, and (iii) with respect to an Interconnection Request, an estimated date that an Interconnection Customer’s Customer Facility can be interconnected with the Transmission System and an estimate of the Interconnection Customer’s cost responsibility for the interconnection; and (iv) with respect to an Upgrade Request, the estimated cost of the requested system upgrades or expansion, or of the cost of the system upgrades or expansion, necessary to provide the requested incremental rights.

System Protection Facilities:

“System Protection Facilities” shall refer to the equipment required to protect (i) the Transmission System, other delivery systems and/or other generating systems connected to the Transmission System from faults or other electrical disturbance occurring at or on the Customer Facility, and (ii) the Customer Facility from faults or other electrical system disturbance occurring on the Transmission System or on other delivery systems and/or other generating systems to which the Transmission System is directly or indirectly connected. System Protection Facilities shall include such protective and regulating devices as are identified in the Applicable Technical Requirements and Standards or that are required by Applicable Laws and Regulations or other Applicable Standards, or as are otherwise necessary to protect personnel and equipment and to minimize deleterious effects to the Transmission System arising from the Customer Facility.

SCHEDULE 3

Regulation and Frequency Response Service

Regulation and Frequency Response Service is necessary to provide for the continuous balancing of resources with load and for maintaining scheduled Interconnection frequency at 60 cycles per second (60 Hz). Regulation and Frequency Response Service is accomplished by committing resources whose output is raised or lowered (predominantly through the use of automatic generating control equipment) and by other non-generation resources capable of providing this service as necessary to follow the moment-by-moment changes in load. The obligation to maintain this balance between resources and load lies with the Transmission Provider. The Transmission Provider must offer this service when the transmission service is used to serve load within its Control Area. The Transmission Customer must either purchase this service from the Transmission Provider or make alternative comparable arrangements to satisfy its Regulation and Frequency Response Service obligation. The Transmission Provider will take into account the speed and accuracy of Regulation resources in its determination of Regulation and Frequency Response reserve requirements, including as it reviews whether a self-supplying Transmission Customer has made alternative comparable arrangements. Upon request by the self-supplying Transmission Customer, the Transmission Provider will share with the Transmission Customer its reasoning and any related data used to make the determination of whether the Transmission Customer has made alternative comparable arrangements. The amount of and charges for Regulation and Frequency Response Service are set forth below. The Transmission Provider shall administer the purchases of Regulation Service in the PJM Interchange Energy Market. PJMSettlement shall be the Counterparty to the purchases by customers of Regulation Service in the PJM Interchange Energy Market; provided however, that PJMSettlement shall not be the contracting party to bilateral transactions between market participants or with respect to a self-schedule or self-supply of resources by a customer to satisfy its Regulation obligation.

For Regulation not satisfied by individual Transmission Owners on behalf of their Native Load Customers, Network Customers or other Transmission Customers serving load in the PJM Region, the Transmission Provider will order the lowest cost alternative for Regulation in service as needed to meet the Regulation Requirements of each Regulation Zone (as may be set forth in the PJM Manuals and as specified below:

- a. Regulation shall be supplied to meet the Regulation objective of a Regulation Zone from resources located within the metered electrical boundaries of such Regulation Zone. Resources offering Regulation shall comply with applicable standards and requirements for Regulation capability and dispatch specified in the PJM Manuals.
- b. The Office of the Interconnection shall obtain and maintain an amount of Regulation for each Regulation Zone equal to the Regulation objective for such Regulation Zone, as specified in the PJM Manuals.
- c. The Regulation megawatt range to a resource providing Regulation-Up Service shall be less than or equal to, and within the Regulation range specified. The Regulation megawatt assigned to a resource providing Regulation-Down Service shall be less than or equal to, and within the Regulation range specified. The Regulation megawatt assigned to a resource

providing Regulation-Up and Regulation-Down Services in the same Regulation interval shall be less than or equal to half of, and within the Regulation range specified. .

d. A resource capable of automatic energy dispatch that is also providing Regulation shall have its energy dispatch range reduced from the Regulation range by at least the amount of Regulation assigned, in the upward direction for Regulation-Up Service and in the downward direction for Regulation-Down Service with consideration of the Regulation limit(s) of the resource, as specified in the PJM Manuals.

e. Qualified Regulation resources must satisfy the measurement and verification tests described in the PJM Manuals.

f. A Transmission Owner, Network Customer or other Transmission Customer may satisfy its Regulation obligation from its own resources capable of performing Regulation service, by contractual arrangements with others able to provide Regulation service on a comparable basis, or by purchases from the PJM Regulation market.

g. The Office of the Interconnection shall obtain Regulation service from the least-cost alternatives available from either pool-scheduled or self-scheduled resources as needed to meet Regulation Zone requirements not otherwise satisfied by a Transmission Owner, Network Customer or other Transmission Customer, in accordance with Tariff, Attachment K-Appendix, section 1.11.4(b).

h. The Office of the Interconnection shall dispatch resources for Regulation by sending Regulation signals and instructions to resources from which Regulation service has been committed, in accordance with the PJM Manuals. Those resources shall comply with Regulation dispatch signals and instructions transmitted by the Office of the Interconnection and, in the event of conflict, Regulation dispatch signals and instructions shall take precedence over energy dispatch signals and instructions. Those providing Regulation shall exert all reasonable efforts to operate, or ensure the operation of, their resources supplying load in the PJM Region as close to desired output levels as practical, consistent with Good Utility Practice.

i. Each Transmission Owner (on behalf of its Native Load Customers), Network Customer or other Transmission Customer serving load within a Regulation Zone shall have an hourly Regulation objective equal to its pro rata share of the Regulation Requirement of such Regulation Zone for such hour, based on the entity's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Regulation Zone for such hour.

j. An entity supplying Regulation at the direction of the Office of the Interconnection in excess of its hourly Regulation obligation shall be credited for each increment of such Regulation at the price specified in Tariff, Attachment K-Appendix, section 3.2.2 and Tariff, Attachment K-Appendix, section 3.3.2 and the parallel provisions of Operating Agreement, Schedule 1, section 3.2.2 and Operating Agreement, Schedule 1, section 3.3.2. A Transmission Owner, Network Customer or other Transmission Customer that does not meet its hourly Regulation obligation shall be charged for Regulation dispatched by the Office of the Interconnection to meet such obligation at the price specified in Tariff, Attachment K-Appendix,

section 3.2.2 and Tariff, Attachment K-Appendix, section 3.3.2 and the parallel provisions of Operating Agreement, Schedule 1, section 3.2.2 and Operating Agreement, Schedule 1, section 3.3.2.

1.10 Scheduling.

1.10.1 General.

(a) The Office of the Interconnection shall administer scheduling processes to implement a Day-ahead Energy Market and a Real-time Energy Market. PJMSettlement shall be the Counterparty to the purchases and sales of energy that clear the Day-ahead Energy Market and the Real-time Energy Market; provided that PJMSettlement shall not be a contracting party to bilateral transactions between Market Participants or with respect to a Generating Market Buyer's self-schedule or self-supply of its generation resources up to that Generating Market Buyer's Equivalent Load.

(b) The Day-ahead Energy Market shall enable Market Participants to purchase and sell energy through the PJM Interchange Energy Market at Day-ahead Prices and enable Transmission Customers to reserve transmission service with Transmission Congestion Charges and Transmission Loss Charges based on locational differences in Day-ahead Prices. Up-to Congestion Transactions submitted in the Day-ahead Energy Market shall not require transmission service and Transmission Customers shall not reserve transmission service for such Up-to Congestion Transactions. Market Participants whose purchases and sales, and Transmission Customers whose transmission uses are scheduled in the Day-ahead Energy Market, shall be obligated to purchase or sell energy, or pay Transmission Congestion Charges and Transmission Loss Charges, at the applicable Day-ahead Prices for the amounts scheduled.

(c) (i) In the Real-time Energy Market, Market Participants that deviate from the amounts of energy purchases or sales scheduled in the Day-ahead Energy Market shall be obligated to purchase or sell energy for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.

(ii) In the Real-time Energy Market, Transmission Customers that deviate from the transmission uses, scheduled in the Day-ahead Energy Market shall be obligated to pay Transmission Congestion Charges and Transmission Loss Charges for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.

(iii) Market Participants that deviate in real-time from the amounts of Secondary Reserve, Non-Synchronized Reserve, or Synchronized Reserve sales, scheduled day-ahead shall be obligated to purchase Secondary Reserve, Non-Synchronized Reserve, or Synchronized Reserve for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.

(d) The following scheduling procedures and principles shall govern the commitment of resources to the Day-ahead Energy Market and the Real-time Energy Market over a period extending from one week to one hour prior to the real-time dispatch. Scheduling encompasses the day-ahead and hourly scheduling process, through which the Office of the Interconnection determines the Day-ahead Energy Market and determines, based on changing forecasts of

conditions and actions by Market Participants and system constraints, a plan to serve the hourly energy and reserve requirements of the Internal Market Buyers and the purchase requests of the External Market Buyers in the least costly manner, subject to maintaining the reliability of the PJM Region. Scheduling does not encompass Coordinated External Transactions, which are subject to the procedures of Tariff, Attachment K-Appendix, section 1.13. Scheduling shall be conducted as specified in section 1.10.1A below, subject to the following condition. If the Office of the Interconnection's forecast for the next seven days projects a likelihood of Emergency conditions, the Office of the Interconnection may commit, for all or part of such seven day period, to the use of generation resources with notification or start-up times greater than one day as necessary in order to alleviate or mitigate such Emergency, in accordance with the Market Sellers' offers for such units for such periods and the specifications in the PJM Manuals. Such resources committed by the Office of the Interconnection to alleviate or mitigate an Emergency will not receive Operating Reserve Credits nor otherwise be made whole for its hours of operation for the duration of any portion of such commitment that exceeds the maximum start-up and notification times for such resources during Hot Weather Alerts and Cold Weather Alerts, consistent with Tariff, Attachment K-Appendix, section 3.2.3 and Tariff, Attachment K-Appendix, section 6.6.

1.10.1A Day-ahead and Real-time Energy Market Scheduling.

The following actions shall occur not later than 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled, or such other deadline as may be specified by the Office of the Interconnection in order to comply with the practical requirements and the economic and efficiency objectives of the scheduling process specified in this Schedule.

(a) Each Market Participant may submit to the Office of the Interconnection specifications of the amount and location of its customer loads and/or energy purchases to be included in the Day-ahead Energy Market for each hour of the next Operating Day, such specifications to comply with the requirements set forth in the PJM Manuals. Each Market Buyer shall inform the Office of the Interconnection of the prices, if any, at which it desires not to include its load in the Day-ahead Energy Market rather than pay the Day-ahead Price. PRD Providers that have committed Price Responsive Demand in accordance with the Reliability Assurance Agreement shall submit to the Office of the Interconnection, in accordance with procedures specified in the PJM Manuals, any desired updates to their previously submitted PRD Curves, provided that such updates are consistent with their Price Responsive Demand commitments, and provided further that PRD Providers that are not Load Serving Entities for the Price Responsive Demand at issue may only submit PRD Curves for the Real-time Energy Market. Price Responsive Demand that has been committed in accordance with the Reliability Assurance Agreement shall be presumed available for the next Operating Day in accordance with the most recently submitted PRD Curve unless the PRD Curve is updated to indicate otherwise. PRD Providers may also submit PRD Curves for any Price Responsive Demand that is not committed in accordance with the Reliability Assurance Agreement; provided that PRD Providers that are not Load Serving Entities for the Price Responsive Demand at issue may only submit PRD Curves for the Real-time Energy Market. All PRD Curves shall be on a PRD Substation basis, and shall specify the maximum time period required to implement load reductions.

(b) Each Generating Market Buyer shall submit to the Office of the Interconnection: (i) hourly schedules for resource increments, including hydropower units, self-scheduled by the Market Buyer to meet its Equivalent Load; and (ii) the Dispatch Rate at which each such self-scheduled resource will disconnect or reduce output, or confirmation of the Market Buyer's intent not to reduce output.

(c) All Market Participants shall submit to the Office of the Interconnection schedules for any energy exports, energy imports, and wheel through transactions involving use of generation or Transmission Facilities as specified below, and shall inform the Office of the Interconnection if the transaction is to be scheduled in the Day-ahead Energy Market. Any Market Participant that elects to schedule an export, import or wheel through transaction in the Day-ahead Energy Market may specify the price (such price not to exceed \$2,000/MWh), if any, at which the export, import or wheel through transaction will be wholly or partially curtailed. The foregoing price specification shall apply to the applicable interface pricing point. Any Market Participant that elects not to schedule its export, import or wheel through transaction in the Day-ahead Energy Market shall inform the Office of the Interconnection if the parties to the transaction are not willing to incur Transmission Congestion and Loss Charges in the Real-time Energy Market in order to complete any such scheduled transaction. Such transactions in the Real-time Energy Market, other than Coordinated Transaction Schedules and emergency energy sales and purchases, may specify a price up to \$2,000/MWh. Scheduling of such transactions shall be conducted in accordance with the specifications in the PJM Manuals and the following requirements:

i) Market Participants shall submit schedules for all energy purchases for delivery within the PJM Region, whether from resources inside or outside the PJM Region;

ii) Market Participants shall submit schedules for exports for delivery outside the PJM Region from resources within the PJM Region that are not Dynamic Transfers to such entities pursuant to Tariff, Attachment K-Appendix, section 1.12; and

iii) In addition to the foregoing schedules for exports, imports and wheel through transactions, Market Participants shall submit confirmations of each scheduled transaction from each other party to the transaction in addition to the party submitting the schedule, or the adjacent Control Area.

(c-1) A Market Participant may elect to submit in the Day-ahead Energy Market a form of Virtual Transaction that combines an offer to sell energy at a source, with a bid to buy the same megawatt quantity of energy at a sink where such transaction specifies the maximum difference between the Locational Marginal Prices at the source and sink. The Office of Interconnection will schedule these transactions only to the extent this difference in Locational Marginal Prices is within the maximum amount specified by the Market Participant. A Virtual Transaction of this type is referred to as an "Up-to Congestion Transaction." Such Up-to Congestion Transactions may be wholly or partially scheduled depending on the price difference between the source and sink locations in the Day-ahead Energy Market. The maximum

difference between the source and sink prices that a participant may specify shall be limited to +/- \$50/MWh. The foregoing price specification shall apply to the price difference between the specified source and sink in the day-ahead scheduling process only. An accepted Up-to Congestion Transaction results in scheduled injection at a specified source and scheduled withdrawal of the same megawatt quantity at a specified sink in the Day-ahead Energy Market.

(c-2) A Market Participant may elect to submit an Increment Offer and/or Decrement Bid form of Virtual Transaction in the Day-ahead Energy Market and shall specify the price for such transaction which shall be limited to \$2,000/megawatt-hour.

(c-3) Up-to Congestion Transactions may only be submitted at hubs, Residual Metered Load and interfaces not described in Tariff, Attachment K-Appendix, section 2.6A(b). Increment Offers and Decrement Bids may be only submitted at hubs, nodes at which physical generation or load is settled, Residual Metered Load and interfaces not described in Tariff, Attachment K-Appendix, section 2.6A(b).

(d) Market Sellers in the Day-ahead Energy Market shall submit offers for the supply of energy, demand reductions, or other services for the following Operating Day for each clock hour for which the Market Seller desires or is required to make its resource available to the Office of the Interconnection. Offers for the supply of energy may be cost-based, market-based, or both, and may vary hourly. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, Operating Agreement, Schedule 2, and the PJM Manuals, as applicable. Market Sellers owning or controlling the output of a Generation Capacity Resource that is committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1, and that has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage shall submit offers for the available capacity of such Generation Capacity Resource, including any portion that is self-scheduled by the Generating Market Buyer. Such offers shall be based on the ICAP equivalent of the Market Seller's cleared UCAP capacity commitment, provided, however, where the underlying resource is a Capacity Storage Resource or an Intermittent Resource, the Market Seller shall satisfy the must offer requirement by either self-scheduling or offering the unit as a dispatchable resource, in accordance with the PJM Manuals, where the hourly day-ahead self-scheduled values for such Capacity Storage Resources and Intermittent Resources may vary hour to hour from the capacity commitment. Any offer not designated as a Maximum Emergency offer shall be considered available for scheduling and dispatch under both Emergency and non-Emergency conditions. Offers may only be designated as Maximum Emergency offers to the extent that the Generation Capacity Resource falls into at least one of the following categories:

i) Environmental limits. If the resource has a limit on its run hours imposed by a federal, state, or other governmental agency that will significantly limit its availability, on either a temporary or long-term basis. This includes a resource that is limited to operating only during declared PJM capacity emergencies by a governmental authority.

ii) Fuel limits. If physical events beyond the control of the resource owner result in the temporary interruption of fuel supply and there is limited on-site fuel storage. A fuel supplier's exercise of a contractual right to interrupt supply or delivery under an interruptible service agreement shall not qualify as an event beyond the control of the resource owner.

iii) Temporary emergency conditions at the unit. If temporary emergency physical conditions at the resource significantly limit its availability.

iv) Temporary megawatt additions. If a resource can provide additional megawatts on a temporary basis by oil topping, boiler over-pressure, or similar techniques, and such megawatts are not ordinarily otherwise available.

The submission of offers for resource increments that are not committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1 shall be optional, but any such offers must contain the information specified in the Office of the Interconnection's Offer Data specification, Operating Agreement, Schedule 1, sections 1.10.1A(d) and 1.10.9B, Operating Agreement, Schedule 2, and the PJM Manuals, as applicable. Energy offered from generation resources that are not committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1 shall not be supplied from resources that are included in or otherwise committed to supply the Operating Reserves of a Control Area outside the PJM Region.

The foregoing offers:

i) Shall specify the Generation Capacity Resource or Economic Load Response Participant resource and energy or demand reduction amount, respectively, for each clock hour in the offer period;

ii) Shall specify the amounts and prices for each clock hour during the entire Operating Day for each resource component offered by the Market Seller to the Office of the Interconnection;

iii) May specify for generation resources offer parameters for each clock hour during the entire Operating Day, as applicable and in accordance with section 1.10.9B below, including: (1) Minimum Run Time; (2) maximum run time; (3) Start-up Costs; (4) No-load Costs; (5) Incremental Energy Offer; (6) notification time; (7) availability; (8) ramp rate; (9) Economic Minimum; (10) Economic Maximum; (11) emergency minimum MW; (12) emergency maximum MW; (13) Synchronized Reserve maximum MW; (14) Secondary Reserve maximum MW; and (15) condense to generation time constraints, and may specify offer parameters for Economic Load Response Participant resources for each clock hour during the entire Operating Day, as applicable and in accordance with section 1.10.9B below, including: (1) minimum down time; (2) shutdown costs; (3) Incremental Energy Offer; (4) notification time; (5) Economic Minimum; and (6) Economic Maximum;

iv) Shall set forth any special conditions upon which the Market Seller proposes to supply a resource increment, including any curtailment rate specified in a bilateral contract for the output of the resource, or any cancellation fees;

v) May include a schedule of offers for prices and operating data contingent on acceptance by the deadline specified in this Schedule, with additional schedules applicable if accepted after the foregoing deadline;

vi) Shall constitute an offer to submit the resource increment to the Office of the Interconnection for scheduling and dispatch in accordance with the terms of the offer for the clock hour, which offer shall remain open through the Operating Day, for which the offer is submitted, unless the Market Seller a) submits a Real-time Offer for the applicable clock hour, or b) updates the availability of its offer for that hour, as further described in the PJM Manuals;

vii) Shall be final as to the price or prices at which the Market Seller proposes to supply energy or other services to the PJM Interchange Energy Market, such price or prices being guaranteed by the Market Seller for the period extending through the end of the following Operating Day, unless modified after the close of the Day-ahead Energy Market as permitted pursuant to sections 1.10.9A or 1.10.9B below;

viii) Shall not exceed an energy offer price of \$1,000/megawatt-hour for all generation resources, except (1) when a Market Seller's cost-based offer is above \$1,000/megawatt-hour and less than or equal to \$2,000/megawatt-hour, then its market-based offer must be less than or equal to the cost-based offer; and (2) when a Market Seller's cost-based offer is greater than \$2,000/megawatt-hour, then its market-based offer must be less than or equal to \$2,000/megawatt-hour;

ix) Shall not exceed a demand reduction offer price of \$1,000/megawatt-hour, except when an Economic Load Response Participant submits a cost-based offer that includes an incremental cost component that is above \$1,000/megawatt-hour, then its market-based offer must be less than or equal to the cost-based offer but in no event greater than \$2,000/megawatt-hour;

x) Shall not exceed an offer price as follows for Emergency Load Response and Pre-Emergency Load Response participants with:

a) a 30 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provision of RAA, Schedule 6, \$1,000/megawatt-hour, plus the applicable Reserve Penalty Factor for the Primary Reserve Requirement, minus \$1.00;

b) an approved 60 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provision of RAA, Schedule 6, \$1,000/megawatt hour, plus [the applicable Reserve Penalty Factor for the Primary Reserve Requirement divided by 2]; and

c) an approved 120 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provisions of RAA, Schedule 6, \$1,100/megawatt-hour; and

xi) Shall not exceed an energy offer price of \$0.00/MWh for pumped storage hydropower units scheduled by the Office of the Interconnection pursuant to the hydro optimization tool in the Day-ahead Energy Market.

(e) A Market Seller that wishes to make a resource available to sell Regulation-Up Service and/or Regulation-Down Service shall submit offer(s) for the applicable Regulation service(s) for each 30 minute Regulation clearing interval for which the Market Seller desires to make its resource available to the Office of the Interconnection to provide Regulation that shall specify the megawatts of Regulation-Up and/or Regulation-Down being offered, which must equal or exceed 0.1 megawatts, in the Regulation Zone for which such Regulation-Up and/or Regulation-Down Service is offered, the price of the capability offer in dollars per MW, the price of the mileage offer in Dollars per change in MW, and such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer and the resource's opportunity costs for Regulation-Up and/or Regulation-Down Service(s). Such offers may vary for each 30 minute Regulation clearing interval, and may be updated each 30 minute Regulation clearing interval, up to 35 minutes before the applicable 30 minute Regulation clearing interval during the Operating Day. The total of the applicable Regulation service mileage offer multiplied by the applicable historical average mileage used in the market clearing plus the applicable Regulation service capability offer shall not exceed \$50/megawatt-hour for the Regulation-Down Service and Regulation-Up Service, independently. In addition to any market-based offer for Regulation-Up and/or Regulation-Down Service, the Market Seller also shall submit a cost-based offer. A cost-based offer must be in the form specified in the PJM Manuals and consist of the following components as well as any other components specified in the PJM Manuals:

i. The costs (in \$/MW) of the fuel cost increase due to the steady-state heat rate increase resulting from operating the unit at lower megawatt output incurred from the provision of Regulation shall apply to the capability offer for Regulation-Down Service;

ii. The cost increase (in \$/ΔMW) in costs associated with movement of the regulation resource incurred from the provision of Regulation shall apply to the mileage offer for Regulation-Down Service and Regulation-Up Service; and

a. Only Regulation-only resources may include all variable operation and maintenance expenses in the mileage offer, as defined in the PJM Manuals.

iii. An adder of up to \$6.00 per megawatt of Regulation provided applied to the capability offer for Regulation-Down Service and an adder of up to \$6.00 per megawatt of Regulation provided applied to the capability offer for Regulation-Up Service.

Qualified Regulation capability must satisfy the measurement and verification tests specified in the PJM Manuals.

(f) Each Market Seller owning or controlling the output of a Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative shall submit a forecast of the availability of each such Generation Capacity Resource for the next seven days. A Market Seller (i) may submit a non-binding forecast of the price at which it expects to offer a generation resource increment to the Office of the Interconnection over the next seven days, and (ii) shall submit a binding offer for energy, along with Start-up Costs and No-load Costs, if any, for the next seven days or part thereof, for any generation resource with minimum notification or start-up requirement greater than 24 hours. Such resources committed by the Office of the Interconnection will not receive Operating Reserve Credits nor otherwise be made whole for its hours of operation for the duration of any portion of such commitment that exceeds the maximum start-up and notification times for such resources during Hot Weather Alerts and Cold Weather Alerts, consistent with Tariff, Attachment K-Appendix, section 3.2.3 and Tariff, Attachment K-Appendix, section 6.6.

(g) Each component of an offer by a Market Seller of a Generation Capacity Resource that is constant for the entire Operating Day and does not vary hour to hour shall remain in effect for subsequent Operating Days until superseded or canceled.

(h) The Office of the Interconnection shall post the total hourly loads scheduled in the Day-ahead Energy Market, as well as, its estimate of the combined hourly load of the Market Buyers for the next four days, and peak load forecasts for an additional three days.

(i) Except for Economic Load Response Participants, all Market Participants may submit Virtual Transactions that apply to the Day-ahead Energy Market only. Such Virtual Transactions must comply with the requirements set forth in the PJM Manuals and must specify amount, location and price, if any, at which the Market Participant desires to purchase or sell energy in the Day-ahead Energy Market. The Office of the Interconnection may require that a market participant shall not submit in excess of a defined number of bid/offer segments in the Day-ahead Energy Market, as specified in the PJM Manuals, when the Office of the Interconnection determines that such limit is required to avoid or mitigate significant system performance problems related to bid/offer volume. Notice of the need to impose such limit shall be provided prior to 10:00 a.m. EPT on the day that the Day-ahead Energy Market will clear. For purposes of this provision, a bid/offer segment is each pairing of price and megawatt quantity submitted as part of an Increment Offer or Decrement Bid. For purposes of applying this provision to an Up-to Congestion Transaction, a bid/offer segment shall refer to the pairing of a source and sink designation, as well as price and megawatt quantity, that comprise each Up-to Congestion Transaction.

(j) (i) Offers to Supply Synchronized and Non-Synchronized Reserves By Generation Resources in the Day-ahead and Real-time Reserve Markets

(1) Market Sellers owning or controlling the output of a Generation Capacity Resource that was committed in an FRR Capacity Plan, self-supplied,

offered and cleared in a Base Residual Auction or Incremental Auction, or designated as replacement capacity, as specified in Tariff, Attachment DD, is capable of providing Synchronized Reserve or Non-Synchronized Reserve as specified in section 1.7.19A(a), in section 1.7.19A.01(a) and in the PJM Manuals, and has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage, shall submit offers or otherwise make their 10-minute reserve capability available to supply Synchronized Reserve or, as applicable, Non-Synchronized Reserve, including any portion that is self-scheduled by the Generating Market Buyer, in an amount equal to the available 10-minute reserve capability of such Generation Capacity Resource. Market Sellers of Generation Capacity Resources subject to this must-offer requirement that do not make the reserve capability of such resources available when such resource is able to operate with a dispatchable range (e.g. through offering a fixed output) will be in violation of this provision.

(2) Market Sellers of all other generation resources that (A) are capable of providing Synchronized Reserve or Non-Synchronized Reserve, as specified in section 1.7.19A(a), in section 1.7.19A.01(a) and in the PJM Manuals, (B) are located within the metered boundaries of the PJM Region, and (C) have submitted offers for the supply of energy into the Day-ahead Energy Market and/or Real-time Energy Market shall be deemed to have made their reserve capability available to provide Synchronized Reserve or Non-Synchronized Reserve in the Day-ahead Energy Market and/or Real-time Energy Market for each clock hour for which the Market Seller submits an available offer to supply energy; provided, however that hydroelectric generation resources and Energy Storage Resources are not automatically deemed available to provide reserves based on the submission of an available energy offer but may submit offers to supply Synchronized Reserve and Non-Synchronized Reserve, as applicable.

(3) Offers for the supply of Synchronized Reserve by all generation resources must be cost-based. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A, section 1.10.9B below, and the PJM Manuals, as applicable. For offers to supply Synchronized Reserve, the offer price shall not exceed the expected value of the penalty for failing to provide Synchronized Reserve, where such expected value shall be recalculated annually, in accordance with the PJM Manuals, and posted on PJM's website. The expected value of the penalty is calculated as the product of: (A) the average penalty, expressed in \$/MWh, multiplied by (B) the average rate of non-performance during Synchronized Reserve events multiplied by (C) the probability a Synchronized Reserve event that will qualify for non-performance assessments will occur.

The expected value of the penalty shall be determined by an annual review of the twelve-month period ending October 31 of the calendar year in which the review is performed. The Office of the Interconnection shall post the results of its annual review by no later than December 15, and the revised offer price cap shall be effective as of the following January 1; provided, however, that at the time of implementation of this rule the expected value of the penalty shall be \$0.02/MWh, and for the period from the second month after implementation through the second December 31 following such date of implementation, the expected value of the penalty shall be recalculated on a monthly basis using data from the implementation date of this rule through the 15th day of the current month, and the revised value shall be effective the 1st day of the following month.

(4) All Non-Synchronized Reserve offers shall be for \$0.00/MWh. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this subsection (d) of this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(ii) Determination of Available Synchronized Reserve Capability of Generation Resources

(1) For each offer to supply reserves by a synchronized resource, the Office of the Interconnection shall determine the MW of available Synchronized Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market, in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Hydroelectric generation resources and Energy Storage Resources may submit offers for their available Synchronized Reserve capability as part of their offer into the Synchronized Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(j)(i) above must submit a Synchronized Reserve offer which specifies the MW of available Synchronized Reserve capability in order to remain compliant with such requirements.

(2) An on-line generation resource's available Synchronized Reserve capability, except for generation resources capable of synchronous condensing, shall be determined in accordance with the PJM Manuals and based on the resource's current performance and initial energy output and the following offer parameters submitted as part of the resource's energy offer: (A) ramp rate; (B) Economic Minimum; and (C) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller

has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Synchronized Reserves above the Synchronized Reserve maximum MW.

For generation resources capable of synchronous condensing, the resource's available Synchronized Reserve capability shall be based on the following offer parameters submitted as part of the resource's energy offer: (D) ramp rate; (E) condense to generation time constraints; (F) Economic Minimum; and (G) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Synchronized Reserves above the Synchronized Reserve maximum MW.

(3) Any Market Seller that believes its generating unit has operating modes, limits, or conditions where the unit would not be capable of providing Synchronized Reserves in real time, can submit to the Office of the Interconnection with a copy to the Market Monitoring Unit a request for an exception from being assigned Synchronized Reserves in the Real-time Synchronized Reserve Market during time periods in which the generating unit is in those operating modes, limits, or conditions. As part of the request, the Market Seller shall supply, for each generating unit, technical information about the operational modes, limits, or conditions to support the requested exception, as further detailed in the PJM Manuals. The Office of the Interconnection shall consult with the Market Monitoring Unit, and consider any input received from the Market Monitoring Unit, in its determination of a request for such an exception. Within 60 days of the submission of the request, the Office of the Interconnection shall notify the Market Seller in writing, with a copy to the Market Monitoring Unit, whether the request is approved or denied. The effective date of any approved request will be provided in the written notification. If a Market Seller has an approved exception, the Market Seller must communicate to the Office of the Interconnection when the unit cannot provide reserves, and the Office of the Interconnection will provide a mechanism for Market Sellers with an approved exception to provide such communication to the Office of the Interconnection in real time, as further detailed in the PJM Manuals. An approved exception will remain applicable to the unit until such time as the Office of the Interconnection determines that a change is needed or the Market Seller notifies the Office of the Interconnection, with a copy to the Market Monitoring Unit, that a change is needed based on changed operational capabilities of the unit. Market Sellers must notify the Office of the Interconnection, with a copy to the Market Monitoring Unit, within 30 days of any changed operational capabilities that necessitate a change in an approved exception.

(iii) Determination of Available Non-Synchronized Reserve Capability of Generation Resources

(1) For each offer to supply reserves by an off-line generation resource, the Office of the Interconnection shall determine the MW of available Non-Synchronized Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Such hydroelectric generation resources or Energy Storage Resources may submit offers for their available Non-Synchronized Reserve capability as part of their offer into the Non-Synchronized Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(j)(i) above must submit a Non-Synchronized Reserve offer which specifies the MW of available Non-Synchronized Reserve capability in order to remain compliant with such requirements.

(2) An off-line generation resource's available Non-Synchronized Reserve capability shall be determined in accordance with the PJM Manuals and based on the following offer parameters submitted as part of the resource's energy offer: (A) startup time; (B) notification time; (C) ramp rate; (D) Economic Minimum; and (E) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Non-Synchronized Reserves above its Synchronized Reserve maximum MW.

(iv) Offers to Supply Synchronized Reserves by Economic Load Response Participant Resources in the Day-ahead and Real-time Reserve Markets

(1) Economic Load Response Participants that submit offers to reduce demand into the Day-ahead Energy Market and Real-time Energy Market and wish to make their resources available to supply Synchronized Reserve may submit offers to supply Synchronized Reserve from such resources, where such offers shall specify the megawatts of Synchronized Reserve being offered, which must equal or exceed 0.1 megawatts and such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer. Such offers may vary hourly, and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day.

(2) All offers to supply Synchronized Reserve offers from Economic Load Response Participant resources shall not exceed the expected value of the penalty for failing to provide Synchronized Reserve, as determined in accordance with section 1.10.1A(j)(i)(3) above. Offers shall be submitted to the Office of the

Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(k) An Economic Load Response Participant that wishes to participate in the Day-ahead Energy Market by reducing demand shall submit an offer to reduce demand to the Office of the Interconnection for each clock hour for which the Economic Load Response Participant desires to make its resource available to the Office of the Interconnection to reduce demand. The offer must equal or exceed 0.1 megawatts, may vary hourly, and shall specify: (i) the amount of the offered curtailment in minimum increments of .1 megawatts; (ii) the Day-ahead Locational Marginal Price above which the end-use customer will reduce load, subject to section 1.10.1A(d)(ix); and (iii) at the Economic Load Response Participant's option, shutdown costs associated with reducing load, including direct labor and equipment costs, opportunity costs, and/or a minimum of number of contiguous hours for which the load reduction must be committed. Such offers may be updated each hour, up to 65 minutes before the applicable clock hour during the Operating Day. Economic Load Response Participants submitting offers to reduce demand in the Day-ahead Energy Market may establish an incremental offer curve, provided that such offer curve shall be limited to ten price pairs (in MWs) per hour.

(l) Market Sellers owning or controlling the output of an Economic Load Response Participant resource that was committed in an FRR Capacity Plan, or that was self-supplied or that offered and cleared in a Base Residual Auction or Incremental Auction, may submit demand reduction bids for the available load reduction capability of the Economic Load Response Participant resource. The submission of demand reduction bids for Economic Load Response Participant resource increments that were not committed in an FRR Capacity Plan, or that have not cleared in a Base Residual Auction or Incremental Auction, shall be optional, but any such bids must contain the information required to be included in such bids, as specified in the PJM Economic Load Response Program. An Economic Load Response Participant resource that was committed in an FRR Capacity Plan, or that was self-supplied or offered and cleared in a Base Residual Auction or Incremental Auction, may submit a demand reduction bid in the Day-ahead Energy Market as specified in the Economic Load Response Program; provided, however, that in the event of an Emergency PJM shall require Economic Load Response Participant resources to reduce load, notwithstanding that the Zonal LMP at the time such Emergency is declared is below the price identified in the demand reduction bid.

(m) (i) Offers to Supply Secondary Reserve By Generation Resources

(1) Market Sellers owning or controlling the output of a Generation Capacity Resource that was committed in an FRR Capacity Plan, self-supplied, offered and cleared in a Base Residual Auction or Incremental Auction, or designated as replacement capacity, as specified in Tariff, Attachment DD, that is available for energy, is capable of providing Secondary Reserve, as specified in section 1.7.19A.02(a) and in the PJM Manuals, and has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage shall submit offers to supply Secondary Reserve, or

otherwise make their Secondary Reserve capability available. Such offers shall be for an amount equal to the resource's available energy output achievable within thirty minutes (less its energy output achievable within ten minutes) from a request of the Office of the Interconnection. Market Sellers of Generation Capacity Resources subject to this must-offer requirement that do not make the reserve capability of such resources available when such resource is able to operate with a dispatchable range (e.g. through offering a fixed output) will be in violation of this provision.

(2) Market Sellers of all other generation resources located within the metered boundaries of the PJM Region that submit offers for the supply of energy into the Day-ahead Energy Market and/or Real-time Energy Market and are capable of providing Secondary Reserve, as specified in the PJM Manuals, shall be deemed to have made their reserve capability available to provide Secondary Reserve in the Day-ahead Energy Market and/or Real-time Energy Market for each clock hour for which the Market Seller submits an available offer to supply energy; provided, however that hydroelectric generation resources and Energy Storage Resources are not automatically deemed available to provide reserves based on the submission of an available energy offer but may submit offers to supply Secondary Reserve, as applicable.

(3) Offers for the supply of Secondary Reserve shall be for \$0.00/MWh. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this subsection (d) above, section 1.10.9B below, and the PJM Manuals, as applicable.

(ii) Determination of Available Secondary Reserve Capability of Generation Resources

(1) For each offer to supply Secondary Reserve by a generation resource, the Office of the Interconnection shall determine the MW of available Secondary Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Hydroelectric generation resources or Energy Storage Resources may submit their available Secondary Reserve capability as part of their offer into the Secondary Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(m)(i) above must submit a Secondary Reserve offer which specifies the MW of available Secondary Reserve capability in order to remain compliant with such requirements.

(2) (A) An on-line generation resource's available Secondary Reserve capability, except for generation resources capable of synchronous condensing, shall be based on the resource's current performance and initial energy output, the resource's available Synchronized Reserve capability; and the following offer parameters submitted as part of the energy offer: (i) ramp rate; (ii) Economic Minimum; and (iii) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(B) For generation resources capable of synchronous condensing, the resource's available Secondary Reserve capability shall be based on the following offer parameters submitted as part of the energy offer: (i) ramp rate; (ii) condense to generation time constraints; (iii) Economic Minimum; and (iv) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(C) An off-line generation resource's available Secondary Reserve capability, shall be based on the resource's available Secondary Reserve capability and the following offer parameters submitted as part of the resource's energy offer: (i) startup time; (ii) notification time; (iii) ramp rate; (iv) Economic Minimum; and (v) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(3) Any Market Seller that believes its generating unit has operating modes, limits, or conditions where the unit would not be capable of providing Secondary Reserves in real time, can submit to the Office of the Interconnection with a copy to the Market Monitoring Unit a request for an exception from being assigned Secondary Reserves in the Real-time

Secondary Reserve Market during time periods in which the generating unit is in those operating modes, limits, or conditions. As part of the request, the Market Seller shall supply, for each generating unit, technical information about the operational modes, limits, or conditions to support the requested exception, as further detailed in the PJM Manuals. The Office of the Interconnection shall consult with the Market Monitoring Unit, and consider any input received from the Market Monitoring Unit, in its determination of a request for such an exception. Within 60 days of the submission of the request, the Office of the Interconnection shall notify the Market Seller in writing, with a copy to the Market Monitoring Unit, whether the request is approved or denied. The effective date of any approved request will be provided in the written notification. If a Market Seller has an approved exception, the Market Seller must communicate to the Office of the Interconnection when the unit cannot provide reserves, and the Office of the Interconnection will provide a mechanism for Market Sellers with an approved exception to provide such communication to the Office of the Interconnection in real time, as further detailed in the PJM Manuals. An approved exception will remain applicable to the unit until such time as the Office of the Interconnection determines that a change is needed or the Market Seller notifies the Office of the Interconnection, with a copy to the Market Monitoring Unit, that a change is needed based on changed operational capabilities of the unit. Market Sellers must notify the Office of the Interconnection, with a copy to the Market Monitoring Unit, within 30 days of any changed operational capabilities that necessitate a change in an approved exception.

(iii) Offers to Supply Secondary Reserves by Economic Load Response Participant resources

(1) Each Economic Load Response Participant that submits offers to reduce demand into the Day-ahead Energy Market and Real-time Energy Market and wishes to make their resources available to supply Secondary Reserve shall submit offers to supply Secondary Reserve from such resources, where such offers shall specify the megawatts of Secondary Reserve being offered, which must equal or exceed 0.1 megawatts and include such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer. Such offers may vary hourly, and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day.

(2) All Secondary Reserve offers by Economic Load Response Participant resources shall be for \$0.00/MWh. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(n) A Market Participant may submit a Day-Ahead Pseudo-Tie Transaction for a Market Participant's generator within the PJM balancing authority area that is a Pseudo-Tie into

the MISO balancing authority area. Day-Ahead Pseudo-Tie Transactions combine an offer to sell energy at a source with a bid to buy the same megawatt quantity of energy at a sink where such transaction specifies the maximum difference between the Locational Marginal Prices at the source and sink.

Each Day-Ahead Pseudo-Tie Transaction shall: (1) source at a Market Participant's generator within the PJM balancing authority area that Pseudo-Ties into MISO; and (2) sink at the PJM-MISO interface. A Market Participant must reserve transmission service in accordance with the PJM Tariff for each Day-Ahead Pseudo-Tie Transaction. Megawatt quantities for Day-Ahead Pseudo-Tie Transactions shall be greater than zero and less than or equal to the transmission service reserved for the Day-Ahead Pseudo-Tie Transaction. An accepted Day-Ahead Pseudo-Tie Transaction results in scheduled injection at a specified source and scheduled withdrawal of the same megawatt quantity at a specified sink in the Day-Ahead Energy Market.

1.10.1B Demand Bid Scheduling and Screening

(a) The Office of the Interconnection shall apply Demand Bid Screening to all Demand Bids submitted in the Day-ahead Energy Market for each Load Serving Entity, separately by Zone. Using Demand Bid Screening, the Office of the Interconnection will automatically reject a Load Serving Entity's Demand Bids in any future Operating Day for which the Load Serving Entity submits bids if the total megawatt volume of such bids would exceed the Load Serving Entity's Demand Bid Limit for any hour in such Operating Day, unless the Office of the Interconnection permits an exception pursuant to subsection (d) below.

(b) On a daily basis, PJM will update and post each Load Serving Entity's Demand Bid Limit in each applicable Zone. Such Demand Bid Limit will apply to all Demand Bids submitted by that Load Serving Entity for each future Operating Day for which it submits bids. The Demand Bid Limit is calculated using the following equation:

Demand Bid Limit = greater of (Zonal Peak Demand Reference Point * 1.3), or (Zonal Peak Demand Reference Point + 10MW)

Where:

1. Zonal Peak Demand Reference Point = for each Zone: the product of (a) LSE Recent Load Share, multiplied by (b) Peak Daily Load Forecast.
2. LSE Recent Load Share is the Load Serving Entity's highest share of Network Load in each Zone for any hour over the most recently available seven Operating Days for which PJM has data.
3. Peak Daily Load Forecast is PJM's highest available peak load forecast for each applicable Zone that is calculated on a daily basis.

(c) A Load Serving Entity whose Demand Bids are rejected as a result of Demand Bid Screening may change its Demand Bids to reduce its total megawatt volume to a level that does not exceed its Demand Bid Limit, and may resubmit them subject to the applicable rules related to bid submission outlined in Tariff, Operating Agreement and PJM Manuals.

(d) PJM may allow a Load Serving Entity to submit bids in excess of its Demand Bid Limit when circumstances exist that will cause, or are reasonably expected to cause, a Load Serving Entity's actual load to exceed its Demand Bid Limit on a given Operating Day. Examples of such circumstances include, but are not limited to, changes in load commitments due to state sponsored auctions, mergers and acquisitions between PJM Members, and sales and divestitures between PJM Members. A Load Serving Entity may submit a written exception request to the Office of Interconnection for a higher Demand Bid Limit for an affected Operating Day. Such request must include a detailed explanation of the circumstances at issue and supporting documentation that justify the Load Serving Entity's expectation that its actual load will exceed its Demand Bid Limit.

1.10.2 Pool-scheduled Resources.

Pool-scheduled resources are those resources for which Market Participants submitted offers to sell energy in the Day-ahead Energy Market and offers to reduce demand in the Day-ahead Energy Market, which the Office of the Interconnection scheduled in the Day-ahead Energy Market as well as generators committed by the Office of the Interconnection subsequent to the Day-ahead Energy Market. Such resources shall be committed to provide energy in the real-time dispatch unless the schedules for such units are revised pursuant to section 1.10.9 below or Tariff, Attachment K-Appendix, section 1.11. Pool-scheduled resources shall be governed by the following principles and procedures.

(a) Pool-scheduled resources shall be selected by the Office of the Interconnection on the basis of the prices offered for energy and demand reductions and related services, whether the resource is expected to be needed to maintain system reliability during the Operating Day, Start-up Costs, No-load Costs and cancellation fees, and the specified operating characteristics, offered by Market Sellers to the Office of the Interconnection by the offer deadline specified in section 1.10.1A above. Hydropower units can only be pool-scheduled if they are pumped storage units and scheduled by the Office of the Interconnection pursuant to the hydro optimization tool in the Day-ahead Energy Market.

(b) A resource that is scheduled by a Market Participant to support a bilateral sale, or that is self-scheduled by a Generating Market Buyer, shall not be selected by the Office of the Interconnection as a pool-scheduled resource except in an Emergency.

(c) Market Sellers offering energy from hydropower or other facilities with fuel or environmental limitations may submit data to the Office of the Interconnection that is sufficient to enable the Office of the Interconnection to determine the available operating hours of such facilities.

(d) The Market Seller of a resource selected as a pool-scheduled resource shall receive payments or credits for energy, demand reductions or related services, or for Start-up Costs and No-load Costs, from the Office of the Interconnection on behalf of the Market Buyers in accordance with Tariff, Attachment K-Appendix, section 3. Alternatively, the Market Seller shall receive, in lieu of Start-up Costs and No-load Costs, its actual costs incurred, if any, up to a

cap of the resource's Start-up Costs, if the Office of the Interconnection cancels its selection of the resource as a pool-scheduled resource and so notifies the Market Seller before the resource is synchronized.

(e) Market Participants shall make available their pool-scheduled resources to the Office of the Interconnection for coordinated operation to supply the Operating Reserves needs of the applicable Control Zone.

(f) Economic Load Response Participants offering to reduce demand shall specify: (i) the amount of the offered curtailment, which must equal or exceed 0.1 megawatts, in minimum increments of 0.1 megawatts; (ii) the real-time Locational Marginal Price above which the end-use customer will reduce load; and (iii) at the Economic Load Response Participant's option, shut-down costs associated with reducing load, including direct labor and equipment costs, opportunity costs, and/or a minimum number of contiguous hours for which the load reduction must be committed. Economic Load Response Participants submitting offers to reduce demand in the Day-ahead Energy Market and/or the Real-time Energy Market may establish an incremental offer curve, provided that such offer curve shall be limited to ten price pairs (in MWs). Economic Load Response Participants offering to reduce demand shall also indicate the hours that the demand reduction is not available.

1.10.3 Self-scheduled Resources.

Self-scheduled resources shall be governed by the following principles and procedures.

(a) Each Generating Market Buyer shall use all reasonable efforts, consistent with Good Utility Practice, not to self-schedule resources in excess of its Equivalent Load.

(b) The offered prices of resources that are self-scheduled and not dispatchable by the Office of the Interconnection shall not be considered by the Office of the Interconnection in determining Locational Marginal Prices.

(c) Market Participants shall make available their self-scheduled resources to the Office of the Interconnection for coordinated operation to supply the Operating Reserves needs of the applicable Control Zone, by submitting an offer as to such resources.

(d) A Market Participant self-scheduling a resource in the Day-ahead Energy Market that does not deliver the energy in the Real-time Energy Market, shall replace the energy not delivered with energy from the Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(e) A Market Participant self-scheduling a resource to supply Synchronized Reserve in the Day-ahead Synchronized Reserve Market that does not deliver the scheduled megawatt quantity in the applicable real-time reserve market, shall replace the Synchronized Reserve not delivered and shall pay for such Synchronized Reserve at the applicable Real-time Synchronized Reserve Market Clearing Price. Market Participants shall not self-schedule a resource to provide Secondary Reserve or Non-Synchronized Reserve.

(f) For energy, hydropower units, excluding pumped storage units, may only be self-scheduled.

(g) A resource that has been self-scheduled shall not receive payments or credits for Start-up Costs or No-load Costs.

1.10.4 Capacity Resources.

(a) A Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative that is selected as a pool-scheduled resource shall be made available for scheduling and dispatch at the direction of the Office of the Interconnection. Such a Generation Capacity Resource that does not deliver energy as scheduled shall be deemed to have experienced a Generator Forced Outage to the extent of such energy not delivered. A Market Participant offering such Generation Capacity Resource in the Day-ahead Energy Market shall replace the energy not delivered with energy from the Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(b) Energy from a Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative that has not been scheduled in the Day-ahead Energy Market may be sold on a bilateral basis by the Market Seller, may be self-scheduled, or may be offered for dispatch during the Operating Day in accordance with the procedures specified in this Schedule. Such a Generation Capacity Resource that has not been scheduled in the Day-ahead Energy Market and that has been sold on a bilateral basis must be made available upon request to the Office of the Interconnection for scheduling and dispatch during the Operating Day if the Office of the Interconnection declares a Maximum Generation Emergency. Any such resource so scheduled and dispatched shall receive the applicable Real-time Price for energy delivered.

1.10.5 External Resources.

(a) External Resources may submit offers to the PJM Interchange Energy Market, in accordance with the day-ahead and real-time scheduling processes specified above. An External Resource selected as a pool-scheduled resource shall be made available for scheduling and dispatch at the direction of the Office of the Interconnection, and except as specified below shall be compensated on the same basis as other pool-scheduled resources. External Resources that are not capable of Dynamic Transfer shall, if selected by the Office of the Interconnection on the basis of the Market Seller's Offer Data, be block loaded on an hourly scheduled basis. Market Sellers shall offer External Resources to the PJM Interchange Energy Market on either a resource-specific or an aggregated resource basis. A Market Participant whose pool-scheduled resource does not deliver the energy scheduled in the Day-ahead Energy Market shall replace such energy not delivered as scheduled in the Day-ahead Energy Market with energy from the PJM Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(b) Offers for External Resources from an aggregation of two or more generating units shall so indicate, and shall specify, in accordance with the Offer Data requirements

specified by the Office of the Interconnection: (i) energy prices; (ii) hours of energy availability; (iii) a minimum dispatch level; (iv) a maximum dispatch level; and (v) unless such information has previously been made available to the Office of the Interconnection, sufficient information, as specified in the PJM Manuals, to enable the Office of the Interconnection to model the flow into the PJM Region of any energy from the External Resources scheduled in accordance with the Offer Data.

(c) Offers for External Resources on a resource-specific basis shall specify the resource being offered, along with the information specified in the Offer Data as applicable.

1.10.6 External Market Buyers.

(a) Deliveries to an External Market Buyer not subject to Dynamic Transfer by the Office of the Interconnection shall be delivered on a block loaded basis to the bus or buses at the electrical boundaries of the PJM Region, or in such area with respect to an External Market Buyer's load within such area not served by Network Service, at which the energy is delivered to or for the External Market Buyer. External Market Buyers shall be charged (which charge may be positive or negative) at either the Day-ahead Prices or Real-time Prices, whichever is applicable, for energy at the foregoing bus or buses.

(b) An External Market Buyer's hourly schedules for energy purchased from the PJM Interchange Energy Market shall conform to the ramping and other applicable requirements of the interconnection agreement between the PJM Region and the Control Area to which, whether as an intermediate or final point of delivery, the purchased energy will initially be delivered.

(c) The Office of the Interconnection shall curtail deliveries to an External Market Buyer if necessary to maintain appropriate reserve levels for a Control Zone as defined in the PJM Manuals, or to avoid shedding load in such Control Zone.

1.10.7 Bilateral Transactions.

Bilateral transactions as to which the parties have notified the Office of the Interconnection by the deadline specified in section 1.10.1A above that they elect not to be included in the Day-ahead Energy Market and that they are not willing to incur Transmission Congestion Charges in the Real-time Energy Market shall be curtailed by the Office of the Interconnection as necessary to reduce or alleviate transmission congestion. Bilateral transactions that were not included in the Day-ahead Energy Market and that are willing to incur congestion charges and bilateral transactions that were accepted in the Day-ahead Energy Market shall continue to be implemented during periods of congestion, except as may be necessary to respond to Emergencies.

1.10.8 Office of the Interconnection Responsibilities.

(a) The Office of the Interconnection shall use its best efforts to determine (i) the least-cost means of satisfying the projected hourly requirements for energy, Operating Reserves, and other ancillary services of the Market Buyers, including the reliability requirements of the

PJM Region, of the Day-ahead Energy Market, and (ii) the least-cost means of satisfying the Operating Reserve and other ancillary service requirements for any portion of the load forecast of the Office of the Interconnection for the Operating Day in excess of that scheduled in the Day-ahead Energy Market. In making these determinations, the Office of the Interconnection shall take into account: (i) the Office of the Interconnection's forecasts of PJM Interchange Energy Market and PJM Region energy requirements, giving due consideration to the energy requirement forecasts and purchase requests submitted by Market Buyers and PRD Curves properly submitted by PRD Providers; (ii) the offers submitted by Market Sellers; (iii) the availability of limited energy resources; (iv) the capacity, location, and other relevant characteristics of self-scheduled resources; (v) the objectives of each Control Zone for Operating Reserves, as specified in the PJM Manuals; (vi) the requirements of each Regulation Zone for Regulation and other ancillary services, as specified in the PJM Manuals; (vii) the benefits of avoiding or minimizing transmission constraint control operations, as specified in the PJM Manuals; and (viii) such other factors as the Office of the Interconnection reasonably concludes are relevant to the foregoing determination, including, without limitation, transmission constraints on external coordinated flowgates to the extent provided by Tariff, Attachment K-Appendix, section 1.7.6. The Office of the Interconnection shall develop a Day-ahead Energy Market based on the foregoing determination, and shall determine the Day-ahead Prices resulting from such schedule. The Office of the Interconnection shall report the planned schedule for a hydropower resource to the operator of that resource as necessary for plant safety and security, and legal limitations on pond elevations.

(b) By 1:30 p.m., or as soon as practicable thereafter, of the day before each Operating Day, or such other deadline as may be specified by the Office of the Interconnection in the PJM Manuals, the Office of the Interconnection shall: (i) post the aggregate Day-ahead Energy Market results; (ii) post the Day-ahead Prices; and (iii) inform the Market Sellers, Market Buyers, and Economic Load Response Participants of their scheduled injections, withdrawals, and demand reductions respectively. The foregoing notwithstanding, the deadlines set forth in this subsection shall not apply if the Office of the Interconnection is unable to obtain Market Participant bid/offer data due to extraordinary circumstances. For purposes of this subsection, extraordinary circumstances shall mean a technical malfunction that limits, prohibits or otherwise interferes with the ability of the Office of the Interconnection to obtain Market Participant bid/offer data prior to 11:59 p.m. on the day before the affected Operating Day. Extraordinary circumstances do not include a Market Participant's inability to submit bid/offer data to the Office of the Interconnection. If the Office of the Interconnection is unable to clear the Day-ahead Energy Market prior to 11:59 p.m. on the day before the affected Operating Day as a result of such extraordinary circumstances, the Office of the Interconnection shall notify Members as soon as practicable.

(c) Following posting of the information specified in section 1.10.8(b), and absent extraordinary circumstances preventing the clearing of the Day-ahead Energy Market, the Office of the Interconnection shall revise its schedule of generation resources to reflect updated projections of load, conditions affecting electric system operations in the PJM Region, the availability of and constraints on limited energy and other resources, transmission constraints, and other relevant factors.

(d) Market Buyers shall pay PJMSettlement and Market Sellers shall be paid by PJMSettlement for the quantities of energy scheduled in the Day-ahead Energy Market at the Day-ahead Prices when the Day-ahead Price is positive. Market Buyers shall be paid by PJMSettlement and Market Sellers shall pay PJMSettlement for the quantities of energy scheduled in the Day-ahead Energy Market at the Day-ahead Prices when the Day-ahead Price is negative. Economic Load Response Participants shall be paid for scheduled demand reductions pursuant to Tariff, Attachment K-Appendix, section 3.3A. Notwithstanding the foregoing, if the Office of the Interconnection is unable to clear the Day-ahead Energy Market prior to 11:59 p.m. on the day before the affected Operating Day due to extraordinary circumstances as described in subsection (b) above, it will be declared a Market Suspension, and Day-ahead Prices shall be determined pursuant to Operating Agreement, Schedule 1, section 2.6.1. If the Office of the Interconnection declares a Market Suspension, it shall notify Market Participants of the Market Suspension as soon as practicable.

(e) If the Office of the Interconnection discovers a *potential* error in prices and/or cleared quantities in the Day-ahead Energy Market or Day-ahead Ancillary Services Markets, or the Real-time Energy Market or Real-time Ancillary Services Markets after it has posted the results for these markets on its Web site, the Office of the Interconnection shall notify Market Participants as soon as possible after it is found, but in no event later than 12:00 p.m. of the second Business Day following the Operating Day for the Real-time Energy Market and Real-time Ancillary Services Markets, and no later than 5:00 p.m. of the second Business Day following the initial publication of the results for the Day-ahead Energy Market and Day-ahead Ancillary Services Markets. After this initial notification, if the Office of the Interconnection determines it is necessary to post modified results, it shall provide notification of its intent to do so, *along with a description detailing the cause and scope of the error*, by no later than 5:00 p.m. of the fifth Business Day following the Operating Day for the Real-time Energy Market and Real-time Ancillary Services Markets, and no later than 5:00 p.m. of the fifth Business Day following the initial publication of the results in the Day-ahead Energy Market and Day-ahead Ancillary Services Markets. *The provided description will not contain information that is market sensitive or confidential.* Thereafter, the Office of the Interconnection must post on its Web site the corrected results by no later than 5:00 p.m. of the tenth calendar day following the Operating Day for the Day-ahead Energy Market, Real-time Energy Market, and Day-ahead Ancillary Services Markets, and Real-time Ancillary Service Markets. Should any of the above deadlines pass without the associated action on the part of the Office of the Interconnection, the originally posted results will be considered final. Notwithstanding the foregoing, the deadlines set forth above shall not apply if the referenced market results are under publicly noticed review by the FERC.

(f) Consistent with Operating Agreement, section 18.17.1, and notwithstanding anything to the contrary in the Operating Agreement or in the PJM Tariff, to allow the tracking of Market Participants' non-aggregated bids and offers over time as required by FERC Order No. 719, the Office of the Interconnection shall post on its Web site the non-aggregated bid data and Offer Data submitted by Market Participants (for participation in the PJM Interchange Energy Market) approximately four months after the bid or offer was submitted to the Office of the Interconnection.

1.10.9 Hourly Scheduling.

(a) Following the initial posting by the Office of the Interconnection of the Locational Marginal Prices resulting from the Day-ahead Energy Market, and subject to the right of the Office of the Interconnection to schedule and dispatch pool-scheduled resources and to direct that schedules be changed in an Emergency, and absent extraordinary circumstances preventing the clearing of the Day-ahead Energy Market, a generation rebidding period shall exist. Typically the rebidding period shall be from the time the Office of the Interconnection posts the results of the Day-ahead Energy Market until 2:15 p.m. on the day before each Operating Day. However, should the clearing of the Day-ahead Energy Market be significantly delayed, the Office of the Interconnection may establish a revised rebidding period. During the rebidding period, Market Participants may submit revisions to generation Offer Data for the next Operating Day. Adjustments to the Day-ahead Energy Market shall be settled at the applicable Real-time Prices, and shall not affect the obligation to pay or receive payment for the quantities of energy scheduled in the Day-ahead Energy Market at the applicable Day-ahead Prices.

(b) A Market Participant may adjust the schedule of a resource under its dispatch control on an hour-to-hour basis beginning at 6:30 p.m. of the day before each Operating Day, provided that the Office of the Interconnection is notified not later than 65 minutes prior to the hour in which the adjustment is to take effect, as follows and as specified in section 1.10.9A below:

i) A Generating Market Buyer may self-schedule any of its resource increments, including hydropower resources, not previously designated as self-scheduled and not selected as a pool-scheduled resource in the Day-ahead Energy Market;

ii) A Market Participant may request the scheduling of a non-firm bilateral transaction; or

iii) A Market Participant may request the scheduling of deliveries or receipts of Spot Market Energy; or

iv) A Generating Market Buyer may remove from service a resource increment, including a hydropower resource, that it had previously designated as self-scheduled, provided that the Office of the Interconnection shall have the option to schedule energy from any such resource increment that is a Capacity Resource at the price offered in the scheduling process, with no obligation to pay any Start-Up Costs.

(c) An External Market Buyer may refuse delivery of some or all of the energy it requested to purchase in the Day-ahead Energy Market by notifying the Office of the Interconnection of the adjustment in deliveries not later than 65 minutes prior to the hour in which the adjustment is to take effect, but any such adjustment shall not affect the obligation of the External Market Buyer to pay for energy scheduled on its behalf in the Day-ahead Energy Market at the applicable Day-ahead Prices.

(d) The Office of the Interconnection shall provide External Market Buyers and External Market Sellers and parties to bilateral transactions with any revisions to their schedules resulting from the rebidding period by 6:30 p.m. on the day before each Operating Day. The Office of the Interconnection may also commit additional resources after such time as system conditions require. For each hour in the Operating Day, as soon as practicable after the deadlines specified in the foregoing subsection of this section 1.10, the Office of the Interconnection shall provide External Market Buyers and External Market Sellers and parties to bilateral transactions with any revisions to their schedules for the hour.

1.10.9A Updating Offers in Real-time

(a) Each Market Seller may submit Real-time Offers for a resource up to 65 minutes before the applicable clock hour, and such Real-time Offers shall supersede any previous offer for that resource for the clock hour, as further described in the PJM Manuals and subject to the following conditions:

(i) A market-based Real-time Offer shall not exceed the applicable energy offer caps specified in this Schedule. Once a Market Seller's resource is committed for an applicable clock hour, the Market Seller may not increase its Incremental Energy Offer and may only submit a market-based Real-time Offer that is higher than its market-based offer that was in effect at the time of commitment to reflect increases in the resource's cost-based Start-up Costs and cost-based No-load Costs. The Market Seller may elect not to have its market-based offer considered for dispatch and to have only its lowest cost-based offer considered for the remainder of the Operating Day.

(ii) Cost-based Real-time Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection's Offer Data specification, Operating Agreement, Schedule 1, sections 1.10.1A(d) and 1.10.9B, Operating Agreement, Schedule 2 and the PJM Manuals, as applicable. If a Market Seller submits a market-based Real-time Offer for a particular clock hour in accordance with subsection (c) below, or if updates to a cost-based offer are required by the Market Seller's approved Fuel Cost Policy, the Market Seller shall update its previously submitted cost-based Real-time Offer.

(iii) If a Market Seller's available cost-based offer is not compliant with Operating Agreement, Schedule 2 and the PJM Manuals at the time a Market Seller submits a market-based Real-time Offer for an applicable clock hour during the Operating Day, the Market Seller must submit an updated cost-based Real-time Offer consisting of an Incremental Energy Offer, Start-up Cost and No-load Cost for that clock hour that is compliant with Operating Agreement, Schedule 2 and the PJM Manuals.

(b) Each Market Seller may submit Real-time Offers for a resource during and through the end of the applicable clock hour to update only the following offer parameters, as further described in the PJM Manuals: (1) Economic Minimum; (2) Economic Maximum; (3) emergency minimum MW; (4) emergency maximum MW; (5) unit availability status; (6) fixed output indicator; (7) Synchronized Reserve maximum MW; and (8) Secondary Reserve

maximum MW. Such Real-time Offers shall supersede any previous offer for that resource for the clock hour.

1.10.9B Offer Parameter Flexibility

(a) Market Sellers may, in accordance with sections 1.10.1A and 1.10.9A above, this section 1.10.9B, and the PJM Manuals, update offer parameters at any time up to 65 minutes before the applicable clock hour, including prior to the close of the Day-ahead Energy Market and prior to the close of the rebidding period specified in section 1.10.9, except that Market Sellers may not update their offers for the supply of energy, Secondary Reserve, Synchronized Reserve, Non-Synchronized Reserve, or demand reduction: (1) during the period after the close the Day-ahead Energy Market and prior to the posting of the Day-ahead Energy Market results pursuant to section 1.10.8(b); or (2) during the period after close of the rebidding period and prior to PJM announcing the results of the rebidding period pursuant to section 1.10.9(d).

(b) For generation resource offers, Market Sellers may vary for each clock hour during the entire Operating Day the following offer parameters: (1) cost-based Start-up Costs; (2) cost-based No-load Costs; (3) Incremental Energy Offer; (4) Economic Minimum and Economic Maximum; (5) emergency minimum MW and emergency maximum MW; (6) ramp rate; (7) Synchronized Reserve maximum MW; (8) Secondary Reserve maximum MW; and (9) for Real-time Offers only, (i) notification time and (ii) for uncommitted hours only, Minimum Run Time.

(c) For Economic Load Response Participant resource offers, Market Sellers may vary for each clock hour during the entire Operating Day the following offer parameters: (1) shutdown costs, (2) Incremental Energy Offer; (3) Economic Minimum; (4) Economic Maximum; and (5) for Real-time Offers only, (i) notification time and (ii) for uncommitted hours only, minimum down time.

(d) After the announcement of the results of the rebidding period pursuant to section 1.10.9(d), a Market Seller may submit a Real-time Offer where offer parameters may differ from the offer originally submitted in the Day-ahead Energy Market, except that a Market Seller may not submit a Real-time Offer that changes, of the offer parameters listed in section 1.10.1A(d), the MW amounts specified in the Incremental Energy Offer, MW amounts specified in the ramp rate, maximum run time, and availability; provided, however, Market Sellers of dual-fueled resources may submit Real-time Offers for such resources that change the availability of a submitted cost-based offer.

3.2 Market Settlements.

If a dollar-per-MW-hour value is applied in a calculation under this section 3.2 where the interval of the value produced in that calculation is less than an hour, then for purposes of that calculation the dollar-per-MW hour value is divided by the number of Real-time Settlement Intervals in the hour.

3.2.1 Spot Market Energy.

(a) The Office of the Interconnection shall calculate System Energy Prices in the form of Day-ahead System Energy Prices and Real-time System Energy Prices for the PJM Region, in accordance with Tariff, Attachment K-Appendix, section 2.

(b) Each Market Participant shall be charged for all of its Market Participant Energy Withdrawals scheduled in the Day-ahead Energy Market at the Day-ahead System Energy Price to be served in the PJM Interchange Energy Market.

(c) Each Market Participant shall be paid for all of its Market Participant Energy Injections scheduled in the Day-ahead Energy Market at the Day-ahead System Energy Price to be delivered to the PJM Interchange Energy Market.

(d) For each Day-ahead Settlement Interval during an Operating Day, the Office of the Interconnection shall calculate Spot Market Energy charges for each Market Participant as the difference between the sum of its Market Participant Energy Withdrawals scheduled times the Day-ahead System Energy Price and the sum of its Market Participant Energy Injections scheduled times the Day-ahead System Energy Price.

(e) For each Real-time Settlement Interval during an Operating Day, the Office of the Interconnection shall calculate Spot Market Energy charges for each Market Participant as the difference between the sum of its real-time Market Participant Energy Withdrawals less its scheduled Market Participant Energy Withdrawals times the Real-time System Energy Price and the sum of its real-time Market Participant Energy Injections less scheduled Market Participant Energy Injections times the Real-time System Energy Price. The Revenue Data for Settlements determined for each Real-time Settlement Interval in accordance with Tariff, Attachment K-Appendix, section 3.1A shall be used in determining the real-time Market Participant Energy Withdrawals and Market Participant Energy Injections used to calculate Spot Market Energy charges under this subsection (e).

(f) For pool External Resources, the Office of the Interconnection shall model, based on an appropriate flow analysis, the megawatts of real-time energy injections to be delivered from each such resource to the corresponding Interface Pricing Point between adjacent Control Areas and the PJM Region.

3.2.2 Regulation.

(a) The Office of the Interconnection's Regulation service is comprised of Regulation-Down Service and Regulation-Up Service. Regulation-Down Service and Regulation-Up Service will have distinct requirements, clearing prices, and performance scores, calculated in accordance with the section(s) below and the PJM Manuals.

Each Market Participant that is a Load Serving Entity in a Regulation Zone shall have an hourly Regulation objective equal to its pro rata share of the Regulation-Down Requirement and Regulation-Up Requirement of such Regulation Zone for the hour, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Regulation Zone for the hour ("Regulation Obligation"). A Market Participant with an hourly Regulation Obligation shall be charged the pro rata share of the sum of the Regulation market mileage clearing price credits and Regulation market capability clearing price credits for the Real-time Settlement Intervals in an hour.

Regulation Charge = Hourly Regulation Obligation Share * (sum of the Real-time Settlement Interval Regulation credits in an hour)

(b) Each Market Participant supplying Regulation in a Regulation Zone at the direction of the Office of the Interconnection shall be credited for each of its resources such that the calculated credit for each increment of Regulation provided by each resource shall be the higher of: (i) the Regulation market-clearing price; or (ii) the sum of the applicable Regulation offers for a resource determined pursuant to section 3.2.2A.1 below, the resource-specific shoulder opportunity costs described in subsection (e) of this section, the resource-specific inter-temporal opportunity costs discussed in subsection (d), and the resource-specific opportunity costs discussed in subsection (e) of this section.

(c) The Office of the Interconnection shall commit resources to provide Regulation-Down Service and Regulation-Up Service every 30 minutes, for the clock intervals of the first 30 minutes of an hour and the second 30 minutes of an hour, to meet the Regulation-Down Requirement and Regulation-Up Requirement of such Regulation Zone. The Office of the Interconnection shall select resources in merit order, taking into account the resource's mileage Regulation offer, capability Regulation offer, and estimated resource-specific opportunity cost, all converted into their performance adjusted values as further detailed in the PJM Manuals. The total Regulation market-clearing price for the Regulation-Down Service and Regulation-Up Service in each Regulation Zone shall be determined in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval. The total Regulation market-clearing price shall include: (i) the mileage Regulation market-clearing price in a Regulation Zone that shall be calculated in accordance with subsection (g) of this section; (ii) the capability Regulation market-clearing price that shall be calculated in accordance with subsection (h) of this section; and (iii) a Regulation resource's unit-specific opportunity costs during the 5-minute period, determined as described in subsection (d) below. A resource's Regulation offer by any Market Seller that fails the Regulation three-pivotal supplier test set forth in section 3.2.2A.1 below shall not exceed the cost of providing Regulation from such

resource, plus six dollars, as determined pursuant to the formula in Tariff, Attachment K-Appendix, section 1.10.1A(e).

(d) In determining the Regulation 5-minute clearing price for each Regulation Zone, the resource-specific opportunity costs (in dollars) of a resource offering to sell Regulation in each regulating interval, except for hydroelectric resources, shall be equal to the area bounded by (i) Locational Marginal Price at the generation bus for the regulating resource, (ii) the resource's Final Offer, (iii) the resource's tracking ramp-rate limited expected output level if it had been dispatched for energy in economic merit order, as further described in the PJM Manuals, and (iv) the resource's regulation set point on the energy schedule curve on which the resource is running in the PJM Interchange Energy Market. The area is divided by the resource performance score and further divided by the resource's regulation assigned megawatt to convert to dollars per megawatt.

For hydroelectric resources offering to sell Regulation in a regulating interval, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the full value of the Locational Marginal Price at that generation bus for each megawatt of Regulation capability.

The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead megawatt commitment greater than zero shall be equal to the product of (i) the deviation of the set point of the hydroelectric resource that is expected to be required in order to provide Regulation from the hydroelectric resource's expected output level if it had been dispatched in economic merit order times (ii) the difference between the expected Locational Marginal Price at the generation bus for the hydroelectric resource and the average of the Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. Estimated opportunity costs shall be zero for hydroelectric resources for which the average Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period, excluding those Real-time Settlement Intervals during which all available units at the hydroelectric resource were operating is higher than the actual Locational Marginal Price at the generator bus for the Real-time Settlement Interval.

The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead megawatt commitment greater than zero shall be equal to the product of (i) the deviation of the set point of the hydroelectric resource that is expected to be required in order to provide Regulation from the hydroelectric resource's expected output level if it had been dispatched in economic merit order times (ii) the difference between the average of the Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating and the expected Locational Marginal Price at the generation bus for the hydroelectric resource. Estimated opportunity costs shall be zero for hydroelectric resources for which the actual Locational Marginal Price at the generator bus for the Real-time Settlement Interval is higher than the average Locational Marginal Price at the generation bus for the appropriate on-peak or

off-peak period, excluding those Real-time Settlement Intervals during which all available units at the hydroelectric resource were operating.

For the purpose of committing resources and setting Regulation market clearing prices, the Office of the Interconnection shall utilize day-ahead Locational Marginal Prices to calculate the average of the Locational Marginal Price values used in the calculation for opportunity costs for hydroelectric resources. For the purposes of settlements, the Office of the Interconnection shall utilize the real-time Locational Marginal Prices to calculate the average of the Locational Marginal Price used in the calculation for opportunity costs for hydroelectric resources.

Opportunity costs for Economic Load Response Participant resources and regulation-only resources to provide Regulation are zero for the purpose of committing resources, setting Regulation clearing prices, and settlements.

(e) In determining the credit under subsection (b) to a Market Participant selected to provide Regulation in a Regulation Zone and that actively follows the Office of the Interconnection's Regulation signals and instructions, **the Office of the Interconnection shall consider both the Regulation-Up Service and Regulation-Down Service selected MW assignments.** The unit-specific opportunity cost of a generation resource shall be determined for (1) each Real-time Settlement Interval that the Office of the Interconnection requires a generation resource to provide Regulation, and (2) the two Real-time Settlement Intervals preceding the regulation commitment and the two Real-time Settlement Intervals following the regulation commitment in accordance with the PJM Manuals and below.

The unit-specific opportunity cost in dollars, incurred during the Real-time Settlement Interval, in which the Regulation obligation is fulfilled, shall be equal to the area bounded by (i) the Locational Marginal Price at the generation bus for the regulating resource, (ii) the resource's Final Offer, (iii) the generation resource's tracking ramp-rate limited expected output level if it had been dispatched in economic merit order, as further described in the PJM Manuals, and (iv) the generation resource's regulation set point, and adjusted for the performance score of the resource **offset by the regulation signal bias, and adjusted for the performance score of the resource.** Opportunity costs for Economic Load Response Participant or regulation only resources to provide Regulation are zero.

The unit-specific opportunity costs associated with uneconomic operation during each of the preceding two Real-time Settlement Intervals of the regulation commitment shall be equal to the product of (i) the deviation between the set point of the generation resource that is expected to be required in the initial regulating Real-time Settlement Interval in order to provide Regulation and the resource's tracking expected ramp rate limited output in each of the preceding two Real-time Settlement Intervals of the regulation commitment times (ii) the absolute value of the difference between the Locational Marginal Price at the generation bus for the generation resource in each of the preceding two Real-time Settlement Intervals of the regulation commitment and the energy offer, using the Final Offer, at the megawatt level of the Regulation set point for the resource in the initial regulating Real-time Settlement Interval, in the PJM Interchange Energy Market, all as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals.

The unit-specific opportunity costs associated with uneconomic operation during each of the following two Real-time Settlement Intervals of the regulation commitment shall be equal to the product of (i) the deviation between the set point of the generation resource that is expected to be required in the final regulating Real-time Settlement Interval in order to provide Regulation and the resource's tracking expected ramp-rate limited output in each of the following two Real-time Settlement Intervals of the regulation commitment times, and (ii) the absolute value of the difference between the Locational Marginal Price at the generation bus for the generation resource in each of the following two Real-time Settlement Intervals of the regulation commitment and the energy offer, using the Final Offer, at the megawatt level of the Regulation set point for the resource in final regulating hour, in the PJM Interchange Energy Market all as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals.

(f) Any amounts credited for Regulation in an hour in excess of the Regulation market-clearing prices in that hour shall be allocated and charged to each Market Participant in a Regulation Zone that does not meet its hourly Regulation obligation in proportion to its purchases of Regulation in such Regulation Zone in megawatt-hours during that hour.

(g) To determine the Regulation market mileage-clearing price for Regulation-Down Service and Regulation-Up Service, the Office of the Interconnection shall adjust the submitted applicable mileage offer for each resource in accordance with the historical performance score of that resource, and the amount of historically dispatched Regulation (mileage) for the given service, calculated by the Office of the Interconnection. The maximum adjusted mileage offer of all cleared resources for each regulation service will set the Regulation market mileage-clearing price for Regulation-Down Service and Regulation-Up Service.

The owner of each Regulation resource that **is committed for a regulation service and** actively follows the Office of the Interconnection's Regulation signals and instructions, will be credited for Regulation-Down Service and/or Regulation-Up Service mileage by multiplying the applicable regulation service assigned MW(s) by the applicable regulation service Regulation market mileage-clearing price, by the ratio between the requested mileage for the Regulation service dispatch signal and the historic requested mileage for the applicable Regulation service dispatch signal, calculated by the Office of the Interconnection, and by the Regulation resource's applicable regulation service performance score calculated in accordance with subsection (j) of this section.

(h) The Office of the Interconnection shall divide each Regulation resource's capability offer for Regulation-Down Service or Regulation-Up Service by the applicable regulation service historic performance score for the resource for the purposes of committing resources and setting the market clearing prices.

The Office of the Interconnection shall calculate the Regulation market capability-clearing price for Regulation-Down Service and Regulation-Up Service for each Regulation Zone by subtracting the **applicable regulation service** Regulation market mileage-clearing price described in subsection (g) from the total Regulation market clearing price described in subsection (c). This

residual sets the Regulation market capability-clearing price for the Regulation-Down Service and Regulation-Up Service Real-time Settlement Interval.

The owner of each Regulation resource that **is committed for a regulation service and** actively follows the Office of the Interconnection's Regulation signals and instructions will be credited for Regulation-Down Service and Regulation-Up Service capability by multiplying the applicable regulation service assigned MW and the **applicable regulation service** capability Regulation market-clearing price multiplied by the Regulation resource's **applicable regulation service** performance score calculated in accordance with subsection (j) of this section.

(i) In accordance with the processes described in the PJM Manuals, the Office of the Interconnection shall: (i) calculate inter-temporal opportunity costs for each applicable resource; (ii) include such inter-temporal opportunity costs in each applicable resource's offer to sell frequency Regulation service; and (iii) account for such inter-temporal opportunity costs in the Regulation market-clearing price.

(j) The Office of the Interconnection shall calculate each Regulation resource's performance score **for Regulation-Down Service and Regulation-Up Service**. The performance score shall be a function of the difference in the energy provided versus the energy requested by the Regulation signal while scaling for the number of samples. The error measured shall be the difference of the resources response and the dispatch signal, adjusted by the assigned MW and signal dispatch of the Regulation resource. The performance score is calculated using the following equations:

$$\text{Performance Score} = 1 - 1/n \sum \text{Abs (Error)};$$

Error = Average of Abs (Abs (Response - Regulation Signal) / (0.5*Interval Average Regulation Signal + 0.5*AREG)); and

n = the number of samples in the interval

AREG = assigned regulation megawatt.

The Office of the Interconnection shall calculate a performance score for each Regulation resource for each regulation service for each five-minute period the Regulation resource is assigned to provide Regulation-Down Service and/or Regulation-Up Service.

The historic performance score **for Regulation-Down Service and Regulation-Up Service** will be based on a 100 clock-hour rolling average of the Real-time Settlement Interval performance scores, with consideration of the qualification score, for resources without adequate historical data, as defined in the PJM Manuals.

Regulation resources that have a Real-time Settlement Interval performance score below 25% will be ineligible for Regulation credits for that Real-time Settlement Interval.

Regulation resources that have historical performance scores fall below 40% shall be disqualified from providing the applicable Regulation service until they are able to re-qualify, as defined in the PJM Manuals.

(k) During a Market Suspension where the suspension is less than or equal to 24 consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Regulation, the resources providing Regulation at the direction of the Office of the Interconnection will be compensated based on a calculated Regulation market-clearing price. Regulation market-clearing prices for each Real-time Settlement Interval associated with such Market Suspension shall be the average of the Regulation market-clearing prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

During a Market Suspension where the suspension is greater than 24 consecutive hours, if the Office of the Interconnection is assigning Regulation, resources providing Regulation at the direction of the Office of the Interconnection will be compensated based on a calculated Regulation clearing price. The Regulation clearing price for each Real-time Settlement Interval will be determined by calculating a Regulation clearing cost for the online resources providing Regulation during the Market Suspension. The resource's Regulation clearing cost is determined by the summation of their adjusted Regulation offer and adjusted opportunity cost. The opportunity cost will be based on the resource's cost-based offer and will be determined as follows:

For online resources providing Regulation on a cost-based offer at the time of the Market Suspension, that cost-based offer will be used.

For online resources providing Regulation on a price-based offer at the time of the Market Suspension, the Office of the Interconnection shall use the cheapest available cost-based offer based on the dispatch cost formula as defined in Operating Agreement, Schedule 1, section 6.4.1(g) using the available cost-based offers in the Office of the Interconnection system at the time of the Market Suspension.

The highest cost resource, based on this Regulation clearing cost, will set the Regulation market-clearing price for each hour of the Market Suspension.

During a Market Suspension, if the Office of the Interconnection is not assigning Regulation resources, then the Regulation market-clearing price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period and no resource-specific opportunity cost will be calculated.

During a Market Suspension, the following Regulation components for all Real-time Settlement Intervals in the Market Suspension period will be determined as follows:

- (i) If the regulation performance score cannot be calculated during a Market Suspension, the performance score will be used for the Market Suspension period.

- (ii) If the regulation mileage ratio cannot be calculated during a Market Suspension, the mileage ratio will be set to one (1) for the Market Suspension period.

3.2.2A Offer Price Caps.

3.2.2A.1 Applicability.

(a) For each Regulation market clearing interval, the Office of the Interconnection shall conduct a Regulation three-pivotal supplier test as described in this section. Regulation offers from Market Sellers that fail the Regulation three-pivotal supplier test shall be capped in the interval in which they failed the test at their cost based offers as determined pursuant to Tariff, Attachment K-Appendix, section 1.10.1A(e). A Regulation supplier fails the three-pivotal supplier test in any Regulation market clearing interval in which such Regulation supplier and the two largest other Regulation suppliers are jointly pivotal. **The Regulation three-pivotal supplier test will be conducted separately for Regulation-Down Service and Regulation-Up Service in the same Regulation market clearing interval.**

(b) For the purposes of conducting the three-pivotal supplier test pursuant to this section, the following applies:

(i) The Regulation three-pivotal supplier test will include in the definition of available supply all offer megawatts from resources capable of satisfying the Regulation-Down Requirement and Regulation-Up Requirement of the PJM Region multiplied by the historic performance score of the resource for which the capability cost-based offer plus the mileage cost-based offer plus any eligible opportunity costs is no greater than 150% of the clearing price that would be calculated if all offers were limited to cost (plus eligible opportunity costs).

(ii) The Regulation three-pivotal supplier test will apply on a Regulation supplier basis (i.e. not a resource by resource basis) and only the Regulation suppliers that fail the three-pivotal supplier test will have their Regulation offers capped. A Regulation supplier for the purposes of this section includes corporate affiliates. Regulation from resources controlled by a Regulation supplier or its affiliates, whether by contract with unaffiliated third parties or otherwise, will be included as Regulation of that Regulation supplier. Regulation provided by resources owned by a Regulation supplier but controlled by an unaffiliated third party, whether by contract or otherwise, will be included as Regulation of that third party.

(iii) Each supplier shall be ranked from the largest to the smallest offered megawatt of eligible Regulation supply adjusted by the historic performance of each resource. Suppliers are then tested in order, starting with the three largest suppliers. For each iteration of the test, the two largest suppliers are combined with a third supplier, and the combined supply is subtracted from total effective supply. The resulting net amount of eligible supply is divided by the Regulation Requirement for the Regulation clearing interval to determine the residual supply index. Where the residual supply index for Regulation three pivotal suppliers is less than or equal to 1.0, then the three suppliers are

jointly pivotal and the suppliers being tested fail the three pivotal supplier test. Iterations of the test continue until the combination of the two largest suppliers and a third supplier result in a residual supply index greater than 1.0, at which point the remaining suppliers pass the test. Any resource owner that fails the three-pivotal supplier test will be offer-capped.

3.2.3 Operating Reserves.

(a) A Market Seller's pool-scheduled resources capable of providing Operating Reserves shall be credited as specified below based on the applicable offer for the operation of such resource, provided that the resource was available for the entire time specified in the Offer Data for such resource. To the extent that sections 3.2.3A, 3.2.3A.001, and 3.2.3A.01 below do not meet the Synchronized Reserve Requirements, the Primary Reserve Requirements, and the 30-minute Reserve Requirements, the Office of the Interconnection shall schedule additional Operating Reserves pursuant to Section 1.7.17 and 1.10 of Schedule 1 of this Agreement. In addition the Office of the Interconnection shall schedule Operating Reserves pursuant to those sections to satisfy any unforeseen Operating Reserve requirements that are not reflected in the day-ahead market. PJMSettlement shall be the Counterparty to the purchases and sales of Operating Reserve in the PJM Interchange Energy Market.

(b) The following determination shall be made for each pool-scheduled resource that is scheduled in the Day-ahead Energy Market: the total offered price for Start-up Costs and No-load Costs and energy, determined on the basis of the resource's scheduled output, shall be compared to the total value of that resource's energy – as determined by the Day-ahead Energy Market and the Day-ahead Prices applicable to the relevant generation bus in the Day-ahead Energy Market. PJM shall also (i) determine whether any resources were scheduled in the Day-ahead Energy Market to provide Black Start service, Reactive Services or transfer interface control during the Operating Day because they are known or expected to be needed to maintain system reliability in a Zone during the Operating Day in order to minimize the total cost of Operating Reserves associated with the provision of such services and reflect the most accurate possible expectation of real-time operating conditions in the day-ahead model, which resources would not have otherwise been committed in the day-ahead security-constrained dispatch and (ii) report on the day following the Operating Day the megawatt quantities scheduled in the Day-ahead Energy Market for the above-enumerated purposes for the entire RTO.

Except as provided in section 3.2.3(n) below, if the total offered price for Start-up Costs (shutdown costs for Economic Load Response Participant resources) and No-load Costs and energy summed over all Day-ahead Settlement Intervals exceeds the total value summed over all Day-ahead Settlement Intervals, the difference shall be credited to the Market Seller as a day-ahead Operating Reserve credit.

However, for the Day-ahead Settlement Intervals in which the resource is scheduled to provide energy in the Operating Day and the resource actually provides energy in at least one Real-time Settlement Interval in an hour that corresponds to such scheduled Day-ahead Settlement Intervals, a resource's day-ahead Operating Reserve credit shall be reduced by the greater of zero

or the difference of the resource's Day-ahead Operating Reserve Target and the Balancing Operating Reserve Target, as determined below.

A resource's Day-ahead Operating Reserve Target shall be determined in accordance with the following equation:

$$(A + B) - C$$

Where:

A = Start-up Costs

B = the sum of day-ahead No-load Costs and energy over the applicable Real-time Settlement Intervals that correspond with Day-ahead Settlement Intervals in which the resource is scheduled. The day-ahead No-load Costs and energy are divided by twelve to determine the cost for each Real-time Settlement Interval.

C = the sum of the day-ahead revenues calculated for each Real-time Settlement Interval that corresponds with a Day-ahead Settlement Interval in which the resource is scheduled, where the day-ahead revenue for each such Real-time Settlement Interval equals the product of the megawatt amount of energy scheduled in the Day-ahead Energy Market and the Day-ahead Price at the applicable pricing point for the resource divided by twelve.

A resource's Balancing Operating Reserve Target shall be determined in accordance with the following equation:

$$D - (E + F)$$

Where:

D = the sum of Start-up Costs and No-load Costs and the incremental cost of energy summed over all Real-time Settlement Intervals that correspond to the Day-ahead Settlement Intervals in which the resource was scheduled;

E = [(the megawatt amount of energy provided in the Real-time Energy Market minus the megawatt amount of energy scheduled in the Day-ahead Energy Market) multiplied by the Real-time Price at the applicable pricing point for the resource] plus the sum of the day-ahead revenues as determined in part C of the above formula for determining the Day-ahead Operating Reserve Target, summed over the applicable Real-time Settlement Intervals; and

F = the sum of all revenues earned for providing Secondary Reserves, Synchronized Reserves, Non-Synchronized Reserves, and Reactive Services over the applicable Real-time Settlement Intervals.

The Office of the Interconnection shall apply any balancing Operating Reserve credits allocated pursuant to this section 3.2.3(b) to real-time deviations or real-time load share plus exports, pursuant to Tariff, Attachment K-Appendix, section 3.2.3(p), depending on whether the balancing Operating Reserve credits are related to resources scheduled during the reliability analysis for an Operating Day, or during the actual Operating Day.

(i) For resources scheduled by the Office of the Interconnection during the reliability analysis for an Operating Day, the associated balancing Operating Reserve credits shall be allocated based on the reason the resource was scheduled according to the following provisions:

(A) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to operate in real-time to augment the physical resources committed in the Day-ahead Energy Market to meet the forecasted real-time load plus the Operating Reserve requirement, the associated balancing Operating Reserve credits, identified as RA Credits for Deviations, shall be allocated to real-time deviations.

(B) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to maintain system reliability, the associated balancing Operating Reserve credits, identified as RA Credits for Reliability, shall be allocated according to ratio share of real time load plus export transactions.

(C) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource with a day-ahead schedule is required to deviate from that schedule to provide balancing Operating Reserves, the associated balancing Operating Reserve credits shall be segmented and separately allocated pursuant to subsections 3.2.3(b)(i)(A) or 3.2.3(b)(i)(B) hereof. Balancing Operating Reserve credits for such resources will be identified in the same manner as units committed during the reliability analysis pursuant to subsections 3.2.3(b)(i)(A) and 3.2.3(b)(i)(B) hereof.

(ii) For resources scheduled during an Operating Day, the associated balancing Operating Reserve credits shall be allocated according to the following provisions:

(A) If the Office of the Interconnection directs a resource to operate during an Operating Day to provide balancing Operating Reserves, the associated balancing Operating Reserve credits, identified as RT Credits for Reliability, shall be allocated according to ratio share of load plus exports. The foregoing notwithstanding, credits will be applied pursuant to this section only if the LMP at the resource's bus does not meet or exceed the applicable offer of the resource for at least four 5-minute intervals during one or more discrete clock hours during each period the resource operated and produced MWs during the relevant Operating Day. If a resource operated and produced MWs for less than four 5-

minute intervals during one or more discrete clock hours during the relevant Operating Day, the credits for that resource during the hour it was operated less than four 5-minute intervals will be identified as being in the same category (RT Credits for Reliability or RT Credits for Deviations) as identified for the Operating Reserves for the other discrete clock hours.

(B) If the Office of the Interconnection directs a resource not covered by section 3.2.3(b)(ii)(A) hereof to operate in real-time during an Operating Day, the associated balancing Operating Reserve credits, identified as RT Credits for Deviations, shall be allocated according to real-time deviations from day-ahead schedules.

(iii) PJM shall post on its Web site the aggregate amount of MWs committed that meet the criteria referenced in subsections (b)(i) and (b)(ii) hereof.

(c) The sum of the foregoing credits calculated in accordance with section 3.2.3(b) plus any unallocated charges from section 3.2.3(h) and Tariff, Attachment K-Appendix, section 5.1.7, and any shortfalls paid pursuant to the Market Settlement provision of the Day-ahead Economic Load Response Program, shall be the cost of Operating Reserves in the Day-ahead Energy Market.

(d) The cost of Operating Reserves in the Day-ahead Energy Market shall be allocated and charged to each Market Participant in proportion to the sum of its (i) scheduled load (net of Behind The Meter Generation expected to be operating, but not to be less than zero), accepted Decrement Bids in the Day-ahead Energy Market in megawatt-hours for that Operating Day and accepted Up-to Congestion Transactions in the Day-ahead Energy Market in megawatt-hours for the Operating Day at the sink of the transaction; and (ii) scheduled energy sales in the Day-ahead Energy Market from within the PJM Region to load outside such region in megawatt-hours for that Operating Day, but not including its bilateral transactions that are Dynamic Transfers to load outside such area pursuant to Tariff, Attachment K-Appendix, section 1.12, except to the extent PJM scheduled resources to provide Black Start service, Reactive Services or transfer interface control. The cost of Operating Reserves in the Day-ahead Energy Market for resources scheduled to provide Black Start service for the Operating Day which resources would not have otherwise been committed in the day-ahead security constrained dispatch shall be allocated by ratio share of the monthly transmission use of each Network Customer or Transmission Customer serving Zone Load or Non-Zone Load, as determined in accordance with the formulas contained in Tariff, Schedule 6A. The cost of Operating Reserves in the Day-ahead Energy Market for resources scheduled to provide Reactive Services or transfer interface control because they are known or expected to be needed to maintain system reliability in a Zone during the Operating Day and would not have otherwise been committed in the day-ahead security constrained dispatch shall be allocated and charged to each Market Participant in proportion to the sum of its real-time deliveries of energy to load (net of operating Behind The Meter Generation) in such Zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such Zone.

(e) At the end of each Operating Day, the following determination shall be made for each synchronized pool-scheduled resource of each Market Seller that operates as requested by the Office of the Interconnection. For each calendar day, pool-scheduled resources in the Real-time Energy Market shall be made whole for each of the following Segments: 1) the greater of their day-ahead schedules and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Economic Load Response Participant resources); and 2) any block of Real-time Settlement Intervals the resource operates at PJM's direction in excess of the greater of its day-ahead schedule and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Economic Load Response Participant resources). For each calendar day, and for each synchronized start of a generation resource or PJM-dispatched economic load reduction, there will be a maximum of two Segments for each resource. Segment 1 will be the greater of the day-ahead schedule and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Demand Resources) and Segment 2 will include the remainder of the contiguous Real-time Settlement Intervals when the resource is operating at the direction of the Office of the Interconnection, provided that a segment is limited to the Operating Day in which it commenced and cannot include any part of the following Operating Day.

A Generation Capacity Resource that operates outside of its unit-specific parameters will not receive Operating Reserve Credits nor be made whole for such operation when not dispatched by the Office of the Interconnection, unless the Market Seller of the Generation Capacity Resource can justify to the Office of the Interconnection that operation outside of such unit-specific parameters was the result of an actual constraint. Such Market Seller shall provide to the Market Monitoring Unit and the Office of the Interconnection its request to receive Operating Reserve Credits and/or to be made whole for such operation, along with documentation explaining in detail the reasons for operating its resource outside of its unit-specific parameters, within thirty calendar days following the issuance of billing statement for the Operating Day. The Market Seller shall also respond to additional requests for information from the Market Monitoring Unit and the Office of the Interconnection. The Market Monitoring Unit shall evaluate such request for compensation and provide its determination of whether there was an exercise of market power to the Office of the Interconnection by no later than twenty-five calendar days after receiving the Market Seller's request for compensation. The Office of the Interconnection shall make its determination whether the Market Seller justified that it is entitled to receive Operating Reserve Credits and/or be made whole for such operation of its resource for the day(s) in question, by no later than thirty calendar days after receiving the Market Seller's request for compensation.

Nuclear generation resources shall not be eligible for Operating Reserve payments unless: 1) the Office of the Interconnection directs such resources to reduce output, in which case, such units shall be compensated in accordance with Tariff, Attachment K-Appendix, section 3.2.3(f) and the parallel provision of Operating Agreement, Schedule 1, section 3.2.3(f); or 2) the resource submits a request for a risk premium to the Market Monitoring Unit under the procedures specified in Tariff, Attachment M – Appendix, section II.B. A nuclear generation resource (i) must submit a risk premium consistent with its agreement under such process, or, (ii) if it has not agreed with the Market Monitoring Unit on an appropriate risk premium, may submit its own determination of an appropriate risk premium to the Office of the Interconnection, subject to

acceptance by the Office of the Interconnection, with or without prior approval from the Commission.

Credits received pursuant to this section shall be equal to the positive difference between a resource's Total Operating Reserve Offer, and the total value of the resource's energy in the Day-ahead Energy Market plus any credit or change for quantity deviations, at PJM dispatch direction (excluding quantity deviations caused by an increase in the Market Seller's Real-time Offer), from the Day-ahead Energy Market during the Operating Day at the real-time LMP(s) applicable to the relevant generation bus in the Real-time Energy Market. The foregoing notwithstanding, credits for Segment 2 shall exclude start up (shutdown costs for Economic Load Response Participant resources) costs for generation resources.

Except as provided in section 3.2.3(m), if the total offered price exceeds the total value, the difference less any credit as determined pursuant to section 3.2.3(b), and less the absolute value of any negative Synchronized Reserve lost opportunity cost credit, as determined in section 3.2.3A(f)(iv) below, and less the absolute value of any negative Non-Synchronized Reserve lost opportunity cost credit determined in section 3.2.3.A.001(d)(iii) below, and less any amounts credited for providing Reactive Services as specified in section 3.2.3B, and the absolute value of any negative Secondary Reserve lost opportunity cost credit, as determined in section 3.2.3A.01(f)(iv) below, and plus the sum of the Market Revenue Neutrality Offsets for Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve, shall be credited to the Market Seller.

Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve credits applied against Operating Reserve credits pursuant to this section shall be netted against the Operating Reserve credits earned in the corresponding Real-time Settlement Interval(s) in which the Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve credits accrued, provided that for condensing combustion turbines, Synchronized Reserve credits will be netted against the total Operating Reserve credits accrued during each Real-time Settlement Interval the unit operates in condensing and generation mode.

(f) A Market Seller of a unit not defined in subsection (f-1), (f-2), or (f-4) hereof (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3(c) hereof), the output of which is reduced or suspended at the request of the Office of the Interconnection due to a transmission constraint or other reliability issue, and for which the real-time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall be credited for each Real-time Settlement Interval in an amount equal to the product of (A) the LOC Deviation times (B) the Locational Marginal Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A * B) - C$. If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.11.6, where the suspension is greater than twenty-four (24) consecutive hours, resources will not be compensated for lost opportunity costs.

(f-1) With the exception of Market Sellers of Flexible Resources that submit a Real-time Offer greater than their resource's Committed Offer in the Day-ahead Energy Market, a Market Seller of a Flexible Resource shall be compensated for lost opportunity cost, and shall be limited to the lesser of the unit's Economic Maximum or the unit's Generation Resource Maximum Output, if either of the following conditions occur:

- (i) if the unit output is reduced at the direction of the Office of the Interconnection and the real time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as directed by the PJM dispatcher), then the Market Seller shall be credited in a manner consistent with that described in section 3.2.3(f).
- (ii) If the unit is scheduled to produce energy in the Day-ahead Energy Market for a Day-ahead Settlement Interval, but the unit is not called on by the Office of the Interconnection and does not operate in the corresponding Real-time Settlement Interval(s), then the Market Seller shall be credited in an amount equal to the higher of:
 - 1) the product of (A) the amount of megawatts committed in the Day-ahead Energy Market for the generating unit, and (B) the Real-time Price at the generation bus for the generating unit, minus the sum of (C) the Total Lost Opportunity Cost Offer plus No-load Costs, plus (D) the Start-up Cost, divided by the Real-time Settlement Intervals committed for each set of contiguous hours for which the unit was scheduled in Day-ahead Energy Market. This equation is represented as $(A*B) - (C+D)$. The startup cost, (D), shall be excluded from this calculation if the unit operates in real time following the Office of the Interconnection's direction during any portion of the set of contiguous hours for which the unit was scheduled in Day-ahead Energy Market, or
 - 2) the Real-time Price at the unit's bus minus the Day-ahead Price at the unit's bus, multiplied by the number of megawatts committed in the Day-ahead Energy Market for the generating unit.

(f-2) A Market Seller of a hydroelectric resource that is pool-scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3(c) hereof), the output of which is altered at the request of the Office of the Interconnection from the schedule submitted by the owner, due to a transmission constraint or other reliability issue, shall be compensated for lost opportunity cost in the same manner as provided in sections 3.2.2(d) and 3.2.3A(f) and further detailed in the PJM Manuals.

(f-3) If a Market Seller believes that, due to specific pre-existing binding commitments to which it is a party, and that properly should be recognized for purposes of this section, the

above calculations do not accurately compensate the Market Seller for opportunity cost associated with following PJM dispatch instructions and reducing or suspending a unit's output due to a transmission constraint or other reliability issue, then the Office of the Interconnection, the Market Monitoring Unit and the individual Market Seller will discuss a mutually acceptable, modified amount of opportunity cost compensation, taking into account the specific circumstances binding on the Market Seller. Following such discussion, if the Office of the Interconnection accepts a modified amount of opportunity cost compensation, the Office of the Interconnection shall invoice the Market Seller accordingly. If the Market Monitoring Unit disagrees with the modified amount of opportunity cost compensation, as accepted by the Office of the Interconnection, it will exercise its powers to inform the Commission staff of its concerns.

(f-4) A Market Seller of a wind generating unit that is pool-scheduled or self-scheduled, has SCADA capability to transmit and receive instructions from the Office of the Interconnection, has provided data and established processes to follow PJM basepoints pursuant to the requirements for wind generating units as further detailed in this Agreement, the Tariff and the PJM Manuals, and which is operating as requested by the Office of the Interconnection, the output of which is reduced or suspended at the request of the Office of the Interconnection due to a transmission constraint or other reliability issue, and for which the , real-time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall be credited for each Real-time Settlement Interval in an amount equal to the product of (A) the LOC Deviation times (B) the Real-time Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A*B) - C$.

(f-5) (i) A Market Seller of a pool-scheduled resource or a dispatchable self-scheduled resource shall receive Dispatch Differential Lost Opportunity Cost credits as calculated under subsection (iv) below if the resource is dispatched to provide energy in the Real-time Energy Market, provided such resource is not committed to provide real-time ancillary services (Regulation, reserves, reactive service) or instructed to reduce or suspend output due to a transmission constraint or other reliability issue pursuant to Tariff, Attachment K-Appendix, section 3.2.3(f-1) through Tariff, Attachment K-Appendix, section (f-4).

(ii) PJM will calculate the revenue above cost for the pricing run for each Real-time Settlement Interval in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = the resource's expected output level based on its resource parameters at the Real-time Price at the applicable pricing point;

B = the Real-time Price at the applicable pricing point; and

C = the sum of the resource's Real-time Energy Market offer integrated under the Final Offer for the resource's expected output level based on its resource parameters at the Real-time Price at the applicable pricing point.

(iii) PJM will calculate the revenue above cost for the dispatch run for each Real-time Settlement Interval in accordance with the following equation:

$$(\text{greater of A and B}) - (\text{lesser of C and D})$$

Where:

A = the product of the amount of megawatts of energy dispatched in the Real-time Energy Market dispatch run for the resource in that Real-time Settlement Interval and the Real-time Price at the applicable pricing point;

B = the product of the amount of megawatts of energy the resource actually provided in that Real-time Settlement Interval and the Real-time Price at the applicable pricing point;

C = the resource's Real-time Energy Market offer integrated under the Final Offer for the amount of megawatts dispatched in the Real-time Energy Market dispatch run;

D = the resource's Real-time Energy Market offer integrated under the Final Offer for the amount of megawatts the resource actually provided in that Real-time Settlement Interval.

(iv) The Dispatch Differential Lost Opportunity Cost credit shall equal the greater of (A) the difference between the revenue above cost based on the pricing run determined in subsection (f-5)(ii) and the revenue above cost based on the dispatch run determined in subsection (f-5)(iii) or (B) zero.

(v) For each hour in an Operating Day, the total cost of the Dispatch Differential Lost Opportunity Cost credits shall be allocated and charged to each Market Participant in proportion to the sum of its (i) deliveries of energy to load ((a) net of operating Behind The Meter Generation, but not to be less than zero; and (b) excluding Direct Charging Energy) in the PJM Region, served under Network Transmission Service, in megawatt-hours; and (ii) deliveries of energy sales from within the PJM Region to load outside such region in megawatt-hours but not including its bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Tariff, Attachment K-Appendix, section 1.12, as compared to the sum of all such deliveries for all Market Participants.

(g) The sum of the foregoing credits in Tariff, Attachment K-Appendix, section 3.2.3(f-1) through Tariff, Attachment K-Appendix, section 3.2.3(f-4), plus any cancellation fees paid in accordance with Tariff, Attachment K-Appendix, section 1.10.2(d), such cancellation fees to be applied to the Operating Day for which the unit was scheduled, plus any shortfalls paid

pursuant to the Market Settlement provision of the real-time Economic Load Response Program, less any payments received from another Control Area for Operating Reserves shall be the cost of Operating Reserves for the Real-time Energy Market in each Operating Day.

(h) The cost of Operating Reserves for the Real-time Energy Market for each Operating Day, except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, shall be allocated and charged to each Market Participant based on their daily total of hourly deviations determined in accordance with the following equation:

$$\sum_h (A + B + C)$$

Where:

h = the hours in the applicable Operating Day;

A = For each Real-time Settlement Interval in an hour, the sum of the absolute value of the withdrawal deviations (in MW) between the quantities scheduled in the Day-ahead Energy Market and the Market Participant's energy withdrawals (net of operating Behind The Meter Generation) in the Real-time Energy Market, except as noted in subsection (h)(ii) below and in the PJM Manuals divided by the number of Real-time Settlement Intervals for that hour. The summation of each Real-time Settlement Interval's withdrawal deviation in an hour will be the Market Participant's total hourly withdrawal deviations. Market Participant bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Tariff, Attachment K-Appendix, section 1.12 are not included in the determination of withdrawal deviations;

B = For each Real-time Settlement Interval in an hour, the sum of the absolute value of generation deviations (in MW and not including deviations in Behind The Meter Generation) as determined in subsection (o) divided by the number of Real-time Settlement Intervals for that hour;

C = For each Real-time Settlement Interval in an hour, the sum of the absolute value of the injection deviations (in MW) between the quantities scheduled in the Day-ahead Energy Market and the Market Participant's energy injections in the Real-time Energy Market divided by the number of Real-time Settlement Intervals for that hour. The summation of the injection deviations for each Real-time Settlement Interval in an hour will be the Market Participant's total hourly injection deviations. The determination of injection deviations does not include generation resources.

The Revenue Data for Settlements determined for each Real-time Settlement Interval in accordance with Tariff, Attachment K-Appendix, section 3.1A shall be used in determining the real-time withdrawal deviations, generation deviations and injection deviations used to calculate Operating Reserve under this subsection (e).

The costs associated with scheduling of units for Black Start service or testing of Black Start Units shall be allocated by ratio share of the monthly transmission use of each Network Customer or Transmission Customer serving Zone Load or Non-Zone Load, as determined in accordance with the formulas contained in Tariff, Schedule 6A.

Notwithstanding section (h)(1) above, as more fully set forth in the PJM Manuals, load deviations from the Day-ahead Energy Market shall not be assessed Operating Reserves charges to the extent attributable to reductions in the load of Price Responsive Demand that is in response to an increase in Locational Marginal Price from the Day-ahead Energy Market to the Real-time Energy Market and that is in accordance with a properly submitted PRD Curve.

Deviations that occur within a single Zone shall be associated with the Eastern or Western Region, as defined in section 3.2.3(q) below, and shall be subject to the regional balancing Operating Reserve rate determined in accordance with Section 3.2.3(q). Deviations at a hub shall be associated with the Eastern or Western Region if all the buses that define the hub are located in the region. Deviations at an Interface Pricing Point shall be associated with whichever region, the Eastern or Western Region, with which the majority of the buses that define that Interface Pricing Point are most closely electrically associated. If deviations at interfaces and hubs are associated with the Eastern or Western region, they shall be subject to the regional balancing Operating Reserve rate. Demand and supply deviations shall be based on total activity in a Zone, including all aggregates and hubs defined by buses that are wholly contained within the same Zone.

The foregoing notwithstanding, netting deviations shall be allowed for each Real-time Settlement Interval in accordance with the following provisions:

- (i) Generation resources with multiple units located at a single bus shall be able to offset deviations in accordance with the PJM Manuals to determine the net deviation MW at the relevant bus.
- (ii) Demand deviations will be assessed by comparing all day-ahead demand transactions, which include the components referenced in section 3.2.3(d) regarding the cost of Operating Reserves in the Day-ahead Energy Market, at a single transmission zone, hub, or interface against the real-time demand transactions at that same transmission zone, hub, or interface; except that the positive values of demand deviations, as set forth in the PJM Manuals, will not be assessed Operating Reserve charges in the event of a Primary Reserve or Synchronized Reserve shortage in real-time or where PJM initiates the request for emergency load reductions in real-time in order to avoid a Primary Reserve or Synchronized Reserve shortage.
- (iii) Supply deviations will be assessed by comparing all day-ahead transactions at a single transmission zone, hub, or interface against the real-time transactions at that same transmission zone, hub, or interface.
- (iv) Bilateral transactions inside the PJM Region, as defined in Operating Agreement, Schedule 1, section 1.7.10, will not be included in the determination of Supply or Demand deviations.

(i) At the end of each Operating Day, Market Sellers shall be credited on the basis of their offered prices for synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, as well as the credits calculated as specified in Section 3.2.3(b) for those generators committed solely for the purpose of providing synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, at the request of the Office of the Interconnection.

(j) The sum of the foregoing credits as specified in section 3.2.3(i) shall be the cost of Operating Reserves for synchronous condensing for the PJM Region for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, or in association with post-contingency operation for the Operating Day and shall be separately determined for the PJM Region.

(k) The cost of Operating Reserves for synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, or in association with post-contingency operation for each Operating Day shall be allocated and charged to each Market Participant in proportion to the sum of its (i) deliveries of energy to load (net of operating Behind The Meter Generation, but not to be less than zero) in the PJM Region, served under Network Transmission Service, in megawatt-hours during that Operating Day; and (ii) deliveries of energy sales from within the PJM Region to load outside such region in megawatt-hours during that Operating Day, but not including its bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Tariff, Attachment K-Appendix, section 1.12, as compared to the sum of all such deliveries for all Market Participants.

(l) For any Operating Day in either, as applicable, the Day-ahead Energy Market or the Real-time Energy Market for which, for all or any part of such Operating Day, the Office of the Interconnection: (i) declares a Maximum Generation Emergency; (ii) issues an alert that a Maximum Generation Emergency may be declared (“Maximum Generation Emergency Alert”); or (iii) schedules units based on the anticipation of a Maximum Generation Emergency or a Maximum Generation Emergency Alert, the Operating Reserves credit otherwise provided by section 3.2.3(b) or section 3.2.3(e) in connection with market-based offers shall be limited as provided in subsections (n) or (m), respectively. The Office of the Interconnection shall provide timely notice on its internet site of the commencement and termination of any of the actions described in subsection (i), (ii), or (iii) of this subsection (l) (collectively referred to as “MaxGen Conditions”). Following the posting of notice of the commencement of a MaxGen Condition, a Market Seller may elect to submit a cost-based offer in accordance with Operating Agreement, Schedule 2, in which case subsections (m) and (n) shall not apply to such offer; provided, however, that such offer must be submitted in accordance with the deadlines in Tariff, Attachment K-Appendix, section 1.10 for the submission of offers in the Day-ahead Energy Market or Real-time Energy Market, as applicable. Submission of a cost-based offer under such conditions shall not be precluded by Tariff, Attachment K-Appendix, section 1.9.7(b); provided, however, that the Market Seller must return to compliance with Tariff, Attachment K-Appendix, section 1.9.7(b) when it submits its bid for the first Operating Day after termination of the MaxGen Condition.

(m) For the Real-time Energy Market, if the Effective Offer Price (as defined below) for a market-based offer is greater than \$1,000/MWh and greater than the Market Seller's lowest available and applicable cost-based offer, the Market Seller shall not receive any credit for Operating Reserves. For purposes of this subsection (m), the Effective Offer Price shall be the amount that, absent subsections (l) and (m), would have been credited for Operating Reserves for such Operating Day pursuant to section 3.2.3(e) plus the Real-time Energy Market revenues for the Real-time Settlement Intervals that the offer is economic divided by the megawatt hours of energy provided during the Real-time Settlement Intervals that the offer is economic. The Real-time Settlement Intervals that the offer is economic shall be: (i) the Real-time Settlement Intervals that the offer price for energy is less than or equal to the Real-time Price for the relevant generation bus, (ii) the Real-time Settlement Intervals in which the offer for energy is greater than Locational Marginal Price and the unit is operated at the direction of the Office of the Interconnection that are in addition to any Real-time Settlement Intervals required due to the minimum run time or other operating constraint of the unit, and (iii) for any unit with a minimum run time of one hour or less and with more than one start available per day, any hours the unit operated at the direction of the Office of the Interconnection.

(n) For the Day-ahead Energy Market, if notice of a MaxGen Condition is provided prior to 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled and the Effective Offer Price for a market-based offer is greater than \$1,000/MWh and greater than the Market Seller's lowest available and applicable cost-based offer, the Market Seller shall not receive any credit for Operating Reserves. If notice of a MaxGen Condition is provided after 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled and the Effective Offer Price is greater than \$1,000/MWh, the Market Seller shall receive credit for Operating Reserves determined in accordance with section 3.2.3(b), subject to the limit on total compensation stated below. If the Effective Offer Price is less than or equal to \$1,000/MWh, regardless of when notice of a MaxGen Condition is provided, the Market Seller shall receive credit for Operating Reserves determined in accordance with section 3.2.3(b), subject to the limit on total compensation stated below. For purposes of this subsection (n), the Effective Offer Price shall be the amount that, absent subsections (l) and (n), would have been credited for Operating Reserves for such Operating Day divided by the megawatt hours of energy offered during the Specified Hours, plus the offer for energy during such hours. The Specified Hours shall be the lesser of: (1) the minimum run hours stated by the Market Seller in its Offer Data; and (2) either (i) for steam-electric generating units and for combined-cycle units when such units are operating in combined-cycle mode, the six consecutive hours of highest Day-ahead Price during such Operating Day when such units are running or (ii) for combustion turbine units and for combined-cycle units when such units are operating in combustion turbine mode, the two consecutive hours of highest Day-ahead Price during such Operating Day when such units are running. Notwithstanding any other provision in this subsection, the total compensation to a Market Seller on any Operating Day that includes a MaxGen Condition shall not exceed \$1,000/MWh during the Specified Hours, where such total compensation in each such hour is defined as the amount that, absent subsections (l) and (n), would have been credited for Operating Reserves for such Operating Day pursuant to section 3.2.3(b) divided by the Specified Hours, plus the Day-ahead Price for such hour, and no Operating Reserves payments shall be made for any other hour of such Operating Day. If a unit operates in real time at the

direction of the Office of the Interconnection consistently with its day-ahead clearing, then subsection (m) does not apply.

(o) Dispatchable pool-scheduled generation resources and dispatchable self-scheduled generation resources that follow dispatch shall not be assessed balancing Operating Reserve deviations. Pool-scheduled generation resources and dispatchable self-scheduled generation resources that do not follow dispatch shall be assessed balancing Operating Reserve deviations in accordance with the calculations described below and in the PJM Manuals.

The Office of the Interconnection shall calculate a ramp-limited desired MW value for generation resources where the economic minimum and economic maximum are at least as far apart in real-time as they are in day-ahead according to the following parameters:

(i) real-time economic minimum \leq 105% of day-ahead economic minimum or day-ahead economic minimum plus 5 MW, whichever is greater.

(ii) real-time economic maximum \geq 95% day-ahead economic maximum or day-ahead economic maximum minus 5 MW, whichever is lower.

The ramp-limited desired MW value for a generation resource shall be equal to:

$$Ramp_Request_t = \frac{(Dispatchtarget_{t-1} - AOutput_{t-1})}{(LAtime_{t-1})}$$

$$RL_Desired_t = AOutput_{t-1} + (Ramp_Request_t * Case_Eff_time_{t-1})$$

where:

1. Dispatchtarget = Dispatch Signal for the previous approved Dispatch case
2. AOutput = Unit's achievable target MW at case solution time as defined in the PJM Manuals
3. LAtime = Dispatch look ahead time
4. Case_Eff_time = Time between signal changes
5. RL_Desired = Ramp-limited desired MW

To determine if a generation resource is following dispatch the Office of the Interconnection shall determine the unit's MW off dispatch and % off dispatch by using the lesser of the difference between the actual output and the dispatch signal or the actual output and ramp-limited desired MW value for each Real-time Settlement Interval. If the dispatch signal and the ramp-limited desired MW for the resource are unavailable, the Office of the Interconnection will determine the unit's MW off dispatch and % off dispatch by calculating the lesser of the difference between the actual output and the dispatch LMP Desired MW for each Real-time Settlement Interval.

A pool-scheduled or dispatchable self-scheduled resource is considered to be following dispatch if its actual output is between its ramp-limited desired MW value and dispatch signal, or if its % off dispatch is ≤ 10 , or its Real-time Settlement Interval MWh is within 5% of the Real-time Settlement Interval ramp-limited desired MW. A self-scheduled generator must also be dispatched above economic minimum. The degree of deviations for resources that are not following dispatch shall be determined for each Real-time Settlement Interval in accordance with the following provisions:

- A dispatchable self-scheduled resource that is not dispatched above economic minimum shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – Day-Ahead MWh.
- A resource that is dispatchable day-ahead but is Fixed Gen in real-time shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – dispatch LMP Desired MW.
- Pool-scheduled generators that are not following dispatch shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – Ramp-Limited Desired MW.
- If a resource's real-time economic minimum is greater than its day-ahead economic minimum by 5% or 5 MW, whichever is greater, or its real-time economic maximum is less than its Day Ahead economic maximum by 5% or 5 MW, whichever is lower, and dispatch LMP Desired MWh for the Real-time Settlement Interval is either below the real time economic minimum or above the real time economic maximum, then balancing Operating Reserve deviations for the resource shall be assessed according to the following formula: Real time Settlement Interval MWh – dispatch LMP Desired MWh.
- If a resource is not following dispatch and its % Off Dispatch is $\leq 20\%$, balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – Ramp-Limited Desired MW. If deviation value is within 5% of Ramp-Limited Desired MW, balancing Operating Reserve deviations shall not be assessed.
- If a resource is not following dispatch and its % off Dispatch is $> 20\%$, balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – dispatch LMP Desired MWh.
- If a resource is not following dispatch, and the resource has tripped, for the Real-time Settlement Interval the resource tripped and the Real-time Settlement Intervals it remains offline throughout its day-ahead schedule balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – Day-Ahead MWh.

- For resources that are not dispatchable in both the Day-Ahead and Real-time Energy Markets balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh - Day-ahead MWh.

If a resource has a sum of the absolute value of generator deviations for an hour that is less than 5 MWh, then the resource shall not be assessed balancing Operating Reserve deviations for that hour.

(o-1) Dispatchable economic load reduction resources that follow dispatch shall not be assessed balancing Operating Reserve deviations. Economic Load Response Participant resources that do not follow dispatch shall be assessed balancing Operating Reserve deviations as described in this subsection and as further specified in the PJM Manuals.

The Desired MW quantity for such resources for each hour shall be the hourly integrated MW quantity to which the load reduction resource was dispatched for each hour (where the hourly integrated value is the average of the dispatched values as determined by the Office of the Interconnection for the resource for each hour).

If the actual reduction quantity for the load reduction resource for a given hour deviates by no more than 20% above or below the Desired MW quantity, then no balancing Operating Reserve deviation will accrue for that hour. If the actual reduction quantity for the load reduction resource for a given hour is outside the 20% bandwidth, the balancing Operating Reserve deviations will accrue for that hour in the amount of the absolute value of (Desired MW – actual reduction quantity). For those hours where the actual reduction quantity is within the 20% bandwidth specified above, the load reduction resource will be eligible to be made whole for the total value of its offer as defined in Tariff, Attachment K-Appendix, section 3.3A. Hours for which the actual reduction quantity is outside the 20% bandwidth will not be eligible for the make-whole payment. If at least one hour is not eligible for make-whole payment based on the 20% criteria, then the resource will also not be made whole for its shutdown cost.

(p) The Office of the Interconnection shall allocate the charges assessed pursuant to Tariff, Attachment K-Appendix, section 3.2.3(h) except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, to real-time deviations from day-ahead schedules or real-time load share plus exports depending on whether the underlying balancing Operating Reserve credits are related to resources scheduled during the reliability analysis for an Operating Day, or during the actual Operating Day. If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, section 1.11.6, the Office of the Interconnection shall allocate the charges to the ratio share of real-time load plus export transactions.

- (i) For resources scheduled by the Office of the Interconnection during the reliability analysis for an Operating Day, the associated balancing Operating Reserve charges shall be allocated based on the reason the resource was scheduled according to the following provisions:

(A) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to operate in real-time to augment the physical resources committed in the Day-ahead Energy Market to meet the forecasted real-time load plus the Operating Reserve requirement, the associated balancing Operating Reserve charges shall be allocated to real-time deviations from day-ahead schedules.

(B) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to maintain system reliability, the associated balancing Operating Reserve charges shall be allocated according to ratio share of real time load plus export transactions.

(C) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource with a day-ahead schedule is required to deviate from that schedule to provide balancing Operating Reserves, the associated balancing Operating Reserve charges shall be allocated pursuant to (A) or (B) above.

(ii) For resources scheduled during an Operating Day, the associated balancing Operating Reserve charges shall be allocated according to the following provisions:

(A) If the Office of the Interconnection directs a resource to operate during an Operating Day to provide balancing Operating Reserves, the associated balancing Operating Reserve charges shall be allocated according to ratio share of load plus exports. The foregoing notwithstanding, charges will be assessed pursuant to this section only if the LMP at the resource's bus does not meet or exceeds the applicable offer of the resource for at least four 5-minute intervals during one or more discrete clock hours during each period the resource operated and produced MWs during the relevant Operating Day. If a resource operated and produced MWs for less than four 5-minute intervals during one or more discrete clock hours during the relevant Operating Day, the charges for that resource during the hour it was operated less than four 5-minute intervals will be identified as being in the same category as identified for the Operating Reserves for the other discrete clock hours.

(B) If the Office of the Interconnection directs a resource not covered by Tariff, Attachment K-Appendix, section 3.2.3(h)(ii)(A) to operate in real-time during an Operating Day, the associated balancing Operating Reserve charges shall be allocated according to real-time deviations from day-ahead schedules.

(q) The Office of the Interconnection shall determine regional balancing Operating Reserve rates for the Western and Eastern Regions of the PJM Region. For the purposes of this section, the Western Region shall be the AEP, APS, ComEd, Duquesne, Dayton, ATSI, DEOK, EKPC, OVEC transmission Zones, and the Eastern Region shall be the AEC, BGE, Dominion,

PENELEC, PEPCO, ME, PPL, JCPL, PECO, DPL, PSEG, RE transmission Zones. The regional balancing Operating Reserve rates shall be determined in accordance with the following provisions:

(i) The Office of the Interconnection shall calculate regional adder rates for the Eastern and Western Regions. Regional adder rates shall be equal to the total balancing Operating Reserve credits paid to generators for transmission constraints that occur on transmission system capacity equal to or less than 345kv. The regional adder rates shall be separated into reliability and deviation charges, which shall be allocated to real-time load or real-time deviations, respectively. Whether the underlying credits are designated as reliability or deviation charges shall be determined in accordance with section 3.2.3(p).

(ii) The Office of the Interconnection shall calculate RTO balancing Operating Reserve rates. RTO balancing Operating Reserve rates shall be equal to balancing Operating Reserve credits except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, in excess of the regional adder rates calculated pursuant to Tariff, Attachment K-Appendix, section 3.2.3(q)(i) of Schedule 1 of this Agreement. The RTO balancing Operating Reserve rates shall be separated into reliability and deviation charges, which shall be allocated to real-time load or real-time deviations, respectively. Whether the underlying credits are allocated as reliability or deviation charges shall be determined in accordance with section 3.2.3(p).

(iii) Reliability and deviation regional balancing Operating Reserve rates shall be determined by summing the relevant RTO balancing Operating Reserve rates and regional adder rates.

(iv) If the Eastern and/or Western Regions do not have regional adder rates, the relevant regional balancing Operating Reserve rate shall be the reliability and/or deviation RTO balancing Operating Reserve rate.

(r) Market Sellers that incur incremental operating costs for a generation resource that are either greater than \$1,000/MWh as determined in accordance with the Market Seller's PJM-approved Fuel Cost Policy, Operating Agreement, Schedule 2 and PJM Manual 15, but are not verified at the time of dispatch of the resource under section 6.4.3 of this Schedule, or greater than \$2,000/MWh as determined in accordance with the Market Seller's PJM-approved Fuel Cost Policy, Operating Agreement, Schedule 2, and PJM Manual 15, will be eligible to receive credit for Operating Reserves upon review of the Market Monitoring Unit and the Office of the Interconnection, and approval of the Office of the Interconnection. Market Sellers must submit to the Office of the Interconnection and the Market Monitoring Unit all relevant documentation demonstrating the calculation of costs greater than \$2,000/MWh, and costs greater than \$1,000/MWh which were not verified at the time of dispatch of the resource under Tariff, Attachment K-Appendix, section 6.4.3. The Office of the Interconnection must approve any Operating Reserve credits paid to a Market Seller under this subsection (r).

3.2.3A Synchronized Reserve.

(a) Each Market Participant that is a Load Serving Entity that is not part of an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have an obligation for hourly Synchronized Reserve equal to its pro rata share of Synchronized Reserve requirements for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone or Reserve Sub-zone for the hour ("Synchronized Reserve Obligation"), less any amount obtained from condensers associated with provision of Reactive Services as described in section 3.2.3B(i) and any amount obtained from condensers associated with post-contingency operations, as described in section 3.2.3C(b). Those entities that participate in an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have their reserve obligations determined based on the stipulations in such agreement. A Market Participant's hourly Synchronized Reserve Obligation shall be adjusted by any Synchronized Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Synchronized Reserve Obligation shall be charged the pro rata share of the sum of day-ahead and real-time credits for Synchronized Reserve as defined in sections 3.2.3A(b)(i) and (ii) below.

(b) A resource supplying Synchronized Reserve at the direction of the Office of the Interconnection shall be credited as follows:

i) Credits for Synchronized Reserve provided by generation and Economic Load Response Participant resources assigned to provide Synchronized Reserve by the Office of the Interconnection or self-scheduled in the Day-ahead Synchronized Reserve Market shall be equal to the product of the Day-ahead Synchronized Reserve Market Clearing Price multiplied by the megawatt amount of Synchronized Reserve such resource is assigned to provide..

ii) Credits for Synchronized Reserve provided by generation resources and Economic Load Response Participant resources assigned to provide Synchronized Reserve by the Office of the Interconnection or self-scheduled in the Real-time Synchronized Reserve Market shall be determined for each operating hour based on the sum of their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Synchronized Reserve from that resource assigned by the Office of the Interconnection or self-scheduled in the Real-time Synchronized Reserve Market. The megawatt value is capped at the lesser of the Economic Maximum and the Synchronized Reserve

maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval where there is not a Synchronized Reserve event;

B = For each Real-time Settlement Interval, the megawatts of Synchronized Reserve from that resource assigned by the Office of the Interconnection or self-scheduled in the Day-ahead Synchronized Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Synchronized Reserve Market Clearing Price.

If a Synchronized Reserve Event is initiated by the Office of the Interconnection and the Economic Load Response Participant resource reduced its load in response to the event, the resource shall be eligible to receive a credit for the fixed costs associated with achieving the load reduction, as specified in the PJM Manuals.

iii) Pool-scheduled resources shall be credited a Synchronized Reserve lost opportunity cost credit, where positive, as described in subsection (f)(iv) below.

(c) [Reserved for future use]

(d) Synchronized Reserve Market Clearing Prices

(i) For the Day-ahead Synchronized Reserve Market, the Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Synchronized Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for Synchronized Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Synchronized Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Synchronized Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Synchronized Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute and (B) the price of serving the next increment of demand for Primary Reserve and 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute, provided that the Synchronized Reserve Market Clearing Price shall be less than or equal to the sum of no more than two of the Reserve Penalty Factors for the Synchronized Reserve Requirement, the Primary Reserve Requirement, and the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Synchronized Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a

scheduled megawatt quantity and Day-ahead Synchronized Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Synchronized Reserve market quantities and prices as determined pursuant to subsection (d)(ii) hereof.

(ii) For the Real-time Synchronized Reserve Market, the Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for Synchronized Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Synchronized Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Synchronized Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Synchronized Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute and (B) the price of serving the next increment of demand for Primary Reserve and 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute, provided that the Synchronized Reserve Market Clearing Price shall be less than or equal to the sum of no more than two of the Reserve Penalty Factors for the Synchronized Reserve Requirement, the Primary Reserve Requirement, and the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Synchronized Reserves, then the Synchronized Reserve Market Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Synchronized Reserves, then the Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Synchronized Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Synchronized

Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Synchronized Reserve Market Clearing Prices exist, then the Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, and the Office of the Interconnection is assigning Synchronized Reserves, the Office of the Interconnection will set the Synchronized Reserve Market Clearing Price to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period. Resources will be compensated for lost opportunity cost per subsection (f) hereof using the energy price as determined in Operating Agreement, Schedule 1, section 2.5.2.iii. The opportunity cost shall be zero for all resources self-scheduled to provide Synchronized Reserve, synchronous condensers and Economic Load Response Participant resources.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action as described in the PJM Manuals or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Synchronized Reserve Market Clearing Price shall be the sum of the Reserve Penalty Factors for the Primary Reserve Requirement, and the Synchronized Reserve Requirement for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the Synchronized Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended Synchronized Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Synchronized Reserve Penalty Factors are warranted for subsequent Delivery Year(s).

(e) (i) For determining the Synchronized Reserve Market Clearing Price in each hour of the Day-ahead Synchronized Reserve Market, the estimated resource-specific opportunity cost for a generation resource or Economic Load Response Participant resource shall be the difference between the Locational Marginal Price at the generation or Economic Load Response Participant resource bus and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) or offer price to reduce energy from the Economic Load Response Participant resource in the PJM Interchange Energy Market when the Locational Marginal Price at the generation or Economic Load Participant resource bus is greater than the offer price

for energy from the generation resource or the offer price to reduce energy from the Economic Load Response Participant resource.

However, the opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve and for synchronous condensers and for Economic Load Response Participant resources that do not receive a day-ahead commitment to provide energy in the same operating hour in which such resource is committed to provide Synchronized Reserve.

(ii) For determining the Synchronized Reserve Market Clearing Price for each Real-time Settlement Interval in the Real-time Synchronized Reserve Market, the estimated unit-specific opportunity cost for a generation resource that is not a hydroelectric resource shall be the difference between the Locational Marginal Price at the generation bus for the generation resource and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) in the PJM Interchange Energy Market when the Locational Marginal Price at the generation bus is greater than the offer price for energy from the generation resource.

For hydroelectric resources, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the expected real-time Locational Marginal Price at that generation bus. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions, as defined in the PJM Manuals, and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the expected real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average day-ahead Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

The opportunity costs shall be zero for all resources self-scheduled to provide Synchronized Reserve, synchronous condensers and Economic Load Response Participant resources.

(f) (i) In determining the credit under subsection (b) to a generation resource, except a generation resource that is operating as a synchronous condenser, selected to provide Synchronized Reserve in the Day-ahead Synchronized Reserve Market, or an Economic Load Response Participant resource that is selected to provide Synchronized Reserve in the Day-ahead Synchronized Reserve Market for the same operating hour in which such resource receives a day-ahead commitment to provide energy, the opportunity cost of a resource shall be determined for each operating hour that the Office of the Interconnection requires a resource to provide Synchronized Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Day-ahead Locational Marginal Price at the generation bus of the generation resource or the applicable pricing point for the Economic Load Response Participant resource;

B = The deviation of the resource's energy output or load reduction necessary to supply a Day-ahead Synchronized Reserve assignment from the resource's energy expected output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load; and

C = The Day-ahead Energy market offer integrated under the applicable energy offer curve for the resource's energy output or load reduction necessary to provide a Day-ahead Synchronized Reserve Market assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load.

For a generation resource that is operating as a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [energy use for providing synchronous condensing multiplied by A] plus [the applicable condense start-up cost divided by the number of hours the resource is assigned Synchronized Reserve].

(ii) In determining the credit under subsection (b) to a generation resource, except a generation resource that is operating as a synchronous condenser, selected to provide Synchronized Reserve in the Real-time Synchronized Reserve Market in excess of the resource's Day-ahead Synchronized Reserve Market assignment and that actively follows the Office of the Interconnection's signals and instructions, the unit-specific opportunity cost of that generation resource shall be determined for each Real-time Settlement Interval that the Office of the Interconnection requires that generation resource to provide Synchronized Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Real-time Locational Marginal Price at the generation bus of the generation resource;

B = The deviation of the generation resource's output necessary to supply Synchronized Reserve in real-time, reduced by the amount of Synchronized Reserve the resource failed to respond during a Synchronized Reserve Event during the Operating Day, in excess of its Day-ahead Synchronized Reserve Market assignment and follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy; and

C = The energy offer integrated under the applicable energy offer curve for the generation resource's output necessary to supply Synchronized Reserve in real-time from the lesser of the generation resource's output necessary to provide a Day-ahead Synchronized Reserve Market assignment or follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [additional energy use in excess of day-ahead energy use for providing synchronous condensing in real-time multiplied by A] plus [any applicable condense start-up costs due to additional condense start-ups in real-time in excess of day-ahead condense start-ups allocated to each Real-time Settlement Interval as described in PJM Manuals].

For hydroelectric resources, the unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the real-time Locational Marginal Price at that generation bus multiplied by the additional megawatts assigned to supply Synchronized Reserve in real-time in excess of its Day-ahead Synchronized Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average real-time Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating multiplied by the additional megawatts assigned to supply the hourly Synchronized Reserve in real-time in excess of its Day-ahead Synchronized Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

(iii) For each Real-time Settlement Interval, a Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in the resource's real-time reserve MW from a day-ahead market assignment in more than one market for that Real-time Settlement Interval, the total Market Revenue Neutrality Offset is allocated to the Synchronized Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Synchronized Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Synchronized Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Synchronized Reserve in a Real-time Settlement Interval for any of the following conditions:

- (A) A resource's real-time Synchronized Reserve assignment decreases due to the resource being self-scheduled to provide energy or Regulation;
- (B) A resource reduces its flexibility in real-time such that the resource no longer qualifies to provide Synchronized Reserve in real-time;
- (C) A resource's Final Offer is less than its Committed Offer;
- (D) A resource trips offline or otherwise becomes unavailable in real-time;
- (E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above; or
- (F) A resource increases its Synchronized Reserve offer price in the Real-time Synchronized Reserve Market from its offer price in the Day-ahead Synchronized Reserve Market.

(iv) A Synchronized Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(A + B + C + D) - (E + F + G + H)$$

Where:

A = day-ahead Synchronized Reserve offer price times the Synchronized Reserve MW assignment;

B = real-time Synchronized Reserve offer price times the Synchronized Reserve MW assigned in real-time in excess of the Synchronized Reserve MW assigned day-ahead, where the Synchronized Reserve MW assigned is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval where there is not a Synchronized Reserve event;

C = day-ahead opportunity cost as determined in subsection (f)(i) above;

D = real-time opportunity cost as determined in subsection (f)(ii) above;

E = day-ahead clearing price credits as determined in subsection (b)(i) above;

F = real-time clearing price credits as determined in subsection (b)(ii) above less any applicable charges for failure to respond to a Synchronized Reserve Event as determined in subsection (j) below;

G = the applicable Market Revenue Neutrality Offset as determined in subsection (f)(iii) above; and

H = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A(f)(iii) above if not eligible for Market Revenue Neutrality Offset.

(v) The opportunity costs for an Economic Load Response Participant resource assigned Synchronized Reserve in real-time or any resource self-scheduled for Synchronized Reserves shall be zero.

(g) [Reserved for future use]

(h) For each operating hour, the sum of the Synchronized Reserve lost opportunity cost credits credited in accordance with subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Synchronized Reserve Obligation in proportion to its real-time purchases of Synchronized Reserve in megawatt-hours during that hour.

(i) [Reserved for future use]

(j) In the event a generation resource or Economic Load Response Participant Resource that either has been assigned by the Office of the Interconnection or self-scheduled to provide Synchronized Reserve in real-time fails to provide the assigned or self-scheduled amount of Synchronized Reserve in response to a Synchronized Reserve Event, the resource will be charged at the Real-time Synchronized Reserve Market Clearing Price for the real-time Synchronized Reserve assignment, in excess of amount that actually responded for all Real-time Settlement Intervals the resource was assigned or self-scheduled Synchronized Reserve real-time, which is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements for the resource on the Operating Day during which the event occurred. The determination of the amount of Synchronized Reserve credited to a resource shall be on an individual resource basis, not on an aggregate basis.

The resource shall refund payments received for Synchronized Reserve it failed to provide. For purposes of determining the amount of the payments to be refunded by a Market Participant, the Office of the Interconnection shall calculate the shortfall of Synchronized Reserve on an individual resource basis unless the Market Participant had multiple resources that were assigned or self-scheduled to provide Synchronized Reserve, in which case the shortfall will be determined on an aggregate basis. For performance determined on an aggregate basis, the response of any resource that provided more Synchronized Reserve than it was assigned or self-scheduled to provide will be used to offset the performance of other resources that provided less Synchronized Reserve than they were assigned or self-scheduled to provide during a

Synchronized Reserve Event, as calculated in the PJM Manuals. The determination of a Market Participant's aggregate response shall not be taken into consideration in the determination of the amount of Synchronized Reserve credited to each individual resource.

The amount refunded shall be determined by multiplying the retroactive penalty megawatts by the Real-time Synchronized Reserve Market Clearing Price for all intervals the resource was assigned or self-scheduled to provide Synchronized Reserve for a period of time immediately preceding the Synchronized Reserve Event equal to the lesser of the average number of days between Synchronized Reserve Events, or the number of days since the resource last failed to provide the amount of Synchronized Reserve it was assigned or self-scheduled to provide in response to a Synchronized Reserve Event. The retroactive penalty megawatts for each interval shall be the lesser of the amount of the shortfall of Synchronized Reserve, measured in megawatts, and the real-time Synchronized Reserve assignment for each interval, which is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements for the resource. The average number of days between Synchronized Reserve Events for purposes of this calculation shall be determined by an annual review of the twenty-four month period ending October 31 of the calendar year in which the review is performed, and shall be rounded down to a whole day value. The Office of the Interconnection shall report the results of its annual review to stakeholders by no later than December 31, and the average number of days between Synchronized Reserve Events shall be effective as of the following January 1. The refunded charges shall be allocated as credits to Market Participants based on its pro rata share of the Synchronized Reserve Obligation megawatts in the hour(s) of the Synchronized Reserve Event for the Reserve Sub-zone or Reserve Zone, except that Market Participants that incur a refund obligation and also have an applicable Synchronized Reserve Obligation during the hour(s) of the Synchronized Reserve Event shall not be included in the allocation of such refund credits. If the event spans multiple hours, the refund credits will be prorated hourly based on the duration of the event within each clock hour.

(k) The magnitude of response to a Synchronized Reserve Event by a generation resource or an Economic Load Response Participant resource, except for Batch Load Economic Load Response Participant resources covered by section 3.2.3A(l), is the difference between the generation resource's output or the Economic Load Response Participant resource's consumption at the start of the event and its output or consumption 10 minutes after the start of the event. In order to allow for small fluctuations and possible telemetry delays, generation resource output or Economic Load Response Participant resource consumption at the start of the event is defined as the lowest telemetered generator resource output or greatest Economic Load Response Participant resource consumption between one minute prior to and one minute following the start of the event. Similarly, a generation resource's output or an Economic Load Response Participant resource's consumption 10 minutes after the event is defined as the greatest generator resource output or lowest Economic Load Response Participant resource consumption achieved between 9 and 11 minutes after the start of the event. The response actually credited to a generation resource will be reduced by the amount the megawatt output of the generation resource falls below the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter. The response actually credited to an Economic Load Response Participant resource will be reduced by the amount the megawatt

consumption of the Economic Load Response Participant resource exceeds the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter.

(l) The magnitude of response by a Batch Load Economic Load Response Participant resource that is at the stage in its production cycle when its energy consumption is less than the level of megawatts in its offer at the start of a Synchronized Reserve Event shall be the difference between (i) the Batch Load Economic Load Response Participant resource's consumption at the end of the Synchronized Reserve Event and (ii) the Batch Load Economic Load Response Participant resource's consumption during the minute within the ten minutes after the end of the Synchronized Reserve Event in which the Batch Load Economic Load Response Participant resource's consumption was highest and for which its consumption in all subsequent minutes within the ten minutes was not less than fifty percent of the consumption in such minute; provided that, the magnitude of the response shall be zero if, when the Synchronized Reserve Event commences, the scheduled off-cycle stage of the production cycle is greater than ten minutes. .

3.2.3A.001 Non-Synchronized Reserve.

(a) Each Market Participant that is a Load Serving Entity that is not part of an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have an obligation for hourly Non-Synchronized Reserve equal to its pro rata share of Non-Synchronized Reserve assigned for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone and Reserve Sub-zone for the hour ("Non-Synchronized Reserve Obligation"). Those entities that participate in an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have their reserve obligations determined based on the stipulations in such agreement. A Market Participant's hourly Non-Synchronized Reserve Obligation shall be adjusted by any Non-Synchronized Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Non-Synchronized Reserve Obligation shall be charged the pro rata share of the sum day-ahead and real-time credits for Non-Synchronized Reserve as defined in sections 3.2.3A.001(b)(i) and (ii) below.

(b) Resources assigned to provide Non-Synchronized Reserve at the direction of the Office of the Interconnection shall be credited as follows:

(i) Credits for Non-Synchronized Reserve provided by generation resources assigned to provide Non-Synchronized Reserve by the Office of the Interconnection in the Day-ahead Non-Synchronized Reserve Market shall be equal to the product of the Day-ahead Non-Synchronized Market Clearing Price multiplied by the megawatt amount of Non-Synchronized Reserve such resource is assigned to provide.

(ii) Credits for Non-Synchronized Reserve provided by generation resources assigned to provide Non-Synchronized Reserve by the Office of the Interconnection in the Real-time Non-Synchronized Reserve Market shall be determined for each operating

hour based on the sum on their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Non-Synchronized Reserve from that resource assigned by the Office of the Interconnection in the Real-time Non-Synchronized Reserve Market;

B = For each Real-time Settlement Interval, the megawatts of Non-Synchronized Reserve from that resource assigned by the Office of the Interconnection in the Day-ahead Non-Synchronized Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Non-Synchronized Reserve Market Clearing Price.

(iii) Pool-scheduled generation resources assigned to provide Non-Synchronized Reserve in the Day-ahead Non-Synchronized Reserve Market shall be credited a Non-Synchronized Reserve lost opportunity cost credit, where positive, as determined in accordance with subsection (d)(iii) below, to recover any net monetary loss to the Market Seller of such resource associated with the purchase of Non-Synchronized Reserve in the Real-time Non-Synchronized Reserve Market as a result of following the dispatch direction of the Office of the Interconnection.

(c) Non-Synchronized Reserve Market Clearing Prices

(i) For the Day-ahead Non-Synchronized Reserve Market, the Non-Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Non-Synchronized Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for Primary Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Non-Synchronized Reserve offer prices and the applicable Operating Reserve Demand Curve for Non-Synchronized Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Primary Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute and (B) the price of serving the next increment of demand for 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute, provided that the Non-Synchronized Reserve Market Clearing Price shall be less than or equal to the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for the

Reserve Zone or Reserve Sub-zone to which the next increment of demand for Non-Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Non-Synchronized Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Non-Synchronized Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Non-Synchronized Reserve market quantities and prices as determined pursuant to subsection (c)(ii) hereof.

(ii) For the Real-time Non-Synchronized Reserve Market, the Non-Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for Primary Reserve in a Reserve Zone or Reserve Sub-zone determined by the interaction between a supply curve formed using Non-Synchronized Reserve offer prices and the applicable Operating Reserve Demand Curve for Non-Synchronized Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Primary Reserve for any other Reserve Zone or Reserve Subzone to which the next increment of demand for Primary Reserve can contribute and (B) the price of serving the next increment of demand for 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute, provided that the Non-Synchronized Reserve Market Clearing Price shall be less than or equal to the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Non-Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Non-Synchronized Reserves, then the Non-Synchronized Reserve Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Non-Synchronized Reserves, then the Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Non-Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Non-Synchronized Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Non-Synchronized Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Non-Synchronized Reserve Market Clearing Prices exist, then the Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Non-Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, the Non-Synchronized Reserve Market Clearing Price will be set to zero dollars per megawatt-hour regardless of whether the Office of the Interconnection is assigning Non-Synchronized Reserves.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action as described in the PJM Manuals or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Non-Synchronized Reserve Market Clearing Price shall be the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the Primary Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended Primary Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Primary Reserve Penalty Factors are warranted for subsequent Delivery Year(s).

(d) (i) For determining the Non-Synchronized Reserve clearing price for each hour in the Day-ahead Non-Synchronized Reserve Market and for each Real-time Settlement Interval in the Real-time Non-Synchronized Reserve Market, including during a declaration of a Market Suspension, the unit-specific opportunity cost for a generation resource that is not providing energy because they are providing Non-Synchronized Reserves will be zero.

(ii) For each Real-time Settlement Interval, a total Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in real-time

reserve MW from a day-ahead market assignment in more than one market for that Real-time Settlement Interval, the total Market Revenue Neutrality Offset is allocated to the Non-Synchronized Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Non-Synchronized Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Non-Synchronized Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Non-Synchronized Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Non-Synchronized Reserve assignment decreases due to the resource being self-scheduled to provide energy, Synchronized Reserve, or Regulation;

(B) A resource reduces flexibility in real-time such that the resource no longer qualifies to provide Non-Synchronized Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time; or

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above.

(iii) A Non-Synchronized Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(\text{zero}) - (A + B + C + D)$$

Where:

A = day-ahead clearing price credits as determined in subsection (b)(i) above;

B = real-time clearing price credits as determined in subsection (b)(ii) above;

C = the applicable Market Revenue Neutrality Offset as determined in subsection (d)(ii) above; and

D = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A.001(d)(ii) above if not eligible for Market Revenue Neutrality Offset.

(e) [Reserved for future use]

(f) For each operating hour, the sum of the Non-Synchronized Reserve lost opportunity cost credits credited in subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Non-Synchronized Reserve Obligation in proportion to its real-time purchases of Non-Synchronized Reserve in megawatt-hours during that hour.

(g) The magnitude of response to a Non-Synchronized Reserve Event by a generation resource is the difference between the generation resource's output at the start of the event and its output 10 minutes after the start of the event. In order to allow for small fluctuations and possible telemetry delays, generation resource output at the start of the event is defined as the lowest telemetered generator resource output between one minute prior to and one minute following the start of the event. Similarly, a generation resource's output 10 minutes after the start of the event is defined as the greatest generator resource output achieved between 9 and 11 minutes after the start of the event. The response actually credited to a generation resource will be reduced by the amount the megawatt output of the generation resource falls below the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter.

(h) In the event a generation resource that has been assigned by the Office of the Interconnection to provide Non-Synchronized Reserve fails to provide the assigned amount of Non-Synchronized Reserve in response to a Non-Synchronized Reserve Event, the resource will be credited for Non-Synchronized Reserve capacity in the amount that actually responded for the contiguous Real-time Settlement Interval the resource was assigned Non-Synchronized Reserve during which the event occurred.

3.2.3A.01 Secondary Reserve.

(a) Each Market Participant that is a Load Serving Entity shall have an obligation for hourly Secondary Reserve equal to its pro rata share of Secondary Reserve assigned for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone and Reserve Sub-zone for the hour ("Secondary Reserve Obligation"). A Market Participant's hourly Secondary Reserve Obligation shall be adjusted by any Secondary Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Secondary Reserve Obligation shall be charged the pro rata share of the sum of day-ahead and real-time credits for Secondary Reserve as defined in sections 3.2.3A.01(b)(i) and (ii) below.

(b) Resources assigned to provide Secondary Reserve at the direction of the Office of the Interconnection shall be credited as follows:

(i) Credits for Secondary Reserve provided by generation resources and Economic Load Response Participant resources assigned to provide Secondary Reserve by the Office of the Interconnection in the Day-ahead Secondary Reserve Market shall be equal to the product of the Day-ahead Secondary Reserve Market Clearing Price multiplied by the megawatt amount of Secondary Reserve such resource is scheduled to provide.

(ii) Credits for Secondary Reserve provided by generation resources and Economic Load Response Participant resources scheduled to provide Secondary Reserve by the Office of the Interconnection in the Real-time Secondary Reserve Market shall be determined for each operating hour based on the sum of their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Secondary Reserve from that resource assigned by the Office of the Interconnection in the Real-time Secondary Reserve Market. The megawatt value is capped at the lesser of the Economic Maximum or Secondary Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval minus the Real-time Synchronized Reserve assignment;

B = For each Real-time Settlement Interval, the megawatts of Secondary Reserve from that resource scheduled by the Office of the Interconnection in the Day-ahead Secondary Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Secondary Reserve Market Clearing Price.

(iii) Pool-scheduled resources and Economic Load Response Participant resources shall be credited a Secondary Reserve lost opportunity cost credit, where positive, as described in subsection (f)(iv) below.

(c) [Reserved for future use]

(d) Secondary Reserve Market Clearing Prices

(i) For the Day-ahead Secondary Reserve Market, the Secondary Reserve Market Clearing Price shall be determined for each Reserve Zone and, as applicable, Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Secondary Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for 30-minute Reserve in a Reserve Zone

or Reserve Sub-zone, determined by the interaction between a supply curve formed using Secondary Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Secondary Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus the price of serving the next increment of demand for 30-minute Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute, but the Secondary Reserve Market Clearing Price shall not exceed the Reserve Penalty Factor for the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Secondary Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Secondary Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Secondary Reserve market quantities and prices as determined pursuant to subsection (d)(ii) hereof.

(ii) For the Real-time Secondary Reserve Market, the Secondary Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for 30-minute Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Secondary Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Secondary Reserve established in accordance with Tariff, Attachment K-Appendix, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus the price of serving the next increment of demand for 30-minute Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute but the Secondary Reserve Market Clearing Price shall not exceed the Reserve Penalty Factor for the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Secondary Reserves, then the Secondary Reserve Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Secondary Reserves, then the Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the

average of the Secondary Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Secondary Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Secondary Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Secondary Reserve Market Clearing Prices exist, then the Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Secondary Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, and the Office of the Interconnection is assigning Secondary Reserves, the Secondary Reserve Market Clearing Price will be set to zero dollars per megawatt-hour. Resources will be compensated for lost opportunity cost per subsection (f) hereof using the energy price as determined in Operating Agreement, Schedule 1, section 2.5.2.iii.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Secondary Reserve Market Clearing Price for a given Reserve Zone or Sub-zone shall be the Reserve Penalty Factor for the 30-minute Reserve Requirements for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the 30-minute Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended 30-minute Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Reserve Penalty Factor for 30-minute Reserve are warranted for subsequent Delivery Year(s).

(e) (i) For determining the Secondary Reserve Market Clearing Price for each hour in the Day-ahead Secondary Reserve Market, the estimated resource-specific opportunity cost for a generation resource or Economic Load Response Participant resources shall be the difference between the Locational Marginal Price at the generation or Economic Load Response Participant resource bus and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) or offer price to reduce energy from the Economic Load Response Participant

resource in the PJM Interchange Energy Market when the Locational Marginal Price at the Economic Load Response Participant resource bus is greater than the offer price for energy from the generation resource or the offer price to reduce energy from the Economic Load Response Participant resource.

However, opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve, and for synchronous condensers and for Economic Load Response Participant resources that do not receive a day-ahead commitment to provide energy in the same operating hour in which such resource is committed to provide Secondary Reserve.

(ii) For determining the Secondary Reserve Market Clearing Price for each Real-time Settlement Interval in the Real-time Secondary Reserve Market, the estimated unit-specific opportunity cost for a generation resource that is not a hydroelectric resource shall be the difference between the Locational Marginal Price at the generation bus for the generation resource and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) in the PJM Interchange Energy Market when the Locational Marginal Price at the generation bus is greater than the offer price for energy from the generation resource.

For hydroelectric resources, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the expected real-time Locational Marginal Price at that generation bus. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the expected real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average day-ahead Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

However, the opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve, and for synchronous condensers and Economic Load Response Participant resources.

(f) (i) In determining the credit under subsection (b) to a generation resource, except a generation resource that is a synchronous condenser, selected to provide Secondary Reserve in the Day-ahead Secondary Reserve Market or an Economic Load Response Participant resource that is selected to provide Secondary Reserve in the Day-ahead Secondary Reserve Market in the same operating hour in which such resource receives a day-ahead commitment to provide energy, the opportunity cost of a resource shall be determined for each operating hour that the Office of the Interconnection

requires a resource to provide Secondary Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Day-ahead Locational Marginal Price at the generation bus of the generation resource or the applicable pricing point for the Economic Load Response Participant resource;

B= The deviation of the resource's energy output or load reduction necessary to supply a Day-ahead Secondary Reserve assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load less any Day-ahead Synchronized Reserve Market assignment; and

C = The Day-ahead Energy Market offer integrated under the applicable energy offer curve for the resource's energy output or load reduction necessary to provide a Day-ahead Secondary Reserve Market assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load less any Day-ahead Synchronized Reserve Market assignment.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [energy use for providing synchronous condensing multiplied by A] plus [the applicable condense start-up cost divided by the number of hours the resource is assigned Secondary Reserve].

(ii) In determining the credit under subsection (b) to a generation resource, except a generation that is a synchronous condenser, selected to provide Secondary Reserve in the Real-time Secondary Reserve Market in excess of the resource's Day-ahead Secondary Reserve Market assignment and that actively follows the Office of the Interconnection's signals and instructions, the unit-specific opportunity cost of that generation resource shall be determined for each Real-time Settlement Interval that the Office of the Interconnection requires that generation resource to provide Secondary Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Real-time Locational Marginal Price at the generation bus of the generation resource;

B= The deviation of the generation resource's output necessary to supply Secondary Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment and follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy less any Real-time Synchronized Reserve Market assignment; and

C = The energy offer integrated under the applicable energy offer curve for the generation resource's output necessary to supply Secondary Reserve in real-time from the lesser of the generation resource's output necessary to provide a Day-ahead Secondary Reserve Market assignment or follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy less any Real-time Synchronized Reserve Market assignment.

For hydroelectric resources, the unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the real-time Locational Marginal Price at that generation bus multiplied by the additional megawatts assigned to supply Synchronized Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average real-time Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating multiplied by the additional megawatts assigned to supply Secondary Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: additional energy use in excess of day-ahead energy use for providing synchronous condensing in real-time multiplied by A plus [any applicable condense start-up costs due to additional condense start-ups in real-time in excess of day-ahead condense start-ups allocated to each Real-time Settlement Interval as described in PJM Manuals]. If the generation resource is operating as a synchronous condenser and also has a Real-time Synchronized Reserve assignment, resource's unit-specific opportunity cost in the Secondary Reserve Market shall be zero,

(iii) For each Real-time Settlement Interval, a total Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in real-time

reserve MW from a day-ahead market assignment in more than one market for that real-time settlement interval, the total Market Revenue Neutrality Offset is allocated to the Secondary Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Secondary Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Secondary Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Secondary Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Secondary Reserve assignment decreases due to the resource being self-scheduled to provide energy, Synchronized Reserve, or Regulation;

(B) A resource reduces flexibility in real-time such that the resource no longer qualifies to provide Secondary Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time;

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above; or

(F) A resource that fails to come online and reach Economic Minimum output within 30 minutes as described in section 3.2.3A.01(h)(i) below.

(iv) A Secondary Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(A + B) - (C + D + E + F)$$

Where:

A = day-ahead opportunity cost as determined in subsection (f)(i) above;

B = real-time opportunity cost as determined in subsection (f)(ii) above;

C = day-ahead clearing price credits as determined in subsection (b)(i) above;

D = real-time clearing price credits as determined subsection (b)(ii) above;

E = the applicable Market Revenue Neutrality Offset as determined in subsection (f)(iii) above; and

F = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A.01(f)(iii) above if not eligible for Market Revenue Neutrality Offset.

(v) The opportunity costs for Economic Load Response Participant resources and generation resources not synchronized to the grid shall be zero, except that Economic Load Response Participant resources may have a day-ahead opportunity cost, as determined in subsection (f)(i) above.

(g) For each operating hour, the sum of the Secondary Reserve lost opportunity cost credits credited in accordance with subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Secondary Reserve Obligation in proportion to its real-time purchases of Secondary Reserve in megawatt-hours during that hour.

(h) (i) In the event an offline generation resource has been assigned by the Office of the Interconnection to provide Secondary Reserve in real-time and is subsequently dispatched by the Office of the Interconnection to supply energy during that Operating Day and the resource qualifies as a Secondary Reserve resource at the time it is dispatched to provide energy, the Office of the Interconnection will assess the resource's performance as follows:

For each generation resource that fails to come online and reach Economic Minimum output within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval and for all prior intervals in which the resource was assigned to provide Secondary Reserve in the Real-time Secondary Reserve Market starting at the later of (A) the last interval the resource was online or (B) the beginning of that Operating Day and continuing up to the interval the resource failed to come online. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time not being paid for the assigned MW.

(ii) In the event an Economic Load Response Participant resource has been assigned by the Office of the Interconnection to provide Secondary Reserve in real-time and is subsequently dispatched to supply the Secondary Reserve assignment as a load reduction, the Office of the Interconnection will assess the resource's performance as follows:

For the purposes of this subsection, a resource's starting MW usage shall be the greatest telemetered consumption between one minute prior to and one minute following the issuance of a dispatch instruction from the Office of the Interconnection, and a resource's ending MW usage shall be the lowest consumption between 29 and 31 minutes after the issuance of a dispatch instruction from the Office of the Interconnection.

For each Economic Load Response Participant resource that fails to reduce load by at least the Economic Minimum, where the measured response is the difference between the resource's starting MW usage and the resource's ending MW usage as described above, within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval, and for all prior intervals in which the resource was assigned to provide Secondary Reserve in the Real-time Secondary Reserve Market between such non-performance event starting at the later of (A) the last interval the resource reduced load at the instruction of the Office of the Interconnection or (B) the beginning of that Operating Day, and for all subsequent intervals through the earlier of (C) the next interval in which the resource is dispatched to reduce load or (D) the end of the Operating Day. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time, refunding all payments due for Secondary Reserve during such period.

(iii) For Batch Load Economic Load Response Participant Resources, a second method of verification will be used for instances where a Secondary Reserve assignment dispatched as an energy load reduction is initiated and the resource is operating at the minimum consumption level of its duty cycle. In this case, the magnitude of the response will be measured as the difference between (A) the minimum of the resource's consumption between the minute before and the minute after the end of the last settlement interval the resource reduced load at the instruction of the Office of the Interconnection and (B) the maximum consumption within a ten (10) minute period following the end of the last settlement interval the resource reduced load provided that all subsequent minutes following that minute are no less than 50% of the consumption in that minute.

For each Batch Load Economic Load Response Participant Resource that fails to reduce load by at least the Economic Minimum, where the measured response is the difference between the resource's starting MW usage and the resource's ending MW usage as described in section (ii) above or the difference between (A) and (B) as described in section (iii) above, within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval, and for all prior intervals in which the resource was assigned to provide Secondary Reserve in either the Day-ahead or Real-time Secondary Reserve Markets between such non-performance event starting at the later of (A) the last interval the resource reduced load at the instruction of the Office of the Interconnection or (B) the beginning of that Operating Day, and for all subsequent intervals through the earlier of (C) the next interval in which the resource is dispatched to reduce load or (D) the end of the Operating Day. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time, refunding all payments due for Secondary Reserve during such period.

3.2.3A.02 Operating Reserve Demand Curves

The Office of the Interconnection shall establish Operating Reserve Demand Curves for clearing 30-minute Reserve, Primary Reserve, and Synchronized Reserve, for, as applicable, each Reserve Zone or Reserve Sub-zone to procure sufficient reserves to meet, as applicable, (a) 30-minute Reserve Requirement and Extended 30-minute Reserve Requirement; (b) Primary Reserve Requirement and Extended Primary Reserve Requirement; and (c) Synchronized Reserve Requirement and Extended Synchronized Reserve Requirement. The Operating Reserve Demand Curves established for each reserve type shall be used to commit such reserves in both the day-ahead and real-time reserve markets. The Operating Reserve Demand Curves shall be determined in accordance with the applicable Reserve Penalty Factors and PJM Manuals.

3.2.3B Reactive Services.

(a) A Market Seller providing Reactive Services at the direction of the Office of the Interconnection shall be credited as specified below for the operation of its resource. These provisions are intended to provide payments to generating units when the LMP dispatch algorithms would not result in the dispatch needed for the required reactive service. LMP will be used to compensate generators that are subject to redispatch for reactive transfer limits.

(b) At the end of each Operating Day, where the active energy output of a Market Seller's resource is reduced or suspended at the request of the Office of the Interconnection for the purpose of maintaining reactive reliability within the PJM Region, the Market Seller shall be credited according to sections 3.2.3B(c) & 3.2.3B(d).

(c) A Market Seller providing Reactive Services from either a steam-electric generating unit or combined cycle unit operating in combined cycle mode, where such unit is pool-scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3 (c) hereof), and where the real time LMP at the unit's bus is higher than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override) shall be compensated for lost opportunity cost by receiving a credit for each Real-time Settlement Interval in an amount equal to the product of (A) the deviation of the generating unit's output necessary to follow the Office of the Interconnection's signals and the generating unit's expected output level if it had been dispatched in economic merit order, times (B) the Real-time Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A*B) - C$.

(d) A Market Seller providing Reactive Services from either a combustion turbine unit or combined cycle unit operating in simple cycle mode that is pool scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3 (c) hereof), operated as requested by the Office of the Interconnection, shall be compensated for lost opportunity cost for each Real-time Settlement Interval, limited to the lesser of the unit's Economic Maximum or the unit's Generation Resource Maximum Output, if the unit output is reduced at the direction of the Office of the Interconnection and the real time LMP at the unit's

bus is higher than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection as directed by the PJM dispatcher, then the Market Seller shall be credited in a manner consistent with that described above in section 3.2.3B(c) for a steam unit or a combined cycle unit operating in combined cycle mode.

(e) At the end of each Operating Day, where the active energy output of a Market Seller's unit is increased at the request of the Office of the Interconnection for the purpose of maintaining reactive reliability within the PJM Region and the offered price of the energy is above the real-time LMP at the unit's bus, the Market Seller shall be credited according to section 3.2.3B(f).

(f) A Market Seller providing Reactive Services from either a steam-electric generating unit, combined cycle unit or combustion turbine unit, where such unit is pool scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3 (c) hereof), and where the real time LMP at the unit's bus is lower than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall receive a credit in an amount equal to $\{(AG - LMPDMW) \times (UB - URTLMP)\}$ where:

AG equals the actual output of the unit;

LMPDMW equals the level of output for the unit determined according to the point on the scheduled offer curve on which the unit was operating corresponding to the real time LMP at the unit's bus and adjusted for any Regulation or Tier 2 Synchronized Reserve assignments;

UB equals the unit offer for that unit for which output is increased, determined according to the lesser of the Final Offer or Committed Offer;

URLTMP equals the real time LMP at the unit's bus; and

where $UB - URTLMP$ shall not be negative.

(g) A Market Seller providing Reactive Services from a hydroelectric resource where such resource is pool scheduled (or self-scheduled, if operating according to Tariff, Attachment K-Appendix, section 1.10.3 (c) hereof), and where the output of such resource is altered from the schedule submitted by the Market Seller for the purpose of maintaining reactive reliability at the request of the Office of the Interconnection, shall be compensated for lost opportunity cost in the same manner as provided in sections 3.2.2(d) and 3.2.3A(f) and further detailed in the PJM Manuals.

(h) If a Market Seller believes that, due to specific pre-existing binding commitments to which it is a party, and that properly should be recognized for purposes of this section, the above calculations do not accurately compensate the Market Seller for lost opportunity cost associated with following the Office of the Interconnection's dispatch instructions to reduce or

suspend a unit's output for the purpose of maintaining reactive reliability, then the Office of the Interconnection, the Market Monitoring Unit and the individual Market Seller will discuss a mutually acceptable, modified amount of such alternate lost opportunity cost compensation, taking into account the specific circumstances binding on the Market Seller. Following such discussion, if the Office of the Interconnection accepts a modified amount of alternate lost opportunity cost compensation, the Office of the Interconnection shall invoice the Market Participant accordingly. If the Market Monitoring Unit disagrees with the modified amount of alternate lost opportunity cost compensation, as accepted by the Office of the Interconnection, it will exercise its powers to inform the Commission staff of its concerns.

(i) The amount of Synchronized Reserve provided by generating units maintaining reactive reliability shall be counted as Synchronized Reserve satisfying the overall PJM Synchronized Reserve requirements. Operators of these generating units shall be notified of such provision, and to the extent a generating unit's operator indicates that the generating unit is capable of providing Synchronized Reserve, shall be subject to the same requirements contained in section 3.2.3A regarding provision of Synchronized Reserve. At the end of each Operating Day, to the extent a condenser operated to provide Reactive Services also provided Synchronized Reserve, a Market Seller shall be credited for providing synchronous condensing for the purpose of maintaining reactive reliability at the request of the Office of the Interconnection, in an amount equal to the higher of (i) the Synchronized Reserve Market Clearing Price for each Real-time Settlement Interval a generating unit provided synchronous condensing multiplied by the amount of Synchronized reserve provided by the synchronous condenser or (ii) the sum of (A) the generating unit's cost to provide synchronous condensing, calculated in accordance with the PJM Manuals, (B) the product of MW energy usage for providing synchronous condensing multiplied by the real time LMP at the generating unit's bus, (C) the generating unit's startup-cost of providing synchronous condensing, and (D) the unit-specific lost opportunity cost of the generating resource supplying the increment of Synchronized Reserve as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals. To the extent a condenser operated to provide Reactive Services was not also providing Synchronized Reserve, the Market Seller shall be credited only for the generating unit's cost to condense, as described in (ii) above. The total Synchronized Reserve Obligations of all Load Serving Entities under section 3.2.3A(a) in the zone where these condensers are located shall be reduced by the amount counted as satisfying the PJM Synchronized Reserve requirements. The Synchronized Reserve Obligation of each Load Serving Entity in the zone under section 3.2.3A(a) shall be reduced to the same extent that the costs of such condensers counted as Synchronized Reserve are allocated to such Load Serving Entity pursuant to subsection (l) below.

(j) A Market Seller's pool scheduled steam-electric generating unit or combined cycle unit operating in combined cycle mode, that is not committed to operate in the Day-ahead Market, but that is directed by the Office of the Interconnection to operate solely for the purpose of maintaining reactive reliability, at the request of the Office of the Interconnection, shall be credited in the amount of the unit's offered price for start-up and no-load fees. The unit also shall receive, if applicable, compensation in accordance with Sections 3.2.3B(e)-(f).

(k) The sum of the foregoing credits as specified in Sections 3.2.3B(b)-(j) shall be the cost of Reactive Services for the purpose of maintaining reactive reliability for the Operating Day and shall be separately determined for each transmission zone in the PJM Region based on whether the resource was dispatched for the purpose of maintaining reactive reliability in such transmission zone.

(l) The cost of Reactive Services for the purpose of maintaining reactive reliability in a transmission zone in the PJM Region for each Operating Day shall be allocated and charged to each Market Participant in proportion to its deliveries of energy to load (net of operating Behind The Meter Generation) in such transmission zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such transmission zone.

(m) Generating units receiving dispatch instructions from the Office of the Interconnection under the expectation of increased actual or reserve reactive shall inform the Office of the Interconnection dispatcher if the requested reactive capability is not achievable. Should the operator of a unit receiving such instructions realize at any time during which said instruction is effective that the unit is not, or likely would not be able to, provide the requested amount of reactive support, the operator shall as soon as practicable inform the Office of the Interconnection dispatcher of the unit's inability, or expected inability, to provide the required reactive support, so that the associated dispatch instruction may be cancelled. PJM Performance Compliance personnel will audit operations after-the-fact to determine whether a unit that has altered its active power output at the request of the Office of the Interconnection has provided the actual reactive support or the reactive reserve capability requested by the Office of the Interconnection. PJM shall utilize data including, but not limited to, historical reactive performance and stated reactive capability curves in order to make this determination, and may withhold such compensation as described above if reactive support as requested by the Office of the Interconnection was not or could not have been provided.

3.2.3C Synchronous Condensing for Post-Contingency Operation.

(a) Under normal circumstances, PJM operates generation out of merit order to control contingency overloads when the flow on the monitored element for loss of the contingent element ("contingency flow") exceeds the long-term emergency rating for that facility, typically a 4-hour or 2-hour rating. At times however, and under certain, specific system conditions, PJM does not operate generation out of merit order for certain contingency overloads until the contingency flow on the monitored element exceeds the 30-minute rating for that facility ("post-contingency operation"). In conjunction with such operation, when the contingency flow on such element exceeds the long-term emergency rating, PJM operates synchronous condensers in the areas affected by such constraints, to the extent they are available, to provide greater certainty that such resources will be capable of producing energy in sufficient time to reduce the flow on the monitored element below the normal rating should such contingency occur.

(b) The amount of Synchronized Reserve provided by synchronous condensers associated with post-contingency operation shall be counted as Synchronized Reserve satisfying the applicable Synchronized Reserve Requirements. Operators of these generation units shall be

notified of such provision, and to the extent a generation unit's operator indicates that the generation unit is capable of providing Synchronized Reserve, shall be subject to the same requirements contained in section 3.2.3A regarding provision of Synchronized Reserve. At the end of each Operating Day, to the extent a condenser operated in conjunction with post-contingency operation also provided Synchronized Reserve, a Market Seller shall be credited for providing synchronous condensing in conjunction with post-contingency operation at the request of the Office of the Interconnection, in an amount equal to the higher of (i) the Real-time Synchronized Reserve Market Clearing Price for each applicable interval a generation resource provided synchronous condensing multiplied by the amount of Synchronized Reserve provided by the synchronous condenser or (ii) the sum of (A) the generation resource's applicable interval cost to provide synchronous condensing, calculated in accordance with the PJM Manuals, (B) the applicable interval product of the megawatts of energy used to provide synchronous condensing multiplied by the real-time LMP at the generation bus of the generation resource, (C) the generation resource's start-up cost of providing synchronous condensing, and (D) the unit-specific lost opportunity cost of the generation resource supplying the increment of Synchronized Reserve as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals. To the extent a condenser operated in association with post-contingency constraint control was not also providing Synchronized Reserve, the Market Seller shall be credited only for the generation unit's cost to condense, as described in (ii) above. The total Synchronized Reserve Obligations of all Load Serving Entities under section 3.2.3A(a) in the zone where these condensers are located shall be reduced by the amount counted as satisfying the PJM Synchronized Reserve requirements. The Synchronized Reserve Obligation of each Load Serving Entity in the zone under section 3.2.3A(a) shall be reduced to the same extent that the costs of such condensers counted as Synchronized Reserve are allocated to such Load Serving Entity pursuant to subsection (d) below.

(c) The sum of the foregoing credits as specified in section 3.2.3C(b) shall be the cost of synchronous condensers associated with post-contingency operations for the Operating Day and shall be separately determined for each transmission zone in the PJM Region based on whether the resource was dispatched in association with post-contingency operation in such transmission zone.

(d) The cost of synchronous condensers associated with post-contingency operations in a transmission zone in the PJM Region for each Operating Day shall be allocated and charged to each Market Participant in proportion to its deliveries of energy to load (net of operating Behind The Meter Generation) in such transmission zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such transmission zone.

3.2.4 Transmission Congestion Charges.

Each Market Buyer shall be assessed Transmission Congestion Charges as specified in Tariff, Attachment K-Appendix, section 5.

3.2.5 Transmission Loss Charges.

Each Market Buyer shall be assessed Transmission Loss Charges as specified in Tariff, Attachment K-Appendix, section 5.

3.2.6 Emergency Energy.

(a) When the Office of the Interconnection has implemented Emergency procedures, resources offering Emergency energy are eligible to set real-time Locational Marginal Prices, capped at the energy offer cap plus sum of the applicable Reserve Penalty Factors for the Synchronized Reserved Requirement and Primary Reserve Requirement, provided that the Emergency energy is needed to meet demand in the PJM Region.

(b) Market Participants shall be allocated a proportionate share of the net cost of Emergency energy purchased by the Office of the Interconnection. Such allocated share during each applicable interval of such Emergency energy purchase shall be in proportion to the amount of each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Energy Market, whenever that deviation increases the Market Participant's spot market purchases or decreases its spot market sales. This deviation shall not include any reduction or suspension of output of pool scheduled resources requested by PJM to manage an Emergency within the PJM Region.

(c) Net revenues in excess of Real-time Prices attributable to sales of energy in connection with Emergencies to other Control Areas shall be credited to Market Participants during each applicable interval of such Emergency energy sale in proportion to the sum of (i) each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Energy Market, whenever that deviation increases the Market Participant's spot market purchases or decreases its spot market sales, and (ii) each Market Participant's energy sales from within the PJM Region to entities outside the PJM Region that have been curtailed by PJM.

(d) The net costs or net revenues associated with sales or purchases of energy in connection with a Minimum Generation Emergency in the PJM Region, or in another Control Area, shall be allocated during each applicable interval of such Emergency sale or purchase to each Market Participant in proportion to the amount of each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Market, whenever that deviation increases the Market Participant's spot market sales or decreases its spot market purchases.

3.2.7 Billing.

(a) PJMSettlement shall prepare a billing statement each billing cycle for each Market Participant in accordance with the charges and credits specified in Tariff, Attachment K-Appendix, sections 3.2.1 through 3.2.6, and showing the net amount to be paid or received by the Market Participant. Billing statements shall provide sufficient detail, as specified in the PJM Manuals, to allow verification of the billing amounts and completion of the Market Participant's internal accounting.

(b) If deliveries to a Market Participant that has PJM Interchange meters in accordance with Operating Agreement, section 14 include amounts delivered for a Market

Participant that does not have PJM Interchange meters separate from those of the metered Market Participant, PJMSettlement shall prepare a separate billing statement for the unmetered Market Participant based on the allocation of deliveries agreed upon between the Market Participant and the unmetered Market Participant specified by them to the Office of the Interconnection.

Definitions Q - R

Ramping Capability:

“Ramping Capability” shall mean the sustained rate of change of generator output, in megawatts per minute.

Real-time Congestion Price:

“Real-time Congestion Price” shall mean the Congestion Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Loss Price:

“Real-time Loss Price” shall mean the Loss Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Offer:

“Real-time Offer” shall mean a new offer or an update to a Market Seller’s existing cost-based or market-based offer for a clock hour, submitted for use after the close of the Day-ahead Energy Market.

Real-time Prices:

“Real-time Prices” shall mean the Locational Marginal Prices resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Real-time Energy Market:

“Real-time Energy Market” shall mean the purchase or sale of energy and payment of Transmission Congestion Charges for quantity deviations from the Day-ahead Energy Market in the Operating Day.

Real-time Settlement Interval:

“Real-time Settlement Interval” shall mean the interval used by settlements, which shall be every five minutes.

Real-time State of Charge:

“Real-time State of Charge” shall mean the current State of Charge of an Energy Storage Resource Model Participant, measured in units of megawatt-hours.

Real-time System Energy Price:

“Real-time System Energy Price” shall mean the System Energy Price resulting from the Office of the Interconnection’s dispatch of the PJM Interchange Energy Market in the Operating Day.

Regional Entity:

“Regional Entity” shall mean an organization that NERC has delegated the authority to propose and enforce reliability standards pursuant to the Federal Power Act.

Regional RTEP Project:

“Regional RTEP Project” shall mean a transmission expansion or enhancement rated at 230 kV or above which is required for compliance with the following PJM criteria: system reliability, operational performance or economic criteria, pursuant to a determination by the Office of the Interconnection.

Registered Entity:

“Registered Entity” shall mean the entity registered under the NERC Functional Model and NERC Rules of Procedures for the purpose of compliance with NERC Reliability Standards and responsible for carrying out the tasks within a NERC function without regard to whether a task or tasks are performed by another entity pursuant to the terms of the PJM Governing Agreements.

Regulation:

“Regulation” shall mean the capability of a specific generation resource or Demand Resource with appropriate telecommunications, control and response capability to separately increase and decrease its output or adjust load in response to a regulating control signal, in accordance with the specifications in the PJM Manuals. Regulation is inclusive of Regulation-Down Service and Regulation-Up Service.

Regulation-Down Requirement:

“Regulation-Down Requirement” shall mean the required megawatts of performance-adjusted Regulation-Down Service capability to be maintained in a Regulation Zone. The Regulation-Down Requirement is defined as a set megawatt value by hour in accordance with the PJM Manuals, and can increase to account for additional operational uncertainty.

Regulation-Down Service

“Regulation-Down Service” shall mean the capability of a specific generation resource or Demand Resource with appropriate telecommunications and response capability to increase and decrease its output in the downward range from a set point or adjust load in response to a regulating-down control signal, in accordance with the specification in the PJM Manuals.

Regulation-Up Requirement:

“Regulation-Up Requirement” shall mean the required megawatts of performance-adjusted Regulation-Up Service capability to be maintained in a Regulation Zone. The Regulation-Up Requirement is defined as a set megawatt value by hour in accordance with the PJM Manuals, and can increase to account for additional operational uncertainty.

Regulation-Up Service

“Regulation-Up Service” shall mean the capability of a specific generation resource or Demand Resource with appropriate telecommunications and response capability to increase and decrease its output in the upward range from a set point or adjust load in response to a regulating-up control signal, in accordance with the specification in the PJM Manuals.

Regulation Zone:

“Regulation Zone” shall mean any of those one or more geographic areas, each consisting of a combination of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, regulation service.

Related Parties:

“Related Parties” shall mean, solely for purposes of the governance provisions of the Operating Agreement: (i) any generation and transmission cooperative and one of its distribution cooperative members; and (ii) any joint municipal agency and one of its members. For purposes of the Operating Agreement, representatives of state or federal government agencies shall not be deemed Related Parties with respect to each other, and a public body's regulatory authority, if any, over a Member shall not be deemed to make it a Related Party with respect to that Member.

Relevant Electric Retail Regulatory Authority:

“Relevant Electric Retail Regulatory Authority” shall mean an entity that has jurisdiction over and establishes prices and policies for competition for providers of retail electric service to end-customers, such as the city council for a municipal utility, the governing board of a cooperative utility, the state public utility commission or any other such entity.

Reliability Assurance Agreement or PJM Reliability Assurance Agreement:

“Reliability Assurance Agreement” or “PJM Reliability Assurance Agreement” shall mean that certain Reliability Assurance Agreement Among Load-Serving Entities in the PJM Region, on file with FERC as PJM Interconnection, L.L.C. Rate Schedule FERC. No. 44, and as amended from time to time thereafter.

Reliability Coordinator:

“Reliability Coordinator” shall have the same meaning set forth in the NERC Glossary of Terms used in NERC Reliability Standards.

Reserve Penalty Factor:

“Reserve Penalty Factor” shall mean the cost, in \$/MWh, associated with being unable to meet a specific reserve requirement in a Reserve Zone or Reserve Sub-zone. A Reserve Penalty Factor will be defined for each reserve requirement in a Reserve Zone or Reserve Sub-zone.

Reserve Sub-zone:

“Reserve Sub-zone” shall mean any of those geographic areas wholly contained within a Reserve Zone, consisting of a combination of a portion of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, reserve service.

Reserve Zone:

“Reserve Zone” shall mean any of those geographic areas consisting of a combination of one or more Control Zone(s) as designated by the Office of the Interconnection in the PJM Manuals, relevant to provision of, and requirements for, reserve service.

Residual Auction Revenue Rights:

“Residual Auction Revenue Rights” shall mean incremental stage 1 Auction Revenue Rights created within a Planning Period by an increase in transmission system capability, including the return to service of existing transmission capability, that was not modeled pursuant to Operating Agreement, Schedule 1, section 7.5, and the parallel provisions of Tariff, Attachment K-Appendix, section 7.5 in compliance with Operating Agreement, Schedule 1, section 7.4.2(h), and the parallel provisions of Tariff, Attachment K-Appendix, section 7.4.2(h), and, if modeled, would have increased the amount of stage 1 Auction Revenue Rights allocated pursuant to Operating Agreement, Schedule 1, section 7.4.2, and the parallel provisions of Attachment K-Appendix, section 7.4.2; provided that, the foregoing notwithstanding, Residual Auction Revenue Rights shall exclude: 1) Incremental Auction Revenue Rights allocated pursuant to Tariff, Part VI; and 2) Auction Revenue Rights allocated to entities that are assigned cost responsibility pursuant to Operating Agreement, Schedule 6 for transmission upgrades that create such rights.

Residual Metered Load:

“Residual Metered Load” shall mean all load remaining in an electric distribution company’s fully metered franchise area(s) or service territory(ies) after all nodally priced load of entities serving load in such area(s) or territory(ies) has been carved out.

Revenue Data for Settlements:

“Revenue Data for Settlements” shall mean energy quantities used in accounting and billing as determined pursuant to Tariff, Attachment K-Appendix and the corresponding provisions of Operating Agreement, Schedule 1.

1.10 Scheduling.

1.10.1 General.

(a) The Office of the Interconnection shall administer scheduling processes to implement a Day-ahead Energy Market and a Real-time Energy Market. PJMSettlement shall be the Counterparty to the purchases and sales of energy that clear the Day-ahead Energy Market and the Real-time Energy Market; provided that PJMSettlement shall not be a contracting party to bilateral transactions between Market Participants or with respect to a Generating Market Buyer's self-schedule or self-supply of its generation resources up to that Generating Market Buyer's Equivalent Load.

(b) The Day-ahead Energy Market shall enable Market Participants to purchase and sell energy through the PJM Interchange Energy Market at Day-ahead Prices and enable Transmission Customers to reserve transmission service with Transmission Congestion Charges and Transmission Loss Charges based on locational differences in Day-ahead Prices. Up-to Congestion Transactions submitted in the Day-ahead Energy Market shall not require transmission service and Transmission Customers shall not reserve transmission service for such Up-to Congestion Transactions. Market Participants whose purchases and sales, and Transmission Customers whose transmission uses are scheduled in the Day-ahead Energy Market, shall be obligated to purchase or sell energy, or pay Transmission Congestion Charges and Transmission Loss Charges, at the applicable Day-ahead Prices for the amounts scheduled.

(c) (i) In the Real-time Energy Market, Market Participants that deviate from the amounts of energy purchases or sales scheduled in the Day-ahead Energy Market shall be obligated to purchase or sell energy for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.

(ii) In the Real-time Energy Market, Transmission Customers that deviate from the transmission uses, scheduled in the Day-ahead Energy Market shall be obligated to pay Transmission Congestion Charges and Transmission Loss Charges for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.

(iii) Market Participants that deviate in real-time from the amounts of Secondary Reserve, Non-Synchronized Reserve, or Synchronized Reserve sales, scheduled day-ahead shall be obligated to purchase Secondary Reserve, Non-Synchronized Reserve, or Synchronized Reserve for the amount of the deviations at the applicable Real-time Prices or price differences, unless otherwise specified by this Schedule.

(d) The following scheduling procedures and principles shall govern the commitment of resources to the Day-ahead Energy Market and the Real-time Energy Market over a period extending from one week to one hour prior to the real-time dispatch. Scheduling encompasses the day-ahead and hourly scheduling process, through which the Office of the Interconnection determines the Day-ahead Energy Market and determines, based on changing forecasts of conditions and actions by Market Participants and system constraints, a plan to serve the hourly

energy and reserve requirements of the Internal Market Buyers and the purchase requests of the External Market Buyers in the least costly manner, subject to maintaining the reliability of the PJM Region. Scheduling does not encompass Coordinated External Transactions, which are subject to the procedures of Operating Agreement, Schedule 1, section 1.13. Scheduling shall be conducted as specified in section 1.10.1A below, subject to the following condition. If the Office of the Interconnection's forecast for the next seven days projects a likelihood of Emergency conditions, the Office of the Interconnection may commit, for all or part of such seven day period, to the use of generation resources with notification or start-up times greater than one day as necessary in order to alleviate or mitigate such Emergency, in accordance with the Market Sellers' offers for such units for such periods and the specifications in the PJM Manuals. Such resources committed by the Office of the Interconnection to alleviate or mitigate an Emergency will not receive Operating Reserve Credits nor otherwise be made whole for its hours of operation for the duration of any portion of such commitment that exceeds the maximum start-up and notification times for such resources during Hot Weather Alerts and Cold Weather Alerts, consistent with Operating Agreement, Schedule 1, section 3.2.3 and Operating Agreement, Schedule 1, section 6.6.

1.10.1A Day-ahead and Real-time Energy Market Scheduling.

The following actions shall occur not later than 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled, or such other deadline as may be specified by the Office of the Interconnection in order to comply with the practical requirements and the economic and efficiency objectives of the scheduling process specified in this Schedule.

(a) Each Market Participant may submit to the Office of the Interconnection specifications of the amount and location of its customer loads and/or energy purchases to be included in the Day-ahead Energy Market for each hour of the next Operating Day, such specifications to comply with the requirements set forth in the PJM Manuals. Each Market Buyer shall inform the Office of the Interconnection of the prices, if any, at which it desires not to include its load in the Day-ahead Energy Market rather than pay the Day-ahead Price. PRD Providers that have committed Price Responsive Demand in accordance with the Reliability Assurance Agreement shall submit to the Office of the Interconnection, in accordance with procedures specified in the PJM Manuals, any desired updates to their previously submitted PRD Curves, provided that such updates are consistent with their Price Responsive Demand commitments, and provided further that PRD Providers that are not Load Serving Entities for the Price Responsive Demand at issue may only submit PRD Curves for the Real-time Energy Market. Price Responsive Demand that has been committed in accordance with the Reliability Assurance Agreement shall be presumed available for the next Operating Day in accordance with the most recently submitted PRD Curve unless the PRD Curve is updated to indicate otherwise. PRD Providers may also submit PRD Curves for any Price Responsive Demand that is not committed in accordance with the Reliability Assurance Agreement; provided that PRD Providers that are not Load Serving Entities for the Price Responsive Demand at issue may only submit PRD Curves for the Real-time Energy Market. All PRD Curves shall be on a PRD Substation basis, and shall specify the maximum time period required to implement load reductions.

(b) Each Generating Market Buyer shall submit to the Office of the Interconnection:
(i) hourly schedules for resource increments, including hydropower units, self-scheduled by the Market Buyer to meet its Equivalent Load; and (ii) the Dispatch Rate at which each such self-scheduled resource will disconnect or reduce output, or confirmation of the Market Buyer's intent not to reduce output.

(c) All Market Participants shall submit to the Office of the Interconnection schedules for any energy exports, energy imports, and wheel through transactions involving use of generation or Transmission Facilities as specified below, and shall inform the Office of the Interconnection if the transaction is to be scheduled in the Day-ahead Energy Market. Any Market Participant that elects to schedule an export, import or wheel through transaction in the Day-ahead Energy Market may specify the price (such price not to exceed \$2,000/MWh), if any, at which the export, import or wheel through transaction will be wholly or partially curtailed. The foregoing price specification shall apply to the applicable interface pricing point. Any Market Participant that elects not to schedule its export, import or wheel through transaction in the Day-ahead Energy Market shall inform the Office of the Interconnection if the parties to the transaction are not willing to incur Transmission Congestion and Loss Charges in the Real-time Energy Market in order to complete any such scheduled transaction. Such transactions in the Real-time Energy Market, other than Coordinated Transaction Schedules and emergency energy sales and purchases, may specify a price up to \$2,000/MWh. Scheduling of such transactions shall be conducted in accordance with the specifications in the PJM Manuals and the following requirements:

- i) Market Participants shall submit schedules for all energy purchases for delivery within the PJM Region, whether from resources inside or outside the PJM Region;
- ii) Market Participants shall submit schedules for exports for delivery outside the PJM Region from resources within the PJM Region that are not Dynamic Transfers to such entities pursuant to Operating Agreement, Schedule 1, section 1.12; and
- iii) In addition to the foregoing schedules for exports, imports and wheel through transactions, Market Participants shall submit confirmations of each scheduled transaction from each other party to the transaction in addition to the party submitting the schedule, or the adjacent Control Area.

(c-1) A Market Participant may elect to submit in the Day-ahead Energy Market a form of Virtual Transaction that combines an offer to sell energy at a source, with a bid to buy the same megawatt quantity of energy at a sink where such transaction specifies the maximum difference between the Locational Marginal Prices at the source and sink. The Office of Interconnection will schedule these transactions only to the extent this difference in Locational Marginal Prices is within the maximum amount specified by the Market Participant. A Virtual Transaction of this type is referred to as an "Up-to Congestion Transaction." Such Up-to Congestion Transactions may be wholly or partially scheduled depending on the price difference between the source and sink locations in the Day-ahead Energy Market. The maximum difference between the source

and sink prices that a participant may specify shall be limited to +/- \$50/MWh. The foregoing price specification shall apply to the price difference between the specified source and sink in the day-ahead scheduling process only. An accepted Up-to Congestion Transaction results in scheduled injection at a specified source and scheduled withdrawal of the same megawatt quantity at a specified sink in the Day-ahead Energy Market.

(c-2) A Market Participant may elect to submit an Increment Offer and/or Decrement Bid form of Virtual Transaction in the Day-ahead Energy Market and shall specify the price for such transaction which shall be limited to \$2,000/megawatt-hour.

(c-3) Up-to Congestion Transactions may only be submitted at hubs, Residual Metered Load and interfaces not described in Tariff, Attachment K-Appendix, section 2.6A(b). Increment Offers and Decrement Bids may be only submitted at hubs, nodes at which physical generation or load is settled, Residual Metered Load and interfaces not described in Tariff, Attachment K-Appendix, section 2.6A(b).

(d) Market Sellers in the Day-ahead Energy Market shall submit offers for the supply of energy, demand reductions, or other services for the following Operating Day for each clock hour for which the Market Seller desires or is required to make its resource available to the Office of the Interconnection. Offers for the supply of energy may be cost-based, market-based, or both, and may vary hourly. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, Operating Agreement, Schedule 2, and the PJM Manuals, as applicable. Market Sellers owning or controlling the output of a Generation Capacity Resource that is committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1, and that has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage shall submit offers for the available capacity of such Generation Capacity Resource, including any portion that is self-scheduled by the Generating Market Buyer. Such offers shall be based on the ICAP equivalent of the Market Seller's cleared UCAP capacity commitment, provided, however, where the underlying resource is a Capacity Storage Resource or an Intermittent Resource, the Market Seller shall satisfy the must offer requirement by either self-scheduling or offering the unit as a dispatchable resource, in accordance with the PJM Manuals, where the hourly day-ahead self-scheduled values for such Capacity Storage Resources and Intermittent Resources may vary hour to hour from the capacity commitment. Any offer not designated as a Maximum Emergency offer shall be considered available for scheduling and dispatch under both Emergency and non-Emergency conditions. Offers may only be designated as Maximum Emergency offers to the extent that the Generation Capacity Resource falls into at least one of the following categories:

- i) Environmental limits. If the resource has a limit on its run hours imposed by a federal, state, or other governmental agency that will significantly limit its availability, on either a temporary or long-term basis. This includes a resource that is limited to operating only during declared PJM capacity emergencies by a governmental authority.

- ii) Fuel limits. If physical events beyond the control of the resource owner result in the temporary interruption of fuel supply and there is limited on-site fuel storage. A fuel supplier's exercise of a contractual right to interrupt supply or delivery under an interruptible service agreement shall not qualify as an event beyond the control of the resource owner.
- iii) Temporary emergency conditions at the unit. If temporary emergency physical conditions at the resource significantly limit its availability.
- iv) Temporary megawatt additions. If a resource can provide additional megawatts on a temporary basis by oil topping, boiler over-pressure, or similar techniques, and such megawatts are not ordinarily otherwise available.

The submission of offers for resource increments that are not committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1 shall be optional, but any such offers must contain the information specified in the Office of the Interconnection's Offer Data specification, Operating Agreement, Schedule 1, sections 1.10.1A(d) and 1.10.9B, Operating Agreement, Schedule 2, and the PJM Manuals, as applicable. Energy offered from generation resources that are not committed as a Capacity Resource under Tariff, Attachment DD or RAA, Schedule 8.1 shall not be supplied from resources that are included in or otherwise committed to supply the Operating Reserves of a Control Area outside the PJM Region.

The foregoing offers:

- i) Shall specify the Generation Capacity Resource or Economic Load Response Participant resource and energy or demand reduction amount, respectively, for each clock hour in the offer period;
- ii) Shall specify the amounts and prices for each clock hour during the entire Operating Day for each resource component offered by the Market Seller to the Office of the Interconnection;
- iii) May specify for generation resources offer parameters for each clock hour during the entire Operating Day, as applicable and in accordance with section 1.10.9B below, including: (1) Minimum Run Time; (2) maximum run time; (3) Start-up Costs; (4) No-load Costs; (5) Incremental Energy Offer; (6) notification time; (7) availability; (8) ramp rate; (9) Economic Minimum; (10) Economic Maximum; (11) emergency minimum MW; (12) emergency maximum MW; (13) Synchronized Reserve maximum MW; (14) Secondary Reserve maximum MW; and (15) condense to generation time constraints, and may specify offer parameters for Economic Load Response Participant resources for each clock hour during the entire Operating Day, as applicable and in accordance with section 1.10.9B below, including: (1) minimum down time; (2) shutdown costs;

(3) Incremental Energy Offer; (4) notification time; (5) Economic Minimum; and (6) Economic Maximum;

- iv) Shall set forth any special conditions upon which the Market Seller proposes to supply a resource increment, including any curtailment rate specified in a bilateral contract for the output of the resource, or any cancellation fees;
- v) May include a schedule of offers for prices and operating data contingent on acceptance by the deadline specified in this Schedule, with additional schedules applicable if accepted after the foregoing deadline;
- vi) Shall constitute an offer to submit the resource increment to the Office of the Interconnection for scheduling and dispatch in accordance with the terms of the offer for the clock hour, which offer shall remain open through the Operating Day, for which the offer is submitted, unless the Market Seller a) submits a Real-time Offer for the applicable clock hour, or b) updates the availability of its offer for that hour, as further described in the PJM Manuals;
- vii) Shall be final as to the price or prices at which the Market Seller proposes to supply energy or other services to the PJM Interchange Energy Market, such price or prices being guaranteed by the Market Seller for the period extending through the end of the following Operating Day, unless modified after the close of the Day-ahead Energy Market as permitted pursuant to sections 1.10.9A or 1.10.9B below;
- viii) Shall not exceed an energy offer price of \$1,000/megawatt-hour for all generation resources, except (1) when a Market Seller's cost-based offer is above \$1,000/megawatt-hour and less than or equal to \$2,000/megawatt-hour, then its market-based offer must be less than or equal to the cost-based offer; and (2) when a Market Seller's cost-based offer is greater than \$2,000/megawatt-hour, then its market-based offer must be less than or equal to \$2,000/megawatt-hour;
- ix) Shall not exceed a demand reduction offer price of \$1,000/megawatt-hour, except when an Economic Load Response Participant submits a cost-based offer that includes an incremental cost component that is above \$1,000/megawatt-hour, then its market-based offer must be less than or equal to the cost-based offer but in no event greater than \$2,000/megawatt-hour;
- x) Shall not exceed an offer price as follows for Emergency Load Response and Pre-Emergency Load Response participants with:
 - a) a 30 minute lead time, pursuant to Tariff, Attachment DD-1,

section A.2 and the parallel provision of RAA, Schedule 6, \$1,000/megawatt-hour, plus the applicable Reserve Penalty Factor for the Primary Reserve Requirement, minus \$1.00;

b) an approved 60 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provision of RAA, Schedule 6, \$1,000/megawatt-hour, plus [the applicable Reserve Penalty Factor for the Primary Reserve Requirement divided by 2]; and

c) an approved 120 minute lead time, pursuant to Tariff, Attachment DD-1, section A.2 and the parallel provisions of RAA, Schedule 6, \$1,100/megawatt-hour; and

xi) Shall not exceed an energy offer price of \$0.00/MWh for pumped storage hydropower units scheduled by the Office of the Interconnection pursuant to the hydro optimization tool in the Day-ahead Energy Market.

(e) A Market Seller that wishes to make a resource available to sell Regulation-Up Service and/or Regulation-Down Service shall submit offer(s) for the applicable Regulation service(s) for each 30 minute Regulation clearing interval for which the Market Seller desires to make its resource available to the Office of the Interconnection to provide Regulation that shall specify the megawatts of Regulation-Up and/or Regulation-Down being offered, which must equal or exceed 0.1 megawatts, in the Regulation Zone for which such Regulation-Up and/or Regulation-Down Service is offered, the price of the capability offer in dollars per MW, the price of the mileage offer in Dollars per change in MW, and such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer and the resource's opportunity costs for Regulation-Up and/or Regulation-Down Service(s). Such offers may vary for each 30 minute Regulation clearing interval, and may be updated each 30 minute Regulation clearing interval, up to 35 minutes before the applicable 30 minute Regulation clearing interval during the Operating Day. The total of the applicable Regulation service mileage offer multiplied by the applicable historical average mileage used in the market clearing plus the applicable Regulation service capability offer shall not exceed \$50/megawatt-hour, for the Regulation-Down Service and Regulation-Up Service, independently. In addition to any market-based offer for Regulation-Up and/or Regulation-Down Service, the Market Seller also shall submit a cost-based offer. A cost-based offer must be in the form specified in the PJM Manuals and consist of the following components as well as any other components specified in the PJM Manuals:

i. The costs (in \$/MW) of the fuel cost increase due to the steady-state heat rate increase resulting from operating the unit at lower megawatt output incurred from the provision of Regulation shall apply to the capability offer for Regulation-Down Service;

ii. The cost increase (in \$/ΔMW) in costs associated with movement of the regulation resource incurred from the provision of Regulation shall apply to the mileage offer for Regulation-Down Service and Regulation-Up Service; and

- a. Only Regulation-only resources may include all variable operation and maintenance expenses in the mileage offer, as defined in the PJM Manuals.
- iii. An adder of up to \$6.00 per megawatt of Regulation provided applied to the capability offer for Regulation-Down Service and an adder of up to \$6.00 per megawatt of Regulation provided applied to the capability offer for Regulation-Up Service.

Qualified Regulation capability must satisfy the measurement and verification tests specified in the PJM Manuals.

(f) Each Market Seller owning or controlling the output of a Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative shall submit a forecast of the availability of each such Generation Capacity Resource for the next seven days. A Market Seller (i) may submit a non-binding forecast of the price at which it expects to offer a generation resource increment to the Office of the Interconnection over the next seven days, and (ii) shall submit a binding offer for energy, along with Start-up Costs and No-load Costs, if any, for the next seven days or part thereof, for any generation resource with minimum notification or start-up requirement greater than 24 hours. Such resources committed by the Office of the Interconnection will not receive Operating Reserve Credits nor otherwise be made whole for its hours of operation for the duration of any portion of such commitment that exceeds the maximum start-up and notification times for such resources during Hot Weather Alerts and Cold Weather Alerts, consistent with Operating Agreement, Schedule 1, section 3.2.3 and Operating Agreement, Schedule 1, section 6.6.

(g) Each component of an offer by a Market Seller of a Generation Capacity Resource that is constant for the entire Operating Day and does not vary hour to hour shall remain in effect for subsequent Operating Days until superseded or canceled.

(h) The Office of the Interconnection shall post the total hourly loads scheduled in the Day-ahead Energy Market, as well as, its estimate of the combined hourly load of the Market Buyers for the next four days, and peak load forecasts for an additional three days.

(i) Except for Economic Load Response Participants, all Market Participants may submit Virtual Transactions that apply to the Day-ahead Energy Market only. Such Virtual Transactions must comply with the requirements set forth in the PJM Manuals and must specify amount, location and price, if any, at which the Market Participant desires to purchase or sell energy in the Day-ahead Energy Market. The Office of the Interconnection may require that a market participant shall not submit in excess of a defined number of bid/offer segments in the Day-ahead Energy Market, as specified in the PJM Manuals, when the Office of the Interconnection determines that such limit is required to avoid or mitigate significant system performance problems related to bid/offer volume. Notice of the need to impose such limit shall be provided prior to 10:00 a.m. EPT on the day that the Day-ahead Energy Market will clear. For purposes of this provision, a bid/offer segment is each pairing of price and megawatt quantity submitted as part of an Increment Offer or Decrement Bid. For purposes of applying this provision to an Up-

to Congestion Transaction, a bid/offer segment shall refer to the pairing of a source and sink designation, as well as price and megawatt quantity, that comprise each Up-to Congestion Transaction.

(j) (i) Offers to Supply Synchronized and Non-Synchronized Reserves By Generation Resources in the Day-ahead and Real-time Reserve Markets

(1) Market Sellers owning or controlling the output of a Generation Capacity Resource that was committed in an FRR Capacity Plan, self-supplied, offered and cleared in a Base Residual Auction or Incremental Auction, or designated as replacement capacity, as specified in Tariff, Attachment DD, is capable of providing Synchronized Reserve or Non-Synchronized Reserve as specified in section 1.7.19A(a), in section 1.7.19A.01(a) and in the PJM Manuals, and has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage, shall submit offers or otherwise make their 10-minute reserve capability available to supply Synchronized Reserve or, as applicable, Non-Synchronized Reserve, including any portion that is self-scheduled by the Generating Market Buyer, in an amount equal to the available 10-minute reserve capability of such Generation Capacity Resource. Market Sellers of Generation Capacity Resources subject to this must-offer requirement that do not make the reserve capability of such resources available when such resource is able to operate with a dispatchable range (e.g. through offering a fixed output) will be in violation of this provision.

(2) Market Sellers of all other generation resources that (A) are capable of providing Synchronized Reserve or Non-Synchronized Reserve, as specified in section 1.7.19A(a), in section 1.7.19A.01(a) and in the PJM Manuals, (B) are located within the metered boundaries of the PJM Region, and (C) have submitted offers for the supply of energy into the Day-ahead Energy Market and/or Real-time Energy Market shall be deemed to have made their reserve capability available to provide Synchronized Reserve or Non-Synchronized Reserve in the Day-ahead Energy Market and/or Real-time Energy Market for each clock hour for which the Market Seller submits an available offer to supply energy; provided, however that hydroelectric generation resources and Energy Storage Resources are not automatically deemed available to provide reserves based on the submission of an available energy offer but may submit offers to supply Synchronized Reserve and Non-Synchronized Reserve, as applicable.

(3) Offers for the supply of Synchronized Reserve by all generation resources must be cost-based. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A, section 1.10.9B below, and the PJM Manuals, as applicable. For offers to supply Synchronized

Reserve, the offer price shall not exceed the expected value of the penalty for failing to provide Synchronized Reserve, where such expected value shall be recalculated annually, in accordance with the PJM Manuals, and posted on PJM's website. The expected value of the penalty is calculated as the product of: (A) the average penalty, expressed in \$/MWh, multiplied by (B) the average rate of non-performance during Synchronized Reserve events multiplied by (C) the probability a Synchronized Reserve event that will qualify for non-performance assessments will occur.

The expected value of the penalty shall be determined by an annual review of the twelve-month period ending October 31 of the calendar year in which the review is performed. The Office of the Interconnection shall post the results of its annual review by no later than December 15, and the revised offer price cap shall be effective as of the following January 1; provided, however, that at the time of implementation of this rule the expected value of the penalty shall be \$0.02/MWh, and for the period from the second month after implementation through the second December 31 following such date of implementation, the expected value of the penalty shall be recalculated on a monthly basis using data from the implementation date of this rule through the 15th day of the current month, and the revised value shall be effective the 1st day of the following month.

(4) All Non-Synchronized Reserve offers shall be for \$0.00/MWh. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this subsection (d) of this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(ii) Determination of Available Synchronized Reserve Capability of Generation Resources

(1) For each offer to supply reserves by a synchronized resource, the Office of the Interconnection shall determine the MW of available Synchronized Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market, in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Hydroelectric generation resources and Energy Storage Resources may submit offers for their available Synchronized Reserve capability as part of their offer into the Synchronized Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(j)(i) above must submit a Synchronized Reserve offer which specifies the MW of available Synchronized Reserve capability in order to remain compliant with such requirements.

(2) An on-line generation resource's available Synchronized Reserve capability, except for generation resources capable of synchronous condensing, shall be determined in accordance with the PJM Manuals and based on the resource's current performance and initial energy output and the following offer parameters submitted as part of the resource's energy offer: (A) ramp rate; (B) Economic Minimum; and (C) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Synchronized Reserves above the Synchronized Reserve maximum MW.

For generation resources capable of synchronous condensing, the resource's available Synchronized Reserve capability shall be based on the following offer parameters submitted as part of the resource's energy offer: (D) ramp rate; (E) condense to generation time constraints; (F) Economic Minimum; and (G) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Synchronized Reserves above the Synchronized Reserve maximum MW.

(3) Any Market Seller that believes its generating unit has operating modes, limits, or conditions where the unit would not be capable of providing Synchronized Reserves in real time, can submit to the Office of the Interconnection with a copy to the Market Monitoring Unit a request for an exception from being assigned Synchronized Reserves in the Real-time Synchronized Reserve Market during time periods in which the generating unit is in those operating modes, limits, or conditions. As part of the request, the Market Seller shall supply, for each generating unit, technical information about the operational modes, limits, or conditions to support the requested exception, as further detailed in the PJM Manuals. The Office of the Interconnection shall consult with the Market Monitoring Unit, and consider any input received from the Market Monitoring Unit, in its determination of a request for such an exception. Within 60 days of the submission of the request, the Office of the Interconnection shall notify the Market Seller in writing, with a copy to the Market Monitoring Unit, whether the request is approved or denied. The effective date of any approved request will be provided in the written notification. If a Market Seller has an approved exception, the Market Seller must communicate to the Office of the Interconnection when the unit cannot provide reserves, and the Office of the Interconnection will provide a mechanism for Market Sellers with an approved exception to provide such communication to the Office of the

Interconnection in real time, as further detailed in the PJM Manuals. An approved exception will remain applicable to the unit until such time as the Office of the Interconnection determines that a change is needed or the Market Seller notifies the Office of the Interconnection, with a copy to the Market Monitoring Unit, that a change is needed based on changed operational capabilities of the unit. Market Sellers must notify the Office of the Interconnection, with a copy to the Market Monitoring Unit, within 30 days of any changed operational capabilities that necessitate a change in an approved exception.

(iii) Determination of Available Non-Synchronized Reserve Capability of Generation Resources

(1) For each offer to supply reserves by an off-line generation resource, the Office of the Interconnection shall determine the MW of available Non-Synchronized Reserve capability offered in the Day-ahead Energy Market and Real-time Energy Market in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Such hydroelectric generation resources or Energy Storage Resources may submit offers for their available Non-Synchronized Reserve capability as part of their offer into the Non-Synchronized Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(j)(i) above must submit a Non-Synchronized Reserve offer which specifies the MW of available Non-Synchronized Reserve capability in order to remain compliant with such requirements.

(2) An off-line generation resource's available Non-Synchronized Reserve capability shall be determined in accordance with the PJM Manuals and based on the following offer parameters submitted as part of the resource's energy offer: (A) startup time; (B) notification time; (C) ramp rate; (D) Economic Minimum; and (E) the lesser of Economic Maximum and Synchronized Reserve maximum MW, where Synchronized Reserve maximum MW may be lower than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Non-Synchronized Reserves above its Synchronized Reserve maximum MW.

(iv) Offers to Supply Synchronized Reserves by Economic Load Response Participant Resources in the Day-ahead and Real-time Reserve Markets

(1) Economic Load Response Participants that submit offers to reduce demand into the Day-ahead Energy Market and Real-time Energy Market and wish to make their resources available to supply Synchronized Reserve may submit offers to supply Synchronized Reserve from such resources, where such

offers shall specify the megawatts of Synchronized Reserve being offered, which must equal or exceed 0.1 megawatts and such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer. Such offers may vary hourly, and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day.

(2) All offers to supply Synchronized Reserve offers from Economic Load Response Participant resources shall not exceed the expected value of the penalty for failing to provide Synchronized Reserve, as determined in accordance with section 1.10.1A(j)(i)(3) above. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(k) An Economic Load Response Participant that wishes to participate in the Day-ahead Energy Market by reducing demand shall submit an offer to reduce demand to the Office of the Interconnection for each clock hour for which the Economic Load Response Participant desires to make its resource available to the Office of the Interconnection to reduce demand. The offer must equal or exceed 0.1 megawatts, may vary hourly, and shall specify: (i) the amount of the offered curtailment in minimum increments of .1 megawatts; (ii) the Day-ahead Locational Marginal Price above which the end-use customer will reduce load, subject to section 1.10.1A(d)(ix); and (iii) at the Economic Load Response Participant's option, shutdown costs associated with reducing load, including direct labor and equipment costs, opportunity costs, and/or a minimum of number of contiguous hours for which the load reduction must be committed. Such offers may be updated each hour, up to 65 minutes before the applicable clock hour during the Operating Day. Economic Load Response Participants submitting offers to reduce demand in the Day-ahead Energy Market may establish an incremental offer curve, provided that such offer curve shall be limited to ten price pairs (in MWs) per hour.

(l) Market Sellers owning or controlling the output of an Economic Load Response Participant resource that was committed in an FRR Capacity Plan, or that was self-supplied or that offered and cleared in a Base Residual Auction or Incremental Auction, may submit demand reduction bids for the available load reduction capability of the Economic Load Response Participant resource. The submission of demand reduction bids for Economic Load Response Participant resource increments that were not committed in an FRR Capacity Plan, or that have not cleared in a Base Residual Auction or Incremental Auction, shall be optional, but any such bids must contain the information required to be included in such bids, as specified in the PJM Economic Load Response Program. An Economic Load Response Participant resource that was committed in an FRR Capacity Plan, or that was self-supplied or offered and cleared in a Base Residual Auction or Incremental Auction, may submit a demand reduction bid in the Day-ahead Energy Market as specified in the Economic Load Response Program; provided, however, that in the event of an Emergency PJM shall require Economic Load Response Participant resources to reduce load, notwithstanding that the Zonal LMP at the time such Emergency is declared is below the price identified in the demand reduction bid.

(m) (i) Offers to Supply Secondary Reserve By Generation Resources

(1) Market Sellers owning or controlling the output of a Generation Capacity Resource that was committed in an FRR Capacity Plan, self-supplied, offered and cleared in a Base Residual Auction or Incremental Auction, or designated as replacement capacity, as specified in Tariff, Attachment DD, that is available for energy, is capable of providing Secondary Reserve, as specified in section 1.7.19A.02(a) and in the PJM Manuals, and has not been rendered unavailable by a Generator Planned Outage, a Generator Maintenance Outage, or a Generator Forced Outage shall submit offers to supply Secondary Reserve, or otherwise make their Secondary Reserve capability available. Such offers shall be for an amount equal to the resource's available energy output achievable within thirty minutes (less its energy output achievable within ten minutes) from a request of the Office of the Interconnection. Market Sellers of Generation Capacity Resources subject to this must-offer requirement that do not make the reserve capability of such resources available when such resource is able to operate with a dispatchable range (e.g. through offering a fixed output) will be in violation of this provision.

(2) Market Sellers of all other generation resources located within the metered boundaries of the PJM Region that submit offers for the supply of energy into the Day-ahead Energy Market and/or Real-time Energy Market and are capable of providing Secondary Reserve, as specified in the PJM Manuals, shall be deemed to have made their reserve capability available to provide Secondary Reserve in the Day-ahead Energy Market and/or Real-time Energy Market for each clock hour for which the Market Seller submits an available offer to supply energy; provided, however that hydroelectric generation resources and Energy Storage Resources are not automatically deemed available to provide reserves based on the submission of an available energy offer but may submit offers to supply Secondary Reserve, as applicable.

(3) Offers for the supply of Secondary Reserve shall be for \$0.00/MWh. Consistent with the resource's offer to supply energy, such offers may vary hourly and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this subsection (d) above, section 1.10.9B below, and the PJM Manuals, as applicable.

(ii) Determination of Available Secondary Reserve Capability of Generation Resources

(1) For each offer to supply Secondary Reserve by a generation resource, the Office of the Interconnection shall determine the MW of available Secondary Reserve capability offered in the Day-ahead Energy Market and Real-time Energy

Market in accordance with the PJM Manuals; except, however, that the Office of the Interconnection will not make such determination for hydroelectric generation resources or Energy Storage Resources. Hydroelectric generation resources or Energy Storage Resources may submit their available Secondary Reserve capability as part of their offer into the Secondary Reserve market, provided that such offer equals or exceeds 0.1 MW; however, any such resource which is subject to the must offer requirements in section 1.10.1A(m)(i) above must submit a Secondary Reserve offer which specifies the MW of available Secondary Reserve capability in order to remain compliant with such requirements.

(2) (A) An on-line generation resource's available Secondary Reserve capability, except for generation resources capable of synchronous condensing, shall be based on the resource's current performance and initial energy output, the resource's available Synchronized Reserve capability; and the following offer parameters submitted as part of the energy offer: (i) ramp rate; (ii) Economic Minimum; and (iii) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(B) For generation resources capable of synchronous condensing, the resource's available Secondary Reserve capability shall be based on the following offer parameters submitted as part of the energy offer: (i) ramp rate; (ii) condense to generation time constraints; (iii) Economic Minimum; and (iv) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(C) An off-line generation resource's available Secondary Reserve capability, shall be based on the resource's available Secondary Reserve capability and the following offer parameters submitted as part of the resource's energy offer: (i) startup time; (ii) notification time; (iii) ramp rate; (iv) Economic Minimum; and (v) the lesser of Economic Maximum and Secondary Reserve maximum MW, where a resource's Secondary Reserve maximum MW may be less than the Economic Maximum only where the Market Seller has, in accordance with the procedures set forth in the PJM Manuals, submitted justification to the

Office of the Interconnection that the resource has an operating configuration that prevents it from reliably providing Secondary Reserves above its Secondary Reserve maximum MW.

(3) Any Market Seller that believes its generating unit has operating modes, limits, or conditions where the unit would not be capable of providing Secondary Reserves in real time, can submit to the Office of the Interconnection with a copy to the Market Monitoring Unit a request for an exception from being assigned Secondary Reserves in the Real-time Secondary Reserve Market during time periods in which the generating unit is in those operating modes, limits, or conditions. As part of the request, the Market Seller shall supply, for each generating unit, technical information about the operational modes, limits, or conditions to support the requested exception, as further detailed in the PJM Manuals. The Office of the Interconnection shall consult with the Market Monitoring Unit, and consider any input received from the Market Monitoring Unit, in its determination of a request for such an exception. Within 60 days of the submission of the request, the Office of the Interconnection shall notify the Market Seller in writing, with a copy to the Market Monitoring Unit, whether the request is approved or denied. The effective date of any approved request will be provided in the written notification. If a Market Seller has an approved exception, the Market Seller must communicate to the Office of the Interconnection when the unit cannot provide reserves, and the Office of the Interconnection will provide a mechanism for Market Sellers with an approved exception to provide such communication to the Office of the Interconnection in real time, as further detailed in the PJM Manuals. An approved exception will remain applicable to the unit until such time as the Office of the Interconnection determines that a change is needed or the Market Seller notifies the Office of the Interconnection, with a copy to the Market Monitoring Unit, that a change is needed based on changed operational capabilities of the unit. Market Sellers must notify the Office of the Interconnection, with a copy to the Market Monitoring Unit, within 30 days of any changed operational capabilities that necessitate a change in an approved exception.

(iii) Offers to Supply Secondary Reserves by Economic Load Response Participant resources

(1) Each Economic Load Response Participant that submits offers to reduce demand into the Day-ahead Energy Market and Real-time Energy Market and wishes to make their resources available to supply Secondary Reserve shall submit offers to supply Secondary Reserve from such resources, where such offers shall specify the megawatts of Secondary Reserve being offered, which must equal or exceed 0.1 megawatts and include such other information specified by the Office of the Interconnection as may be necessary to evaluate the offer.

Such offers may vary hourly, and may be updated each hour up to 65 minutes before the applicable clock hour during the Operating Day.

(2) All Secondary Reserve offers by Economic Load Response Participant resources shall be for \$0.00/MWh. Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection and shall contain the information specified in the Office of the Interconnection's Offer Data specification, this section 1.10.1A(d), section 1.10.9B below, and the PJM Manuals, as applicable.

(n) A Market Participant may submit a Day-Ahead Pseudo-Tie Transaction for a Market Participant's generator within the PJM balancing authority area that is a Pseudo-Tie into the MISO balancing authority area. Day-Ahead Pseudo-Tie Transactions combine an offer to sell energy at a source with a bid to buy the same megawatt quantity of energy at a sink where such transaction specifies the maximum difference between the Locational Marginal Prices at the source and sink.

Each Day-Ahead Pseudo-Tie Transaction shall: (1) source at a Market Participant's generator within the PJM balancing authority area that Pseudo-Ties into MISO; and (2) sink at the PJM-MISO interface. A Market Participant must reserve transmission service in accordance with the PJM Tariff for each Day-Ahead Pseudo-Tie Transaction. Megawatt quantities for Day-Ahead Pseudo-Tie Transactions shall be greater than zero and less than or equal to the transmission service reserved for the Day-Ahead Pseudo-Tie Transaction. An accepted Day-Ahead Pseudo-Tie Transaction results in scheduled injection at a specified source and scheduled withdrawal of the same megawatt quantity at a specified sink in the Day-Ahead Energy Market.

1.10.1B Demand Bid Scheduling and Screening

(a) The Office of the Interconnection shall apply Demand Bid Screening to all Demand Bids submitted in the Day-ahead Energy Market for each Load Serving Entity, separately by Zone. Using Demand Bid Screening, the Office of the Interconnection will automatically reject a Load Serving Entity's Demand Bids in any future Operating Day for which the Load Serving Entity submits bids if the total megawatt volume of such bids would exceed the Load Serving Entity's Demand Bid Limit for any hour in such Operating Day, unless the Office of the Interconnection permits an exception pursuant to subsection (d) below.

(b) On a daily basis, PJM will update and post each Load Serving Entity's Demand Bid Limit in each applicable Zone. Such Demand Bid Limit will apply to all Demand Bids submitted by that Load Serving Entity for each future Operating Day for which it submits bids. The Demand Bid Limit is calculated using the following equation:

Demand Bid Limit = greater of (Zonal Peak Demand Reference Point * 1.3), or (Zonal Peak Demand Reference Point + 10MW)

Where:

1. Zonal Peak Demand Reference Point = for each Zone: the product of (a) LSE Recent Load Share, multiplied by (b) Peak Daily Load Forecast.
2. LSE Recent Load Share is the Load Serving Entity's highest share of Network Load in each Zone for any hour over the most recently available seven Operating Days for which PJM has data.
3. Peak Daily Load Forecast is PJM's highest available peak load forecast for each applicable Zone that is calculated on a daily basis.

(c) A Load Serving Entity whose Demand Bids are rejected as a result of Demand Bid Screening may change its Demand Bids to reduce its total megawatt volume to a level that does not exceed its Demand Bid Limit, and may resubmit them subject to the applicable rules related to bid submission outlined in Tariff, Operating Agreement and PJM Manuals.

(d) PJM may allow a Load Serving Entity to submit bids in excess of its Demand Bid Limit when circumstances exist that will cause, or are reasonably expected to cause, a Load Serving Entity's actual load to exceed its Demand Bid Limit on a given Operating Day. Examples of such circumstances include, but are not limited to, changes in load commitments due to state sponsored auctions, mergers and acquisitions between PJM Members, and sales and divestitures between PJM Members. A Load Serving Entity may submit a written exception request to the Office of Interconnection for a higher Demand Bid Limit for an affected Operating Day. Such request must include a detailed explanation of the circumstances at issue and supporting documentation that justify the Load Serving Entity's expectation that its actual load will exceed its Demand Bid Limit.

1.10.2 Pool-scheduled Resources.

Pool-scheduled resources are those resources for which Market Participants submitted offers to sell energy in the Day-ahead Energy Market and offers to reduce demand in the Day-ahead Energy Market, which the Office of the Interconnection scheduled in the Day-ahead Energy Market as well as generators committed by the Office of the Interconnection subsequent to the Day-ahead Energy Market. Such resources shall be committed to provide energy in the real-time dispatch unless the schedules for such units are revised pursuant to section 1.10.9 below or Operating Agreement, Schedule 1, section 1.11. Pool-scheduled resources shall be governed by the following principles and procedures.

(a) Pool-scheduled resources shall be selected by the Office of the Interconnection on the basis of the prices offered for energy and demand reductions and related services, whether the resource is expected to be needed to maintain system reliability during the Operating Day, Start-up Costs, No-load Costs, and cancellation fees, and the specified operating characteristics, offered by Market Sellers to the Office of the Interconnection by the offer deadline specified in section 1.10.1A above. Hydropower units can only be pool-scheduled if they are pumped storage units and scheduled by the Office of the Interconnection pursuant to the hydro optimization tool in the Day-ahead Energy Market.

(b) A resource that is scheduled by a Market Participant to support a bilateral sale, or that is self-scheduled by a Generating Market Buyer, shall not be selected by the Office of the Interconnection as a pool-scheduled resource except in an Emergency.

(c) Market Sellers offering energy from hydropower or other facilities with fuel or environmental limitations may submit data to the Office of the Interconnection that is sufficient to enable the Office of the Interconnection to determine the available operating hours of such facilities.

(d) The Market Seller of a resource selected as a pool-scheduled resource shall receive payments or credits for energy, demand reductions or related services, or for Start-up Costs and No-load Costs, from the Office of the Interconnection on behalf of the Market Buyers in accordance with Operating Agreement, Schedule 1, section 3. Alternatively, the Market Seller shall receive, in lieu of Start-up Costs and No-load Costs, its actual costs incurred, if any, up to a cap of the resource's Start-up Costs, if the Office of the Interconnection cancels its selection of the resource as a pool-scheduled resource and so notifies the Market Seller before the resource is synchronized.

(e) Market Participants shall make available their pool-scheduled resources to the Office of the Interconnection for coordinated operation to supply the Operating Reserves needs of the applicable Control Zone.

(f) Economic Load Response Participants offering to reduce demand shall specify: (i) the amount of the offered curtailment, which must equal or exceed 0.1 megawatts, in minimum increments of 0.1 megawatts; (ii) the real-time Locational Marginal Price above which the end-use customer will reduce load; and (iii) at the Economic Load Response Participant's option, shut-down costs associated with reducing load, including direct labor and equipment costs, opportunity costs, and/or a minimum number of contiguous hours for which the load reduction must be committed. Economic Load Response Participants submitting offers to reduce demand in the Day-ahead Energy Market and/or the Real-time Energy Market may establish an incremental offer curve, provided that such offer curve shall be limited to ten price pairs (in MWs). Economic Load Response Participants offering to reduce demand shall also indicate the hours that the demand reduction is not available.

1.10.3 Self-scheduled Resources.

Self-scheduled resources shall be governed by the following principles and procedures.

(a) Each Generating Market Buyer shall use all reasonable efforts, consistent with Good Utility Practice, not to self-schedule resources in excess of its Equivalent Load.

(b) The offered prices of resources that are self-scheduled and not dispatchable by the Office of the Interconnection shall not be considered by the Office of the Interconnection in determining Locational Marginal Prices.

(c) Market Participants shall make available their self-scheduled resources to the Office of the Interconnection for coordinated operation to supply the Operating Reserves needs of the applicable Control Zone, by submitting an offer as to such resources.

(d) A Market Participant self-scheduling a resource in the Day-ahead Energy Market that does not deliver the energy in the Real-time Energy Market, shall replace the energy not delivered with energy from the Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(e) A Market Participant self-scheduling a resource to supply Synchronized Reserve in the Day-ahead Synchronized Reserve Market that does not deliver the scheduled megawatt quantity in the applicable real-time reserve market, shall replace the Synchronized Reserve not delivered and shall pay for such Synchronized Reserve at the applicable Real-time Synchronized Reserve Market Clearing Price. Market Participants shall not self-schedule a resource to provide Secondary Reserve or Non-Synchronized Reserve.

(f) For energy, hydropower units, excluding pumped storage units, may only be self-scheduled.

(g) A resource that has been self-scheduled shall not receive payments or credits for Start-up Costs or No-load Costs.

1.10.4 Capacity Resources.

(a) A Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative that is selected as a pool-scheduled resource shall be made available for scheduling and dispatch at the direction of the Office of the Interconnection. Such a Generation Capacity Resource that does not deliver energy as scheduled shall be deemed to have experienced a Generator Forced Outage to the extent of such energy not delivered. A Market Participant offering such Generation Capacity Resource in the Day-ahead Energy Market shall replace the energy not delivered with energy from the Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(b) Energy from a Generation Capacity Resource committed to service of PJM loads under the Reliability Pricing Model or Fixed Resource Requirement Alternative that has not been scheduled in the Day-ahead Energy Market may be sold on a bilateral basis by the Market Seller, may be self-scheduled, or may be offered for dispatch during the Operating Day in accordance with the procedures specified in this Schedule. Such a Generation Capacity Resource that has not been scheduled in the Day-ahead Energy Market and that has been sold on a bilateral basis must be made available upon request to the Office of the Interconnection for scheduling and dispatch during the Operating Day if the Office of the Interconnection declares a Maximum Generation Emergency. Any such resource so scheduled and dispatched shall receive the applicable Real-time Price for energy delivered.

1.10.5 External Resources.

(a) External Resources may submit offers to the PJM Interchange Energy Market, in accordance with the day-ahead and real-time scheduling processes specified above. An External Resource selected as a pool-scheduled resource shall be made available for scheduling and dispatch at the direction of the Office of the Interconnection, and except as specified below shall be compensated on the same basis as other pool-scheduled resources. External Resources that are not capable of Dynamic Transfer shall, if selected by the Office of the Interconnection on the basis of the Market Seller's Offer Data, be block loaded on an hourly scheduled basis. Market Sellers shall offer External Resources to the PJM Interchange Energy Market on either a resource-specific or an aggregated resource basis. A Market Participant whose pool-scheduled resource does not deliver the energy scheduled in the Day-ahead Energy Market shall replace such energy not delivered as scheduled in the Day-ahead Energy Market with energy from the PJM Real-time Energy Market and shall pay for such energy at the applicable Real-time Price.

(b) Offers for External Resources from an aggregation of two or more generating units shall so indicate, and shall specify, in accordance with the Offer Data requirements specified by the Office of the Interconnection: (i) energy prices; (ii) hours of energy availability; (iii) a minimum dispatch level; (iv) a maximum dispatch level; and (v) unless such information has previously been made available to the Office of the Interconnection, sufficient information, as specified in the PJM Manuals, to enable the Office of the Interconnection to model the flow into the PJM Region of any energy from the External Resources scheduled in accordance with the Offer Data.

(c) Offers for External Resources on a resource-specific basis shall specify the resource being offered, along with the information specified in the Offer Data as applicable.

1.10.6 External Market Buyers.

(a) Deliveries to an External Market Buyer not subject to Dynamic Transfer by the Office of the Interconnection shall be delivered on a block loaded basis to the bus or buses at the electrical boundaries of the PJM Region, or in such area with respect to an External Market Buyer's load within such area not served by Network Service, at which the energy is delivered to or for the External Market Buyer. External Market Buyers shall be charged (which charge may be positive or negative) at either the Day-ahead Prices or Real-time Prices, whichever is applicable, for energy at the foregoing bus or buses.

(b) An External Market Buyer's hourly schedules for energy purchased from the PJM Interchange Energy Market shall conform to the ramping and other applicable requirements of the interconnection agreement between the PJM Region and the Control Area to which, whether as an intermediate or final point of delivery, the purchased energy will initially be delivered.

(c) The Office of the Interconnection shall curtail deliveries to an External Market Buyer if necessary to maintain appropriate reserve levels for a Control Zone as defined in the PJM Manuals, or to avoid shedding load in such Control Zone.

1.10.7 Bilateral Transactions.

Bilateral transactions as to which the parties have notified the Office of the Interconnection by the deadline specified in section 1.10.1A above that they elect not to be included in the Day-ahead Energy Market and that they are not willing to incur Transmission Congestion Charges in the Real-time Energy Market shall be curtailed by the Office of the Interconnection as necessary to reduce or alleviate transmission congestion. Bilateral transactions that were not included in the Day-ahead Energy Market and that are willing to incur congestion charges and bilateral transactions that were accepted in the Day-ahead Energy Market shall continue to be implemented during periods of congestion, except as may be necessary to respond to Emergencies.

1.10.8 Office of the Interconnection Responsibilities.

(a) The Office of the Interconnection shall use its best efforts to determine (i) the least-cost means of satisfying the projected hourly requirements for energy, Operating Reserves, and other ancillary services of the Market Buyers, including the reliability requirements of the PJM Region, of the Day-ahead Energy Market, and (ii) the least-cost means of satisfying the Operating Reserve and other ancillary service requirements for any portion of the load forecast of the Office of the Interconnection for the Operating Day in excess of that scheduled in the Day-ahead Energy Market. In making these determinations, the Office of the Interconnection shall take into account: (i) the Office of the Interconnection's forecasts of PJM Interchange Energy Market and PJM Region energy requirements, giving due consideration to the energy requirement forecasts and purchase requests submitted by Market Buyers and PRD Curves properly submitted by PRD Providers; (ii) the offers submitted by Market Sellers; (iii) the availability of limited energy resources; (iv) the capacity, location, and other relevant characteristics of self-scheduled resources; (v) the objectives of each Control Zone for Operating Reserves, as specified in the PJM Manuals; (vi) the requirements of each Regulation Zone for Regulation and other ancillary services, as specified in the PJM Manuals; (vii) the benefits of avoiding or minimizing transmission constraint control operations, as specified in the PJM Manuals; and (viii) such other factors as the Office of the Interconnection reasonably concludes are relevant to the foregoing determination, including, without limitation, transmission constraints on external coordinated flowgates to the extent provided by Operating Agreement, Schedule 1, section 1.7.6. The Office of the Interconnection shall develop a Day-ahead Energy Market based on the foregoing determination, and shall determine the Day-ahead Prices resulting from such schedule. The Office of the Interconnection shall report the planned schedule for a hydropower resource to the operator of that resource as necessary for plant safety and security, and legal limitations on pond elevations.

(b) By 1:30 p.m., or as soon as practicable thereafter, of the day before each Operating Day, or such other deadline as may be specified by the Office of the Interconnection in the PJM Manuals, the Office of the Interconnection shall: (i) post the aggregate Day-ahead Energy Market results; (ii) post the Day-ahead Prices; and (iii) inform the Market Sellers, Market Buyers, and Economic Load Response Participants of their scheduled injections, withdrawals, and demand reductions respectively. The foregoing notwithstanding, the deadlines set forth in this subsection shall not apply if the Office of the Interconnection is unable to obtain Market Participant bid/offer data due to extraordinary circumstances. For purposes of this subsection, extraordinary circumstances shall mean a technical malfunction that limits, prohibits or

otherwise interferes with the ability of the Office of the Interconnection to obtain Market Participant bid/offer data prior to 11:59 p.m. on the day before the affected Operating Day. Extraordinary circumstances do not include a Market Participant's inability to submit bid/offer data to the Office of the Interconnection. If the Office of the Interconnection is unable to clear the Day-ahead Energy Market prior to 11:59 p.m. on the day before the affected Operating Day as a result of such extraordinary circumstances, the Office of the Interconnection shall notify Members as soon as practicable.

(c) Following posting of the information specified in section 1.10.8(b), and absent extraordinary circumstances preventing the clearing of the Day-ahead Energy Market, the Office of the Interconnection shall revise its schedule of generation resources to reflect updated projections of load, conditions affecting electric system operations in the PJM Region, the availability of and constraints on limited energy and other resources, transmission constraints, and other relevant factors.

(d) Market Buyers shall pay PJMSettlement and Market Sellers shall be paid by PJMSettlement for the quantities of energy scheduled in the Day-ahead Energy Market at the Day-ahead Prices when the Day-ahead Price is positive. Market Buyers shall be paid by PJMSettlement and Market Sellers shall pay PJMSettlement for the quantities of energy scheduled in the Day-ahead Energy Market at the Day-ahead Prices when the Day-ahead Price is negative. Economic Load Response Participants shall be paid for scheduled demand reductions pursuant to Operating Agreement, Schedule 1, section 3.3A. Notwithstanding the foregoing, if the Office of the Interconnection is unable to clear the Day-ahead Energy Market prior to 11:59 p.m. on the day before the affected Operating Day due to extraordinary circumstances as described in subsection (b) above, it will be declared a Market Suspension, and Day-ahead Prices shall be determined pursuant to Operating Agreement, Schedule 1, section 2.6.1. If the Office of the Interconnection declares a Market Suspension, it shall notify Market Participants of the Market Suspension as soon as practicable.

(e) If the Office of the Interconnection discovers a *potential* error in prices and/or cleared quantities in the Day-ahead Energy Market or Day-ahead Ancillary Services Markets, or the Real-time Energy Market or Real-time Ancillary Services Markets after it has posted the results for these markets on its Web site, the Office of the Interconnection shall notify Market Participants as soon as possible after it is found, but in no event later than 12:00 p.m. of the second Business Day following the Operating Day for the Real-time Energy Market and Real-time Ancillary Services Markets, and no later than 5:00 p.m. of the second Business Day following the initial publication of the results for the Day-ahead Energy Market and Day-ahead Ancillary Services Markets. After this initial notification, if the Office of the Interconnection determines it is necessary to post modified results, it shall provide notification of its intent to do so, *along with a description detailing the cause and scope of the error*, by no later than 5:00 p.m. of the fifth Business Day following the Operating Day for the Real-time Energy Market and Real-time Ancillary Services Markets, and no later than 5:00 p.m. of the fifth Business Day following the initial publication of the results in the Day-ahead Energy Market and Day-ahead Ancillary Services Markets. *The provided description will not contain information that is market sensitive or confidential.* Thereafter, the Office of the Interconnection must post on its Web site the corrected results by no later than 5:00 p.m. of the tenth calendar day following the Operating

Day for the Day-ahead Energy Market, Real-time Energy Market, and Day-ahead Ancillary Services Markets, and Real-time Ancillary Service Markets. Should any of the above deadlines pass without the associated action on the part of the Office of the Interconnection, the originally posted results will be considered final. Notwithstanding the foregoing, the deadlines set forth above shall not apply if the referenced market results are under publicly noticed review by the FERC.

(f) Consistent with Operating Agreement, section 18.17.1, and notwithstanding anything to the contrary in the Operating Agreement or in the PJM Tariff, to allow the tracking of Market Participants' non-aggregated bids and offers over time as required by FERC Order No. 719, the Office of the Interconnection shall post on its Web site the non-aggregated bid data and Offer Data submitted by Market Participants (for participation in the PJM Interchange Energy Market) approximately four months after the bid or offer was submitted to the Office of the Interconnection.

1.10.9 Hourly Scheduling.

(a) Following the initial posting by the Office of the Interconnection of the Locational Marginal Prices resulting from the Day-ahead Energy Market, and subject to the right of the Office of the Interconnection to schedule and dispatch pool-scheduled resources and to direct that schedules be changed in an Emergency, and absent extraordinary circumstances preventing the clearing of the Day-ahead Energy Market, a generation rebidding period shall exist. Typically the rebidding period shall be from the time the Office of the Interconnection posts the results of the Day-ahead Energy Market until 2:15 p.m. on the day before each Operating Day. However, should the clearing of the Day-ahead Energy Market be significantly delayed, the Office of the Interconnection may establish a revised rebidding period. During the rebidding period, Market Participants may submit revisions to generation Offer Data for the next Operating Day. Adjustments to the Day-ahead Energy Market shall be settled at the applicable Real-time Prices, and shall not affect the obligation to pay or receive payment for the quantities of energy scheduled in the Day-ahead Energy Market at the applicable Day-ahead Prices.

(b) A Market Participant may adjust the schedule of a resource under its dispatch control on an hour-to-hour basis beginning at 6:30 p.m. of the day before each Operating Day, provided that the Office of the Interconnection is notified not later than 65 minutes prior to the hour in which the adjustment is to take effect, as follows and as specified in section 1.10.9A below:

- i) A Generating Market Buyer may self-schedule any of its resource increments, including hydropower resources, not previously designated as self-scheduled and not selected as a pool-scheduled resource in the Day-ahead Energy Market;
- ii) A Market Participant may request the scheduling of a non-firm bilateral transaction; or
- iii) A Market Participant may request the scheduling of deliveries or receipts of Spot Market Energy; or

iv) A Generating Market Buyer may remove from service a resource increment, including a hydropower resource, that it had previously designated as self-scheduled, provided that the Office of the Interconnection shall have the option to schedule energy from any such resource increment that is a Capacity Resource at the price offered in the scheduling process, with no obligation to pay any Start-Up Costs.

(c) An External Market Buyer may refuse delivery of some or all of the energy it requested to purchase in the Day-ahead Energy Market by notifying the Office of the Interconnection of the adjustment in deliveries not later than 65 minutes prior to the hour in which the adjustment is to take effect, but any such adjustment shall not affect the obligation of the External Market Buyer to pay for energy scheduled on its behalf in the Day-ahead Energy Market at the applicable Day-ahead Prices.

(d) The Office of the Interconnection shall provide External Market Buyers and External Market Sellers and parties to bilateral transactions with any revisions to their schedules resulting from the rebidding period by 6:30 p.m. on the day before each Operating Day. The Office of the Interconnection may also commit additional resources after such time as system conditions require. For each hour in the Operating Day, as soon as practicable after the deadlines specified in the foregoing subsection of this section 1.10, the Office of the Interconnection shall provide External Market Buyers and External Market Sellers and parties to bilateral transactions with any revisions to their schedules for the hour.

1.10.9A Updating Offers in Real-time

(a) Each Market Seller may submit Real-time Offers for a resource up to 65 minutes before the applicable clock hour, and such Real-time Offers shall supersede any previous offer for that resource for the clock hour, as further described in the PJM Manuals and subject to the following conditions:

(i) A market-based Real-time Offer shall not exceed the applicable energy offer caps specified in this Schedule. Once a Market Seller's resource is committed for an applicable clock hour, the Market Seller may not increase its Incremental Energy Offer and may only submit a market-based Real-time Offer that is higher than its market-based offer that was in effect at the time of commitment to reflect increases in the resource's cost-based Start-up Costs and cost-based No-load Costs. The Market Seller may elect not to have its market-based offer considered for dispatch and to have only its lowest cost-based offer considered for the remainder of the Operating Day.

(ii) Cost-based Real-time Offers shall be submitted to the Office of the Interconnection in the form specified by the Office of the Interconnection's Offer Data specification, Operating Agreement, Schedule 1, sections 1.10.1A(d) and 1.10.9B, Operating Agreement, Schedule 2 and the PJM Manuals, as applicable. If a Market Seller submits a market-based Real-time Offer for a particular clock hour in accordance with subsection (c) below, or if updates to a cost-based offer are required by the Market

Seller's approved Fuel Cost Policy, the Market Seller shall update its previously submitted cost-based Real-time Offer.

(iii) If a Market Seller's available cost-based offer is not compliant with Operating Agreement, Schedule 2 and the PJM Manuals at the time a Market Seller submits a market-based Real-time Offer for an applicable clock hour during the Operating Day, the Market Seller must submit an updated cost-based Real-time Offer consisting of an Incremental Energy Offer, Start-up Cost, and No-load Cost for that clock hour that is compliant with Operating Agreement, Schedule 2 and the PJM Manuals.

(b) Each Market Seller may submit Real-time Offers for a resource during and through the end of the applicable clock hour to update only the following offer parameters, as further described in the PJM Manuals: (1) Economic Minimum; (2) Economic Maximum; (3) emergency minimum MW; (4) emergency maximum MW; (5) unit availability status; (6) fixed output indicator; (7) Synchronized Reserve maximum MW; and (8) Secondary Reserve maximum MW. Such Real-time Offers shall supersede any previous offer for that resource for the clock hour.

1.10.9B Offer Parameter Flexibility

(a) Market Sellers may, in accordance with sections 1.10.1A and 1.10.9A above, this section 1.10.9B, and the PJM Manuals, update offer parameters at any time up to 65 minutes before the applicable clock hour, including prior to the close of the Day-ahead Energy Market and prior to the close of the rebidding period specified in section 1.10.9, except that Market Sellers may not update their offers for the supply of energy, Secondary Reserve, Synchronized Reserve, Non-Synchronized Reserve, or demand reduction: (1) during the period after the close the Day-ahead Energy Market and prior to the posting of the Day-ahead Energy Market results pursuant to section 1.10.8(b); or (2) during the period after close of the rebidding period and prior to PJM announcing the results of the rebidding period pursuant to section 1.10.9(d).

(b) For generation resource offers, Market Sellers may vary for each clock hour during the entire Operating Day the following offer parameters: (1) cost-based Start-up Costs; (2) cost-based No-load Costs; (3) Incremental Energy Offer; (4) Economic Minimum and Economic Maximum; (5) emergency minimum MW and emergency maximum MW; (6) ramp rate; (7) Synchronized Reserve maximum MW; (8) Secondary Reserve maximum MW; and (9) for Real-time Offers only, (i) notification time and (ii) for uncommitted hours only, Minimum Run Time.

(c) For Economic Load Response Participant resource offers, Market Sellers may vary for each clock hour during the entire Operating Day the following offer parameters: (1) shutdown costs, (2) Incremental Energy Offer; (3) Economic Minimum; (4) Economic Maximum; and (5) for Real-time Offers only, (i) notification time and (ii) for uncommitted hours only, minimum down time.

(d) After the announcement of the results of the rebidding period pursuant to section 1.10.9(d), a Market Seller may submit a Real-time Offer where offer parameters may differ from the offer originally submitted in the Day-ahead Energy Market, except that a Market Seller may not submit a Real-time Offer that changes, of the offer parameters listed in section 1.10.1A(d), the MW amounts specified in the Incremental Energy Offer, MW amounts specified in the ramp rate, maximum run time, and availability; provided, however, Market Sellers of dual-fueled resources may submit Real-time Offers for such resources that change the availability of a submitted cost-based offer.

3.2 Market Settlements.

If a dollar-per-MW-hour value is applied in a calculation under this section 3.2 where the interval of the value produced in that calculation is less than an hour, then for purposes of that calculation the dollar-per-MW hour value is divided by the number of Real-time Settlement Intervals in the hour.

3.2.1 Spot Market Energy.

(a) The Office of the Interconnection shall calculate System Energy Prices in the form of Day-ahead System Energy Prices and Real-time System Energy Prices for the PJM Region, in accordance with Operating Agreement, Schedule 1, section 2.

(b) Each Market Participant shall be charged for all of its Market Participant Energy Withdrawals scheduled in the Day-ahead Energy Market at the Day-ahead System Energy Price to be served in the PJM Interchange Energy Market.

(c) Each Market Participant shall be paid for all of its Market Participant Energy Injections scheduled in the Day-ahead Energy Market at the Day-ahead System Energy Price to be delivered to the PJM Interchange Energy Market.

(d) For each Day-ahead Settlement Interval during an Operating Day, the Office of the Interconnection shall calculate Spot Market Energy charges for each Market Participant as the difference between the sum of its Market Participant Energy Withdrawals scheduled times the Day-ahead System Energy Price and the sum of its Market Participant Energy Injections scheduled times the Day-ahead System Energy Price.

(e) For each Real-time Settlement Interval during an Operating Day, the Office of the Interconnection shall calculate Spot Market Energy charges for each Market Participant as the difference between the sum of its real-time Market Participant Energy Withdrawals less its scheduled Market Participant Energy Withdrawals times the Real-time System Energy Price and the sum of its real-time Market Participant Energy Injections less scheduled Market Participant Energy Injections times the Real-time System Energy Price. The Revenue Data for Settlements determined for each Real-time Settlement Interval in accordance with Operating Agreement, Schedule 1, section 3.1A shall be used in determining the real-time Market Participant Energy Withdrawals and Market Participant Energy Injections used to calculate Spot Market Energy charges under this subsection (e).

(f) For pool External Resources, the Office of the Interconnection shall model, based on an appropriate flow analysis, the megawatts of real-time energy injections to be delivered from each such resource to the corresponding Interface Pricing Point between adjacent Control Areas and the PJM Region.

3.2.2 Regulation.

(a) The Office of the Interconnection's Regulation service is comprised of Regulation-Down Service and Regulation-Up Service. Regulation-Down Service and Regulation-Up Service will have distinct requirements, clearing prices, and performance scores, calculated in accordance with the section(s) below and the PJM Manuals.

Each Market Participant that is a Load Serving Entity in a Regulation Zone shall have an hourly Regulation objective equal to its pro rata share of the Regulation-Down Requirement and Regulation-Up Requirement of such Regulation Zone for the hour, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Regulation Zone for the hour ("Regulation Obligation"). A Market Participant with an hourly Regulation Obligation shall be charged the pro rata share of the sum of the Regulation market mileage clearing price credits and Regulation market capability clearing price credits for the Real-time Settlement Intervals in an hour.

Regulation Charge = Hourly Regulation Obligation Share * (sum of the Real-time Settlement Interval Regulation credits in an hour)

(b) Each Market Participant supplying Regulation in a Regulation Zone at the direction of the Office of the Interconnection shall be credited for each of its resources such that the calculated credit for each increment of Regulation provided by each resource shall be the higher of: (i) the Regulation market-clearing price; or (ii) the sum of the applicable Regulation offers for a resource determined pursuant to section 3.2.2A.1 below, the resource-specific shoulder opportunity costs described in subsection (e) of this section, the resource-specific inter-temporal opportunity costs discussed in subsection (d), and the resource-specific opportunity costs discussed in subsection (e) of this section.

(c) The Office of the Interconnection shall commit resources to provide Regulation-Down Service and Regulation-Up Service every 30 minutes, for the clock intervals of the first 30 minutes of an hour and the second 30 minutes of an hour, to meet the Regulation-Down Requirement and Regulation-Up Requirement of such Regulation Zone. The Office of the Interconnection shall select resources in merit order, taking into account the resource's mileage Regulation offer, capability Regulation offer, and estimated resource-specific opportunity cost, all converted into their performance adjusted values as further detailed in the PJM Manuals. The total Regulation market-clearing price for the Regulation-Down Service and Regulation-Up Service in each Regulation Zone shall be determined in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval. The total Regulation market-clearing price shall include: (i) the mileage Regulation market-clearing price in a Regulation Zone that shall be calculated in accordance with subsection (g) of this section; (ii) the capability Regulation market-clearing price that shall be calculated in accordance with subsection (h) of this section; and (iii) a Regulation resource's unit-specific opportunity costs during the 5-minute period, determined as described in subsection (d) below. A resource's Regulation offer by any Market Seller that fails the Regulation three-pivotal supplier test set forth in section 3.2.2A.1 below shall not exceed the cost of providing Regulation from such

resource, plus six dollars, as determined pursuant to the formula in Operating Agreement, Schedule 1, section 1.10.1A(e).

(d) In determining the Regulation 5-minute clearing price for each Regulation Zone, the resource-specific opportunity costs (in dollars) of a resource offering to sell Regulation in each regulating interval, except for hydroelectric resources, shall be equal to the area bounded by (i) Locational Marginal Price at the generation bus for the regulating resource, (ii) the resource's Final Offer, (iii) the resource's tracking ramp-rate limited expected output level if it had been dispatched for energy in economic merit order, as further described in the PJM Manuals, and (iv) the resource's regulation set point on the energy schedule curve on which the resource is running in the PJM Interchange Energy Market. The area is divided by the resource performance score and further divided by the resource's regulation assigned megawatt to convert to dollars per megawatt.

For hydroelectric resources offering to sell Regulation in a regulating interval, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the full value of the Locational Marginal Price at that generation bus for each megawatt of Regulation capability.

The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead megawatt commitment greater than zero shall be equal to the product of (i) the deviation of the set point of the hydroelectric resource that is expected to be required in order to provide Regulation from the hydroelectric resource's expected output level if it had been dispatched in economic merit order times (ii) the difference between the expected Locational Marginal Price at the generation bus for the hydroelectric resource and the average of the Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. Estimated opportunity costs shall be zero for hydroelectric resources for which the average Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period, excluding those Real-time Settlement Intervals during which all available units at the hydroelectric resource were operating is higher than the actual Locational Marginal Price at the generator bus for the Real-time Settlement Interval.

The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead megawatt commitment greater than zero shall be equal to the product of (i) the deviation of the set point of the hydroelectric resource that is expected to be required in order to provide Regulation from the hydroelectric resource's expected output level if it had been dispatched in economic merit order times (ii) the difference between the average of the Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating and the expected Locational Marginal Price at the generation bus for the hydroelectric resource. Estimated opportunity costs shall be zero for hydroelectric resources for which the actual Locational Marginal Price at the generator bus for the Real-time Settlement Interval is higher than the average Locational Marginal Price at the generation bus for the appropriate on-peak or

off-peak period, excluding those Real-time Settlement Intervals during which all available units at the hydroelectric resource were operating.

For the purpose of committing resources and setting Regulation market clearing prices, the Office of the Interconnection shall utilize day-ahead Locational Marginal Prices to calculate the average of the Locational Marginal Price values used in the calculation for opportunity costs for hydroelectric resources. For the purposes of settlements, the Office of the Interconnection shall utilize the real-time Locational Marginal Prices to calculate the average of the Locational Marginal Price used in the calculation for opportunity costs for hydroelectric resources.

Opportunity costs for Economic Load Response Participant resources and regulation-only resources to provide Regulation are zero for the purpose of committing resources, setting Regulation clearing prices, and settlements.

(e) In determining the credit under subsection (b) to a Market Participant selected to provide Regulation in a Regulation Zone and that actively follows the Office of the Interconnection's Regulation signals and instructions, the Office of the Interconnection shall consider both the Regulation-Up Service and Regulation-Down Service selected MW assignments. The unit-specific opportunity cost of a generation resource shall be determined for (1) each Real-time Settlement Interval that the Office of the Interconnection requires a generation resource to provide Regulation, and (2) the two Real-time Settlement Intervals preceding the regulation commitment and the two Real-time Settlement Intervals following the regulation commitment in accordance with the PJM Manuals and below.

The unit-specific opportunity cost in dollars incurred during the Real-time Settlement Interval in which the Regulation obligation is fulfilled, shall be equal to the area bounded by (i) the Locational Marginal Price at the generation bus for the regulating resource, (ii) the resource's Final Offer, (iii) the generation resource's tracking ramp-rate limited expected output level if it had been dispatched in economic merit order, as further described in the PJM Manuals, and (iv) the generation resource's regulation set point, and adjusted for the performance score of the resource offset by the regulation signal bias, and adjusted for the performance score of the resource. Opportunity costs for Economic Load Response Participant or regulation only resources to provide Regulation are zero.

The unit-specific opportunity costs associated with uneconomic operation during each of the preceding two Real-time Settlement Intervals of the regulation commitment shall be equal to the product of (i) the deviation between the set point of the generation resource that is expected to be required in the initial regulating Real-time Settlement Interval in order to provide Regulation and the resource's tracking expected ramp rate limited output in each of the preceding two Real-time Settlement Intervals of the regulation commitment times (ii) the absolute value of the difference between the Locational Marginal Price at the generation bus for the generation resource in each of the preceding two Real-time Settlement Intervals of the regulation commitment and the energy offer, using the Final Offer, at the megawatt level of the Regulation set point for the resource in the initial regulating Real-time Settlement Interval, in the PJM Interchange Energy Market, all as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals.

The unit-specific opportunity costs associated with uneconomic operation during each of the following two Real-time Settlement Intervals of the regulation commitment shall be equal to the product of (i) the deviation between the set point of the generation resource that is expected to be required in the final regulating Real-time Settlement Interval in order to provide Regulation and the resource's tracking expected ramp-rate limited output in each of the following two Real-time Settlement Intervals of the regulation commitment times, and (ii) the absolute value of the difference between the Locational Marginal Price at the generation bus for the generation resource in each of the following two Real-time Settlement Intervals of the regulation commitment and the energy offer, using the Final Offer, at the megawatt level of the Regulation set point for the resource in final regulating hour, in the PJM Interchange Energy Market all as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals.

(f) Any amounts credited for Regulation in an hour in excess of the Regulation market-clearing prices in that hour shall be allocated and charged to each Market Participant in a Regulation Zone that does not meet its hourly Regulation obligation in proportion to its purchases of Regulation in such Regulation Zone in megawatt-hours during that hour.

(g) To determine the Regulation market mileage-clearing price for Regulation-Down Service and Regulation-Up Service, the Office of the Interconnection shall adjust the submitted applicable mileage offer for each resource in accordance with the historical performance score of that resource, and the amount of historically dispatched Regulation (mileage) for the given service, calculated by the Office of the Interconnection. The maximum adjusted mileage offer of all cleared resources for each regulation service will set the Regulation market mileage-clearing price for Regulation-Down Service and Regulation-Up Service.

The owner of each Regulation resource that is committed for a regulation service and actively follows the Office of the Interconnection's Regulation signals and instructions, will be credited for Regulation-Down Service and/or Regulation-Up Service mileage by multiplying the applicable regulation service assigned MW(s) by the applicable regulation service Regulation market mileage-clearing price, by the ratio between the requested mileage for the Regulation service dispatch signal and the historic requested mileage for the applicable Regulation service dispatch signal, calculated by the Office of the Interconnection, and by the Regulation resource's applicable regulation service performance score calculated in accordance with subsection (j) of this section.

(h) The Office of the Interconnection shall divide each Regulation resource's capability offer for Regulation-Down Service or Regulation-Up Service by the applicable regulation service historic performance score for the resource for the purposes of committing resources and setting the market clearing prices.

The Office of the Interconnection shall calculate the Regulation market capability-clearing price for Regulation-Down Service and Regulation-Up Service for each Regulation Zone by subtracting the applicable regulation service Regulation market mileage-clearing price described in subsection (g) from the total Regulation market clearing price described in subsection (c). This

residual sets the Regulation market capability-clearing price for the Regulation-Down Service and Regulation-Up Service Real-time Settlement Interval.

The owner of each Regulation resource that is committed for a regulation service and actively follows the Office of the Interconnection's Regulation signals and instructions will be credited for Regulation-Down Service and Regulation-Up Service capability by multiplying the applicable regulation service assigned MW and the applicable regulation service capability Regulation market-clearing price multiplied by the Regulation resource's applicable regulation service performance score calculated in accordance with subsection (j) of this section.

(i) In accordance with the processes described in the PJM Manuals, the Office of the Interconnection shall: (i) calculate inter-temporal opportunity costs for each applicable resource; (ii) include such inter-temporal opportunity costs in each applicable resource's offer to sell frequency Regulation service; and (iii) account for such inter-temporal opportunity costs in the Regulation market-clearing price.

(j) The Office of the Interconnection shall calculate each Regulation resource's performance score for Regulation-Down Service and Regulation-Up Service. The performance score shall be a function of the difference in the energy provided versus the energy requested by the Regulation signal while scaling for the number of samples. The error measured shall be the difference of the resources response and the dispatch signal, adjusted by the assigned MW and signal dispatch of the Regulation resource. The performance score is calculated using the following equations:

$$\text{Performance Score} = 1 - 1/n \sum \text{Abs (Error)};$$

Error = Average of Abs (Abs (Response - Regulation Signal) / (0.5*Interval Average Regulation Signal + 0.5*AREG)); and

n = the number of samples in the interval

AREG = assigned regulation megawatt.

The Office of the Interconnection shall calculate a performance score for each Regulation resource for each regulation service for each five-minute period the Regulation resource is assigned to provide Regulation-Down Service and/or Regulation-Up Service.

The historic performance score for Regulation-Down Service and Regulation-Up Service will be based on a 100 clock-hour rolling average of the Real-time Settlement Interval performance scores, with consideration of the qualification score, for resources without adequate historical data, as defined in the PJM Manuals.

Regulation resources that have a Real-time Settlement Interval performance score below 25% will be ineligible for Regulation credits for that Real-time Settlement Interval.

Regulation resources that have historical performance scores fall below 40% shall be disqualified from providing the applicable Regulation service until they are able to re-qualify, as defined in the PJM Manuals.

(k) During a Market Suspension where the suspension is less than or equal to 24 consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Regulation, the resources providing Regulation at the direction of the Office of the Interconnection will be compensated based on a calculated Regulation market-clearing price. Regulation market-clearing prices for each Real-time Settlement Interval associated with such Market Suspension shall be the average of the Regulation market-clearing prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

During a Market Suspension where the suspension is greater than 24 consecutive hours, if the Office of the Interconnection is assigning Regulation, resources providing Regulation at the direction of the Office of the Interconnection will be compensated based on a calculated Regulation clearing price. The Regulation clearing price for each Real-time Settlement Interval will be determined by calculating a Regulation clearing cost for the online resources providing Regulation during the Market Suspension. The resource's Regulation clearing cost is determined by the summation of their adjusted Regulation offer and adjusted opportunity cost. The opportunity cost will be based on the resource's cost-based offer and will be determined as follows:

For online resources providing Regulation on a cost-based offer at the time of the Market Suspension, that cost-based offer will be used.

For online resources providing Regulation on a price-based offer at the time of the Market Suspension, the Office of the Interconnection shall use the cheapest available cost-based offer based on the dispatch cost formula as defined in Operating Agreement, Schedule 1, section 6.4.1(g) using the available cost-based offers in the Office of the Interconnection system at the time of the Market Suspension.

The highest cost resource, based on this Regulation clearing cost, will set the Regulation market-clearing price for each hour of the Market Suspension.

During a Market Suspension, if the Office of the Interconnection is not assigning Regulation resources, then the Regulation market-clearing price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period and no resource-specific opportunity cost will be calculated.

During a Market Suspension, the following Regulation components for all Real-time Settlement Intervals in the Market Suspension period will be determined as follows:

- (i) If the regulation performance score cannot be calculated during a Market Suspension, the historic performance score will be used for the Market Suspension period.

- (ii) If the regulation mileage cannot be calculated during a Market Suspension, the mileage ratio will be set to one (1) for the Market Suspension period.

3.2.2A Offer Price Caps.

3.2.2A.1 Applicability.

(a) For each Regulation market clearing interval, the Office of the Interconnection shall conduct a Regulation three-pivotal supplier test as described in this section. Regulation offers from Market Sellers that fail the Regulation three-pivotal supplier test shall be capped in the interval in which they failed the test at their cost based offers as determined pursuant to Operating Agreement, Schedule 1, section 1.10.1A(e). A Regulation supplier fails the three-pivotal supplier test in any Regulation market clearing interval in which such Regulation supplier and the two largest other Regulation suppliers are jointly pivotal. The Regulation three-pivotal supplier test will be conducted separately for Regulation-Down Service and Regulation-Up Service in the same Regulation market clearing interval.

(b) For the purposes of conducting the three-pivotal supplier test pursuant to this section, the following applies:

(i) The Regulation three-pivotal supplier test will include in the definition of available supply all offer megawatts from resources capable of satisfying the Regulation-Down Requirement and Regulation-Up Requirement of the PJM Region multiplied by the historic performance score of the resource for which the capability cost-based offer plus the mileage cost-based offer plus any eligible opportunity costs is no greater than 150% of the clearing price that would be calculated if all offers were limited to cost (plus eligible opportunity costs).

(ii) The Regulation three-pivotal supplier test will apply on a Regulation supplier basis (i.e. not a resource by resource basis) and only the Regulation suppliers that fail the three-pivotal supplier test will have their Regulation offers capped. A Regulation supplier for the purposes of this section includes corporate affiliates. Regulation from resources controlled by a Regulation supplier or its affiliates, whether by contract with unaffiliated third parties or otherwise, will be included as Regulation of that Regulation supplier. Regulation provided by resources owned by a Regulation supplier but controlled by an unaffiliated third party, whether by contract or otherwise, will be included as Regulation of that third party.

(iii) Each supplier shall be ranked from the largest to the smallest offered megawatt of eligible Regulation supply adjusted by the historic performance of each resource. Suppliers are then tested in order, starting with the three largest suppliers. For each iteration of the test, the two largest suppliers are combined with a third supplier, and the combined supply is subtracted from total effective supply. The resulting net amount of eligible supply is divided by the Regulation Requirement for the Regulation clearing

interval to determine the residual supply index. Where the residual supply index for Regulation three pivotal suppliers is less than or equal to 1.0, then the three suppliers are jointly pivotal and the suppliers being tested fail the three pivotal supplier test. Iterations of the test continue until the combination of the two largest suppliers and a third supplier result in a residual supply index greater than 1.0, at which point the remaining suppliers pass the test. Any resource owner that fails the three-pivotal supplier test will be offer-capped.

3.2.3 Operating Reserves.

(a) A Market Seller's pool-scheduled resources capable of providing Operating Reserves shall be credited as specified below based on the applicable offer for the operation of such resource, provided that the resource was available for the entire time specified in the Offer Data for such resource. To the extent that sections 3.2.3A, 3.2.3A.001, and 3.2.3A.01 below do not meet the Synchronized Reserve Requirements, the Primary Reserve Requirements, and the 30-minute Reserve Requirements, the Office of the Interconnection shall schedule additional Operating Reserves pursuant to Section 1.7.17 and 1.10 of Schedule 1 of this Agreement. In addition the Office of the Interconnection shall schedule Operating Reserves pursuant to those sections to satisfy any unforeseen Operating Reserve requirements that are not reflected in the day-ahead market. PJM Settlement shall be the Counterparty to the purchases and sales of Operating Reserve in the PJM Interchange Energy Market.

(b) The following determination shall be made for each pool-scheduled resource that is scheduled in the Day-ahead Energy Market: the total offered price for Start-up Costs and No-load Costs and energy, determined on the basis of the resource's scheduled output, shall be compared to the total value of that resource's energy – as determined by the Day-ahead Energy Market and the Day-ahead Prices applicable to the relevant generation bus in the Day-ahead Energy Market. PJM shall also (i) determine whether any resources were scheduled in the Day-ahead Energy Market to provide Black Start service, Reactive Services or transfer interface control during the Operating Day because they are known or expected to be needed to maintain system reliability in a Zone during the Operating Day in order to minimize the total cost of Operating Reserves associated with the provision of such services and reflect the most accurate possible expectation of real-time operating conditions in the day-ahead model, which resources would not have otherwise been committed in the day-ahead security-constrained dispatch and (ii) report on the day following the Operating Day the megawatt quantities scheduled in the Day-ahead Energy Market for the above-enumerated purposes for the entire RTO.

Except as provided in section 3.2.3(n) below, if the total offered price for Start-up Costs (shutdown costs for Economic Load Response Participant resources) and No-load Costs and energy summed over all Day-ahead Settlement Intervals exceeds the total value summed over all Day-ahead Settlement Intervals, the difference shall be credited to the Market Seller as a day-ahead Operating Reserve credit.

However, for the Day-ahead Settlement Intervals in which the resource is scheduled to provide energy in the Operating Day and the resource actually provides energy in at least one Real-time Settlement Interval in an hour that corresponds to such scheduled Day-ahead Settlement

Intervals, a resource's day-ahead Operating Reserve credit shall be reduced by the greater of zero or the difference of the resource's Day-ahead Operating Reserve Target and the Balancing Operating Reserve Target, as determined below.

A resource's Day-ahead Operating Reserve Target shall be determined in accordance with the following equation:

$$(A + B) - C$$

Where:

A = Start-up Costs

B = the sum of day-ahead No-load Costs and energy over the applicable Real-time Settlement Intervals that correspond with Day-ahead Settlement Intervals in which the resource is scheduled. The day-ahead No-load Costs and energy are divided by twelve to determine the cost for each Real-time Settlement Interval.

C = the sum of the day-ahead revenues calculated for each Real-time Settlement Interval that corresponds with a Day-ahead Settlement Interval in which the resource is scheduled, where the day-ahead revenue for each such Real-time Settlement Interval equals the product of the megawatt amount of energy scheduled in the Day-ahead Energy Market and the Day-ahead Price at the applicable pricing point for the resource divided by twelve.

A resource's Balancing Operating Reserve Target shall be determined in accordance with the following equation:

$$D - (E + F)$$

Where:

D = the sum of Start-up Costs and No-load Costs and the incremental cost of energy summed over all Real-time Settlement Intervals that correspond to the Day-ahead Settlement Intervals in which the resource was scheduled;

E = [(the megawatt amount of energy provided in the Real-time Energy Market minus the megawatt amount of energy scheduled in the Day-ahead Energy Market) multiplied by the Real-time Price at the applicable pricing point for the resource] plus the sum of the day-ahead revenues as determined in part C of the above formula for determining the Day-ahead Operating Reserve Target, summed over the applicable Real-time Settlement Intervals; and

F = the sum of all revenues earned for providing Secondary Reserves, Synchronized Reserves, Non-Synchronized Reserves, and Reactive Services over the applicable Real-time Settlement Intervals.

The Office of the Interconnection shall apply any balancing Operating Reserve credits allocated pursuant to this section 3.2.3(b) to real-time deviations or real-time load share plus exports, pursuant to Operating Agreement, Schedule 1, section 3.2.3(p), depending on whether the balancing Operating Reserve credits are related to resources scheduled during the reliability analysis for an Operating Day, or during the actual Operating Day.

(i) For resources scheduled by the Office of the Interconnection during the reliability analysis for an Operating Day, the associated balancing Operating Reserve credits shall be allocated based on the reason the resource was scheduled according to the following provisions:

(A) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to operate in real-time to augment the physical resources committed in the Day-ahead Energy Market to meet the forecasted real-time load plus the Operating Reserve requirement, the associated balancing Operating Reserve credits, identified as RA Credits for Deviations, shall be allocated to real-time deviations.

(B) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to maintain system reliability, the associated balancing Operating Reserve credits, identified as RA Credits for Reliability, shall be allocated according to ratio share of real time load plus export transactions.

(C) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource with a day-ahead schedule is required to deviate from that schedule to provide balancing Operating Reserves, the associated balancing Operating Reserve credits shall be segmented and separately allocated pursuant to subsections 3.2.3(b)(i)(A) or 3.2.3(b)(i)(B) hereof. Balancing Operating Reserve credits for such resources will be identified in the same manner as units committed during the reliability analysis pursuant to subsections 3.2.3(b)(i)(A) and 3.2.3(b)(i)(B) hereof.

(ii) For resources scheduled during an Operating Day, the associated balancing Operating Reserve credits shall be allocated according to the following provisions:

(A) If the Office of the Interconnection directs a resource to operate during an Operating Day to provide balancing Operating Reserves, the associated balancing Operating Reserve credits, identified as RT Credits for Reliability, shall be allocated according to ratio share of load plus exports. The foregoing notwithstanding, credits will be applied pursuant to this section only if the LMP at the resource's bus does not meet or exceed the applicable offer of the resource for at least four 5-minute intervals during one or more discrete clock hours during each period the resource operated and produced MWs during the relevant

Operating Day. If a resource operated and produced MWs for less than four 5-minute intervals during one or more discrete clock hours during the relevant Operating Day, the credits for that resource during the hour it was operated less than four 5-minute intervals will be identified as being in the same category (RT Credits for Reliability or RT Credits for Deviations) as identified for the Operating Reserves for the other discrete clock hours.

(B) If the Office of the Interconnection directs a resource not covered by section 3.2.3(b)(ii)(A) hereof to operate in real-time during an Operating Day, the associated balancing Operating Reserve credits, identified as RT Credits for Deviations, shall be allocated according to real-time deviations from day-ahead schedules.

(iii) PJM shall post on its Web site the aggregate amount of MWs committed that meet the criteria referenced in subsections (b)(i) and (b)(ii) hereof.

(c) The sum of the foregoing credits calculated in accordance with section 3.2.3(b) plus any unallocated charges from section 3.2.3(h) and Operating Agreement, Schedule 1, section 5.1.7, and any shortfalls paid pursuant to the Market Settlement provision of the Day-ahead Economic Load Response Program, shall be the cost of Operating Reserves in the Day-ahead Energy Market.

(d) The cost of Operating Reserves in the Day-ahead Energy Market shall be allocated and charged to each Market Participant in proportion to the sum of its (i) scheduled load (net of Behind The Meter Generation expected to be operating, but not to be less than zero), accepted Decrement Bids in the Day-ahead Energy Market in megawatt-hours for that Operating Day and accepted Up-to Congestion Transactions in the Day-ahead Energy Market in megawatt-hours for the Operating Day at the sink of the transaction; and (ii) scheduled energy sales in the Day-ahead Energy Market from within the PJM Region to load outside such region in megawatt-hours for that Operating Day, but not including its bilateral transactions that are Dynamic Transfers to load outside such area pursuant to Operating Agreement, Schedule 1, section 1.12, except to the extent PJM scheduled resources to provide Black Start service, Reactive Services or transfer interface control. The cost of Operating Reserves in the Day-ahead Energy Market for resources scheduled to provide Black Start service for the Operating Day which resources would not have otherwise been committed in the day-ahead security constrained dispatch shall be allocated by ratio share of the monthly transmission use of each Network Customer or Transmission Customer serving Zone Load or Non-Zone Load, as determined in accordance with the formulas contained in Tariff, Schedule 6A. The cost of Operating Reserves in the Day-ahead Energy Market for resources scheduled to provide Reactive Services or transfer interface control because they are known or expected to be needed to maintain system reliability in a Zone during the Operating Day and would not have otherwise been committed in the day-ahead security constrained dispatch shall be allocated and charged to each Market Participant in proportion to the sum of its real-time deliveries of energy to load (net of operating Behind The Meter Generation) in such Zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such Zone.

(e) At the end of each Operating Day, the following determination shall be made for each synchronized pool-scheduled resource of each Market Seller that operates as requested by the Office of the Interconnection. For each calendar day, pool-scheduled resources in the Real-time Energy Market shall be made whole for each of the following Segments: 1) the greater of their day-ahead schedules and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Economic Load Response Participant resources); and 2) any block of Real-time Settlement Intervals the resource operates at PJM's direction in excess of the greater of its day-ahead schedule and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Economic Load Response Participant resources). For each calendar day, and for each synchronized start of a generation resource or PJM-dispatched economic load reduction, there will be a maximum of two Segments for each resource. Segment 1 will be the greater of the day-ahead schedule and minimum run time specified at the time of commitment (minimum down time specified at the time of commitment for Demand Resources) and Segment 2 will include the remainder of the contiguous Real-time Settlement Intervals when the resource is operating at the direction of the Office of the Interconnection, provided that a segment is limited to the Operating Day in which it commenced and cannot include any part of the following Operating Day.

A Generation Capacity Resource that operates outside of its unit-specific parameters will not receive Operating Reserve Credits nor be made whole for such operation when not dispatched by the Office of the Interconnection, unless the Market Seller of the Generation Capacity Resource can justify to the Office of the Interconnection that operation outside of such unit-specific parameters was the result of an actual constraint. Such Market Seller shall provide to the Market Monitoring Unit and the Office of the Interconnection its request to receive Operating Reserve Credits and/or to be made whole for such operation, along with documentation explaining in detail the reasons for operating its resource outside of its unit-specific parameters, within thirty calendar days following the issuance of billing statement for the Operating Day. The Market Seller shall also respond to additional requests for information from the Market Monitoring Unit and the Office of the Interconnection. The Market Monitoring Unit shall evaluate such request for compensation and provide its determination of whether there was an exercise of market power to the Office of the Interconnection by no later than twenty-five calendar days after receiving the Market Seller's request for compensation. The Office of the Interconnection shall make its determination whether the Market Seller justified that it is entitled to receive Operating Reserve Credits and/or be made whole for such operation of its resource for the day(s) in question, by no later than thirty calendar days after receiving the Market Seller's request for compensation.

Nuclear generation resources shall not be eligible for Operating Reserve payments unless: 1) the Office of the Interconnection directs such resources to reduce output, in which case, such units shall be compensated in accordance with Tariff, Attachment K-Appendix, section 3.2.3(f) and the parallel provision of Operating Agreement, Schedule 1, section 3.2.3(f); or 2) the resource submits a request for a risk premium to the Market Monitoring Unit under the procedures specified in Tariff, Attachment M – Appendix, section II.B. A nuclear generation resource (i) must submit a risk premium consistent with its agreement under such process, or, (ii) if it has not agreed with the Market Monitoring Unit on an appropriate risk premium, may submit its own

determination of an appropriate risk premium to the Office of the Interconnection, subject to acceptance by the Office of the Interconnection, with or without prior approval from the Commission.

Credits received pursuant to this section shall be equal to the positive difference between a resource's Total Operating Reserve Offer, and the total value of the resource's energy in the Day-ahead Energy Market plus any credit or change for quantity deviations, at PJM dispatch direction (excluding quantity deviations caused by an increase in the Market Seller's Real-time Offer), from the Day-ahead Energy Market during the Operating Day at the real-time LMP(s) applicable to the relevant generation bus in the Real-time Energy Market. The foregoing notwithstanding, credits for Segment 2 shall exclude start up (shutdown costs for Economic Load Response Participant resources) costs for generation resources.

Except as provided in section 3.2.3(m), if the total offered price exceeds the total value, the difference less any credit as determined pursuant to section 3.2.3(b), and less the absolute value of any negative Synchronized Reserve lost opportunity cost credit, as determined in section 3.2.3A(f)(iv) below, and less the absolute value of any negative Non-Synchronized Reserve lost opportunity cost credit determined in section 3.2.3.A.001(d)(iii) below, and less any amounts credited for providing Reactive Services as specified in section 3.2.3B, and the absolute value of any negative Secondary Reserve lost opportunity cost credit, as determined in section 3.2.3A.01(f)(iv) below, and plus the sum of the Market Revenue Neutrality Offsets for Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve, shall be credited to the Market Seller.

Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve credits applied against Operating Reserve credits pursuant to this section shall be netted against the Operating Reserve credits earned in the corresponding Real-time Settlement Interval(s) in which the Synchronized Reserve, Non-Synchronized Reserve, and Secondary Reserve credits accrued, provided that for condensing combustion turbines, Synchronized Reserve credits will be netted against the total Operating Reserve credits accrued during each Real-time Settlement Interval the unit operates in condensing and generation mode.

(f) A Market Seller of a unit not defined in subsection (f-1), (f-2), or (f-4) hereof (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3(c) hereof), the output of which is reduced or suspended at the request of the Office of the Interconnection due to a transmission constraint or other reliability issue, and for which the real-time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall be credited for each Real-time Settlement Interval in an amount equal to the product of (A) the LOC Deviation times (B) the Locational Marginal Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A*B) - C$. If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.11.6, where the suspension is greater than twenty-four (24) consecutive hours, resources will not be compensated for lost opportunity costs.

(f-1) With the exception of Market Sellers of Flexible Resources that submit a Real-time Offer greater than their resource's Committed Offer in the Day-ahead Energy Market, a Market Seller of a Flexible Resource shall be compensated for lost opportunity cost, and shall be limited to the lesser of the unit's Economic Maximum or the unit's Generation Resource Maximum Output, if either of the following conditions occur:

- (i) if the unit output is reduced at the direction of the Office of the Interconnection and the real time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as directed by the PJM dispatcher), then the Market Seller shall be credited in a manner consistent with that described in section 3.2.3(f).
- (ii) If the unit is scheduled to produce energy in the Day-ahead Energy Market for a Day-ahead Settlement Interval, but the unit is not called on by the Office of the Interconnection and does not operate in the corresponding Real-time Settlement Interval(s), then the Market Seller shall be credited in an amount equal to the higher of:
 - 1) the product of (A) the amount of megawatts committed in the Day-ahead Energy Market for the generating unit, and (B) the Real-time Price at the generation bus for the generating unit, minus the sum of (C) the Total Lost Opportunity Cost Offer plus No-load Costs, plus (D) the Start-up Cost, divided by the Real-time Settlement Intervals committed for each set of contiguous hours for which the unit was scheduled in Day-ahead Energy Market. This equation is represented as $(A*B) - (C+D)$. The startup cost, (D), shall be excluded from this calculation if the unit operates in real time following the Office of the Interconnection's direction during any portion of the set of contiguous hours for which the unit was scheduled in Day-ahead Energy Market, or
 - 2) the Real-time Price at the unit's bus minus the Day-ahead Price at the unit's bus, multiplied by the number of megawatts committed in the Day-ahead Energy Market for the generating unit.

(f-2) A Market Seller of a hydroelectric resource that is pool-scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3(c) hereof), the output of which is altered at the request of the Office of the Interconnection from the schedule submitted by the owner, due to a transmission constraint or other reliability issue, shall be compensated for lost opportunity cost in the same manner as provided in sections 3.2.2(d) and 3.2.3A(f) and further detailed in the PJM Manuals.

(f-3) If a Market Seller believes that, due to specific pre-existing binding commitments to which it is a party, and that properly should be recognized for purposes of this section, the above calculations do not accurately compensate the Market Seller for opportunity cost associated with following PJM dispatch instructions and reducing or suspending a unit's output due to a transmission constraint or other reliability issue, then the Office of the Interconnection, the Market Monitoring Unit and the individual Market Seller will discuss a mutually acceptable, modified amount of opportunity cost compensation, taking into account the specific circumstances binding on the Market Seller. Following such discussion, if the Office of the Interconnection accepts a modified amount of opportunity cost compensation, the Office of the Interconnection shall invoice the Market Seller accordingly. If the Market Monitoring Unit disagrees with the modified amount of opportunity cost compensation, as accepted by the Office of the Interconnection, it will exercise its powers to inform the Commission staff of its concerns.

(f-4) A Market Seller of a wind generating unit that is pool-scheduled or self-scheduled, has SCADA capability to transmit and receive instructions from the Office of the Interconnection, has provided data and established processes to follow PJM basepoints pursuant to the requirements for wind generating units as further detailed in this Agreement, the Tariff and the PJM Manuals, and which is operating as requested by the Office of the Interconnection, the output of which is reduced or suspended at the request of the Office of the Interconnection due to a transmission constraint or other reliability issue, and for which the , real-time LMP at the unit's bus is higher than the unit's offer corresponding to the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall be credited for each Real-time Settlement Interval in an amount equal to the product of (A) the LOC Deviation times (B) the Real-time Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A * B) - C$.

(f-5) (i) A Market Seller of a pool-scheduled resource or a dispatchable self-scheduled resource shall receive Dispatch Differential Lost Opportunity Cost credits as calculated under subsection (iv) below if the resource is dispatched to provide energy in the Real-time Energy Market, provided such resource is not committed to provide real-time ancillary services (Regulation, reserves, reactive service) or instructed to reduce or suspend output due to a transmission constraint or other reliability issue pursuant to Operating Agreement, Schedule 1, section 3.2.3(f-1) through Operating Agreement, Schedule 1, section (f-4).

(ii) PJM will calculate the revenue above cost for the pricing run for each Real-time Settlement Interval in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = the resource's expected output level based on its resource parameters at the Real-time Price at the applicable pricing point;

B = the Real-time Price at the applicable pricing point; and

C = the sum of the resource's Real-time Energy Market offer integrated under the Final Offer for the resource's expected output level based on its resource parameters at the Real-time Price at the applicable pricing point.

(iii) PJM will calculate the revenue above cost for the dispatch run for each Real-time Settlement Interval in accordance with the following equation:

$$(\text{greater of A and B}) - (\text{lesser of C and D})$$

Where:

A = the product of the amount of megawatts of energy dispatched in the Real-time Energy Market dispatch run for the resource in that Real-time Settlement Interval and the Real-time Price at the applicable pricing point;

B = the product of the amount of megawatts of energy the resource actually provided in that Real-time Settlement Interval and the Real-time Price at the applicable pricing point;

C = the resource's Real-time Energy Market offer integrated under the Final Offer for the amount of megawatts dispatched in the Real-time Energy Market dispatch run;

D = the resource's Real-time Energy Market offer integrated under the Final Offer for the amount of megawatts the resource actually provided in that Real-time Settlement Interval.

(iv) The Dispatch Differential Lost Opportunity Cost credit shall equal the greater of (A) the difference between the revenue above cost based on the pricing run determined in subsection (f-5)(ii) and the revenue above cost based on the dispatch run determined in subsection (f-5)(iii) or (B) zero.

(v) For each hour in an Operating Day, the total cost of the Dispatch Differential Lost Opportunity Cost credits shall be allocated and charged to each Market Participant in proportion to the sum of its (i) deliveries of energy to load ((a) net of operating Behind The Meter Generation, but not to be less than zero; and (b) excluding Direct Charging Energy) in the PJM Region, served under Network Transmission Service, in megawatt-hours; and (ii) deliveries of energy sales from within the PJM Region to load outside such region in megawatt-hours but not including its bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Operating Agreement, Schedule 1, section 1.12, as compared to the sum of all such deliveries for all Market Participants.

(g) The sum of the foregoing credits in Operating Agreement, Schedule 1, section 3.2.3(f-1) through Operating Agreement, Schedule 1, section 3.2.3(f-4), plus any cancellation

fees paid in accordance with Operating Agreement, Schedule 1, section 1.10.2(d), such cancellation fees to be applied to the Operating Day for which the unit was scheduled, plus any shortfalls paid pursuant to the Market Settlement provision of the real-time Economic Load Response Program, less any payments received from another Control Area for Operating Reserves shall be the cost of Operating Reserves for the Real-time Energy Market in each Operating Day.

(h) The cost of Operating Reserves for the Real-time Energy Market for each Operating Day, except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, shall be allocated and charged to each Market Participant based on their daily total of hourly deviations determined in accordance with the following equation:

$$\sum_h (A + B + C)$$

Where:

h = the hours in the applicable Operating Day;

A = For each Real-time Settlement Interval in an hour, the sum of the absolute value of the withdrawal deviations (in MW) between the quantities scheduled in the Day-ahead Energy Market and the Market Participant's energy withdrawals (net of operating Behind The Meter Generation) in the Real-time Energy Market, except as noted in subsection (h)(ii) below and in the PJM Manuals divided by the number of Real-time Settlement Intervals for that hour. The summation of each Real-time Settlement Interval's withdrawal deviation in an hour will be the Market Participant's total hourly withdrawal deviations. Market Participant bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Operating Agreement, Schedule 1, section 1.12 are not included in the determination of withdrawal deviations;

B = For each Real-time Settlement Interval in an hour, the sum of the absolute value of generation deviations (in MW and not including deviations in Behind The Meter Generation) as determined in subsection (o) divided by the number of Real-time Settlement Intervals for that hour;

C = For each Real-time Settlement Interval in an hour, the sum of the absolute value of the injection deviations (in MW) between the quantities scheduled in the Day-ahead Energy Market and the Market Participant's energy injections in the Real-time Energy Market divided by the number of Real-time Settlement Intervals for that hour. The summation of the injection deviations for each Real-time Settlement Interval in an hour will be the Market Participant's total hourly injection deviations. The determination of injection deviations does not include generation resources.

The Revenue Data for Settlements determined for each Real-time Settlement Interval in accordance with Operating Agreement, Schedule 1, section 3.1A shall be used in determining the

real-time withdrawal deviations, generation deviations and injection deviations used to calculate Operating Reserve under this subsection (e).

The costs associated with scheduling of units for Black Start service or testing of Black Start Units shall be allocated by ratio share of the monthly transmission use of each Network Customer or Transmission Customer serving Zone Load or Non-Zone Load, as determined in accordance with the formulas contained in Tariff, Schedule 6A.

Notwithstanding section (h)(1) above, as more fully set forth in the PJM Manuals, load deviations from the Day-ahead Energy Market shall not be assessed Operating Reserves charges to the extent attributable to reductions in the load of Price Responsive Demand that is in response to an increase in Locational Marginal Price from the Day-ahead Energy Market to the Real-time Energy Market and that is in accordance with a properly submitted PRD Curve.

Deviations that occur within a single Zone shall be associated with the Eastern or Western Region, as defined in section 3.2.3(q) below, and shall be subject to the regional balancing Operating Reserve rate determined in accordance with Section 3.2.3(q). Deviations at a hub shall be associated with the Eastern or Western Region if all the buses that define the hub are located in the region. Deviations at an Interface Pricing Point shall be associated with whichever region, the Eastern or Western Region, with which the majority of the buses that define that Interface Pricing Point are most closely electrically associated. If deviations at interfaces and hubs are associated with the Eastern or Western region, they shall be subject to the regional balancing Operating Reserve rate. Demand and supply deviations shall be based on total activity in a Zone, including all aggregates and hubs defined by buses that are wholly contained within the same Zone.

The foregoing notwithstanding, netting deviations shall be allowed for each Real-time Settlement Interval in accordance with the following provisions:

- (i) Generation resources with multiple units located at a single bus shall be able to offset deviations in accordance with the PJM Manuals to determine the net deviation MW at the relevant bus.
- (ii) Demand deviations will be assessed by comparing all day-ahead demand transactions, which include the components referenced in section 3.2.3(d) regarding the cost of Operating Reserves in the Day-ahead Energy Market, at a single transmission zone, hub, or interface against the real-time demand transactions at that same transmission zone, hub, or interface; except that the positive values of demand deviations, as set forth in the PJM Manuals, will not be assessed Operating Reserve charges in the event of a Primary Reserve or Synchronized Reserve shortage in real-time or where PJM initiates the request for emergency load reductions in real-time in order to avoid a Primary Reserve or Synchronized Reserve shortage.
- (iii) Supply deviations will be assessed by comparing all day-ahead transactions at a single transmission zone, hub, or interface against the real-time transactions at that same transmission zone, hub, or interface.

(iv) Bilateral transactions inside the PJM Region, as defined in Operating Agreement, Schedule 1, section 1.7.10, will not be included in the determination of Supply or Demand deviations.

(i) At the end of each Operating Day, Market Sellers shall be credited on the basis of their offered prices for synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, as well as the credits calculated as specified in Section 3.2.3(b) for those generators committed solely for the purpose of providing synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, at the request of the Office of the Interconnection.

(j) The sum of the foregoing credits as specified in section 3.2.3(i) shall be the cost of Operating Reserves for synchronous condensing for the PJM Region for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, or in association with post-contingency operation for the Operating Day and shall be separately determined for the PJM Region.

(k) The cost of Operating Reserves for synchronous condensing for purposes other than providing Synchronized Reserve, Secondary Reserve, or Reactive Services, or in association with post-contingency operation for each Operating Day shall be allocated and charged to each Market Participant in proportion to the sum of its (i) deliveries of energy to load (net of operating Behind The Meter Generation, but not to be less than zero) in the PJM Region, served under Network Transmission Service, in megawatt-hours during that Operating Day; and (ii) deliveries of energy sales from within the PJM Region to load outside such region in megawatt-hours during that Operating Day, but not including its bilateral transactions that are Dynamic Transfers to load outside the PJM Region pursuant to Operating Agreement, Schedule 1, section 1.12, as compared to the sum of all such deliveries for all Market Participants.

(l) For any Operating Day in either, as applicable, the Day-ahead Energy Market or the Real-time Energy Market for which, for all or any part of such Operating Day, the Office of the Interconnection: (i) declares a Maximum Generation Emergency; (ii) issues an alert that a Maximum Generation Emergency may be declared (“Maximum Generation Emergency Alert”); or (iii) schedules units based on the anticipation of a Maximum Generation Emergency or a Maximum Generation Emergency Alert, the Operating Reserves credit otherwise provided by section 3.2.3(b) or section 3.2.3(e) in connection with market-based offers shall be limited as provided in subsections (n) or (m), respectively. The Office of the Interconnection shall provide timely notice on its internet site of the commencement and termination of any of the actions described in subsection (i), (ii), or (iii) of this subsection (l) (collectively referred to as “MaxGen Conditions”). Following the posting of notice of the commencement of a MaxGen Condition, a Market Seller may elect to submit a cost-based offer in accordance with Operating Agreement, Schedule 2, in which case subsections (m) and (n) shall not apply to such offer; provided, however, that such offer must be submitted in accordance with the deadlines in Operating Agreement, Schedule 1, section 1.10 for the submission of offers in the Day-ahead Energy Market or Real-time Energy Market, as applicable. Submission of a cost-based offer under such conditions shall not be precluded by Operating Agreement, Schedule 1, section 1.9.7(b); provided, however, that the Market Seller must return to compliance with Operating Agreement,

Schedule 1, section 1.9.7(b) when it submits its bid for the first Operating Day after termination of the MaxGen Condition.

(m) For the Real-time Energy Market, if the Effective Offer Price (as defined below) for a market-based offer is greater than \$1,000/MWh and greater than the Market Seller's lowest available and applicable cost-based offer, the Market Seller shall not receive any credit for Operating Reserves. For purposes of this subsection (m), the Effective Offer Price shall be the amount that, absent subsections (l) and (m), would have been credited for Operating Reserves for such Operating Day pursuant to section 3.2.3(e) plus the Real-time Energy Market revenues for the Real-time Settlement Intervals that the offer is economic divided by the megawatt hours of energy provided during the Real-time Settlement Intervals that the offer is economic. The Real-time Settlement Intervals that the offer is economic shall be: (i) the Real-time Settlement Intervals that the offer price for energy is less than or equal to the Real-time Price for the relevant generation bus, (ii) the Real-time Settlement Intervals in which the offer for energy is greater than Locational Marginal Price and the unit is operated at the direction of the Office of the Interconnection that are in addition to any Real-time Settlement Intervals required due to the minimum run time or other operating constraint of the unit, and (iii) for any unit with a minimum run time of one hour or less and with more than one start available per day, any hours the unit operated at the direction of the Office of the Interconnection.

(n) For the Day-ahead Energy Market, if notice of a MaxGen Condition is provided prior to 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled and the Effective Offer Price for a market-based offer is greater than \$1,000/MWh and greater than the Market Seller's lowest available and applicable cost-based offer, the Market Seller shall not receive any credit for Operating Reserves. If notice of a MaxGen Condition is provided after 11:00 a.m. on the day before the Operating Day for which transactions are being scheduled and the Effective Offer Price is greater than \$1,000/MWh, the Market Seller shall receive credit for Operating Reserves determined in accordance with section 3.2.3(b), subject to the limit on total compensation stated below. If the Effective Offer Price is less than or equal to \$1,000/MWh, regardless of when notice of a MaxGen Condition is provided, the Market Seller shall receive credit for Operating Reserves determined in accordance with section 3.2.3(b), subject to the limit on total compensation stated below. For purposes of this subsection (n), the Effective Offer Price shall be the amount that, absent subsections (l) and (n), would have been credited for Operating Reserves for such Operating Day divided by the megawatt hours of energy offered during the Specified Hours, plus the offer for energy during such hours. The Specified Hours shall be the lesser of: (1) the minimum run hours stated by the Market Seller in its Offer Data; and (2) either (i) for steam-electric generating units and for combined-cycle units when such units are operating in combined-cycle mode, the six consecutive hours of highest Day-ahead Price during such Operating Day when such units are running or (ii) for combustion turbine units and for combined-cycle units when such units are operating in combustion turbine mode, the two consecutive hours of highest Day-ahead Price during such Operating Day when such units are running. Notwithstanding any other provision in this subsection, the total compensation to a Market Seller on any Operating Day that includes a MaxGen Condition shall not exceed \$1,000/MWh during the Specified Hours, where such total compensation in each such hour is defined as the amount that, absent subsections (l) and (n), would have been credited for Operating Reserves for such Operating Day pursuant to section 3.2.3(b) divided by the

Specified Hours, plus the Day-ahead Price for such hour, and no Operating Reserves payments shall be made for any other hour of such Operating Day. If a unit operates in real time at the direction of the Office of the Interconnection consistently with its day-ahead clearing, then subsection (m) does not apply.

(o) Dispatchable pool-scheduled generation resources and dispatchable self-scheduled generation resources that follow dispatch shall not be assessed balancing Operating Reserve deviations. Pool-scheduled generation resources and dispatchable self-scheduled generation resources that do not follow dispatch shall be assessed balancing Operating Reserve deviations in accordance with the calculations described below and in the PJM Manuals.

The Office of the Interconnection shall calculate a ramp-limited desired MW value for generation resources where the economic minimum and economic maximum are at least as far apart in real-time as they are in day-ahead according to the following parameters:

- (i) real-time economic minimum \leq 105% of day-ahead economic minimum or day-ahead economic minimum plus 5 MW, whichever is greater.
- (ii) real-time economic maximum \geq 95% day-ahead economic maximum or day-ahead economic maximum minus 5 MW, whichever is lower.

The ramp-limited desired MW value for a generation resource shall be equal to:

$$Ramp_Request_t = \frac{(Dispatch_target_{t-1} - AOutput_{t-1})}{(LAtime_{t-1})}$$

$$RL_Desired_t = AOutput_{t-1} + (Ramp_Request_t * Case_Eff_time_{t-1})$$

where:

1. Dispatchtarget = Dispatch Signal for the previous approved Dispatch case
2. AOutput = Unit's achievable target MW at case solution time as defined in the PJM Manuals
3. LAtime = Dispatch look ahead time
4. Case_Eff_time = Time between signal changes
5. RL_Desired = Ramp-limited desired MW

To determine if a generation resource is following dispatch the Office of the Interconnection shall determine the unit's MW off dispatch and % off dispatch by using the lesser of the difference between the actual output and the dispatch signal or the actual output and ramp-limited desired MW value for each Real-time Settlement Interval. If the dispatch signal and the ramp-limited desired MW for the resource are unavailable, the Office of the Interconnection will determine the unit's MW off dispatch and % off dispatch by calculating the lesser of the

difference between the actual output and the dispatch LMP Desired MW for each Real-time Settlement Interval.

A pool-scheduled or dispatchable self-scheduled resource is considered to be following dispatch if its actual output is between its ramp-limited desired MW value and dispatch signal, or if its % off dispatch is ≤ 10 , or its Real-time Settlement Interval MWh is within 5% of the Real-time Settlement Interval ramp-limited desired MW. A self-scheduled generator must also be dispatched above economic minimum. The degree of deviations for resources that are not following dispatch shall be determined for each Real-time Settlement Interval in accordance with the following provisions:

- A dispatchable self-scheduled resource that is not dispatched above economic minimum shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – Day-Ahead MWh.
- A resource that is dispatchable day-ahead but is Fixed Gen in real-time shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – dispatch LMP Desired MW.
- Pool-scheduled generators that are not following dispatch shall be assessed balancing Operating Reserve deviations according to the following formula: Real-time Settlement Interval MWh – Ramp-Limited Desired MW.
- If a resource's real-time economic minimum is greater than its day-ahead economic minimum by 5% or 5 MW, whichever is greater, or its real-time economic maximum is less than its Day Ahead economic maximum by 5% or 5 MW, whichever is lower, and dispatch LMP Desired MWh for the Real-time Settlement Interval is either below the real time economic minimum or above the real time economic maximum, then balancing Operating Reserve deviations for the resource shall be assessed according to the following formula: Real time Settlement Interval MWh – dispatch LMP Desired MWh.
- If a resource is not following dispatch and its % Off Dispatch is $\leq 20\%$, balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – Ramp-Limited Desired MW. If deviation value is within 5% of Ramp-Limited Desired MW, balancing Operating Reserve deviations shall not be assessed.
- If a resource is not following dispatch and its % off Dispatch is $> 20\%$, balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – dispatch LMP Desired MWh.
- If a resource is not following dispatch, and the resource has tripped, for the Real-time Settlement Interval the resource tripped and the Real-time Settlement Intervals it remains offline throughout its day-ahead schedule balancing Operating Reserve

deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh – Day-Ahead MWh.

- For resources that are not dispatchable in both the Day-Ahead and Real-time Energy Markets balancing Operating Reserve deviations shall be assessed according to the following formula: Real-time Settlement Interval MWh - Day-ahead MWh.

If a resource has a sum of the absolute value of generator deviations for an hour that is less than 5 MWh, then the resource shall not be assessed balancing Operating Reserve deviations for that hour.

(o-1) Dispatchable economic load reduction resources that follow dispatch shall not be assessed balancing Operating Reserve deviations. Economic Load Response Participant resources that do not follow dispatch shall be assessed balancing Operating Reserve deviations as described in this subsection and as further specified in the PJM Manuals.

The Desired MW quantity for such resources for each hour shall be the hourly integrated MW quantity to which the load reduction resource was dispatched for each hour (where the hourly integrated value is the average of the dispatched values as determined by the Office of the Interconnection for the resource for each hour).

If the actual reduction quantity for the load reduction resource for a given hour deviates by no more than 20% above or below the Desired MW quantity, then no balancing Operating Reserve deviation will accrue for that hour. If the actual reduction quantity for the load reduction resource for a given hour is outside the 20% bandwidth, the balancing Operating Reserve deviations will accrue for that hour in the amount of the absolute value of (Desired MW – actual reduction quantity). For those hours where the actual reduction quantity is within the 20% bandwidth specified above, the load reduction resource will be eligible to be made whole for the total value of its offer as defined in Operating Agreement, Schedule 1, section 3.3A. Hours for which the actual reduction quantity is outside the 20% bandwidth will not be eligible for the make-whole payment. If at least one hour is not eligible for make-whole payment based on the 20% criteria, then the resource will also not be made whole for its shutdown cost.

(p) The Office of the Interconnection shall allocate the charges assessed pursuant to Operating Agreement, Schedule 1, section 3.2.3(h) except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, to real-time deviations from day-ahead schedules or real-time load share plus exports depending on whether the underlying balancing Operating Reserve credits are related to resources scheduled during the reliability analysis for an Operating Day, or during the actual Operating Day. If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, section 1.11.6, the Office of the Interconnection shall allocate the charges to the ratio share of real-time load plus export transactions.

- (i) For resources scheduled by the Office of the Interconnection during the reliability analysis for an Operating Day, the associated balancing Operating Reserve

charges shall be allocated based on the reason the resource was scheduled according to the following provisions:

(A) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to operate in real-time to augment the physical resources committed in the Day-ahead Energy Market to meet the forecasted real-time load plus the Operating Reserve requirement, the associated balancing Operating Reserve charges shall be allocated to real-time deviations from day-ahead schedules.

(B) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource was committed to maintain system reliability, the associated balancing Operating Reserve charges shall be allocated according to ratio share of real time load plus export transactions.

(C) If the Office of the Interconnection determines during the reliability analysis for an Operating Day that a resource with a day-ahead schedule is required to deviate from that schedule to provide balancing Operating Reserves, the associated balancing Operating Reserve charges shall be allocated pursuant to (A) or (B) above.

(ii) For resources scheduled during an Operating Day, the associated balancing Operating Reserve charges shall be allocated according to the following provisions:

(A) If the Office of the Interconnection directs a resource to operate during an Operating Day to provide balancing Operating Reserves, the associated balancing Operating Reserve charges shall be allocated according to ratio share of load plus exports. The foregoing notwithstanding, charges will be assessed pursuant to this section only if the LMP at the resource's bus does not meet or exceeds the applicable offer of the resource for at least four 5-minute intervals during one or more discrete clock hours during each period the resource operated and produced MWs during the relevant Operating Day. If a resource operated and produced MWs for less than four 5-minute intervals during one or more discrete clock hours during the relevant Operating Day, the charges for that resource during the hour it was operated less than four 5-minute intervals will be identified as being in the same category as identified for the Operating Reserves for the other discrete clock hours.

(B) If the Office of the Interconnection directs a resource not covered by Operating Agreement, Schedule 1, section 3.2.3(h)(ii)(A) to operate in real-time during an Operating Day, the associated balancing Operating Reserve charges shall be allocated according to real-time deviations from day-ahead schedules.

(q) The Office of the Interconnection shall determine regional balancing Operating Reserve rates for the Western and Eastern Regions of the PJM Region. For the purposes of this section, the Western Region shall be the AEP, APS, ComEd, Duquesne, Dayton, ATSI, DEOK, EKPC, OVEC transmission Zones, and the Eastern Region shall be the AEC, BGE, Dominion, PENELEC, PEPCO, ME, PPL, JCPL, PECO, DPL, PSEG, RE transmission Zones. The regional balancing Operating Reserve rates shall be determined in accordance with the following provisions:

(i) The Office of the Interconnection shall calculate regional adder rates for the Eastern and Western Regions. Regional adder rates shall be equal to the total balancing Operating Reserve credits paid to generators for transmission constraints that occur on transmission system capacity equal to or less than 345kv. The regional adder rates shall be separated into reliability and deviation charges, which shall be allocated to real-time load or real-time deviations, respectively. Whether the underlying credits are designated as reliability or deviation charges shall be determined in accordance with section 3.2.3(p).

(ii) The Office of the Interconnection shall calculate RTO balancing Operating Reserve rates. RTO balancing Operating Reserve rates shall be equal to balancing Operating Reserve credits except those associated with the scheduling of units for Black Start service or testing of Black Start Units as provided in Tariff, Schedule 6A, in excess of the regional adder rates calculated pursuant to Operating Agreement, Schedule 1, section 3.2.3(q)(i) of Schedule 1 of this Agreement. The RTO balancing Operating Reserve rates shall be separated into reliability and deviation charges, which shall be allocated to real-time load or real-time deviations, respectively. Whether the underlying credits are allocated as reliability or deviation charges shall be determined in accordance with section 3.2.3(p).

(iii) Reliability and deviation regional balancing Operating Reserve rates shall be determined by summing the relevant RTO balancing Operating Reserve rates and regional adder rates.

(iv) If the Eastern and/or Western Regions do not have regional adder rates, the relevant regional balancing Operating Reserve rate shall be the reliability and/or deviation RTO balancing Operating Reserve rate.

(r) Market Sellers that incur incremental operating costs for a generation resource that are either greater than \$1,000/MWh as determined in accordance with the Market Seller's PJM-approved Fuel Cost Policy, Operating Agreement, Schedule 2 and PJM Manual 15, but are not verified at the time of dispatch of the resource under section 6.4.3 of this Schedule, or greater than \$2,000/MWh as determined in accordance with the Market Seller's PJM-approved Fuel Cost Policy, Operating Agreement, Schedule 2, and PJM Manual 15, will be eligible to receive credit for Operating Reserves upon review of the Market Monitoring Unit and the Office of the Interconnection, and approval of the Office of the Interconnection. Market Sellers must submit to the Office of the Interconnection and the Market Monitoring Unit all relevant documentation demonstrating the calculation of costs greater than \$2,000/MWh, and costs greater than

\$1,000/MWh which were not verified at the time of dispatch of the resource under Operating Agreement, Schedule 1, section 6.4.3. The Office of the Interconnection must approve any Operating Reserve credits paid to a Market Seller under this subsection (r).

3.2.3A Synchronized Reserve.

(a) Each Market Participant that is a Load Serving Entity that is not part of an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have an obligation for hourly Synchronized Reserve equal to its pro rata share of Synchronized Reserve requirements for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone or Reserve Sub-zone for the hour ("Synchronized Reserve Obligation"), less any amount obtained from condensers associated with provision of Reactive Services as described in section 3.2.3B(i) and any amount obtained from condensers associated with post-contingency operations, as described in section 3.2.3C(b). Those entities that participate in an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have their reserve obligations determined based on the stipulations in such agreement. A Market Participant's hourly Synchronized Reserve Obligation shall be adjusted by any Synchronized Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Synchronized Reserve Obligation shall be charged the pro rata share of the sum of day-ahead and real-time credits for Synchronized Reserve as defined in sections 3.2.3A(b)(i) and (ii) below.

(b) A resource supplying Synchronized Reserve at the direction of the Office of the Interconnection shall be credited as follows:

i) Credits for Synchronized Reserve provided by generation and Economic Load Response Participant resources assigned to provide Synchronized Reserve by the Office of the Interconnection or self-scheduled in the Day-ahead Synchronized Reserve Market shall be equal to the product of the Day-ahead Synchronized Reserve Market Clearing Price multiplied by the megawatt amount of Synchronized Reserve such resource is assigned to provide..

ii) Credits for Synchronized Reserve provided by generation resources and Economic Load Response Participant resources assigned to provide Synchronized Reserve by the Office of the Interconnection or self-scheduled in the Real-time Synchronized Reserve Market shall be determined for each operating hour based on the sum of their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Synchronized Reserve from that resource assigned by the Office of the Interconnection or self-scheduled in the Real-time Synchronized Reserve Market. The megawatt value is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval where there is not a Synchronized Reserve event;

B = For each Real-time Settlement Interval, the megawatts of Synchronized Reserve from that resource assigned by the Office of the Interconnection or self-scheduled in the Day-ahead Synchronized Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Synchronized Reserve Market Clearing Price.

If a Synchronized Reserve Event is initiated by the Office of the Interconnection and the Economic Load Response Participant resource reduced its load in response to the event, the resource shall be eligible to receive a credit for the fixed costs associated with achieving the load reduction, as specified in the PJM Manuals.

iii) Pool-scheduled resources shall be credited a Synchronized Reserve lost opportunity cost credit, where positive, as described in subsection (f)(iv) below.

(c) [Reserved for future use]

(d) Synchronized Reserve Market Clearing Prices

(i) For the Day-ahead Synchronized Reserve Market, the Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Synchronized Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for Synchronized Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Synchronized Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Synchronized Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Synchronized Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute and (B) the price of serving the next increment of demand for Primary Reserve and 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute, provided that the Synchronized Reserve Market Clearing Price shall be less than or equal to the sum of no more than two of the Reserve Penalty Factors for the Synchronized Reserve Requirement, the Primary Reserve Requirement, and the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Synchronized Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Synchronized Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Synchronized Reserve market quantities and prices as determined pursuant to subsection (d)(ii) hereof.

(ii) For the Real-time Synchronized Reserve Market, the Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for Synchronized Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Synchronized Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Synchronized Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Synchronized Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute and (B) the price of serving the next increment of demand for Primary Reserve and 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute, provided that the Synchronized Reserve Market Clearing Price shall be less than or equal to the sum of no more than two of the Reserve Penalty Factors for the Synchronized Reserve Requirement, the Primary Reserve Requirement, and the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Synchronized Reserves, then the Synchronized Reserve Market Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Synchronized Reserves, then the Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than

or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Synchronized Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Synchronized Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Synchronized Reserve Market Clearing Prices exist, then the Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, and the Office of the Interconnection is assigning Synchronized Reserves, the Office of the Interconnection will set the Synchronized Reserve Market Clearing Price to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period. Resources will be compensated for lost opportunity cost per subsection (f) hereof using the energy price as determined in Operating Agreement, Schedule 1, section 2.5.2.iii. The opportunity cost shall be zero for all resources self-scheduled to provide Synchronized Reserve, synchronous condensers and Economic Load Response Participant resources.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action as described in the PJM Manuals or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Synchronized Reserve Market Clearing Price shall be the sum of the Reserve Penalty Factors for the Primary Reserve Requirement, and the Synchronized Reserve Requirement for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the Synchronized Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended Synchronized Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Synchronized Reserve Penalty Factors are warranted for subsequent Delivery Year(s).

(e) (i) For determining the Synchronized Reserve Market Clearing Price in each hour of the Day-ahead Synchronized Reserve Market, the estimated resource-specific opportunity cost for a generation resource or Economic Load Response Participant resource shall be the difference between the Locational Marginal Price at the generation or Economic Load Response Participant resource bus and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the

resource) or offer price to reduce energy from the Economic Load Response Participant resource in the PJM Interchange Energy Market when the Locational Marginal Price at the generation or Economic Load Participant resource bus is greater than the offer price for energy from the generation resource or the offer price to reduce energy from the Economic Load Response Participant resource.

However, the opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve and for synchronous condensers and for Economic Load Response Participant resources that do not receive a day-ahead commitment to provide energy in the same operating hour in which such resource is committed to provide Synchronized Reserve.

(ii) For determining the Synchronized Reserve Market Clearing Price for each Real-time Settlement Interval in the Real-time Synchronized Reserve Market, the estimated unit-specific opportunity cost for a generation resource that is not a hydroelectric resource shall be the difference between the Locational Marginal Price at the generation bus for the generation resource and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) in the PJM Interchange Energy Market when the Locational Marginal Price at the generation bus is greater than the offer price for energy from the generation resource.

For hydroelectric resources, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the expected real-time Locational Marginal Price at that generation bus. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions, as defined in the PJM Manuals, and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the expected real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average day-ahead Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

The opportunity costs shall be zero for all resources self-scheduled to provide Synchronized Reserve, synchronous condensers and Economic Load Response Participant resources.

(f) (i) In determining the credit under subsection (b) to a generation resource, except a generation resource that is operating as a synchronous condenser, selected to provide Synchronized Reserve in the Day-ahead Synchronized Reserve Market, or an Economic Load Response Participant resource that is selected to provide Synchronized Reserve in the Day-ahead Synchronized Reserve Market for the same operating hour in which such resource receives a day-ahead commitment to provide energy, the opportunity cost of a resource shall be determined

for each operating hour that the Office of the Interconnection requires a resource to provide Synchronized Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Day-ahead Locational Marginal Price at the generation bus of the generation resource or the applicable pricing point for the Economic Load Response Participant resource;

B = The deviation of the resource's energy output or load reduction necessary to supply a Day-ahead Synchronized Reserve assignment from the resource's energy expected output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load; and

C = The Day-ahead Energy market offer integrated under the applicable energy offer curve for the resource's energy output or load reduction necessary to provide a Day-ahead Synchronized Reserve Market assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load.

For a generation resource that is operating as a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [energy use for providing synchronous condensing multiplied by A] plus [the applicable condense start-up cost divided by the number of hours the resource is assigned Synchronized Reserve].

(ii) In determining the credit under subsection (b) to a generation resource, except a generation resource that is operating as a synchronous condenser, selected to provide Synchronized Reserve in the Real-time Synchronized Reserve Market in excess of the resource's Day-ahead Synchronized Reserve Market assignment and that actively follows the Office of the Interconnection's signals and instructions, the unit-specific opportunity cost of that generation resource shall be determined for each Real-time Settlement Interval that the Office of the Interconnection requires that generation resource to provide Synchronized Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Real-time Locational Marginal Price at the generation bus of the generation resource;

B = The deviation of the generation resource's output necessary to supply Synchronized Reserve in real-time, reduced by the amount of Synchronized Reserve the resource failed to respond during a Synchronized Reserve Event

during the Operating Day, in excess of its Day-ahead Synchronized Reserve Market assignment and follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy; and

C = The energy offer integrated under the applicable energy offer curve for the generation resource's output necessary to supply Synchronized Reserve in real-time from the lesser of the generation resource's output necessary to provide a Day-ahead Synchronized Reserve Market assignment or follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [additional energy use in excess of day-ahead energy use for providing synchronous condensing in real-time multiplied by A] plus [any applicable condense start-up costs due to additional condense start-ups in real-time in excess of day-ahead condense start-ups allocated to each Real-time Settlement Interval as described in PJM Manuals].

For hydroelectric resources, the unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the real-time Locational Marginal Price at that generation bus multiplied by the additional megawatts assigned to supply Synchronized Reserve in real-time in excess of its Day-ahead Synchronized Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average real-time Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating multiplied by the additional megawatts assigned to supply the hourly Synchronized Reserve in real-time in excess of its Day-ahead Synchronized Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

(iii) For each Real-time Settlement Interval, a Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in the resource's real-time reserve MW from a day-ahead market assignment in more than one market for that Real-time Settlement Interval, the total Market Revenue Neutrality Offset is allocated to the Synchronized Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Synchronized Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time

from all reserve markets, not to exceed the resource's opportunity cost owed in the Synchronized Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Synchronized Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Synchronized Reserve assignment decreases due to the resource being self-scheduled to provide energy or Regulation;

(B) A resource reduces its flexibility in real-time such that the resource no longer qualifies to provide Synchronized Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time;

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above; or

(F) A resource increases its Synchronized Reserve offer price in the Real-time Synchronized Reserve Market from its offer price in the Day-ahead Synchronized Reserve Market.

(iv) A Synchronized Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(A + B + C + D) - (E + F + G + H)$$

Where:

A = day-ahead Synchronized Reserve offer price times the Synchronized Reserve MW assignment;

B = real-time Synchronized Reserve offer price times the Synchronized Reserve MW assigned in real-time in excess of the Synchronized Reserve MW assigned day-ahead, where the Synchronized Reserve MW assigned is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval where there is not a Synchronized Reserve event;

C = day-ahead opportunity cost as determined in subsection (f)(i) above;

D = real-time opportunity cost as determined in subsection (f)(ii) above;

E = day-ahead clearing price credits as determined in subsection (b)(i) above;

F = real-time clearing price credits as determined in subsection (b)(ii) above less any applicable charges for failure to respond to a Synchronized Reserve Event as determined in subsection (j) below;

G = the applicable Market Revenue Neutrality Offset as determined in subsection (f)(iii) above; and

H = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A(f)(iii) above if not eligible for Market Revenue Neutrality Offset.

(v) The opportunity costs for an Economic Load Response Participant resource assigned Synchronized Reserve in real-time or any resource self-scheduled for Synchronized Reserves shall be zero.

(g) [Reserved for future use]

(h) For each operating hour, the sum of the Synchronized Reserve lost opportunity cost credits credited in accordance with subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Synchronized Reserve Obligation in proportion to its real-time purchases of Synchronized Reserve in megawatt-hours during that hour.

(i) [Reserved for future use]

(j) In the event a generation resource or Economic Load Response Participant Resource that either has been assigned by the Office of the Interconnection or self-scheduled to provide Synchronized Reserve in real-time fails to provide the assigned or self-scheduled amount of Synchronized Reserve in response to a Synchronized Reserve Event, the resource will be charged at the Real-time Synchronized Reserve Market Clearing Price for the real-time Synchronized Reserve assignment, in excess of amount that actually responded for all Real-time Settlement Intervals the resource was assigned or self-scheduled Synchronized Reserve real-time, which is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements for the resource on the Operating Day during which the event occurred. The determination of the amount of Synchronized Reserve credited to a resource shall be on an individual resource basis, not on an aggregate basis.

The resource shall refund payments received for Synchronized Reserve it failed to provide. For purposes of determining the amount of the payments to be refunded by a Market Participant, the Office of the Interconnection shall calculate the shortfall of Synchronized Reserve on an individual resource basis unless the Market Participant had multiple resources that were assigned or self-scheduled to provide Synchronized Reserve, in which case the shortfall will be determined on an aggregate basis. For performance determined on an aggregate basis, the response of any resource that provided more Synchronized Reserve than it was assigned or self-scheduled to provide will be used to offset the performance of other resources that provided less

Synchronized Reserve than they were assigned or self-scheduled to provide during a Synchronized Reserve Event, as calculated in the PJM Manuals. The determination of a Market Participant's aggregate response shall not be taken into consideration in the determination of the amount of Synchronized Reserve credited to each individual resource.

The amount refunded shall be determined by multiplying the retroactive penalty megawatts by the Real-time Synchronized Reserve Market Clearing Price for all intervals the resource was assigned or self-scheduled to provide Synchronized Reserve for a period of time immediately preceding the Synchronized Reserve Event equal to the lesser of the average number of days between Synchronized Reserve Events, or the number of days since the resource last failed to provide the amount of Synchronized Reserve it was assigned or self-scheduled to provide in response to a Synchronized Reserve Event. The retroactive penalty megawatts for each interval shall be the lesser of the amount of the shortfall of Synchronized Reserve, measured in megawatts, and the real-time Synchronized Reserve assignment for each interval, which is capped at the lesser of the Economic Maximum and the Synchronized Reserve maximum MW minus the Revenue Data for Settlements for the resource. The average number of days between Synchronized Reserve Events for purposes of this calculation shall be determined by an annual review of the twenty-four month period ending October 31 of the calendar year in which the review is performed, and shall be rounded down to a whole day value. The Office of the Interconnection shall report the results of its annual review to stakeholders by no later than December 31, and the average number of days between Synchronized Reserve Events shall be effective as of the following January 1. The refunded charges shall be allocated as credits to Market Participants based on its pro rata share of the Synchronized Reserve Obligation megawatts in the hour(s) of the Synchronized Reserve Event for the Reserve Sub-zone or Reserve Zone, except that Market Participants that incur a refund obligation and also have an applicable Synchronized Reserve Obligation during the hour(s) of the Synchronized Reserve Event shall not be included in the allocation of such refund credits. If the event spans multiple hours, the refund credits will be prorated hourly based on the duration of the event within each clock hour.

(k) The magnitude of response to a Synchronized Reserve Event by a generation resource or an Economic Load Response Participant resource, except for Batch Load Economic Load Response Participant resources covered by section 3.2.3A(1), is the difference between the generation resource's output or the Economic Load Response Participant resource's consumption at the start of the event and its output or consumption 10 minutes after the start of the event. In order to allow for small fluctuations and possible telemetry delays, generation resource output or Economic Load Response Participant resource consumption at the start of the event is defined as the lowest telemetered generator resource output or greatest Economic Load Response Participant resource consumption between one minute prior to and one minute following the start of the event. Similarly, a generation resource's output or an Economic Load Response Participant resource's consumption 10 minutes after the event is defined as the greatest generator resource output or lowest Economic Load Response Participant resource consumption achieved between 9 and 11 minutes after the start of the event. The response actually credited to a generation resource will be reduced by the amount the megawatt output of the generation resource falls below the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter. The response actually credited to an

Economic Load Response Participant resource will be reduced by the amount the megawatt consumption of the Economic Load Response Participant resource exceeds the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter.

(l) The magnitude of response by a Batch Load Economic Load Response Participant resource that is at the stage in its production cycle when its energy consumption is less than the level of megawatts in its offer at the start of a Synchronized Reserve Event shall be the difference between (i) the Batch Load Economic Load Response Participant resource's consumption at the end of the Synchronized Reserve Event and (ii) the Batch Load Economic Load Response Participant resource's consumption during the minute within the ten minutes after the end of the Synchronized Reserve Event in which the Batch Load Economic Load Response Participant resource's consumption was highest and for which its consumption in all subsequent minutes within the ten minutes was not less than fifty percent of the consumption in such minute; provided that, the magnitude of the response shall be zero if, when the Synchronized Reserve Event commences, the scheduled off-cycle stage of the production cycle is greater than ten minutes. .

3.2.3A.001 Non-Synchronized Reserve.

(a) Each Market Participant that is a Load Serving Entity that is not part of an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have an obligation for hourly Non-Synchronized Reserve equal to its pro rata share of Non-Synchronized Reserve assigned for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone and Reserve Sub-zone for the hour ("Non-Synchronized Reserve Obligation"). Those entities that participate in an agreement to share reserves with external entities subject to the requirements in BAL-002 shall have their reserve obligations determined based on the stipulations in such agreement. A Market Participant's hourly Non-Synchronized Reserve Obligation shall be adjusted by any Non-Synchronized Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Non-Synchronized Reserve Obligation shall be charged the pro rata share of the sum day-ahead and real-time credits for Non-Synchronized Reserve as defined in sections 3.2.3A.001(b)(i) and (ii) below.

(b) Resources assigned to provide Non-Synchronized Reserve at the direction of the Office of the Interconnection shall be credited as follows:

(i) Credits for Non-Synchronized Reserve provided by generation resources assigned to provide Non-Synchronized Reserve by the Office of the Interconnection in the Day-ahead Non-Synchronized Reserve Market shall be equal to the product of the Day-ahead Non-Synchronized Market Clearing Price multiplied by the megawatt amount of Non-Synchronized Reserve such resource is assigned to provide.

(ii) Credits for Non-Synchronized Reserve provided by generation resources assigned to provide Non-Synchronized Reserve by the Office of the Interconnection in the Real-time Non-Synchronized Reserve Market shall be determined for each operating

hour based on the sum on their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Non-Synchronized Reserve from that resource assigned by the Office of the Interconnection in the Real-time Non-Synchronized Reserve Market;

B = For each Real-time Settlement Interval, the megawatts of Non-Synchronized Reserve from that resource assigned by the Office of the Interconnection in the Day-ahead Non-Synchronized Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Non-Synchronized Reserve Market Clearing Price.

(iii) Pool-scheduled generation resources assigned to provide Non-Synchronized Reserve in the Day-ahead Non-Synchronized Reserve Market shall be credited a Non-Synchronized Reserve lost opportunity cost credit, where positive, as determined in accordance with subsection (d)(iii) below, to recover any net monetary loss to the Market Seller of such resource associated with the purchase of Non-Synchronized Reserve in the Real-time Non-Synchronized Reserve Market as a result of following the dispatch direction of the Office of the Interconnection.

(c) Non-Synchronized Reserve Market Clearing Prices

(i) For the Day-ahead Non-Synchronized Reserve Market, the Non-Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Non-Synchronized Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for Primary Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Non-Synchronized Reserve offer prices and the applicable Operating Reserve Demand Curve for Non-Synchronized Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Primary Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute and (B) the price of serving the next increment of demand for 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute, provided that the Non-Synchronized Reserve Market Clearing Price shall be less than or equal to the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve

Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Non-Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Non-Synchronized Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Non-Synchronized Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Non-Synchronized Reserve market quantities and prices as determined pursuant to subsection (c)(ii) hereof.

(ii) For the Real-time Non-Synchronized Reserve Market, the Non-Synchronized Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection in the Real-time Price software program, which is known as the pricing run, for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for Primary Reserve in a Reserve Zone or Reserve Sub-zone determined by the interaction between a supply curve formed using Non-Synchronized Reserve offer prices and the applicable Operating Reserve Demand Curve for Non-Synchronized Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus (A) the price of serving the next increment of demand for Primary Reserve for any other Reserve Zone or Reserve Subzone to which the next increment of demand for Primary Reserve can contribute and (B) the price of serving the next increment of demand for 30-minute Reserve for each Reserve Zone or Reserve Sub-zone to which the next increment of demand for Primary Reserve can contribute, provided that the Non-Synchronized Reserve Market Clearing Price shall be less than or equal to the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for Non-Synchronized Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Non-Synchronized Reserves, then the Non-Synchronized Reserve Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Non-Synchronized Reserves, then the Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Non-Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Non-Synchronized Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Non-Synchronized Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Non-Synchronized Reserve Market Clearing Prices exist, then the Non-Synchronized Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Non-Synchronized Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, the Non-Synchronized Reserve Market Clearing Price will be set to zero dollars per megawatt-hour regardless of whether the Office of the Interconnection is assigning Non-Synchronized Reserves.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action as described in the PJM Manuals or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Non-Synchronized Reserve Market Clearing Price shall be the product of 1.5 multiplied by the Reserve Penalty Factor for the Primary Reserve Requirement for that Reserve Zone or Reserve Sub-zone.

(iii) The Reserve Penalty Factor for the Primary Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended Primary Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Primary Reserve Penalty Factors are warranted for subsequent Delivery Year(s).

(d) (i) For determining the Non-Synchronized Reserve clearing price for each hour in the Day-ahead Non-Synchronized Reserve Market and for each Real-time Settlement Interval in the Real-time Non-Synchronized Reserve Market, including during a declaration of a Market Suspension, the unit-specific opportunity cost for a generation resource that is not providing energy because they are providing Non-Synchronized Reserves will be zero.

(ii) For each Real-time Settlement Interval, a total Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in real-time

reserve MW from a day-ahead market assignment in more than one market for that Real-time Settlement Interval, the total Market Revenue Neutrality Offset is allocated to the Non-Synchronized Reserve market based on the ratio of the opportunity cost owed due to a reduction in assignment in real-time within the Non-Synchronized Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Non-Synchronized Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Non-Synchronized Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Non-Synchronized Reserve assignment decreases due to the resource being self-scheduled to provide energy, Synchronized Reserve, or Regulation;

(B) A resource reduces flexibility in real-time such that the resource no longer qualifies to provide Non-Synchronized Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time; or

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above.

(iii) A Non-Synchronized Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(\text{zero}) - (A + B + C + D)$$

Where:

A = day-ahead clearing price credits as determined in subsection (b)(i) above;

B = real-time clearing price credits as determined in subsection (b)(ii) above;

C = the applicable Market Revenue Neutrality Offset as determined in subsection (d)(ii) above; and

D = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A.001(d)(ii) above if not eligible for Market Revenue Neutrality Offset.

(e) [Reserved for future use]

(f) For each operating hour, the sum of the Non-Synchronized Reserve lost opportunity cost credits credited in subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Non-Synchronized Reserve Obligation in proportion to its real-time purchases of Non-Synchronized Reserve in megawatt-hours during that hour.

(g) The magnitude of response to a Non-Synchronized Reserve Event by a generation resource is the difference between the generation resource's output at the start of the event and its output 10 minutes after the start of the event. In order to allow for small fluctuations and possible telemetry delays, generation resource output at the start of the event is defined as the lowest telemetered generator resource output between one minute prior to and one minute following the start of the event. Similarly, a generation resource's output 10 minutes after the start of the event is defined as the greatest generator resource output achieved between 9 and 11 minutes after the start of the event. The response actually credited to a generation resource will be reduced by the amount the megawatt output of the generation resource falls below the level achieved after 10 minutes by either the end of the event or after 30 minutes from the start of the event, whichever is shorter.

(h) In the event a generation resource that has been assigned by the Office of the Interconnection to provide Non-Synchronized Reserve fails to provide the assigned amount of Non-Synchronized Reserve in response to a Non-Synchronized Reserve Event, the resource will be credited for Non-Synchronized Reserve capacity in the amount that actually responded for the contiguous Real-time Settlement Interval the resource was assigned Non-Synchronized Reserve during which the event occurred.

3.2.3A.01 Secondary Reserve.

(a) Each Market Participant that is a Load Serving Entity shall have an obligation for hourly Secondary Reserve equal to its pro rata share of Secondary Reserve assigned for the hour for each Reserve Zone and Reserve Sub-zone of the PJM Region, based on the Market Participant's total load (net of operating Behind The Meter Generation, but not to be less than zero) in such Reserve Zone and Reserve Sub-zone for the hour ("Secondary Reserve Obligation"). A Market Participant's hourly Secondary Reserve Obligation shall be adjusted by any Secondary Reserve provided on the Market Participant's behalf through a bilateral agreement. A Market Participant with an hourly Secondary Reserve Obligation shall be charged the pro rata share of the sum of day-ahead and real-time credits for Secondary Reserve as defined in sections 3.2.3A.01(b)(i) and (ii) below.

(b) Resources assigned to provide Secondary Reserve at the direction of the Office of the Interconnection shall be credited as follows:

(i) Credits for Secondary Reserve provided by generation resources and Economic Load Response Participant resources assigned to provide Secondary Reserve by the Office of the Interconnection in the Day-ahead Secondary Reserve Market shall be equal to the product of the Day-ahead Secondary Reserve Market Clearing Price multiplied by the megawatt amount of Secondary Reserve such resource is scheduled to provide.

(ii) Credits for Secondary Reserve provided by generation resources and Economic Load Response Participant resources scheduled to provide Secondary Reserve by the Office of the Interconnection in the Real-time Secondary Reserve Market shall be determined for each operating hour based on the sum of their hourly total of Real-time Settlement Interval deviations determined in accordance with the following equation:

$$\sum_i ((A - B) * C)$$

Where:

i = the Real-time Settlement Intervals in the applicable operating hour;

A = For each Real-time Settlement Interval, the megawatts of Secondary Reserve from that resource assigned by the Office of the Interconnection in the Real-time Secondary Reserve Market. The megawatt value is capped at the lesser of the Economic Maximum or Secondary Reserve maximum MW minus the Revenue Data for Settlements of the resource for each Real-time Settlement Interval minus the Real-time Synchronized Reserve assignment;

B = For each Real-time Settlement Interval, the megawatts of Secondary Reserve from that resource scheduled by the Office of the Interconnection in the Day-ahead Secondary Reserve Market; and

C = For each Real-time Settlement Interval, the Real-time Secondary Reserve Market Clearing Price.

(iii) Pool-scheduled resources and Economic Load Response Participant resources shall be credited a Secondary Reserve lost opportunity cost credit, where positive, as described in subsection (f)(iv) below.

(c) [Reserved for future use]

(d) Secondary Reserve Market Clearing Prices

(i) For the Day-ahead Secondary Reserve Market, the Secondary Reserve Market Clearing Price shall be determined for each Reserve Zone and, as applicable, Reserve Sub-zone by the Office of the Interconnection for each hour of the Operating Day. The Day-ahead Secondary Reserve Market Clearing Price shall be calculated as the price of serving the next increment of demand for 30-minute Reserve in a Reserve Zone

or Reserve Sub-zone, determined by the interaction between a supply curve formed using Secondary Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Secondary Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus the price of serving the next increment of demand for 30-minute Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute, but the Secondary Reserve Market Clearing Price shall not exceed the Reserve Penalty Factor for the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, per Operating Agreement, Schedule 1, section 1.10.8(d), Day-ahead Secondary Reserve Market Clearing Prices shall be set to zero dollars per megawatt-hour and for purposes of settlements for such Operating Day, the Office of the Interconnection shall utilize a scheduled megawatt quantity and Day-ahead Secondary Reserve Market Clearing Price of zero dollars per megawatt-hour and all settlements will be based on the Real-time Secondary Reserve market quantities and prices as determined pursuant to subsection (d)(ii) hereof.

(ii) For the Real-time Secondary Reserve Market, the Secondary Reserve Market Clearing Price shall be determined for each Reserve Zone and Reserve Sub-zone by the Office of the Interconnection for each Real-time Settlement Interval of the Operating Day. Each 5-minute clearing price shall be calculated as the price of serving the next increment of demand for 30-minute Reserve in a Reserve Zone or Reserve Sub-zone, determined by the interaction between a supply curve formed using Secondary Reserve offer prices and opportunity costs and the applicable Operating Reserve Demand Curve for Secondary Reserve established in accordance with Operating Agreement, Schedule 1, section 3.2.3A.02 for that Reserve Zone or Reserve Sub-zone, plus the price of serving the next increment of demand for 30-minute Reserve for any other Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute but the Secondary Reserve Market Clearing Price shall not exceed the Reserve Penalty Factor for the 30-minute Reserve Requirement for the Reserve Zone or Reserve Sub-zone to which the next increment of demand for 30-minute Reserve can contribute.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, and the Office of the Interconnection is not assigning Secondary Reserves, then the Secondary Reserve Clearing Price will be set to zero dollars per megawatt-hour for all Real-time Settlement Intervals in the Market Suspension period.

If the Office of the Interconnection declares a Market Suspension, as per Operating Agreement, Schedule 1, section 2.5.2, where the real-time Market Suspension is less than or equal to six (6) consecutive hours, which may span up to two Operating Days, and the Office of the Interconnection is assigning Secondary Reserves, then the Secondary

Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Secondary Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than six (6) consecutive hours but less than or equal to twenty-four (24) consecutive hours, which may span up to two Operating Days, and there are cleared Day-ahead Secondary Reserve Market Clearing Prices for the affected Operating Day, then the Real-time Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the Day-ahead Secondary Reserve Market Clearing Prices for each corresponding hour. If no such Day-ahead Secondary Reserve Market Clearing Prices exist, then the Secondary Reserve Market Clearing Prices associated with such Market Suspension shall be the average of the Secondary Reserve Market Clearing Prices for all Real-time Settlement Intervals of the preceding and subsequent clock hours (from XX:00 to XX:59) adjacent to such Market Suspension.

If the real-time Market Suspension is greater than twenty-four (24) consecutive hours, and the Office of the Interconnection is assigning Secondary Reserves, the Secondary Reserve Market Clearing Price will be set to zero dollars per megawatt-hour. Resources will be compensated for lost opportunity cost per subsection (f) hereof using the energy price as determined in Operating Agreement, Schedule 1, section 2.5.2.iii.

If the Office of the Interconnection has initiated in a Reserve Zone or Reserve Sub-zone either a Voltage Reduction Action or a Manual Load Dump Action as described in the PJM Manuals, the Real-time Secondary Reserve Market Clearing Price for a given Reserve Zone or Sub-zone shall be the Reserve Penalty Factor for the 30-minute Reserve Requirements for that Reserve Zone or Reserve Sub-zone

(iii) The Reserve Penalty Factor for the 30-minute Reserve Requirement shall be \$850/MWh.

The Reserve Penalty Factor for the Extended 30-minute Reserve Requirement shall be \$300/MWh.

(iv) By no later than April 30 of each year, the Office of the Interconnection will analyze Market Participants' response to prices exceeding \$1,000/MWh on an annual basis and will provide its analysis to PJM stakeholders. The Office of the Interconnection will also review this analysis to determine whether any changes to the Reserve Penalty Factor for 30-minute Reserve are warranted for subsequent Delivery Year(s).

(e) (i) For determining the Secondary Reserve Market Clearing Price for each hour in the Day-ahead Secondary Reserve Market, the estimated resource-specific opportunity cost for a generation resource or Economic Load Response Participant resources shall be the difference between the Locational Marginal Price at the generation or Economic Load Response Participant resource bus and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) or offer price to reduce energy from the Economic Load Response Participant resource in the PJM Interchange Energy Market when the Locational Marginal Price at

the Economic Load Response Participant resource bus is greater than the offer price for energy from the generation resource or the offer price to reduce energy from the Economic Load Response Participant resource.

However, opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve, and for synchronous condensers and for Economic Load Response Participant resources that do not receive a day-ahead commitment to provide energy in the same operating hour in which such resource is committed to provide Secondary Reserve.

(ii) For determining the Secondary Reserve Market Clearing Price for each Real-time Settlement Interval in the Real-time Secondary Reserve Market, the estimated unit-specific opportunity cost for a generation resource that is not a hydroelectric resource shall be the difference between the Locational Marginal Price at the generation bus for the generation resource and the offer price for energy from the generation resource (at the megawatt level of the energy dispatch point for the resource) in the PJM Interchange Energy Market when the Locational Marginal Price at the generation bus is greater than the offer price for energy from the generation resource.

For hydroelectric resources, the estimated unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the expected real-time Locational Marginal Price at that generation bus. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the expected real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average day-ahead Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating. The estimated unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

However, the opportunity costs shall be zero for resources self-scheduled to provide Synchronized Reserve, and for synchronous condensers and Economic Load Response Participant resources.

(f) (i) In determining the credit under subsection (b) to a generation resource, except a generation resource that is a synchronous condenser, selected to provide Secondary Reserve in the Day-ahead Secondary Reserve Market or an Economic Load Response Participant resource that is selected to provide Secondary Reserve in the Day-ahead Secondary Reserve Market in the same operating hour in which such resource receives a day-ahead commitment to provide energy, the opportunity cost of a resource shall be determined for each operating hour that the Office of the Interconnection requires a resource to provide Secondary Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Day-ahead Locational Marginal Price at the generation bus of the generation resource or the applicable pricing point for the Economic Load Response Participant resource;

B= The deviation of the resource's energy output or load reduction necessary to supply a Day-ahead Secondary Reserve assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load less any Day-ahead Synchronized Reserve Market assignment; and

C = The Day-ahead Energy Market offer integrated under the applicable energy offer curve for the resource's energy output or load reduction necessary to provide a Day-ahead Secondary Reserve Market assignment from the resource's expected energy output or load reduction level if it had been assigned in economic merit order to provide energy or reduce load less any Day-ahead Synchronized Reserve Market assignment.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: [energy use for providing synchronous condensing multiplied by A] plus [the applicable condense start-up cost divided by the number of hours the resource is assigned Secondary Reserve].

(ii) In determining the credit under subsection (b) to a generation resource, except a generation that is a synchronous condenser, selected to provide Secondary Reserve in the Real-time Secondary Reserve Market in excess of the resource's Day-ahead Secondary Reserve Market assignment and that actively follows the Office of the Interconnection's signals and instructions, the unit-specific opportunity cost of that generation resource shall be determined for each Real-time Settlement Interval that the Office of the Interconnection requires that generation resource to provide Secondary Reserve and shall be in accordance with the following equation:

$$(A \times B) - C$$

Where:

A = The Real-time Locational Marginal Price at the generation bus of the generation resource;

B= The deviation of the generation resource's output necessary to supply Secondary Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment and follow the Office of the Interconnection's signals and

instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy less any Real-time Synchronized Reserve Market assignment; and

C = The energy offer integrated under the applicable energy offer curve for the generation resource's output necessary to supply Secondary Reserve in real-time from the lesser of the generation resource's output necessary to provide a Day-ahead Secondary Reserve Market assignment or follow the Office of the Interconnection's signals and instructions from the generation resource's expected output level if it had been dispatched in economic merit order to provide energy less any Real-time Synchronized Reserve Market assignment.

For hydroelectric resources, the unit-specific opportunity costs for each hydroelectric resource in spill conditions as defined in the PJM Manuals will be the real-time Locational Marginal Price at that generation bus multiplied by the additional megawatts assigned to supply Synchronized Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and has a day-ahead energy commitment greater than zero shall be the greater of zero and the difference between the real-time Locational Marginal Price at the generation bus for the hydroelectric resource and the average real-time Locational Marginal Price at the generation bus for the appropriate on-peak or off-peak period as defined in the PJM Manuals, excluding those hours during which all available units at the hydroelectric resource were operating multiplied by the additional megawatts assigned to supply Secondary Reserve in real-time in excess of its Day-ahead Secondary Reserve Market assignment.

The unit-specific opportunity costs for each hydroelectric resource that is not in spill conditions as defined in the PJM Manuals and does not have a day-ahead energy commitment greater than zero shall be zero.

For a generation resource that is a synchronous condenser, the resource's unit-specific opportunity cost shall be determined as follows: additional energy use in excess of day-ahead energy use for providing synchronous condensing in real-time multiplied by A plus [any applicable condense start-up costs due to additional condense start-ups in real-time in excess of day-ahead condense start-ups allocated to each Real-time Settlement Interval as described in PJM Manuals]. If the generation resource is operating as a synchronous condenser and also has a Real-time Synchronized Reserve assignment, resource's unit-specific opportunity cost in the Secondary Reserve Market shall be zero,

(iii) For each Real-time Settlement Interval, a total Market Revenue Neutrality Offset is calculated for each resource, if eligible. If there is a decrease in real-time reserve MW from a day-ahead market assignment in more than one market for that real-time settlement interval, the total Market Revenue Neutrality Offset is allocated to the Secondary Reserve market based on the ratio of the opportunity cost owed due to a

reduction in assignment in real-time within the Secondary Reserve market and the total opportunity cost owed due to a reduction in assignment in real-time from all reserve markets, not to exceed the resource's opportunity cost owed in the Secondary Reserve market.

A resource is not eligible for Market Revenue Neutrality Offset for Secondary Reserve in a Real-time Settlement Interval for any of the following conditions:

(A) A resource's real-time Secondary Reserve assignment decreases due to the resource being self-scheduled to provide energy, Synchronized Reserve, or Regulation;

(B) A resource reduces flexibility in real-time such that the resource no longer qualifies to provide Secondary Reserve in real-time;

(C) A resource's Final Offer is less than its Committed Offer;

(D) A resource trips offline or otherwise becomes unavailable in real-time;

(E) A resource does not follow dispatch as described in section 3.2.3(o) above and section 3.2.3(o-1) above; or

(F) A resource that fails to come online and reach Economic Minimum output within 30 minutes as described in section 3.2.3A.01(h)(i) below.

(iv) A Secondary Reserve lost opportunity cost credit is determined for each resource for each Real-time Settlement Interval in accordance with the following equation:

$$(A + B) - (C + D + E + F)$$

Where:

A = day-ahead opportunity cost as determined in subsection (f)(i) above;

B = real-time opportunity cost as determined in subsection (f)(ii) above;

C = day-ahead clearing price credits as determined in subsection (b)(i) above;

D = real-time clearing price credits as determined subsection (b)(ii) above;

E = the applicable Market Revenue Neutrality Offset as determined in subsection (f)(iii) above; and

F = the opportunity cost credit owed due to a reduction in assignment in real-time as described in section 3.2.3A.01(f)(iii) above if not eligible for Market Revenue Neutrality Offset.

(v) The opportunity costs for Economic Load Response Participant resources and generation resources not synchronized to the grid shall be zero, except that Economic Load Response Participant resources may have a day-ahead opportunity cost, as determined in subsection (f)(i) above.

(g) For each operating hour, the sum of the Secondary Reserve lost opportunity cost credits credited in accordance with subsection (b)(iii) above shall be allocated and charged to each Market Participant that does not meet its hourly Secondary Reserve Obligation in proportion to its real-time purchases of Secondary Reserve in megawatt-hours during that hour.

(h) (i) In the event an offline generation resource has been assigned by the Office of the Interconnection to provide Secondary Reserve in real-time and is subsequently dispatched by the Office of the Interconnection to supply energy during that Operating Day and the resource qualifies as a Secondary Reserve resource at the time it is dispatched to provide energy, the Office of the Interconnection will assess the resource's performance as follows:

For each generation resource that fails to come online and reach Economic Minimum output within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval and for all prior intervals in which the resource was assigned to provide Secondary Reserve in the Real-time Secondary Reserve Market starting at the later of (A) the last interval the resource was online or (B) the beginning of that Operating Day and continuing up to the interval the resource failed to come online. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time not being paid for the assigned MW.

(ii) In the event an Economic Load Response Participant resource has been assigned by the Office of the Interconnection to provide Secondary Reserve in real-time and is subsequently dispatched to supply the Secondary Reserve assignment as a load reduction, the Office of the Interconnection will assess the resource's performance as follows:

For the purposes of this subsection, a resource's starting MW usage shall be the greatest telemetered consumption between one minute prior to and one minute following the issuance of a dispatch instruction from the Office of the Interconnection, and a resource's ending MW usage shall be the lowest consumption between 29 and 31 minutes after the issuance of a dispatch instruction from the Office of the Interconnection.

For each Economic Load Response Participant resource that fails to reduce load by at least the Economic Minimum, where the measured response is the difference between the

resource's starting MW usage and the resource's ending MW usage as described above, within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval, and for all prior intervals in which the resource was assigned to provide Secondary Reserve in the Real-time Secondary Reserve Market between such non-performance event starting at the later of (A) the last interval the resource reduced load at the instruction of the Office of the Interconnection or (B) the beginning of that Operating Day, and for all subsequent intervals through the earlier of (C) the next interval in which the resource is dispatched to reduce load or (D) the end of the Operating Day. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time, refunding all payments due for Secondary Reserve during such period.

(iii) For Batch Load Economic Load Response Participant Resources, a second method of verification will be used for instances where a Secondary Reserve assignment dispatched as an energy load reduction is initiated and the resource is operating at the minimum consumption level of its duty cycle. In this case, the magnitude of the response will be measured as the difference between (A) the minimum of the resource's consumption between the minute before and the minute after the end of the last settlement interval the resource reduced load at the instruction of the Office of the Interconnection and (B) the maximum consumption within a ten (10) minute period following the end of the last settlement interval the resource reduced load provided that all subsequent minutes following that minute are no less than 50% of the consumption in that minute.

For each Batch Load Economic Load Response Participant Resource that fails to reduce load by at least the Economic Minimum, where the measured response is the difference between the resource's starting MW usage and the resource's ending MW usage as described in section (ii) above or the difference between (A) and (B) as described in section (iii) above, within 30 minutes as instructed by the Office of the Interconnection, the resource's Real-time Secondary Reserve assignment will be set to zero megawatts for that interval, and for all prior intervals in which the resource was assigned to provide Secondary Reserve in either the Day-ahead or Real-time Secondary Reserve Markets between such non-performance event starting at the later of (A) the last interval the resource reduced load at the instruction of the Office of the Interconnection or (B) the beginning of that Operating Day, and for all subsequent intervals through the earlier of (C) the next interval in which the resource is dispatched to reduce load or (D) the end of the Operating Day. This results in the resource buying back the day-ahead assignment at the Real-time Secondary Reserve Market Clearing Price, or if solely assigned in real-time, refunding all payments due for Secondary Reserve during such period.

3.2.3A.02 Operating Reserve Demand Curves

The Office of the Interconnection shall establish Operating Reserve Demand Curves for clearing 30-minute Reserve, Primary Reserve, and Synchronized Reserve, for, as applicable, each Reserve Zone or Reserve Sub-zone to procure sufficient reserves to meet, as applicable, (a) 30-minute Reserve Requirement and Extended 30-minute Reserve Requirement; (b) Primary Reserve Requirement and Extended Primary Reserve Requirement; and (c) Synchronized

Reserve Requirement and Extended Synchronized Reserve Requirement. The Operating Reserve Demand Curves established for each reserve type shall be used to commit such reserves in both the day-ahead and real-time reserve markets. The Operating Reserve Demand Curves shall be determined in accordance with the applicable Reserve Penalty Factors and PJM Manuals.

3.2.3B Reactive Services.

(a) A Market Seller providing Reactive Services at the direction of the Office of the Interconnection shall be credited as specified below for the operation of its resource. These provisions are intended to provide payments to generating units when the LMP dispatch algorithms would not result in the dispatch needed for the required reactive service. LMP will be used to compensate generators that are subject to redispatch for reactive transfer limits.

(b) At the end of each Operating Day, where the active energy output of a Market Seller's resource is reduced or suspended at the request of the Office of the Interconnection for the purpose of maintaining reactive reliability within the PJM Region, the Market Seller shall be credited according to sections 3.2.3B(c) & 3.2.3B(d).

(c) A Market Seller providing Reactive Services from either a steam-electric generating unit or combined cycle unit operating in combined cycle mode, where such unit is pool-scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3 (c) hereof), and where the real time LMP at the unit's bus is higher than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override) shall be compensated for lost opportunity cost by receiving a credit for each Real-time Settlement Interval in an amount equal to the product of (A) the deviation of the generating unit's output necessary to follow the Office of the Interconnection's signals and the generating unit's expected output level if it had been dispatched in economic merit order, times (B) the Real-time Price at the generation bus for the generating unit, minus (C) the Total Lost Opportunity Cost Offer, provided that the resulting outcome is greater than \$0.00. This equation is represented as $(A*B) - C$.

(d) A Market Seller providing Reactive Services from either a combustion turbine unit or combined cycle unit operating in simple cycle mode that is pool scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3 (c) hereof), operated as requested by the Office of the Interconnection, shall be compensated for lost opportunity cost for each Real-time Settlement Interval, limited to the lesser of the unit's Economic Maximum or the unit's Generation Resource Maximum Output, if the unit output is reduced at the direction of the Office of the Interconnection and the real time LMP at the unit's bus is higher than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection as directed by the PJM dispatcher, then the Market Seller shall be credited in a manner consistent with that described above in section 3.2.3B(c) for a steam unit or a combined cycle unit operating in combined cycle mode.

(e) At the end of each Operating Day, where the active energy output of a Market Seller's unit is increased at the request of the Office of the Interconnection for the purpose of maintaining reactive reliability within the PJM Region and the offered price of the energy is above the real-time LMP at the unit's bus, the Market Seller shall be credited according to section 3.2.3B(f).

(f) A Market Seller providing Reactive Services from either a steam-electric generating unit, combined cycle unit or combustion turbine unit, where such unit is pool scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3 (c) hereof), and where the real time LMP at the unit's bus is lower than the price offered by the Market Seller for energy from the unit at the level of output requested by the Office of the Interconnection (as indicated either by the desired MWs of output from the unit determined by PJM's unit dispatch system or as directed by the PJM dispatcher through a manual override), shall receive a credit in an amount equal to $\{(AG - LMPDMW) \times (UB - URTLMP)\}$ where:

AG equals the actual output of the unit;

LMPDMW equals the level of output for the unit determined according to the point on the scheduled offer curve on which the unit was operating corresponding to the real time LMP at the unit's bus and adjusted for any Regulation or Tier 2 Synchronized Reserve assignments;

UB equals the unit offer for that unit for which output is increased, determined according to the lesser of the Final Offer or Committed Offer;

URLTMP equals the real time LMP at the unit's bus; and

where $UB - URTLMP$ shall not be negative.

(g) A Market Seller providing Reactive Services from a hydroelectric resource where such resource is pool scheduled (or self-scheduled, if operating according to Operating Agreement, Schedule 1, section 1.10.3 (c) hereof), and where the output of such resource is altered from the schedule submitted by the Market Seller for the purpose of maintaining reactive reliability at the request of the Office of the Interconnection, shall be compensated for lost opportunity cost in the same manner as provided in sections 3.2.2(d) and 3.2.3A(f) and further detailed in the PJM Manuals.

(h) If a Market Seller believes that, due to specific pre-existing binding commitments to which it is a party, and that properly should be recognized for purposes of this section, the above calculations do not accurately compensate the Market Seller for lost opportunity cost associated with following the Office of the Interconnection's dispatch instructions to reduce or suspend a unit's output for the purpose of maintaining reactive reliability, then the Office of the Interconnection, the Market Monitoring Unit and the individual Market Seller will discuss a mutually acceptable, modified amount of such alternate lost opportunity cost compensation, taking into account the specific circumstances binding on the Market Seller. Following such discussion, if the Office of the Interconnection accepts a modified amount of alternate lost

opportunity cost compensation, the Office of the Interconnection shall invoice the Market Participant accordingly. If the Market Monitoring Unit disagrees with the modified amount of alternate lost opportunity cost compensation, as accepted by the Office of the Interconnection, it will exercise its powers to inform the Commission staff of its concerns.

(i) The amount of Synchronized Reserve provided by generating units maintaining reactive reliability shall be counted as Synchronized Reserve satisfying the overall PJM Synchronized Reserve requirements. Operators of these generating units shall be notified of such provision, and to the extent a generating unit's operator indicates that the generating unit is capable of providing Synchronized Reserve, shall be subject to the same requirements contained in section 3.2.3A regarding provision of Synchronized Reserve. At the end of each Operating Day, to the extent a condenser operated to provide Reactive Services also provided Synchronized Reserve, a Market Seller shall be credited for providing synchronous condensing for the purpose of maintaining reactive reliability at the request of the Office of the Interconnection, in an amount equal to the higher of (i) the Synchronized Reserve Market Clearing Price for each Real-time Settlement Interval a generating unit provided synchronous condensing multiplied by the amount of Synchronized reserve provided by the synchronous condenser or (ii) the sum of (A) the generating unit's cost to provide synchronous condensing, calculated in accordance with the PJM Manuals, (B) the product of MW energy usage for providing synchronous condensing multiplied by the real time LMP at the generating unit's bus, (C) the generating unit's startup-cost of providing synchronous condensing, and (D) the unit-specific lost opportunity cost of the generating resource supplying the increment of Synchronized Reserve as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals. To the extent a condenser operated to provide Reactive Services was not also providing Synchronized Reserve, the Market Seller shall be credited only for the generating unit's cost to condense, as described in (ii) above. The total Synchronized Reserve Obligations of all Load Serving Entities under section 3.2.3A(a) in the zone where these condensers are located shall be reduced by the amount counted as satisfying the PJM Synchronized Reserve requirements. The Synchronized Reserve Obligation of each Load Serving Entity in the zone under section 3.2.3A(a) shall be reduced to the same extent that the costs of such condensers counted as Synchronized Reserve are allocated to such Load Serving Entity pursuant to subsection (l) below.

(j) A Market Seller's pool scheduled steam-electric generating unit or combined cycle unit operating in combined cycle mode, that is not committed to operate in the Day-ahead Market, but that is directed by the Office of the Interconnection to operate solely for the purpose of maintaining reactive reliability, at the request of the Office of the Interconnection, shall be credited in the amount of the unit's offered price for start-up and no-load fees. The unit also shall receive, if applicable, compensation in accordance with Sections 3.2.3B(e)-(f).

(k) The sum of the foregoing credits as specified in Sections 3.2.3B(b)-(j) shall be the cost of Reactive Services for the purpose of maintaining reactive reliability for the Operating Day and shall be separately determined for each transmission zone in the PJM Region based on whether the resource was dispatched for the purpose of maintaining reactive reliability in such transmission zone.

(l) The cost of Reactive Services for the purpose of maintaining reactive reliability in a transmission zone in the PJM Region for each Operating Day shall be allocated and charged to each Market Participant in proportion to its deliveries of energy to load (net of operating Behind The Meter Generation) in such transmission zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such transmission zone.

(m) Generating units receiving dispatch instructions from the Office of the Interconnection under the expectation of increased actual or reserve reactive shall inform the Office of the Interconnection dispatcher if the requested reactive capability is not achievable. Should the operator of a unit receiving such instructions realize at any time during which said instruction is effective that the unit is not, or likely would not be able to, provide the requested amount of reactive support, the operator shall as soon as practicable inform the Office of the Interconnection dispatcher of the unit's inability, or expected inability, to provide the required reactive support, so that the associated dispatch instruction may be cancelled. PJM Performance Compliance personnel will audit operations after-the-fact to determine whether a unit that has altered its active power output at the request of the Office of the Interconnection has provided the actual reactive support or the reactive reserve capability requested by the Office of the Interconnection. PJM shall utilize data including, but not limited to, historical reactive performance and stated reactive capability curves in order to make this determination, and may withhold such compensation as described above if reactive support as requested by the Office of the Interconnection was not or could not have been provided.

3.2.3C Synchronous Condensing for Post-Contingency Operation.

(a) Under normal circumstances, PJM operates generation out of merit order to control contingency overloads when the flow on the monitored element for loss of the contingent element ("contingency flow") exceeds the long-term emergency rating for that facility, typically a 4-hour or 2-hour rating. At times however, and under certain, specific system conditions, PJM does not operate generation out of merit order for certain contingency overloads until the contingency flow on the monitored element exceeds the 30-minute rating for that facility ("post-contingency operation"). In conjunction with such operation, when the contingency flow on such element exceeds the long-term emergency rating, PJM operates synchronous condensers in the areas affected by such constraints, to the extent they are available, to provide greater certainty that such resources will be capable of producing energy in sufficient time to reduce the flow on the monitored element below the normal rating should such contingency occur.

(b) The amount of Synchronized Reserve provided by synchronous condensers associated with post-contingency operation shall be counted as Synchronized Reserve satisfying the applicable Synchronized Reserve Requirements. Operators of these generation units shall be notified of such provision, and to the extent a generation unit's operator indicates that the generation unit is capable of providing Synchronized Reserve, shall be subject to the same requirements contained in section 3.2.3A regarding provision of Synchronized Reserve. At the end of each Operating Day, to the extent a condenser operated in conjunction with post-contingency operation also provided Synchronized Reserve, a Market Seller shall be credited for providing synchronous condensing in conjunction with post-contingency operation at the request

of the Office of the Interconnection, in an amount equal to the higher of (i) the Real-time Synchronized Reserve Market Clearing Price for each applicable interval a generation resource provided synchronous condensing multiplied by the amount of Synchronized Reserve provided by the synchronous condenser or (ii) the sum of (A) the generation resource's applicable interval cost to provide synchronous condensing, calculated in accordance with the PJM Manuals, (B) the applicable interval product of the megawatts of energy used to provide synchronous condensing multiplied by the real-time LMP at the generation bus of the generation resource, (C) the generation resource's start-up cost of providing synchronous condensing, and (D) the unit-specific lost opportunity cost of the generation resource supplying the increment of Synchronized Reserve as determined by the Office of the Interconnection in accordance with procedures specified in the PJM Manuals. To the extent a condenser operated in association with post-contingency constraint control was not also providing Synchronized Reserve, the Market Seller shall be credited only for the generation unit's cost to condense, as described in (ii) above. The total Synchronized Reserve Obligations of all Load Serving Entities under section 3.2.3A(a) in the zone where these condensers are located shall be reduced by the amount counted as satisfying the PJM Synchronized Reserve requirements. The Synchronized Reserve Obligation of each Load Serving Entity in the zone under section 3.2.3A(a) shall be reduced to the same extent that the costs of such condensers counted as Synchronized Reserve are allocated to such Load Serving Entity pursuant to subsection (d) below.

(c) The sum of the foregoing credits as specified in section 3.2.3C(b) shall be the cost of synchronous condensers associated with post-contingency operations for the Operating Day and shall be separately determined for each transmission zone in the PJM Region based on whether the resource was dispatched in association with post-contingency operation in such transmission zone.

(d) The cost of synchronous condensers associated with post-contingency operations in a transmission zone in the PJM Region for each Operating Day shall be allocated and charged to each Market Participant in proportion to its deliveries of energy to load (net of operating Behind The Meter Generation) in such transmission zone, served under Network Transmission Service, in megawatt-hours during that Operating Day, as compared to all such deliveries for all Market Participants in such transmission zone.

3.2.4 Transmission Congestion Charges.

Each Market Buyer shall be assessed Transmission Congestion Charges as specified in Operating Agreement, Schedule 1, section 5.

3.2.5 Transmission Loss Charges.

Each Market Buyer shall be assessed Transmission Loss Charges as specified in Operating Agreement, Schedule 1, section 5.

3.2.6 Emergency Energy.

- (a) When the Office of the Interconnection has implemented Emergency procedures, resources offering Emergency energy are eligible to set real-time Locational Marginal Prices, capped at the energy offer cap plus the sum of the applicable Reserve Penalty Factors for the Synchronized Reserve Requirement and Primary Reserve Requirement, provided that the Emergency energy is needed to meet demand in the PJM Region.
- (b) Market Participants shall be allocated a proportionate share of the net cost of Emergency energy purchased by the Office of the Interconnection. Such allocated share during each applicable interval of such Emergency energy purchase shall be in proportion to the amount of each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Energy Market, whenever that deviation increases the Market Participant's spot market purchases or decreases its spot market sales. This deviation shall not include any reduction or suspension of output of pool scheduled resources requested by PJM to manage an Emergency within the PJM Region.
- (c) Net revenues in excess of Real-time Prices attributable to sales of energy in connection with Emergencies to other Control Areas shall be credited to Market Participants during each applicable interval of such Emergency energy sale in proportion to the sum of (i) each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Energy Market, whenever that deviation increases the Market Participant's spot market purchases or decreases its spot market sales, and (ii) each Market Participant's energy sales from within the PJM Region to entities outside the PJM Region that have been curtailed by PJM.
- (d) The net costs or net revenues associated with sales or purchases of energy in connection with a Minimum Generation Emergency in the PJM Region, or in another Control Area, shall be allocated during each applicable interval of such Emergency sale or purchase to each Market Participant in proportion to the amount of each Market Participant's real-time deviation from its net withdrawals and injections in the Day-ahead Market, whenever that deviation increases the Market Participant's spot market sales or decreases its spot market purchases.

3.2.7 Billing.

(a) PJMSettlement shall prepare a billing statement each billing cycle for each Market Participant in accordance with the charges and credits specified in Operating Agreement, Schedule 1, sections 3.2.1 through 3.2.6, and showing the net amount to be paid or received by the Market Participant. Billing statements shall provide sufficient detail, as specified in the PJM Manuals, to allow verification of the billing amounts and completion of the Market Participant's internal accounting.

(b) If deliveries to a Market Participant that has PJM Interchange meters in accordance with Operating Agreement, section 14 include amounts delivered for a Market Participant that does not have PJM Interchange meters separate from those of the metered Market Participant, PJMSettlement shall prepare a separate billing statement for the unmetered Market Participant based on the allocation of deliveries agreed upon between the Market Participant and the unmetered Market Participant specified by them to the Office of the Interconnection.

